

NASA

Energy  
A Continuing  
Bibliography  
with Indexes

NASA SP-7043(30)  
July 1981

(NASA-SP-7043(30)) ENERGY: A CONTINUING  
BIBLIOGRAPHY WITH INDEXES Quarterly Report,  
1 Apr. - 30 Jun. 1981 (National Aeronautics  
and Space Administration) 461 p HC \$15.00

N82-12536

Unclas  
CSCL 10B 00/44 03013

National Aeronautics and  
Space Administration



Energy Energy E  
gy Energy Energy  
nergy Energy Ene  
Energy Energy E  
gy Energy Energy  
nergy Energy Ene  
Energy Energy E

## ACCESSION NUMBER RANGES

Accession numbers cited in this Supplement fall within the following ranges:

*IAA* (A-10000 Series)

A81-19673 – A81-30424

*STAR* (N-10000 Series)

N81-15968 – N81-21997



# **ENERGY**

## **A Continuing Bibliography**

### **With Indexes**

### **Issue 30**

A selection of annotated references to unclassified reports and journal articles that were introduced into the NASA scientific and technical information system and announced from April 1 through June 30, 1981 in

- *Scientific and Technical Aerospace Reports (STAR)*
- *International Aerospace Abstracts (IAA).*



This supplement is available as NTISUB/026/093 from the National Technical Information Service (NTIS), Springfield, Virginia 22161 at the price of \$15.00 domestic; \$30.00 foreign.

# INTRODUCTION

This issue of *Energy: A Continuing Bibliography with Indexes* (NASA SP-7043(30)) lists 1546 reports, journal articles, and other documents announced between April 1, 1981 and June 30, 1981 in *Scientific and Technical Aerospace Reports (STAR)* or in *International Aerospace Abstracts (IAA)*. The first issue of this continuing bibliography was published in May 1974 and succeeding issues are published quarterly.

The coverage includes regional, national and international energy systems; research and development on fuels and other sources of energy; energy conversion, transport, transmission, distribution and storage, with special emphasis on use of hydrogen and of solar energy. Also included are methods of locating or using new energy resources. Of special interest is energy for heating, lighting, for powering aircraft, surface vehicles, or other machinery.

Each entry in the bibliography consists of a standard bibliographic citation accompanied in most cases by an abstract. The entries are arranged in eight major categories, with *IAA Entries* preceding *STAR Entries* in each category. The citation, and abstracts when available, are reproduced exactly as they appeared originally in *IAA* or *STAR* including the original accession numbers from the respective announcement journals. This procedure, which saves time and money accounts for the slight variation in citation appearances.

Five indexes -- subject, personal author, corporate source, contract number, and report number -- are included.

# AVAILABILITY OF CITED PUBLICATIONS

## IAA ENTRIES (A81-10000 Series)

All publications abstracted in this Section are available from the Technical Information Service, American Institute of Aeronautics and Astronautics, Inc (AIAA), as follows: Paper copies of 'accessions are available at \$7.00 per document up to a maximum of 40 pages. The charge for each additional page is \$0.25. Microfiche<sup>(1)</sup> of documents announced in /AA are available at the rate of \$3.00 per microfiche on demand, and at the rate of \$1.25 per microfiche for standing orders for all /AA microfiche. The price for the /AA microfiche by category is available at the rate of \$1.50 per microfiche plus a \$1.00 service charge per category per issue. Microfiche of all the current AIAA Meeting Papers are available on a standing order basis at the rate of \$1.50 per microfiche.

Minimum air-mail postage to foreign countries is \$1.00 and all foreign orders are shipped on payment of pro-forma invoices

All inquiries and requests should be addressed to AIAA Technical Information Service. Please refer to the accession number when requesting publications

## STAR ENTRIES (N81-10000 Series)

One or more sources from which a document announced in *STAR* is available to the public is ordinarily given on the last line of the citation. The most commonly indicated sources and their acronyms or abbreviations are listed below. If the publication is available from a source other than those listed, the publisher and his address will be displayed on the availability line or in combination with the corporate source line

Avail: NTIS Sold by the National Technical Information Service. Prices for hard copy (HC) and microfiche (MF) are indicated by a price code followed by the letters HC or MF in the *STAR* citation. Current values for the price codes are given in the tables on page VIII

Documents on microfiche are designated by a pound sign (#) following the accession number. The pound sign is used without regard to the source or quality of the microfiche.

Initially distributed microfiche under the NTIS SRIM (Selected Research in Microfiche) is available at greatly reduced unit prices. For this service and for information concerning subscription to NASA printed reports, consult the NTIS Subscription Section, Springfield, Va 22161.

**NOTE ON ORDERING DOCUMENTS:** When ordering NASA publications (those followed by the \* symbol), use the N accession number. NASA patent applications (only the specifications are offered) should be ordered by the US-Patent-Appl-SN number. Non-NASA publications (no asterisk) should be ordered by the AD, PB, or other *report* number shown on the last line of the citation, not by the N accession number. It is also advisable to cite the title and other bibliographic identification.

Avail SOD (or GPO). Sold by the Superintendent of Documents, U S Government Printing Office, in hard copy. The current price and order number are given following the availability line. (NTIS will fill microfiche requests, at the standard \$3.50 price, for those documents identified by a # symbol)

(1) A microfiche is a transparent sheet of film, 105 by 148 mm in size, containing as many as 60 to 98 pages of information reduced to micro images (not to exceed 26:1 reduction)



- Avail:** NASA Public Document Rooms. Documents so indicated may be examined at or purchased from the National Aeronautics and Space Administration, Public Documents Room (Room 126), 600 Independence Ave., S.W., Washington, D.C. 20546, or public document rooms located at each of the NASA research centers, the NASA Space Technology Laboratories, and the NASA Pasadena Office at the Jet Propulsion Laboratory.
- Avail:** DOE Depository Libraries. Organizations in U.S. cities and abroad that maintain collections of Department of Energy reports, usually in microfiche form, are listed in *Energy Research Abstracts*. Services available from the DOE and its depositories are described in a booklet, *DOE Technical Information Center - Its Functions and Services* (TID-4660), which may be obtained without charge from the DOE Technical Information Center.
- Avail:** Univ. Microfilms. Documents so indicated are dissertations selected from *Dissertation Abstracts* and are sold by University Microfilms as xerographic copy (HC) and microfilm. All requests should cite the author and the Order Number as they appear in the citation.
- Avail:** USGS. Originals of many reports from the U.S. Geological Survey, which may contain color illustrations, or otherwise may not have the quality of illustrations preserved in the microfiche or facsimile reproduction, may be examined by the public at the libraries of the USGS field offices whose addresses are listed in this introduction. The libraries may be queried concerning the availability of specific documents and the possible utilization of local copying services, such as color reproduction.
- Avail:** HMSO. Publications of Her Majesty's Stationery Office are sold in the U.S. by Pendragon House, Inc. (PHI), Redwood City, California. The U.S. price (including a service and mailing charge) is given, or a conversion table may be obtained from PHI.
- Avail:** BLL (formerly NLL). British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. Photocopies available from this organization at the price shown. (If none is given, inquiry should be addressed to the BLL.)
- Avail:** Fachinformationszentrum, Karlsruhe. Sold by the Fachinformationszentrum Energie, Physik, Mathematik GMBH, Eggenstein-Leopoldshafen, Federal Republic of Germany, at the price shown in Deutschmarks (DM).
- Avail:** Issuing Activity, or Corporate Author, or no indication of availability. Inquiries as to the availability of these documents should be addressed to the organization shown in the citation as the corporate author of the document.
- Avail:** U.S. Patent and Trademark Office. Sold by Commissioner of Patents and Trademarks, U.S. Patent and Trademark Office, at the standard price of 50 cents each, postage free.
- Other availabilities.** If the publication is available from a source other than the above, the publisher and his address will be displayed entirely on the availability line or in combination with the corporate author line.

### **GENERAL AVAILABILITY**

All publications abstracted in this bibliography are available to the public through the sources as indicated in the *STAR Entries* and *IAA Entries* sections. It is suggested that the bibliography user contact his own library or other local libraries prior to ordering any publication inasmuch as many of the documents have been widely distributed by the issuing agencies, especially NASA. A listing of public collections of NASA documents is included on the inside back cover.

### **SUBSCRIPTION AVAILABILITY**

This publication is available on subscription from the National Technical Information Service (NTIS). The annual subscription rate for the monthly supplements is \$50.00 domestic, \$100.00 foreign. All questions relating to the subscriptions should be referred to NTIS, Attn: Subscriptions, 5285 Port Royal Road, Springfield Virginia 22161.

## ADDRESSES OF ORGANIZATIONS

American Institute of Aeronautics  
and Astronautics  
Technical Information Service  
555 West 57th Street, 12th Floor  
New York, New York 10019

British Library Lending Division,  
Boston Spa, Wetherby, Yorkshire,  
England

Commissioner of Patents and  
Trademarks  
U S Patent and Trademark Office  
Washington, D C 20231

Department of Energy  
Technical Information Center  
P.O. Box 62  
Oak Ridge, Tennessee 37830

ESA-Information Retrieval Service  
ESRIN  
Via Galileo Galilei  
00044 Frascati (Rome) Italy

Fachinformationszentrum Energie, Physik,  
Mathematik GMBH  
7514 Eggenstein Leopoldshafen  
Federal Republic of Germany

Her Majesty's Stationery Office  
P.O. Box 569, S E 1  
London, England

NASA Scientific and Technical Information  
Facility  
P.O. Box 8757  
B. W. I. Airport, Maryland 21240

National Aeronautics and Space  
Administration  
Scientific and Technical Information  
Branch (NST-41)  
Washington, D.C. 20546

National Technical Information Service  
5285 Port Royal Road  
Springfield, Virginia 22161

Pendragon House, Inc  
899 Broadway Avenue  
Redwood City, California 94063

Superintendent of Documents  
U S Government Printing Office  
Washington, D C 20402

University Microfilms  
A Xerox Company  
300 North Zeeb Road  
Ann Arbor, Michigan 48106

University Microfilms, Ltd  
Tylers Green  
London, England

U.S. Geological Survey  
1033 General Services Administration  
Building  
Washington, D C 20242

U S Geological Survey  
601 E Cedar Avenue  
Flagstaff, Arizona 86002

U.S. Geological Survey  
345 Middlefield Road  
Menlo Park, California 94025

U S Geological Survey  
Bldg 25, Denver Federal Center  
Denver, Colorado 80225

# NTIS PRICE SCHEDULES

## Schedule A STANDARD PAPER COPY PRICE SCHEDULE

(Effective January 1, 1981)

Price Code	Page Range	North American Price	Foreign Price
A01	Microfiche	\$ 3 50	\$ 7 00
A02	001-025	5 00	10 00
A03	026-050	6 50	13 00
A04	051-075	8 00	16 00
A05	076-100	9 50	19 00
A06	101-125	11 00	22 00
A07	126-150	12 50	25 00
A08	151-175	14 00	28 00
A09	176-200	15 50	31 00
A10	201-225	17 00	34 00
A11	226-250	18 50	37 00
A12	251-275	20 00	40 00
A13	276-300	21 50	43 00
A14	301-325	23 00	46 00
A15	326-350	24 50	49 00
A16	351-375	26 00	52 00
A17	376-400	27 50	55 00
A18	401-425	29 00	58 00
A19	426-450	30 50	61 00
A20	451-475	32 00	64 00
A21	476-500	33 50	67 00
A22	501-525	35 00	70 00
A23	526-550	36 50	73 00
A24	551-575	38 00	76 00
A25	576-600	39 50	79 00
	601-up	1/	2/

A99 - Write for quote

1/ Add \$1 50 for each additional 25 page increment or portion thereof for 601 pages up

2/ Add \$3 00 for each additional 25 page increment or portion thereof for 601 pages and more

## Schedule E EXCEPTION PRICE SCHEDULE Paper Copy & Microfiche

Price Code	North American Price	Foreign Price
E01	\$ 5 50	\$ 11 50
E02	6 50	13 50
E03	8 50	17 50
E04	10 50	21 50
E05	12 50	25 50
E06	14 50	29 50
E07	16 50	33 50
E08	18 50	37 50
E09	20 50	41 50
E10	22 50	45 50
E11	24 50	49 50
E12	27 50	55 50
E13	30 50	61 50
E14	33 50	67 50
E15	36 50	73 50
E16	39 50	79 50
E17	42 50	85 50
E18	45 50	91 50
E19	50 50	100 50
E20	55 50	121 50
E99 - Write for quote		
N01	28 00	40 00



# TABLE OF CONTENTS


## Subject Categories

*Abstracts in this Bibliography are grouped under the following categories:*


*page:*

<b>01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS</b>	<b>185</b>
Includes energy requirements, energy conservation, and environmental impacts of energy systems	
<b>02 SOLAR ENERGY</b>	<b>209</b>
Includes solar collectors, solar cells, solar heating and cooling systems, and solar generators.	
<b>03 HYDROGEN</b>	<b>285</b>
Includes hydrogen production, storage, and distribution.	
<b>04 FUELS AND OTHER SOURCES OF ENERGY</b>	<b>293</b>
Includes fossil fuels, nuclear fuels, geothermal and ocean thermal energy, tidal energy, and wind energy.	
<b>05 ENERGY CONVERSION</b>	<b>327</b>
Includes thermomechanical, thermoelectric, geothermal, ocean thermal, and wind energy conversion. Also includes nuclear reactors, magnetohydrodynamic generators, and fuel cells.	
<b>06 ENERGY TRANSPORT, TRANSMISSION, AND DISTRIBUTION</b>	<b>365</b>
Includes transport of fuels by pipelines, tubes, etc., microwave power transmission, and superconducting power transmission.	
<b>07 ENERGY STORAGE</b>	<b>371</b>
Includes flywheels, heat storage, underground air storage, compressed air, storage batteries, and electric hybrid vehicles.	
<b>08 GENERAL</b>	<b>381</b>
<b>SUBJECT INDEX</b>	<b>A-1</b>
<b>PERSONAL AUTHOR INDEX</b>	<b>B-1</b>
<b>CORPORATE SOURCE INDEX</b>	<b>C-1</b>
<b>CONTRACT NUMBER INDEX</b>	<b>D-1</b>
<b>REPORT/ACCESSION NUMBER INDEX</b>	<b>E-1</b>

## TYPICAL CITATION AND ABSTRACT FROM STAR

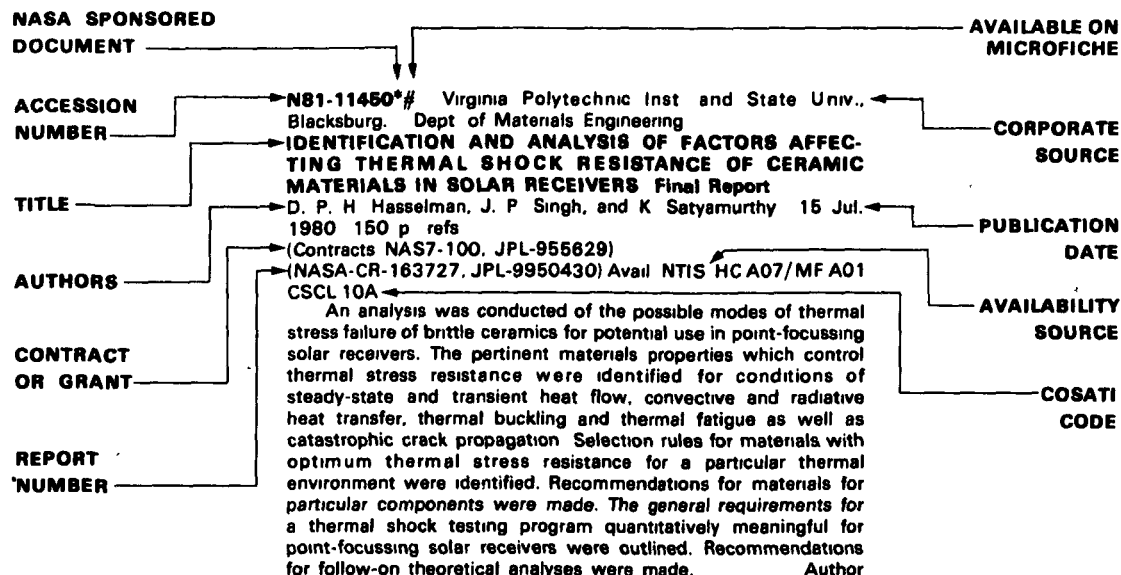

## TYPICAL CITATION AND ABSTRACT FROM /AA

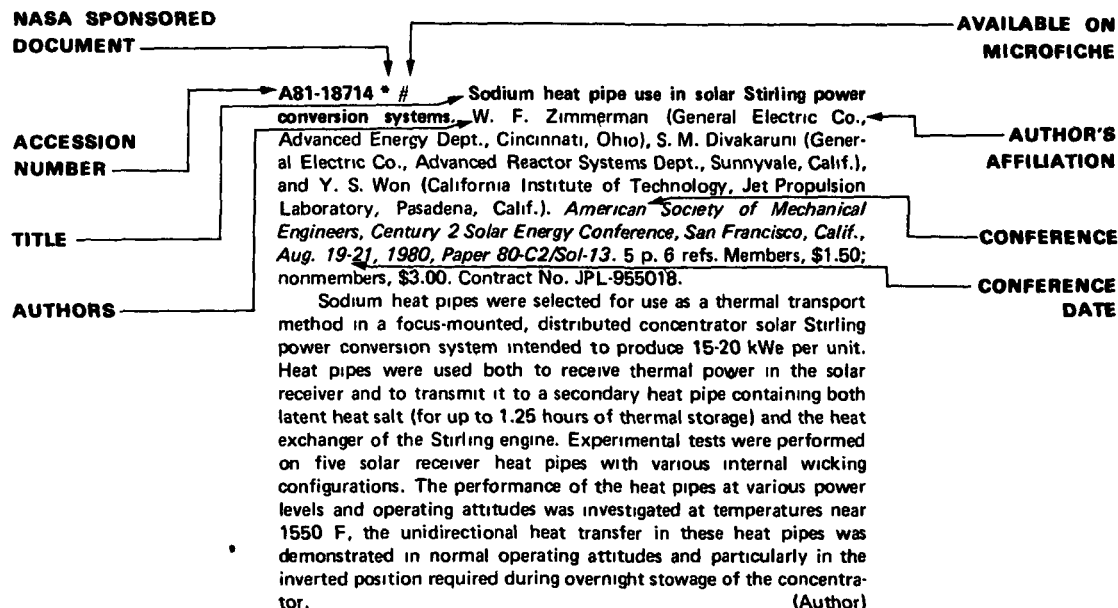

## A Listing of Energy Bibliographies Contained In This Publication:

1. Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base  
p0352 N81-16615
2. Technology assessments in transportation: Survey of recent literature --- and bibliography  
p0192 N81-16958
3. Energy: Solar energy programme of the Commission of the European Communities  
p0263 N81-17593
4. Energy policy and research planning. Citations from the NTIS data base p0195 N81-17620
5. *Compilation of energy efficient concepts in advanced aircraft design and operations.*  
Volume 2. Abstract data base p0196 N81-18050
6. Management assistance for the development of hydrothermal energy in the Rocky  
Mountain / basin and range region p0315 N81-18547
7. The Energy Link catalog. Volume 2. Energy resource catalog --- bibliographies  
p0384 N81-21633
8. Scientific and Technical Publications of the Environmental Research Laboratories' fiscal  
year 1978 p0384 N81-21975

JULY 1981

01

### ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

Includes energy requirements, energy conservation, and environmental impacts of energy systems

**A81-19848** Energy analysis of four geothermal technologies. R. A. Herendeen and R. L. Plant (Illinois, University, Urbana, Ill.). *Energy* (UK), vol. 6, Jan. 1981, p. 73-82. 31 refs. Contract No. ET-78-S-02-5085.

Standard energy analysis was applied to liquid-dominated, hot dry rock, geopressure, and vapor-dominated geothermal-electric technologies. It was shown that the four processes are net energy producers, so that the ratios of net electric energy produced over lifetime to primary nonrenewable energy inputs over lifetime exceed unity. The highest energy ratio of 13 + or - 4 is characteristic of vapor-dominated (dry-stream) technology, which is the only method used commercially to produce electricity in the U.S. It is concluded that the energy ratios computed are similar to those of other authors; however, the estimates for liquid-dominated systems are significantly lower due to the inclusion of environmental control costs. A.T.

**A81-20465** Operational energy conservation strategies in commercial aviation. R. R. Covey, G. J. Mascetti, W. U. Roessler (Aerospace Corp., El Segundo, Calif.), and R. L. Bowles (U.S. Department of Energy, Washington, D.C.) In: Conference on Decision and Control, and Symposium on Adaptive Processes, 18th, Fort Lauderdale, Fla., December 12-14, 1979, Proceedings. Volume 1. Piscataway, N.J., Institute of Electrical and Electronics Engineers, Inc., 1979, p. 408-414. 12 refs.

Various fuel conservation strategies that are applicable to commercial aviation and that lend themselves to real-time decision and control techniques are discussed. It is noted that these 12 strategies could potentially save 12 percent of current fuel usage. The strategies are as follows: optimized takeoff procedures, optimized cruise Mach number selection, optimized altitude selection, optimized descent procedures, reduced/delayed flap approaches, flow control, linear holding, gate holding, profile descent, reduced final approach spacing, area navigation/direct routing, and airborne performance computer systems. It is concluded that since the costs incurred and benefits derived in implementing these techniques and strategies are intimately related to fuel prices, comprehensive parametric analyses are needed to clearly identify those strategies for which automatic decision and control can provide the highest energy conservation returns on investment. C.R.

**A81-20468** Integration of fuel conservative procedures in the high density terminal area. R. G. Dear (California State University, Fullerton, Calif.). In: Conference on Decision and Control, and Symposium on Adaptive Processes, 18th, Fort Lauderdale, Fla., December 12-14, 1979, Proceedings. Volume 1. Piscataway, N.J., Institute of Electrical and Electronics Engineers, Inc., 1979, p. 427-431. 8 refs.

Fuel conservative procedures reduce fuel consumption in high density thermal areas if properly planned, but their effectiveness is

affected by air traffic controls. Real-time pilot-and-control-in-the-loop simulations showed that fuel savings can be made under moderately heavy traffic conditions; in heavy traffic, high controller workload and lower fuel savings indicate that time-controlled aircraft guidance and computer scheduling may be required to realize the possibilities of fuel conservative procedures. A.T.

**A81-20695 #** Environmental assessment for the satellite power system concept development and evaluation program. M. M. Abromavage (Illinois Institute of Technology, Chicago, Ill.) and A. R. Valentino (Argonne National Laboratory, Argonne, Ill.). *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0244*. 9 p. 8 refs. Research supported by the U.S. Department of Energy.

A 3-year environmental assessment of the satellite power system energy concept has been completed. Potential environmental effects and candidate mitigating strategies have been identified. The important effects which depend upon satellite and energy transmission design are: Low-level long-term microwave exposure to the public; ionizing radiation exposure to workers in space; space transportation exhaust effluent effects in the atmosphere; and electromagnetic compatibility impacts at geostationary earth orbit locations, in the ionosphere, and on earth. These potential effects would influence any further development of the satellite energy concept, including design preferences, energy transmission principles, and system construction, operating and maintenance scenarios. (Author)

**A81-21022** An energy used model of the residential sector. D. L. O'Neal and E. Hirst (Oak Ridge National Laboratory, Oak Ridge, Tenn.). *IEEE Transactions on Systems, Man, and Cybernetics*, vol. SMC-10, Nov. 1980, p. 749-755. 19 refs. Contract No. W-7405-eng-26.

An energy simulation model for residential energy uses and costs from 1970 through 2000 estimates annual consumption of four fuels, eight end uses, and three housing types. The model also evaluates annual equipment installation, ownership, and equipment costs including charges for improving thermal performance of new and existing housing. An example of the model application is given by estimating the energy and economic factors of alternate water heating conservation options, they show the advantages of heat pump water heaters over conventional and solar units. A.T.

**A81-21063 #** Prospective energy sources and their comparison with current supplies (Perspektivnye istochniki energii i ikh sravnenie s ispol'zuemyimi). B. V. Voitsekhoyskii. *PMTF - Zhurnal Prikladnoi Mekhaniki i Tekhnicheskoi Fiziki*, Sept.-Oct. 1980, p. 118-125. 17 refs. In Russian.

The comparative physical-technical and economic characteristics of renewable energy sources are analyzed. The significant advantages of wind energy for future use over oil, gas, and coal are demonstrated. Costs of wind electrical energy are compared in the U.S., Denmark, and the U.S.S.R. A.T.

**A81-21101 \* #** Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning. R. D. Cess, S. Hameed, and J. S. Hogan (New York, State University,



## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

Stony Brook, N.Y.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/HT-3*. 3 p. 7 refs. Members, \$2.00; nonmembers, \$4.00. NSF Grant No. CME-79-09065; Grant No. NCC5-7.

Tropospheric ozone and methane might increase in the future as the result of increasing anthropogenic emissions of CO, NO<sub>x</sub> and CH<sub>4</sub> due to fossil fuel burning. Since O<sub>3</sub> and CH<sub>4</sub> are both greenhouse gases, increases in their concentrations could augment global warming due to larger future amounts of atmospheric CO<sub>2</sub>. To test this possible climatic impact, a zonal energy-balance climate model has been combined with a vertically-averaged tropospheric chemical model. The latter model includes all relevant chemical reactions which affect species derived from H<sub>2</sub>O, O<sub>2</sub>, CH<sub>4</sub> and NO<sub>x</sub>. The climate model correspondingly incorporates changes in the infrared heating of the surface-troposphere system resulting from chemically induced changes in tropospheric ozone and methane. This coupled climate-chemical model indicates that global climate is sensitive to changes in emissions of CO, NO<sub>x</sub> and CH<sub>4</sub>, and that future increases in these emissions could enhance global warming due to increasing atmospheric CO<sub>2</sub>. (Author)

**A81-22548** Preliminary environmental assessment for the satellite power system (SPS). *Journal of Environmental Sciences*, vol. 24, Jan.-Feb. 1981, p. 16-22, 31, 32.

The collection of solar energy via SPS for conversion to microwave energy and subsequent conversion to electricity is examined in light of potential health hazards, effect on ecosystems, and interaction of electromagnetic systems. Research exploring the immunologic, teratologic, and behavioral effects of a frequency of 2.45 gigahertz is discussed. Tropospheric effects of rocket effluents are documented in terms of the modification of weather conditions. Rectenna waste heat may result in alterations in the chemical composition of the stratosphere and mesosphere affecting ozone concentrations. Microwave energy transmitted might be sufficient to heat the ionosphere resulting in increased electron temperatures, irregularities in electron densities, focusing of electromagnetic waves and absorption or scattering of radio waves. Principal nonmicrowave effects catalogued are pollution and exposure of the general public and space workers to explosives and toxins. L.S.

**A81-23073** Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City. J. B. Homolya (U.S. Environmental Protection Agency, Environmental Sciences Research Laboratory, Research Triangle Park, N.C.) and S. Lambert (Engineering-Science, Inc., McLean, Va.). *Air Pollution Control Association, Journal*, vol. 31, Feb. 1981, p. 139-143. 27 refs.

**A81-23416** Utilization of cascade impactors in hot waste gas from an oil firing installation (Kaskadenimpaktoreinsatz im heißen Abgas einer Ölfeuerung). H. Franzen and H.-J. Fissan (Duisburg, Gesamthochschule, Duisburg, West Germany) *Staub - Reinhaltung der Luft*, vol. 41, Jan. 1981, p. 22-26. 8 refs. In German.

Andersen cascade impactors were used in an oil firing plant to characterize particulate emissions. Methods of eliminating possible errors in the fractionation and subsequent gravimetric analysis are described. The relation between soot index and particle parameters, including total particle mass concentration and particle mass distribution, is examined in relation to the value of the soot index for the assessment of particulate emissions. B.J.

**A81-23555 #** Evaluating the environmental effects of past and present surface mining - A remote sensing applied research review. A. T. Anderson (U.S. Department of the Interior, Office of Surface Mining, Washington, D.C.). In: *International Symposium on Remote Sensing of Environment*, 14th, San Jose, Costa Rica, April 23-30, 1980, Proceedings. Volume 1. Ann Arbor, Mich., Environmental Research Institute of Michigan, 1980, p. 275-278.

The objectives of the Office of Surface Mining Reclamation and Enforcement (OSM) of the U.S. Department of Interior are outlined,

with a view to its applied research program on remote sensing projects. The projects discussed include the development of a coal surface mine monitoring capability, the aerial photography of the Appalachian coal regions, contributions to the national high-altitude aerial photography data base and western surface mine aerial coverage. Remote sensing is also being used as a supplementary tool in five project and program areas dealing with mine evaluation. L.S.

**A81-24622** Sulfur pollution from coal combustion - Effect of the mineral components of coal on the thermal stabilities of sulfated ash and calcium sulfate. D. C. Baker and A. Attar (Houston, University, Houston, Tex.) *Environmental Science and Technology*, vol. 15, Mar. 1981, p. 288-293. 33 refs. Research supported by the Texas Energy Advisory Council and Dow Chemical Co.

**A81-24991** Energy storage technology - Environmental implications of large scale utilization. M. C. Krupka, J. E. Moore, W. E. Keller (California, University, Los Alamos, N. Mex.), G. A. Baca, R. I. Brasier, and W. S. Bennett (Los Alamos Technical Associates, Inc., Los Alamos, N. Mex.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 265-284. 33 refs.

Environmental effects are identified for several energy storage technologies including advanced lead-acid battery, compressed air, underground pumped hydroelectric, flywheel, superconducting magnet, and various thermal systems. A preliminary study on fuel cell technology is also reported. New applications for energy storage technologies and the additional costs of controls to be used for mitigation of specific impacts are briefly discussed. V.L.

**A81-25020** The series solar heat pump and energy conservation. E. A. Kush (Brookhaven National Laboratory, Upton, N.Y.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 665-676. 17 refs. Research sponsored by the U.S. Department of Energy.

An overview is given of the series solar heat pump concept and the reasons why it can serve an important role in energy conservation in space heating. These are highlighted by elevated Coefficients of Performance (COP's) and the use of low-temperature potentially inexpensive solar collectors. The characteristics required of the subsystems and integrated system are detailed. Particular emphasis is given to the performance of the heat pump itself at high temperature source conditions corresponding to those of solar input, and recent laboratory results which demonstrate very high COP's using practical components are shown. The reasons why the high COP's are a necessary but not sufficient condition for competitive overall system performance are detailed and methods for applying the high COP's to an effective Solar Assisted Heat Pump (SAHP) system are discussed. Ongoing development work in the field is summarized. (Author)

**A81-25036** A non-conventional reversible total energy system. S. Arosio (Milano, Politecnico, Milan, Italy) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 865-887. 20 refs.

The possibility of producing electricity and heat for residential use by a heat-pumped, freon working fluid-cycle thermogravimetric method is explored. The plant structure matches that of apartment buildings, and its operational characteristics react positively to insolation-incidence fluctuations. The system is made up entirely of conventional, safe and highly reliable components and with the choice of a suitable user, it is possible to obtain a system producing 100% of required heat and 30% of required electricity with operating costs lower than present energy prices and high efficiencies at even off-design conditions. O.C.

**A81-25053** An assessment of the atmospheric effects of a Satellite Power System. D. M. Rote, K. L. Brubaker, J. Lee, and A. R. Valentino (Argonne National Laboratory, Argonne, Ill.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979*. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1163-1191. 36 refs.

Assuming the elements of a reference Satellite Power System (SPS) created by NASA, the general environmental consequences and specific atmospheric effects of the Heavy Lift Launch Vehicle needed for its construction are assessed. Beginning with the troposphere, potential atmospheric effects such as weather modification, and the present understanding of them, are summarized as a function of altitude. Although all levels of the atmosphere will be affected, it is thought that its progressive rarefaction with increasing altitude will attenuate the rocket effluent and acoustical energy impacts of the HLLV's two daily flights over a period of 30 years and the rectenna waste heat release of the microwave power transmission system. O.C.

**A81-25061** Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices. C. Kirschner, S. Ben-David (New Mexico, University, Albuquerque, N. Mex.), and F. Roach (California, University, Los Alamos, N. Mex.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979*. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1371-1401. 6 refs. Research supported by the U.S. Department of Energy.

The economic potential of two passive space heating configurations with night insulation - a masonry thermal storage wall (Trombe) and a direct gain system - is assessed. Use is made throughout the analysis of a standard tract home design for each of the two passive systems in order to allow interregional comparisons. The performance of the two systems is evaluated from an economic standpoint on a regional basis (223 locations) throughout the U.S. For each of the two conventional energy types considered (electricity and natural gas), sensitivity analysis is carried out to determine the impact of alternative fuel price escalation rates and solar costs upon feasibility of the two solar systems. Cost goals for solar system prices are fixed under one set of future fuel prices and stated economic conditions. Alternatively, future fuel price requirements (given solar feasibility) are examined under stated add-on cost expenditures. C.R.

**A81-25088** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5 - Geothermal power/energy program. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.). Washington, D.C., Hemisphere Publishing Corp., 1981. 409 p. Price of nine volumes, \$595.

This volume examines the geothermal resource and geothermal energy utilization, and surveys regional energy programs worldwide. The particular papers presented on geothermal energy include those on the temperature indicators for geothermal use, geothermal drilling research in the United States, and geothermal energy and biofuel production in agriculture. Energy programs from India, Egypt, Turkey, Greece and Puerto Rico are reviewed. L.S.

**A81-25098** Indian energy sources in 1980's. A. C. Chaturvedi (Minor Irrigation Department, Lucknow, India). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979*. Volume 5. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2173-2196. 23 refs.

Indian energy sources for electrical power generation are surveyed with a view to the development of the available hydroelectric resources. The capital-intensive nature of hydroelectric

projects and their long gestation periods have impeded the rapid exploitation of the hydroelectric resources in the country, which are expected to provide 37% of the 16,200 MW capacity anticipated by 2001. Alternative sources of power such as solar and wind energy, biogas conversion and the use of industrial waste heat to produce electricity are discussed with case studies presented. L.S.

**A81-25161** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 9 - Conservation, economics, and policy; Index. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.). Washington, D.C., Hemisphere Publishing Corp., 1981. 560 p. Price of nine volumes, \$595.

The book examines the topics of waste utilization, conservation, and energy economics and policy. Energy supply and demand, energy economics and planning, and energy strategies and policies are reviewed. Papers are presented on the contributions to the energy supply of the industrialized countries from nuclear energy and regenerative energy flows, a method for estimating escalation and interest during construction, and a comparison of the incentives used to stimulate energy production between the United States and Japan. L.S.

**A81-25800** Energy efficiency of electrified passenger railway in the Canadian context. A. M. Khan (Carleton University, Ottawa, Canada) *Journal of Advanced Transportation*, vol. 14, Fall 1980, p. 237-254. 17 refs. Research sponsored by the Science Council of Canada and Transport Canada

Energy requirements of electrified passenger trains have not been adequately addressed in the technical literature. This paper examines in the Canadian context (1) the energy implications of passenger railway electrification in terms of propulsion energy requirements (from primary energy source to final consumption) as well as the indirect energy needed for rolling stock and infrastructure, and (2) the relative energy efficiencies of electric and diesel-electric railway traction systems (Author)

**A81-26196** An environmental appraisal of tidal power stations: With particular reference to the Severn barrage. Edited by T. L. Shaw (Bristol, University, Bristol, England) London and Marshfield, Mass., Pitman Publishing, Ltd. (Current Reports in Civil and Environmental Engineering 1), 1980. 932 p. \$18.95.

The book evaluates the changes in natural environment of the Severn Estuary whose tidal conditions are most favorable for power stations. Topics covered include physics of water movements in the Severn Estuary, sediment dynamics, drainage and land quality, and biological effects. In addition, ecosystem models and predictions, pollution, impact on wading birds, effects on wildfowl, fisheries, civil engineering problems, and the use of china clay sand in construction are discussed. A.T.

**A81-26371** Wind energy - A utility perspective. K. T. Fung, R. L. Scheffler, and J. Stolpe (Southern California Edison Co., Rosemead, Calif.) (*Institute of Electrical and Electronics Engineers, Summer Meeting, Minneapolis, Minn., July 13-18, 1980*) *IEEE Transactions on Power Apparatus and Systems*, vol. PAS-100, Mar 1981, p. 1176-1182. 6 refs.

Broad consideration is given to the siting, demand, capital and operating cost and wind turbine design factors involved in a utility company's incorporation of wind powered electrical generation into existing grids. With the requirements of the Southern California Edison service region in mind, it is concluded that although the economic and legal climate for major investments in windpower are favorable, the continued development of large only wind turbine machines (on the scale of NASA's 2.5 MW Mod 2 design) is imperative in order to reduce manpower and maintenance costs. Stress is also put on the use of demonstration projects for both

# 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

vertical and horizontal axis devices, in order to build up operational experience and confidence O.C.

**A81-27212 #** The U.S. National Photovoltaic Program. L. M. Magid and P. D. Maycock (U.S. Department of Energy, Div. of Distributed Solar Technology, Washington, D.C.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 887-892.

The Photovoltaic Energy System Program proposed by the United States Department of Energy is discussed with reference to the program strategy and goals, major elements, and management. A key element in this program is the expectation that photovoltaic residences will begin to be cost effective within the Southwestern United States when modules are priced at 70 cents/peak watt and the total installed system costs from \$1.6 to \$2.20 per peak watt (in 1980 dollars). The program anticipates this occurring in 1986. V.L.

**A81-28478 #** Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra. R. F. Pueschel, E. W. Barrett, D. L. Wellman, and J. A. McGuire (NOAA, Air Resources Laboratories, Boulder, Colo.). *Geophysical Research Letters*, vol. 8, Mar. 1981, p. 221-224. 11 refs. Research supported by the U.S. Environmental Protection Agency.

**A81-28549** Pacific Northwest geothermal - Review and outlook. W. Youngquist. *Geothermal Energy*, vol. 8, Oct.-Nov. 1980, p. 3-11.

Activities associated with geothermal exploration and development in the states of Idaho, Oregon, and Washington are reviewed. A geothermal electric plant on the Raft River is almost operational. Tests for space heating projects at Rexburg and in the City of Boise continue. The State of Oregon conducts its regional temperature gradient drilling program, and a number of shallow wells were drilled in 1979 and 1980. Deep well drilling (projected to 5,000 to 7,000 ft.) is pursued at Mount Hood. The eruption of Mount St. Helens has increased interest in the geothermal resources in Washington. A study of the warm and hot water potential on the northwest flank of Mount Ranier is negotiated. Possible space heating sources in 22 cities, towns, and hamlets in the Columbia Basin have been identified. Deleterious environmental impact on the forest regions of the Pacific Northwest is one reason for the Federal leasing problems. The electric power situation will be critical in the Northwest in 1983, as no additional power will probably be available to utilities from the Bonneville Power Administration. Indigenous U.S. energy sources can be developed and exploration activity can be increased if federal lease processing is greatly expedited. K.S.

**A81-28993** Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants. S. Ergun (California, University, Berkeley, Calif.). *Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980.* *Royal Society (London), Philosophical Transactions, Series A*, vol. 300, no. 1453, Mar. 20, 1981, p. 89-97. Discussion, p. 97, 98. 13 refs.

The presence of sulphur in coals is a major obstacle to their use in coal-fired power plants because of the restrictions placed on sulphur dioxide emitted from such plants. In this study, it has been found that the recently imposed sulphur dioxide emission standards in the United States are unrealistic because they are not consonant with the reserve base of U.S. coals by total and pyritic sulphur contents, and with factors influencing the removal of pyrite by physical methods. Since cleaning of coal by physical means is inexpensive compared with converting coals into clean-burning fuels before burning them in the boilers or reverting to stack-gas clean-up, and since direct firing of coal conserves the coal if the end product is electricity, it is recommended that the standards to be imposed should be consonant with the reserve base and the potential of physical methods. (Author)

**A81-29195** Oil substitution and energy saving - A research and development strategy of the International Energy Agency /IEA/ (Ölsubstitution und Energieeinsparung - Eine Forschungs- und Entwicklungsstrategie der Internationalen Energieagentur /IEA/). S. Rath-Nagel (Kernforschungsanlage Jülich GmbH, Jülich, West Germany). *Brennstoff-Wärme-Kraft*, vol. 33, Mar. 1981, p. 85-89. 18 refs. In German.

Systems analyses were carried out by the International Energy Agency for the participating 15 countries in order to work out strategies and scenarios for lessening the dependence on imported oil and for developing new energy technologies. MARKAL model computations show the technology and energy mixes necessary for achieving a reduction of oil imports by two thirds over the next 40 years. The scenario 'high social security' examines the projected rise in energy consumption, the development of oil substitutes, the increase in alternative heating sources, the development of markets for liquid energy products, the demand for gas, and the relative usage of various energy generation methods. The recommended strategy involves as the most important points an increase in coal consumption, greater nuclear energy reliance and development of alternative technologies. D.K.

**A81-29681** Private sector initiatives - A case history. H. Homeyer (Texas Eastern Synfuels, Inc., Houston, Tex.). In: Synfuels industry opportunities, Proceedings of the Seminar, Washington, D.C., November 6, 7, 1980. Seminar sponsored by the Government Institutes. Washington, D.C., Government Institutes, Inc., 1981, p. 95-126.

The overall development of the synfuel industry in the United States is reviewed with reference to types of synfuels, synfuel production goals, expected structure of industry, characteristics of projects, and government involvement. In particular, the role of private energy companies in the synfuels area is discussed using as an example the projects pursued by Texas Eastern. V.L.

**A81-30056 \* #** Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels. P. L. Russell, G. W. Beal (United Technologies Corp., Government Products Div., West Palm Beach, Fla.), R. A. Sederquist (United Technologies Corp., Power Systems Div., South Windsor, Conn.), and D. Shultz (NASA, Lewis Research Center, Cleveland, Ohio). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-157* 8 p. Members, \$2.00, nonmembers, \$4.00. Research supported by the U.S. Department of Energy and NASA.

Rich-lean combustor concepts designed to enhance rich combustion chemistry and increase combustor flexibility for NO(x) reduction with minimally processed fuels are examined. Processes such as rich product recirculation in the rich chamber, rich-lean annihilation, and graduated air addition or staged rich combustion to release bound nitrogen in steps of reduced equivalence ratio are discussed. Variations to the baseline rapid quench section are considered, and the effect of residence time in the rich zone is investigated. The feasibility of using uncooled non-metallic materials for the rich zone combustion construction is also addressed. The preliminary results indicate that rich primary zone staged combustion provides environmentally acceptable operation with residual and/or synthetic coal derived liquid fuels. L.S.

**A81-30111 #** Energy conservation through process modification and control. S. C. Agarwal and M. A. Keyes (Bailey Controls Co., Wickliffe, Ohio). *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex., Jan. 18-22, 1981, Paper 81-PID 2* 13 p. 9 refs. Members, \$2.00, nonmembers, \$4.00.

Application of the second law of thermodynamics for identification of energy conservation opportunities in process plants is briefly reviewed. Energy conservation by process modification and control in process and petrochemical plants is presented via examples. Also, a generalized algorithm, minimizing incremental cost, for load allocation to multiple units (functionally similar, e.g., boilers, process

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

heaters, pumps, compressors, etc.) operating in parallel has been developed (Author)

**A81-30113 #** Making windpower an important part of a national energy plan. A. N. Finlayson (A. Neil Finlayson, Ltd., Broomall, Pa.) *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex., Jan. 18-22, 1981, Paper 81-Pet-11* 5 p. Members, \$2.00; nonmembers, \$4.00.

The design characteristics of the Finlayson Windcatcher wind turbine are outlined. The unit geometry consists of two vertical axis cylindrical vane arrays mounted very close to each other and rotating in opposite directions. The two rotors are supported top and bottom by anti-friction bearings mounted at the ends of arms which are attached to a single support pillar. Because the rotor axes are downwind of the support pillar axis, they are free to swing in the horizontal plane, remaining automatically downwind without the need for a separate guide vane. There is not gyroscopic effect of the rotors to hinder rotation in wind direction. A 1-2 kW net electrical output in a 30 mph wind is estimated. L.S.

**A81-30118 #** Overview of unconventional energy projects in the public power sector. R. E. Leber (American Public Power Association, Washington, D.C.) *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex., Jan. 18-22, 1981, Paper 81-DGP-1* 8 p. Members, \$2.00; nonmembers, \$4.00.

The alternative energy programs sponsored by publically owned utilities across the country are reviewed. Biomass conversion, diesels, combustion turbines, fuel cells, solar heating units, wind power, cogeneration, and load management are discussed in the context of the individual projects. The emphasis of the programs is on providing the services required by consumers, such as water heating, space conditioning, and insulation, rather than on the marketing of electricity as a single product. L.S.

**N81-16311#** Committee on Energy and Natural Resources (U.S. Senate)

**OCTOBER REPORT ON THE CURRENT FUEL SITUATION FROM THE ENERGY INFORMATION ADMINISTRATION** Washington GPO 1980 220 p refs. Hearing before the Subcomm. on Energy Regulation of the Comm. on Energy and Nat. Resources, 96th Congr., 1st Sess., 22 Oct 1979 (GPO-80-871, Publ-96-101) Avail: Subcommittee on Energy Regulation

The energy situation is assessed with emphasis on the near term supply of petroleum fuels and prevailing prices. The effect of immediate decontrol of gasoline prices is considered as well as the profits of refineries since price controls were lifted from heating oil and diesel fuels. A.R.H.

**N81-16314#** Oak Ridge National Lab., Tenn. Environmental Sciences Div.

**ENVIRONMENTAL METRICS OF SYNTHETIC FUELS. 1: PROCESSING THE AUTOMATED PDP-11 DATA COMPONENTS FOR THE UMD GASIFIER FACILITY**

R. H. Strand, M. P. Farrell, C. W. Gudmundson, T. K. Birchfield, S. S. Casada, and M. E. Vansuch 1980 19 p (Contract W-7405-eng-26) (CONF-8010108-7; Publ-1564) Avail: NTIS HC A02/MF A01

Techniques and procedures used to handle automated data collected at the University of Minnesota-Duluth campus coal gasification facility are described. This facility is evaluated for its potential health and environmental effects. Automatic and manually collected data and sample results data are used for this assessment. The procedures developed within the data management project for handling two categories of automated data are described: (1) process; and (2) environmental. The examples use data from the first one and a half years of gasifier operation. S.F.

**N81-16316#** Mid-American Solar Energy Complex, Minneapolis, Minn.

**ON-FARM PRODUCTION OF FUEL-ALCOHOL IN MID-AMERICA TECHNICAL AND ECONOMIC POTENTIAL**

Michael A. Hohmann Mar 1980 22 p refs. Presented at the 12th Ann. Meeting of the Mid-Continent Regional Sci. Assoc., Lincoln, Nebr., 24-26 Apr 1980

(Contract DE-AC02-79CS-30150)

(MASEC-TP-80-009, CONF-8004124-1)

HC A02/MF A01

Avail: NTIS

The agricultural energy consumption for the central part of the United States was examined. Fermentation alcohol production and co-product usage rates were predicted. Theoretical ethanol yields from raw materials are presented. Suggestions for further research and development in farm fuel production are presented. TM

**N81-16510** Michigan State Univ., East Lansing

**THE INDIAN LANDS STUDY: AN EXAMPLE OF THE APPLICATION OF GEOGRAPHIC RESEARCH TO THE ANALYSIS OF COMPLEX ENERGY AND ENVIRONMENTAL POLICY ISSUES** Ph.D. Thesis

Douglas Burton Richardson 1980 397 p

Avail: Univ. Microfilms Order No. 8101157

Numerous policy and land use planning issues related to controlling the environmental impacts and changes which accompany large scale surface mining on Indian lands were analyzed. The spatial area encompassed by the project includes all twenty-five Indian reservation in the United States which are known to contain coal resources. The subject matter of the study ranged from the physical landscapes of those areas to their political and cultural environments to their interaction with the larger, national region in two key areas--the quest for an expanded energy supply, and the need to prevent environmental damage and degradation. The Study's final report, entitled *The Control and Reclamation of Surface Mining on Indian Lands*, brings together a comprehensive set of data on the contemporary North American Indian setting, and in so doing addresses an important range of the key energy related issues confronting tribes in their modern environment. Dissertation Abstr.

**N81-16513#** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

**REGIONAL PRICE TARGETS APPROPRIATE FOR ADVANCED COAL EXTRACTION**

Katsuaki L. Terasawa and David M. Whipple 1 Dec. 1980 74 p refs

(Contracts NAS7-100; DE-AI01-76ET-12548)

(NASA-CR-163896; JPL-Pub-80-91)

HC A04/MF A01 CSCL 081

Avail: NTIS

A methodology is presented for predicting coal prices in regional markets for the target time frames 1985 and 2000 that could subsequently be used to guide the development of an advanced coal extraction system. The model constructed is a supply and demand model that focuses on underground mining since the advanced technology is expected to be developed for these reserves by the target years. Coal reserve data and the cost of operating a mine are used to obtain the minimum acceptable selling price that would induce the producer to bring the mine into production. Based on this information, market supply curves can be generated. Demand by region is calculated based on an EEA methodology that emphasizes demand by electric utilities and demand by industry. The demand and supply curves are then used to obtain the price targets. The results show a growth in the size of the markets for compliance and low sulphur coal regions. A significant rise in the real price of coal is not expected even by the year 2000. The model predicts heavy reliance on mines with thick seams, larger block size and deep overburden. A.R.H.

**N81-16524#** Committee on Science and Technology (U.S. House).

**NATIONAL ACADEMY OF SCIENCES REPORT: ENERGY IN TRANSITION, 1985-2010**

Washington GPO 1980 150 p refs. Hearing before the

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

Comm on Sci and Technol., 96th Congr, 2nd Sess., no. 119, 25 Jan. 1980

(GPO-61-847) Avail. Committee on Science and Technology

The results of the report of the Committee on Nuclear and Alternative Energy Systems, known as the CONAES report, were reviewed. The economic, social and technical aspects of energy policy options during the remainder of the 20th century and early in the 21st century were examined. The results are used as one of many guidelines in energy policy making. T.M

### **N81-16525#** Committee of Conference (U. S Congress) **WIND ENERGY SYSTEMS ACT OF 1980**

Washington GPO 1980 17 p Conf Rept to accompany H R 5892 presented by the Comm of Conf at the 96th Congr, 2nd Sess., 1 Aug 1980

(H-Rept-96-1217) Avail. US Capitol, House Document Room

A compromise set of findings and purpose was adopted which is based on parts of both the House and Senate bills. By the end of 1988, the Act seeks (1) to reduce the average cost of electricity produced by installed wind energy systems; (2) to reach a total megawatt capacity in the U.S from wind energy systems of at least 800 megawatts, of which at least 100 megawatts are provided by small wind energy systems, and (3) to accelerate the growth of a commercially viable and competitive industry to make wind energy systems available to the general public as an option. It is recommended that the House recede from disagreement to the Senate amendment to test the bill and agree on a compromise title. A.R.H.

### **N81-16527#** Committee on Science and Technology (U. S. House) **FORESIGHT. VOLUME 2: ENERGY CONSERVATION IN CITIES**

Washington GPO 1979 123 p refs Presented to the Subcomm. on Advan Energy Technol and Energy Conserv Res., Develop. and Demonstration of the Comm on Sci and Technol., 95th Congr., 2nd Sess., Dec 1978 Prepared by Congressional Research Service, Library of Congress (GPO-47-454) Avail: SOD

A review of the development of cities is presented along with demographic patterns and imperatives that affect energy conservation. Public reactions to energy conservation were surveyed and planning strategies and policies were developed. Social and institutional barriers to energy conservation were examined. Problems that cities have with federal energy conservation programs were reviewed. Urban planning with emphasis on energy conservation was discussed. T.M.

### **N81-16530\*#** National Aeronautics and Space Administration, Washington, D C

**SOLAR POWER SATELLITE SYSTEM Patent Application**  
George L. Sarver, III, inventor (to NASA) (MIT, Cambridge) Filed 29 Sep. 1980 11 p Sponsored by NASA (NASA-Case-HQN-10949-1, US-Patent-Appl-SN-191747) Avail: NTIS HC A02/MF A01 CSCL 10A

A solar power satellite system is provided which includes a power satellite and at least one reflector satellite. The power satellite, which constitutes the great mass of the system, has a geosynchronous, gravity gradient stabilized orbit. The power satellite comprises a planar array of solar cells, with the plane of the satellite being oriented so as to be parallel with the plane of its orbit. An antenna or antennas mounted on the power satellite are powered by the solar cells and serve to transmit microwave energy back to earth. The shape and orbit of the reflector satellite are controlled so that solar radiation is focused by the reflector satellite onto the solar array of the power satellite. NASA

### **N81-16531#** Comptroller General of the United States, Washington, D.C.

#### **A FRAMEWORK FOR DEVELOPING A NATIONAL ENERGY CONSERVATION PROGRAM**

31 Jul 1979 60 p refs  
(EMD-79-76) Avail. NTIS HC A04/MF A01

A decision making framework is discussed which is intended

as one approach for considering the wide range of alternatives available to the Government for achieving more energy conservation in the Nation. The framework provides for evaluating energy conservation strategies ranging from voluntary initiatives to mandatory actions. It also provides for selecting specific policies and programs based on an evaluation of expected energy savings and costs and on environmental, economic, and social impacts. A.R.H.

### **N81-16532#** Comptroller General of the United States, Washington, D C

#### **HOW THE PETROLEUM REFINING INDUSTRY APPROACHES ENERGY CONSERVATION. A CASE STUDY**

13 Jun 1980 70 p refs  
(EMD-80-55) Avail: NTIS HC A04/MF A01

The U.S. petroleum refining industry accounts for about 4 percent of total domestic energy consumption and over 10 percent of all energy consumed by the industrial sector. The refining industry has achieved significant improvements in efficiency in the past and expects continued improvements. Conservation achievements are examined and the impact of existing Federal energy conservation programs in furthering conservation gains are assessed. The definition of 'conservation' used includes both increased energy efficiency and fuel substitution. A.R.H.

### **N81-16569\*#** National Aeronautics and Space Administration, Goddard Space Flight Center, Greenbelt, Md

#### **HOUSING AUTHORITY OF BALTIMORE CITY-PUBLIC HOUSING ENERGY WORKSHOP**

Thomas S. Golden, ed. 1980 49 p Workshop held at Easton, Md., 21-23 Sep. 1980

(NASA-TM-82050) Avail: NTIS HC A03/MF A01 CSCL 10B

The NASA/Baltimore Applications Project operating at the Goddard Space Flight Center was called upon by the Housing Authority of Baltimore City to consider the problems of providing low cost public housing because of increased energy costs and suggest methods for correction and alleviation. The first step chosen was to elicit as many different options for solution as possible through means of a Public Housing Energy Workshop held in Easton, Md. in September 1980. A final role for the Workshop was a listing and qualifying of each alternative as to its suitability and cost. Specific areas were examined by three panels: (1) Systems, (2) Conservation and Motivation, and (3) Fuels. Each panel was made up of persons from differing but appropriate backgrounds; membership was not restricted to housing people alone. A summary of their deliberations is given - it will be used as a stepping stone to further selection and implementation of alternatives. Author

### **N81-16585#** Committee on Energy and Natural Resources (U S Senate)

#### **ENERGY IN TRANSITION, 1985-2010**

Washington GPO 1980 64 p refs Hearing before the Comm. on Energy and Nat. Resources, 96th Congr., 2nd Sess., 18 Apr 1980

(GPO-63-171, Publ-96-110) Avail. Committee on Energy and Natural Resources

Highlights of the Committee on Nuclear and Alternative Energy Systems' (CONAES) report are summarized. A variety of energy futures are discussed with respect to their political desirability and feasibility. The social acceptability attached to the risks involved in each of the possible energy futures was examined. Policies were determined with regard to the flexibility to change the direction of growth and research in the future. T.M

### **N81-16587#** Air Force Inst of Tech, Wright-Patterson AFB, Ohio. School of Meteorology

#### **ENVIRONMENTAL INFLUENCES IN THE SIMULATION OF A SOLAR SPACE HEATING SYSTEM M.S. Thesis - Oklahoma Univ.**

Douglas M. Brooks 1980 132 p refs  
(AD-A092436; AFIT-CI-80-20T) Avail NTIS  
HC A07/MF A01 CSCL 13/1

The objective of this thesis was to determine whether hourly

departures in building heat loss given by a simplified degree day approach has a significant effect on the selection of an optimum collector size for the solar system. A numerical model was to do simulation studies. Using the results from this simulation an optimum collector size was determined from the energy requirements given by each model and a comparison made between the simulations and the degree day approaches. GRA

**N81-16603#** Houston Univ., Tex.  
**ENERGY SUPPLY AND DEMAND PROPERTIES FROM ENGINEERING PROCESS MODELS** Final Report  
 R G Thompson, S Muthukrishnan, F D Singleton, Jr., and J C Stone Jan 1980 171 p refs  
 (EPRI Proj 1055-1)  
 (EPRI-EA-1568) Avail: NTIS HC A08/MF A01

Energy supplies and demands are studied by use of process models. A process mode represents a synthesis of engineering and economic principles into a mathematical model of production. The mathematical procedure employed is linear programming. The distinguishing features of this method are: (1) the representation of specific processes by vectors of fixed coefficients which describe the inputs, outputs and costs of each process; and (2) the mathematical structuring of these process representations in such a way as to impose relevant economic, engineering, and policy constraints on the choice of process alternatives. Solution of the linear programming model for its minimum cost solution gives the economically efficient way to produce the required outputs within the limitations of externally imposed economic and regulatory constraints. S F

**N81-16604#** Los Alamos Scientific Lab., N. Mex.  
**CONSTRAINTS TO BIO-ENERGY DEVELOPMENT**  
 Virginia Barber Parsons 1980 9 p refs Presented at the 3rd Intern. Conf on Alternative Energy Sources, Miami Beach, Fla., 15-17 Dec 1980  
 (Contract W-7405-eng-36)  
 (LA-UR-80-3387; CONF-801210-7) Avail: NTIS HC A02/MF A01

The energy crisis has prompted research and development of renewable, domestic, cost effective, and publicly acceptable energy alternatives. Among these are the bioconversion technologies. To date bioenergy research has been directed toward the mechanics of the conversion processes and technical assessment of the environmental impacts. However, there are other obstacles to overcome before biomass can be converted to more useful forms of energy that fit existing need. Barriers to bioenergy resource application are identified. In addition, examples from several agricultural regions serve to illustrate site specific resource problems. E D.K.

**N81-16605#** Los Alamos Scientific Lab., N. Mex.  
**ENERGY, HELIUM, AND THE FUTURE, 2**  
 Milton C Krupka and Edward F Hammel 1980 23 p refs  
 Presented at Third Intern Conf on Alternative Energy Sources, Miami Beach, Fla., 15-17 Dec 1980  
 (Contract W-7405-eng-36)  
 (LA-UR-80-3342; CONF-801210-6) Avail: NTIS HC A02/MF A01

Potential supplies of helium from both conventional and unconventional natural gas resources, projected supply/demand relationships to the year 2030 based upon a given power generation scenario, projected helium demand for specific energy related technologies and the supply options available to meet that demand are discussed. An updated review is given of the energy requirements for the extraction of helium from natural gas as they relate to the concentration of helium. The technical and economic feasibility of several methods available both now and conceptually possible to extract helium from helium lean natural gas, the atmosphere and outer space is discussed. A brief review is given of the 1980 congressional activities with respect to the introduction and possible passage of helium conservation legislation. E D.K.

**N81-16611#** National Inst. of Building Sciences, Washington, D C.

**RESIDENTIAL ENERGY EFFICIENCY STANDARDS STUDY: TECHNICAL ANALYSIS**  
 Jun. 1980 370 p refs  
 (Contract HUD-HC-5040)  
 (PB81-106981, HUD-0001671) Avail: NTIS HC A16/MF A01 CSCL 13A

The need for, the feasibility of, and the problems of requiring, by mandatory federal action, that all residential dwelling units meet applicable, energy efficiency standards was determined. The potential requirements of mandatory energy efficiency standards was identified. The incremental energy savings and investment cost of mandatory standards for 1981 through 1990 was estimated. The impact of estimated, maximum incremental energy savings and investment cost of standards on the entire economy was assessed. GRA

**N81-16612#** National Bureau of Standards, Washington, D C.  
 National Engineering Lab  
**THE NBS ENERGY MODEL ASSESSMENT PROJECT: SUMMARY AND OVERVIEW**  
 S. I. Gass, K L Hoffman, R H F. Jackson, L S. Joel, and P B Saunders Sep. 1980 43 p refs Sponsored in part by DOE  
 (PB81-105082, NBSIR-80-2128) Avail: NTIS HC A03/MF A01 CSCL 10A

The activities and technical reports for the project are summarized. The reports cover: assessment of the documentation of Midterm Oil and Gas Supply Modeling System, analysis of the model methodology characteristics of the input and other supporting data, statistical procedures undergirding construction of the model and sensitivity of the outputs to variations in input, as well as guidelines and recommendations for the role of these in model building and developing procedures for their evaluation. GRA

**N81-16614#** Gamze-Korobkin-Caloger, Inc., Washington, D C.  
**ANALYSIS OF RESIDENTIAL DUCT LOSSES** Final Report, Mar. 1979 - Apr. 1980  
 Joseph A Orlando, Maurie G Gamze, N Malik, R Crews, G. Michaels, and J. Christie Aug 1980 219 p refs Sponsored by Gas Research Inst  
 (PB80-228000, Rept-9240-2, GRI-79/0037) Avail: NTIS HC A10/MF A01 CSCL 08M

To assess the impact of measured duct losses on energy consumption, it is necessary to consider the duct system as but one element in the residential environmental control system that includes both the building frame and the furnace. Based on data collected in this effort, it was concluded that duct systems should include return registers in each room and balancing dampers in all supply branches. This will increase occupant comfort and decrease heating costs. It may also improve the performance of a central air conditioning system. It was also found that taping and insulating duct-work can produce meaningful energy savings, while the use of outside air for combustion was of minor consequence. GRA

**N81-16626#** Committee on Energy and Natural Resources (U S Senate)  
**EFFECTS OF CARBON DIOXIDE BUILDUP IN THE ATMOSPHERE**  
 Washington GPO 1980 344 p Hearing before the Comm on Energy and Nat. Resources, 96th Congr., 2nd Sess., 3 Apr 1980  
 (GPO-62-841, Publ-96-107) Avail: Committee on Energy and Natural Resources

The extent to which the burning of fossil fuels contributes to the greenhouse effect is examined as well as other sources of carbon dioxide in the atmosphere and the effects on climate, environment and society. Physical processes important for climate and climate modeling and the validity of the models is assessed. Particular attention is given to atmospheric warming and the snow-ice effects. The need for international efforts to consider the global effects of carbon dioxide and the possibilities for avoiding or reducing them is expressed. A.R.H.

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

**N81-16631#** Brookhaven National Lab., Upton, N Y Process Sciences Div

**THE VALUE OF FORESTATION IN ABSORBING CARBON DIOXIDE SURROUNDING A COAL FIRED POWER PLANT**  
V D. Dang and M. Steinberg Aug 1980 25 p refs  
(Contract DE-AC02-76CH-00016)

(BNL-51279) Avail: NTIS HC A02/MF A01

The dispersion of carbon dioxide emitted from a 1000 MW(e) coal fired power plant is investigated. Forestation is examined as a means for removal and control of atmospheric carbon dioxide at a distance of 5 to 10 km away from the power plant stack. An equilibrium and a dynamic approach are considered. For an average temperate zone forest growth rate (7.42 mg/sqdm hr), the overall reduction in forested land area required to remove the equivalent of all of the CO<sub>2</sub> from a 1000 MW(e) power plant would be less than 33% compared to removing the equivalent amount of CO<sub>2</sub> by planting forests remotely from the plant. If faster growing tropical plants or trees having up to four times the temperature plant growth rate were used, there would be a maximum savings of 15% in forested land area compared to a remote planting. This magnitude of reduction in cultivated forest area is insufficient to recommend planting forested areas adjacent to central power stations as a means of controlling CO<sub>2</sub> emission. Rather it is suggested to provide sufficient increased regional forest areas on a global scale. M G

**N81-16635#** California Univ., Livermore Lawrence Livermore Lab

**ECOLOGICAL PROBLEMS ASSOCIATED WITH GEOTHERMAL DEVELOPMENT IN CALIFORNIA**

J H Shinn and R R Ireland 4 Aug 1980 14 p refs Submitted for publication. Sponsored by DOE

(UCRL-83941-Rev-1, CONF-800867-1-Rev-1) Avail: NTIS HC A02/MF A01

Geothermal power plants have the potential for supplying about 5 percent of the U S electrical generating needs by 1985 and are even now supplying about one third of San Francisco's electricity. Our investigations have shown that the typical geothermal field, such as the hot water resource of Imperial Valley, can be developed in an environmentally sound manner when proper considerations are made for ecosystem problems. Experimental evidence is presented, both pro and con for potential impacts due to habitat disturbance, powerline corridors, noise effects, trace element emissions from cooling towers, accidental brine discharges into aquatic or soil systems, competition for water and H<sub>2</sub>S effects on vegetation. A mitigation and control strategy is recommended for each ecological issue and it is shown where effects are likely to be irreversible. E D K.

**N81-16956#** Committee on Science and Technology (U S House).

**MUNICIPAL SOLID WASTE TO ENERGY ACT OF 1979**

Washington GPO 1980 220 p refs. Hearings on S 1934 before the Subcomm. on Energy Conserv. and Supply of the Comm. on Energy and Nat. Resources, 96th Congr., 2nd Sess. 27-28 Feb. 1980

(GPO-60-684; Publ-96-99) Avail: Subcommittee on Energy Conservation and Supply

A bill is discussed which is designed to promote the construction and operation of facilities for solid waste utilization. Among its provisions is a price support loan program for municipal solid waste to energy systems. Grants in the amount of \$12 million are authorized for states and local subdivisions, to evaluate the feasibility of various resource recovery alternatives in given communities. A R H.

**N81-16958#** Argonne National Lab., Ill Transportation Energy Systems Sect.

**TECHNOLOGY ASSESSMENTS IN TRANSPORTATION: SURVEY OF RECENT LITERATURE**

Sarah J LaBelle Mar 1980 245 p refs

(Contract W-31-109-eng-38)

(ANL/CNSV-TM-44) Avail: NTIS HC A11/MF A01

A survey and an evaluation of recent studies of transportation systems done in a technology assessment framework were

undertaken as the basis for a detailed statement for a technology assessment of transportation energy conservation strategies. Several bibliographies were searched and numerous professionals in the field of technology assessment were contacted regarding current work. Detailed abstracts were prepared for studies judged to be sufficiently broad in coverage of impacts assessed, yet detailed in coverage of all or part of the nation's transportation systems. Some studies were rich in data but not comprehensive in their analytical approach. Brief abstracts were prepared for these. An explanation of the criteria used to screen the studies, as well as abstracts of 37 reports, are provided in this compendium of transportation technology assessment literature. Author

**N81-17285#** Oak Ridge National Lab., Tenn  
**LIFE SCIENCES SYNTHETIC FUELS PROGRAM AT OAK RIDGE NATIONAL LAB.**

K E Cowser and C R Richmond 1980 27 p refs. Presented at 20th Ann Hanford Life Sci Symp., Richland, Wash., 10 Oct 1980

(Contract W-7405-eng-28)

(CONF-801039-3) Avail: NTIS HC A03/MF A01

The health and environmental issues of synthetic fuels technologies is summarized. The program objectives are discussed. Investigations underway on the chemical, physical, and biological properties of potentially hazardous products derived from coal conversion or shale oil and on the environmental aspects of these products are described. DOE

**N81-17394#** National Water Well Association, Worthington, Ohio.

**GROUND-WATER HEAT PUMPS: AN EXAMINATION OF HYDROGEOLOGIC, ENVIRONMENTAL, LEGAL, AND ECONOMIC FACTORS AFFECTING THEIR USE.**

VOLUME 1: MAIN TEXT, APPENDICES A, B, AND C  
D. M. Armitage, Douglas J Bacon, John T Massey-Norton, and James M. Miller 12 Nov 1980 280 p refs

(Contract DE-AC01-78CS-20060)

(DOE/CS-20060/5120-Vol-1) Avail: NTIS HC A13/MF A01

Groundwater is attractive as a potential low temperature energy source in residential space conditioning applications. When used in conjunction with a heat pump, ground water can serve as both a heat source and a heat sink. Major hydrogeologic aspects that affect system use include groundwater temperature and availability at shallow depths as these factors influence operational efficiency. Ground water quality is considered as it affects the performance and life expectancy of the water side heat exchanger. Environmental impacts related to groundwater heat pump system use are most influenced by water use and disposal methods. In general, recharge to the subsurface is recommended. Legal restrictions on system use are often stricter at the municipal and county levels than at state and federal levels. Computer simulations indicate that under a variety of climatologic conditions, groundwater heat pumps use less energy than conventional heating and cooling equipment. Life cycle cost comparisons with conventional equipment depend on alternative system choices and well cost options included in the groundwater heat pump system. DOE

**N81-17410#** Oak Ridge National Lab., Tenn. Presented at Ind. Hygiene and Occupational Med. in Coal Conversion Project Workshop, Washington, D.C., 7 Nov 1980

**BIOLOGICAL EXPOSURE SENSORS IN COAL CONVERSION TECHNOLOGIES**

A. S. Garrett, Jr. 1980 9 p refs

(Contract W-7405-eng-28)

(CONF-801143-1) Avail: NTIS HC A02/MF A01

A surveillance package appropriate to the special needs for those exposed to effects of coal conversion technologies was proposed. The monitoring program to evaluate the health of the population exposed to the chemical constituents of conversion products, effluents, process stream contents or wastes is described. Particular attention is paid to polycyclic aromatic hydrocarbons. DOE

**N81-17445#** Automated Sciences Group, Inc., Silver Spring, Md



**SUPPORT FOR THE ANALYTICAL TOOLS FOR AUTOMOTIVE FUEL ECONOMY ACTIVITIES** Final Report, 30 Nov. 1977 - 1 Jul. 1980

William E. Hatch Jun 1980 78 p refs  
(Contract DOT-HS-7-01708)

(PB81-109555; ASG-TR-80-31; DOT-HS-805-518) Avail: NTIS HC A05/MF A01 CSCL 13F

Vehicle certification reports issued by EPA in September and February of each year contain individual emissions tests results. Data on vehicle test weight, engine displacement, dynamometer horsepower setting and fuel economy as computed from the emissions values are included. The certification data were extracted on magnetic tape. GRA

**N81-17520\*** Meridian Corp., Falls Church, Va.  
**CENTRAL STATION MARKET DEVELOPMENT STRATEGIES FOR PHOTOVOLTAICS** Final Report

7 Nov. 1980 70 p refs Sponsored by DOE Prepared for JPL  
(Contract JPL-955820)

(NASA-CR-163947; DOE/JPL-955820-80) Avail: NTIS HC A04/MF A01 CSCL 10A

Federal market development strategies designed to accelerate the market penetration of central station applications of photovoltaic energy system are analyzed. Since no specific goals were set for the commercialization of central station applications, strategic principles are explored which, when coupled with specific objectives for central stations, can produce a market development implementation plan. The study includes (1) background information on the National Photovoltaic Program, photovoltaic technology, and central stations; (2) a brief market assessment; (3) a discussion of the viewpoints of the electric utility industry with respect to solar energy; (4) a discussion of commercialization issues; and (5) strategy principles. It is recommended that a set of specific goals and objectives be defined for the photovoltaic central station program, and that these goals and objectives evolve into an implementation plan that identifies the appropriate federal role. Author

**N81-17526\*** National Aeronautics and Space Administration.  
Lyndon B. Johnson Space Center, Houston, Tex.

**THE DEVELOPMENT AND UTILIZATION OF SOLAR PHOTOVOLTAIC CELLS: AN ASSESSMENT OF THE POTENTIAL FOR A NEW ENERGY TECHNOLOGY**

Kelley J. Cyr Jan 1981 45 p refs  
(NASA-TM-58229) Avail: NTIS HC A03/MF A01 CSCL 10A

The Government set the goal of accelerating the adaptation of photovoltaics by reducing system costs to a competitive level and overcoming the technical, institutional, legal, environmental, and social barriers impeding the diffusion of photovoltaic technology. The technology of silicon solar arrays was examined and the status of development efforts are reviewed. The political, legal, economic, social, and environmental issues are discussed, and several methods for selecting development projects are described. A number of market forecasting techniques, including time trend, judgemental, and econometric methods, were reviewed, and the results of these models are presented. T.M.

**N81-17578\*** Aerospace Corp., Germantown, Md. Environment and Energy Conservation Directorate

**MILITARY WASTES-TO-ENERGY APPLICATIONS**

Keith E. Kawaoka Nov. 1980 199 p refs

(AD-A093042; ATR-80(8374)-1) Avail: NTIS HC A09/MF A01 CSCL 13/2

This analysis focuses on the military waste material and byproduct stream and the potential for energy recovery and utilization. Feedstock material includes municipal-type solid waste, selected installation hazardous waste, and biomass residue. The study objectives are to (1) analyze the characteristics of the military waste stream; (2) identify potential energy recovery options; and (3) examine and assess the technical and economic feasibility and environmental and institutional impacts of various energy recovery approaches. Total energy recoverable from DOD solid waste could provide about 2 percent of DOD's facility

energy demand. The energy potential available to DOD from biomass and hazardous waste was not available. Available waste-to-energy systems are thermal conversion processes such as incineration with heat recovery. The significance of this recoverable energy from military wastes is put in proper perspective when the benefits and barriers in using waste-derived energy are considered. Some of the benefits of waste-to-energy conversion are as follows: waste energy is a readily available and inexhaustible resource that greatly reduces dependence on imported energy. GRA

**N81-17582\*** Friends of the Earth, San Francisco, Calif  
**DECENTRALIZED ENERGY STUDIES: COMPENDIUM OF INTERNATIONAL STUDIES AND RESEARCH**

Cissy Wallace Mar. 1980 73 p refs Prepared in cooperation with Midwest Research Inst., Golden, Colo.  
(Contract EG-77-C-01-4042)

(SERI/RR-744-451) Avail: NTIS HC A04/MF A01

With efficient use of energy, renewable energy sources can supply the majority, if not the totality, of energy supplies in developed nations at real energy prices that double or triple by 2025 (1975 prices). This appears true even in harsh climates with oil dependent industrial economies. Large increases in end-use energy efficiency are cost effective at present prices. Some reports show that cost effective end-use efficiency improvements can reduce energy consumption (per capita, per unit of amenity, or per unit of output) to as much as 90 percent. This was demonstrated by highly disaggregated analyses of end-uses. Such analyses consistently show larger potential for efficiency improvements than can be detected from conventional analyses of more aggregated data. As energy use demands decline due to end use efficiency improvements, energy supply problems subsequently decrease. Lifestyle changes, influenced by social factors, and rising energy prices can substantially reduce demands for energy. Such changes are already discernible in end-use energy studies. When energy efficient capital stock is in place, many end-users of energy will be able to provide a substantial portion of their own energy needs from renewable energy sources that are directly available to them. E.D.K

**N81-17583\*** Oak Ridge Associated Universities, Tenn. Inst. for Energy Analysis.

**COST-ENERGY DYNAMICS: AN ENGINEERING-ECONOMIC BASIS FOR INDUSTRIAL ENERGY CONSERVATION POLICIES**

Doan L. Phung and Willem van Gool (Rijksuniversiteit Utrecht, The Netherlands) Oct. 1980 41 p refs

(Contract DE-AC05-76OR-00033)

(ORAU/IEA-80-12(M)) Avail: NTIS HC A03/MF A01

A theory of cost energy dynamics that can be used to shape policies for industrial energy conservation is developed. The theory is built on two relationships commonly observed in process engineering: cost varies as a positive power function of system size and complexity, whereas energy consumption varies as a negative power function of the same attributes. These functions, rooted in thermodynamics, may be combined to yield a technological parameter (denoted  $c$ ) that can be determined for each unit process. The lower the value of  $c$ , the greater the energy savings may be for a given expenditure. Cost energy dynamics ranks energy conservation potentials of industrial processes by the technology parameter  $c$ , aggregates energy consumption by unit processes, accounts for energy embodied in the investments, considers the tradeoffs between cost and energy and distinguishes bases for decision making in the public and private sectors. E.D.K.

**N81-17588\*** Argonne National Lab., Ill.

**COMMUNITY ENERGY AUDITING: EXPERIENCE WITH THE COMPREHENSIVE COMMUNITY ENERGY MANAGEMENT PROGRAM**

J. L. Moore, D. A. Berger, C. B. Rubin, P. A. Hutchinson, Sr., and H. M. Griggs Sep 1980 107 p refs

(Contract W-31-109-eng-38)

(ANL/CNSV/TM-43) Avail: NTIS HC A06/MF A01

The evaluation issues and key findings based on the



## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

communities' experiences from Spring of 1979 to approximately March of 1980 are presented. An organized review of experience of communities in applying the detailed audit methodology for estimating current community energy consumption and projecting future consumption and supply is presented. A preliminary assessment of how audit information is being used in other CCEMP tasks is provided. DOE

**N81-17597#** Battelle Inst., Frankfurt am Main (West Germany). **ENERGY: ECONOMIC ACTIVITY AND ENERGY DEMAND; LINK TO ENERGY FLOW. EXAMPLE: FRANCE** 1980 112 p. Sponsored by Commission of the European Communities (EUR-6773-EN). Avail: NTIS (US Sales Only) HC A06/MF A01; DOE Depository Libraries

The data derived from the EXPLOR and EPOM, Energy Flow Optimization Model are described. The core of the EXPLOR model is a circular system of relations involving consumer's demand, producer's outputs, and market prices. The solution of this system of relations is obtained by successive iterations; the final output is a coherent system of economic accounts. The computer program for this transition is described. The work conducted by comparing different energy demand models is summarized. The procedure is illustrated by a numerical projection to 1980 and 1985 using the existing version of the EXPLOR France model. DOE

**N81-17598#** Yale Univ., New Haven, Conn. Dept. of Political Science.

**US SOLAR ENERGY POLICY FOR LESS DEVELOPED COUNTRIES**

B. Russell Oct. 1980 55 p refs  
(Contract DE-AC02-79CS-10048)  
(DOE/CS-10048/T1) Avail: NTIS HC A04/MF A01

While remaining sensitive to engineering and economic considerations, concentration is on some political and sociological issues which will have great effect on decisions whether and how to make use of solar energy technology in less developed countries (LDCs). Only with an understanding of these issues and with answers to some of the questions raised can there be any serious effort to devise a satisfactory United States government policy for the promotion of solar energy applications abroad. Tentative propositions outlining issues about which further information is required are based on the results of interviews in the United States, India and the Middle East, and an analysis of various reports by private individuals, national and transnational organizations, and government agencies. DOE

**N81-17610#** Oak Ridge National Lab., Tenn. Data Management Analysis Group.

**END USE ENERGY CONSUMPTION DATA BASE: TRANSPORTATION SECTOR**

John N. Hooker, Axel B. Rose, and David L. Greene Feb. 1980 461 p refs  
(Contract W-7405-eng-26)  
(PB81-112203. DOE/DF-81/002A) Avail: NTIS  
HC A20/MF A01 CSCL 10A

The transportation fuel and energy use estimates developed at Oak Ridge National Laboratory (ORNL) for the end use energy consumption data base are documented. The transportation data generally cover each of the ten years 1967 to 76, with omissions in some modes. The estimates are broken down by mode of transport, by fuel, by region and state, by the sector of the economy providing the transportation and by the use to which it is put, and in the case of automobile and bus travel by the income of the traveler. The mode, fuel, sector, and use categories themselves subsume one, two, or three levels of subcategories, resulting in a very detailed categorization of energy use. GRA

**N81-17611#** TRW, Inc., McLean, Va. Energy System Planning Div.

**ENERGY/ECONOMIC MODEL ANALYSIS. VOLUME 1: GAS TECHNOLOGY ASSESSMENTS USING THREE ENERGY SUPPLY/DEMAND INTEGRATING MODELS** Final Report Stanley Cohen Jun 1980 109 p refs Sponsored by Gas

Research Inst. 2 Vol.  
(PB81-114225. GRI-79/0052.1) Avail: NTIS  
HC A06/MF A01 CSCL 10A

The main outputs of the three models are forecasts of the energy (in Btu's) supplied or converted by various technologies and the prices associated with such supply or conversion. Forecasts are made at points in time during the period of 1980-2025. GRA

**N81-17612#** TRW, Inc., McLean, Va. Energy Systems Planning Div.

**ENERGY/ECONOMIC MODEL ANALYSIS. VOLUME 2: EVALUATION OF ENERGY SUPPLY/DEMAND INTEGRATING MODELS** Final Report

Stanley Cohen Jun. 1980 86 p refs Sponsored by Gas Research Inst. 2 Vol.  
(PB81-114233. GRI-79/0052.2) Avail: NTIS  
HC A05/MF A01 CSCL 10A

The main objective of this evaluation is to give GRI and its advisors insight into how useful each model is in meeting the objectives of a particular GRI activity. A second major objective is to furnish insight on the similarities and differences of the numerical output associated with the R&D assessment project. GRA

**N81-17613#** Jorgenson (Dale W.) Associates, Cambridge, Mass. **ENERGY/ECONOMIC MODEL ANALYSIS. MACROECONOMIC IMPACTS OF RESEARCH AND DEVELOPMENT IN GAS SUPPLY AND END USE TECHNOLOGIES** Final Report

Richard J. Goettle, IV and Edward A. Hudson Jun. 1980 73 p  
Sponsored by Gas Research Inst. Prepared for TRW, Inc., McLean, Va.

(PB81-114258. GRI-79/0052.4) Avail: NTIS  
HC A04/MF A01 CSCL 10A

The Gas Research Institute (GRI) needs to consider the economic impact of the various technologies whose research and development is supported by GRI funding. Three energy-economic models are useful for such a technology assessment. These models are: Energy Economic Modeling System, Energy Policy Model, and Time Stepped Energy System Optimization/Long Term Inter-Industry Transaction Model. These three models were used to help in the economic impact evaluation of various GRI research and development programs. GRA

**N81-17614#** Decision Focus, Inc., Palo Alto, Calif. **ENERGY/ECONOMIC MODEL ANALYSIS. ENERGY ECONOMIC MODELING SYSTEM** Final Report

Dale M. Nesbitt and Donna B. Oman Jun 1980 329 p refs  
Sponsored by Gas Research Inst. Prepared for TRW, Inc., McLean, Va.

(PB81-114274. GRI-79/0052.6) Avail: NTIS  
HC A15/MF A01 CSCL 10A

The Decision Focus Incorporated (DFI) Energy-Economy Model is an integrating model designed in part to focus on two budget-related decisions. Specifically, the DFI model provides a robust but simple way of computing the benefits of successful R&D both in the aggregate and at the level of individual R&D projects. GRA

**N81-17615#** Brookhaven National Lab., Upton, N. Y. **ENERGY/ECONOMIC MODEL ANALYSIS. TIME-STEPPED ENERGY SYSTEM OPTIMIZATION MODEL** Final Report

A. S. Kydes and J. Rabinowitz Jun 1980 137 p refs Sponsored by Gas Research Inst. Prepared for TRW, Inc., McLean, Va.  
(PB81-114241. GRI-79/0052.3) Avail: NTIS  
HC A07/MF A01 CSCL 10A

The energy results from the Brookhaven National Laboratory/Dale W. Jorgenson Associates energy-economy system as executed under GRI specifications are presented. It is intended to serve as a complement to the DJA report on the macroeconomic consequences of these specifications. GRA

**N81-17616#** California Univ., Livermore. Lawrence Livermore Lab.

**ENERGY/ECONOMIC MODEL ANALYSIS. LIVERMORE**

**ENERGY POLICY MODEL Final Report**

Robert B. Bell Jun 1980 135 p Sponsored by Gas Research Inst Prepared for TRW, Inc., McLean, Va.  
(PB81-114266, GRI-79/0052.5) Avail. NTIS  
HC A07/MF A01 CSCL 10A

The results of a study done by the Energy and Resources Planning Group of the Lawrence Livermore Laboratory (LLL) for the Gas Research Institute (GRI) using the LLL Economic Modeling System (EMS) are described. The purpose was to allow GRI to evaluate the appropriateness of their continued use of an energy model and, at the same time, for them to gain a better understanding of the consequences of current or proposed GRI supported research and development. GRA

**N81-17620#** National Technical Information Service, Springfield, Va

**ENERGY POLICY AND RESEARCH PLANNING. CITATIONS FROM THE NTIS DATA BASE Progress Report, Oct. 1977 - Sep. 1980**

Audrey S Hundemann Sep. 1980 260 p. Supersedes NTIS/PS-79/1069 and NTIS/PS-78/0962  
(PB81-800112, NTIS/PS-79/1069, NTIS/PS-78/0962) Avail. NTIS HC \$30.00/MF \$30.00 CSCL 10A

Citations relative to planning for future U.S. energy needs on both national and state government levels are presented. The history and development of national and state legislation and regulations, Project Independence studies, and assessment of the effects of deregulation are included. Technical, economic, and environmental considerations in energy planning are also covered. This updated bibliography contains 254 citations, 77 of which are new entries to the previous edition. T.M

**N81-17630#** National Oceanic and Atmospheric Administration, Washington, D. C.

**REPORT TO THE CONGRESS ON OCEAN POLLUTION AND OFFSHORE DEVELOPMENT Annual Report, Oct. 1977 - Sep. 1978**

May 1980 94 p  
(PB81-118333, NOAA-80093001; AR-6) Avail. NTIS  
HC A05/MF A01 CSCL 08J

The sixth annual report on NOAA's research activities presents the highlights that contributed to a better understanding of the marine environment and the effect of human activities upon it. Four principal areas of concern were addressed: petroleum hydrocarbons, chlorinated (manmade) hydrocarbons, metals, and biological hazards. GRA

**N81-17635#** Wapora, Inc., Washington, D. C.

**ENVIRONMENTAL IMPACT ASSESSMENT GUIDELINES FOR NEW SOURCE COAL GASIFICATION FACILITIES Final Interim Report**

Robert N. Rickles and D. Kerth Whitenight Aug. 1980 108 p refs  
(Contract EPA-88-01-4157)  
(PB81-114555; EPA-130/6-80-001) Avail. NTIS  
HC A06/MF A01 CSCL 13B

Guidance on identification of potential wastewater effluents, air emissions and solid wastes from coal gasification facilities, assessment of the impacts of such residuals on the quality of the environment, state of the art technology for in process and end of process control waste streams, evaluation of alternatives; and environmental regulations that apply to industry are included. In addition, the guidelines include an 'overview' chapter that gives a general description of the coal gasification industry, significant problems associated with it, and recent trends in location, raw materials, processes, pollution control, and the demand for industry output. GRA

**N81-17636#** Coordinating Research Council, Inc., Atlanta, Ga  
**INFORMATIONAL REPORT: 1979 PROGRESS OF THE CHEMICAL CHARACTERIZATION PANEL OF THE COMPOSITION OF DIESEL EXHAUST PROJECT AND RESULTS OF PARTICULATE EXTRACTION ROUND-ROBIN Progress Report, 1979**

Mar. 1980 75 p refs

(CRC Proj. CAPI-1-64)

(PB81-114870; CRC-516; CRC-APRAC-CAPI-1-64-516) Avail. NTIS HC A04/MF A01 CSCL 13B

Chemical characterization methods for unregulated diesel emissions are described. Chemical analysis methods to measure unregulated emissions are validated. The extraction of particle bound material is discussed as well. GRA

**N81-17641#** Tetra Tech, Inc., Lafayette, Calif

**METHODOLOGY TO EVALUATE THE POTENTIAL FOR GROUND WATER CONTAMINATION FROM GEOTHERMAL FLUID RELEASES Final Report**

Karen Summers, Steve Gheirini, and Carl Chen Aug 1980 178 p refs

(Contract EPA-68-03-2671)

(PB81-111114; EPA-600/7-80-117) Avail. NTIS  
HC A09/MF A01 CSCL 13B

Analytical methods and graphical techniques are presented for predicting potential ground water contamination from geothermal energy development. Overflows and leaks from ponds, pipe leaks, well blowouts, leaks from well casing, and migration from injection zones can be handled by the methodology. General characteristics of geothermal systems and fluids and probable modes of release are included to provide typical data. GRA

**N81-17644#** Foster Associates, Inc., Washington, D.C.

**A STATISTICAL STUDY OF COAL SULFUR VARIABILITY AND RELATED FACTORS Final Report**

George R. Warholc, John E. Morton, Yimin Ngan, James E. Spearman, and Yvonne Harris May 1980 265 p refs  
(Contract EPA-68-02-2592)

(PB81-111585; EPA-450/5-80-008A) Avail. NTIS  
HC A12/MF A01 CSCL 13B

Coal analysis data and power plant continuous monitoring data were gathered, reviewed and analyzed to assess the impact of fuel coal characteristics on compliance strategies and emission regulations. Analyses indicated that the heat content (Btu/lb) was best approximated by the normal distribution, of which the sulfur content and pounds sulfur/MMBtu were best represented by the inverted gamma distribution which was slightly superior to the lognormal distribution. Analysis of available continuous monitoring data supported the inverse relationship between coal sulfur variability and lot size, i.e., significant reductions in relative variability of emissions occur as the averaging time increases. The various analyses of coal sulfur variability identified no reliable method for coal suppliers or consumers to predict variability which may be critical for compliance by some coal-fired boilers to existing sulfur emission-limiting regulations. GRA

**N81-17645#** Hittman Associates, Inc., Columbia, Md.

**PROCEEDINGS: EPA/INDUSTRY FORUM ON COAL-LIQUEFACTION**

Dorothy G. Weatherby Sep. 1980 179 p Forum held at Chicago, 23-24 Oct. 1979  
(Contract EPA-68-02-3147)

(PB81-113052, HIT-C1005/402-80-938; EPA-600/9-80-054, IERL-RTP-1112) Avail. NTIS HC A09/MF A01 CSCL 13B

Representatives of government and industry met with the goal of sharing information and increasing cooperation between the two groups. Synthetic fuels, standards-setting procedures, activities, and plans relating to coal liquefaction were discussed for air emissions, solid wastes, and liquid effluents. Permit procedures were summarized for coal liquefaction plants. State government participation in coal liquefaction development was discussed for Kentucky and Illinois. Industry plans in the area of coal liquefaction were presented by representatives of several firms actively involved in development and use of the technology. GRA

**N81-17959#** National Highway Traffic Safety Administration, Washington, D. C.

**AUTOMOTIVE FUEL ECONOMY PROGRAM Annual Report**

Jan. 1980 79 p

(DOT-HS-805-279, ARTTC-4) Avail. NTIS HC A05/MF A01

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

An energy outlook is presented that focuses on petroleum demand and supply, and the effects of fuel economy standards on petroleum savings. Passenger car and light truck fuel economy activities are summarized including sales patterns and trends. Other fuel economy related activities are discussed and include compliance activities, the gas guzzler tax, legislative recommendations, and voluntary fuel economy programs. T.M.

**N81-18050#** Information Spectrum, Inc., Warminster, Pa  
**COMPILATION OF ENERGY EFFICIENT CONCEPTS IN ADVANCED AIRCRAFT DESIGN AND OPERATIONS. VOLUME 2: ABSTRACT DATA BASE Final Report, 10 Mar. - 5 Nov. 1980**  
Milton Clyman, Sheldon J. Einhorn, and Richard S. Schultz 5 Nov 1980 435 p refs  
(Contract N62269-80-C-0200)  
(AD-A094226, NADC-79239-60-Vol-2) Avail NTIS HC A19/MF A01 CSCL 01/3

The technologies necessary to support next generation (1990+) air vehicle design and operation concepts that will reduce the requirements for natural petroleum derived energy are considered in the Advanced Concepts Data Base which consists of 599 abstracts listed as 948 entries. The data base abstracts are arranged into 11 areas of R&D effort as follows: synthetic fuels, liquid hydrogen fuels, other fuels, gas turbines, nuclear propulsion, advanced propulsion, aerodynamics; structures and materials, flight performance management, advanced and unconventional systems, and energy efficient operation. A.R.H.

**N81-18051#** Information Spectrum, Inc., Warminster, Pa  
**COMPILATION OF ENERGY EFFICIENT CONCEPTS IN ADVANCED AIRCRAFT DESIGN AND OPERATIONS. VOLUME 1: TECHNICAL REPORT Final Report, 10 Mar. - 5 Nov. 1980**  
Milton Clyman, Sheldon J. Einhorn, and Richard S. Schultz 5 Nov 1980 101 p refs  
(Contract N62269-80-C-0200)  
(AD-A094225, NADC-79239-60-Vol-1) Avail NTIS HC A06/MF A01 CSCL 01/3

This final report (contained in two volumes) presents the results of research into published literature. The search addressed the technologies necessary to support next generation (1990+) vehicle design and operation concepts that will reduce the requirement for natural petroleum-derived energy. The Advanced Concepts Evaluation (ACE) Data Base consists of 599 unique abstracts listed as 948 entries. The ACE Data Base is arranged into eleven areas of R & D effort, each subdivided into Navy and non-Navy funded programs. Volume 1 includes introduction, Data Bases searched, research methodology for creation of the ACE Data Base, summary of search results, conclusions and recommendations. This volume contains an appendix of search strategies utilized. GRA

**N81-18510#** Oak Ridge National Lab, Tenn  
**US DEPARTMENT OF ENERGY THERMAL ENERGY STORAGE PROGRAM**  
James F. Martin 12 Nov 1980 16 p refs Presented at the Intern Conf on Thermal Storage in Buildings, Toronto, 12 Nov 1980  
(Contract W-7405-eng-26)  
(CONF-801154-1) Avail NTIS HC A02/MF A01

The overall DOE program for energy conservation in space heating and cooling, in industrial waste heat utilization, and in power generation through the use of thermal energy storage (TES) and the ORNL activities for building heating and cooling uses and industrial uses of TES are discussed. It is concluded that the DOE TES program is both comprehensive and of significant size and that demonstration projects within the program will show a favorable commercialization potential for TES. DOE

**N81-18512#** Centro Informazioni Studi Esperienze, Milan (Italy)  
**OPTIMIZED DESIGN OF TOTAL ENERGY SYSTEMS: THE RETE PROJECT**  
P. Alia, F. Dallavalle, C. deNard, F. Sanson, S. Veneziani (Arienda Gas Acqua Consorziale, Reggio Emilia), and G. Spagni (Arienda

Gas Acqua Consorziale, Reggio Emilia) 12 May 1980 40 p refs Presented at the 4th Intern Conf of Urban Heating, Sirmione, Italy, 12-15 May 1980  
(CISE-1806; CONF-8005120-1) Avail NTIS HC A03/MF A01

The RETE (Reggio Emilia Total Energy) project is discussed. The total energy system (TES) was developed to achieve the maximum quality matching on the thermal energy side between plant and user and perform an open scheme on the electrical energy side by connection with the Italian electrical network. The most significant qualitative considerations at the basis of the plant economic energy optimization and the selection of the operating criterion most fitting the user consumption characteristics and the external system constraints are reported. The design methodology described results in a TES that in energy terms achieves a total efficiency evaluated on a yearly basis to be equal to about 78 percent and a fuel saving of about 28 percent and in economic terms allows a recovery of the investment required as to conventional solutions, in about seven years. DOE

**N81-18514#** Land (Peter), Chicago, Ill  
**DEVELOPMENT OF ECONOMIC HOUSE TYPE BASED UPON PASSIVE SOLAR ENERGY UTILIZATION AND ENERGY CONSERVATION FOR HIGH DENSITY URBAN PLANNING**  
1980 16 p  
(Contract DE-FG02-79R5-10104)  
(DOE/R5-10104/1) Avail NTIS HC A02/MF A01

House types and their corresponding nesting patterns for high density, low rise urban neighborhoods are described which have the following characteristics: utilize the Sun for warming in winter, self cool in summer, conserve energy, low building cost and instructure costs, and efficiently use land. Implementing these criteria produces a range of about 25 designs and proposals for neighborhoods using them. Designs included are one story, two story, and split level. Basic house forms are determined. A precision model of one complete 800 unit neighborhood proposal is discussed. DOE

**N81-18524#** Department of Energy, Washington, D. C.  
**REDUCING US OIL VULNERABILITY: ENERGY POLICY FOR THE 1980'S**  
10 Nov 1980 40 p  
(DOE/PE-0021) Avail NTIS HC A03/MF A01

Current Federal energy policies and programs are asked in light of recent events and in light of what are believed to be the most reliable available projections of the future. Additional steps are outlined that could reduce our vulnerability to an oil import disruption during the next decade. Specifically, the study seeks to answer three questions: as a base case, what levels of US energy consumption, production, and imports might we anticipate for 1985 and 1990 under existing statutes, policies, and programs, considering both our own and our allies dependence on oil imports, how vulnerable does this leave the United States to foreign supply disruptions, considering the likely effects of government policies and programs which already exist to reduce our vulnerability (through reduction of US oil imports or by any other means), are there additional initiatives that could be undertaken to give us greater protection - especially between now and 1990. DOE

**N81-18528#** Oak Ridge National Lab, Tenn. Metals and Ceramics Div  
**ECONOMIC APPLICATION, DESIGN ANALYSIS, AND MATERIAL AVAILABILITY FOR CERAMIC HEAT EXCHANGERS**  
V. J. Tennergy 1 Jan 1981 74 p refs  
(Contract W-7405-eng-26)  
(ORNL/TM-7580) Avail NTIS HC A04/MF A01

Fuel consumption in an industrial process can be reduced by 40% or more by using recuperation or regeneration to heat air for the burners compared with use of ambient temperature air for fuel combustion with furnace gases in the range of 1300 C and air preheat temperatures above 800 C. Alloy temperature limitations and corrosion of the alloys severely limit

the use of metal recuperators to preheat air above about 600 C. Structural ceramics, such as silicon carbide, offer promise for use in high-temperature HXs for recovering waste heat from hot flue gases. An assessment was made of industrial attitudes toward advanced high-temperature ceramic recuperators. Three promising industrial processes are identified where these recuperators could be applied. Conceptual designs of ceramic recuperators are given consistent with the furnace requirements for these processes. The annual national fuel saving possible for the three applications of these recuperators was estimated. DOE

**N81-18549#** California Univ., Berkeley Lawrence Berkeley Lab Energy and Environment Div.

**THIN FILM ELECTROCHROMIC MATERIALS FOR ENERGY EFFICIENT WINDOWS**

Carl M. Lampert Oct. 1980 47 p refs

(Contract W-7405-eng-48)

(LBL-10882; EEB-W-80-10) Avail NTIS HC A03/MF A01

By use of electrochromic thin films, it is possible electronically to control transmission or reflection properties of a window, thus allowing it to be optically and thermally managed, thereby reducing space heating and cooling load. The properties of transition metal oxides, such as WO<sub>3</sub>, MoO<sub>3</sub>, Ir<sub>2</sub>O<sub>3</sub>, and V<sub>2</sub>O<sub>5</sub> are detailed. Organic systems such as Heptyl Viologen, Polytungsten anion are reviewed. Also, intercalated structures are discussed. The designs of working devices are outlined. From this quantification, materials, devices, and appropriate deposition technology are selected for window applications. DOE

**N81-18563#** National Academy of Sciences - National Research Council, Washington, D C Committee on Nuclear and Alternative Energy Systems.

**ENERGY CHOICES IN A DEMOCRATIC SOCIETY**

Laura Nader Apr. 1980 156 p refs

(PB81-114852; ISBN-0-309-03045-5; LC-80-81335) Avail.

NTIS HC A08/MF A01 CSCI 10A

Four views of the future involving widely varying levels of energy consumption and life styles are presented. The futurists' descriptions of life in the imagined societies, loosely termed superindustrial, plentitude, small is beautiful, and minimum feasible are explored according to predictions about twelve cultural dimensions, including natural environment, settlement patterns, occupations, leisure, dispersion of decision making power, and pluralism vs. homogeneity. These descriptions demonstrate some possible results of alternatives to be considered by scientists, policymakers, and citizens concerned about the direction of energy policy. GRA

**N81-18571\*#** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

**THE ENVIRONMENTAL ASSESSMENT OF A CONTEMPORARY COAL MINING SYSTEM**

Elisabeth J. Dutzi, Patrick J. Sullivan, Charles F. Hutchinson, and Christopher M. Stevens 15 Dec 1980 55 p refs

(Contracts NAS7-100, DE-AI01-76ET-12548)

(NASA-CR-183974, JPL-Pub-80-99)

Avail: NTIS

HC A04/MF A01 CSCI 13B

A contemporary underground coal mine in eastern Kentucky was assessed in order to determine potential off-site and on-site environmental impacts associated with the mining system in the given environmental setting. A 4 section, continuous room and pillar mine plan was developed for an appropriate site in eastern Kentucky. Potential environmental impacts were identified, and mitigation costs determined. The major potential environmental impacts were determined to be: acid water drainage from the mine and refuse site, uneven subsidence of the surface as a result of mining activity, and alteration of ground water aquifers in the subsidence zone. In the specific case examined, the costs of environmental impact mitigation to levels prescribed by regulations would not exceed \$1/ton of coal mined, and post mining land values would not be affected. T.M.

**N81-18573#** PEDCo-Environmental, Inc., Cincinnati, Ohio.

**ACID RAIN: THE IMPACT OF LOCAL SOURCES**

P. Spaite (Paul W. Spaite Co.), M. P. Esposito, M. F. Szabo,

and T. W. Devitt 24 Nov 1980 28 p refs

(Contract DE-AC21-80MC-14787)

(DOE/METC-14787/103) Avail. NTIS HC A03/MF A01

Acid rain is predominantly a problem of long range transport of pollutants from large fossil fuel combustion sources, namely coal-fired utilities. However, close examination of fuel use information and source emission characteristics in the Adirondacks, Florida, and California suggests that local oil burning and automotive sources may be major contributors to the occurrence of acid rain in these areas. The possible role of local combustion sources in the production of acid rain, the implications of the findings, and their relevance to alternative control strategies for acid rain are discussed. Oil-fired boilers, especially the smaller commercial, industrial, and residential units, produce at least 3 to 10 times as much primary sulfate per unit of sulfur content as coal-fired units. Oil-fired units emit comparatively large quantities of catalytic compounds capable of rapidly converting still more sulfur oxide to sulfate in the atmosphere. DOE

**N81-18575#** California Univ., Livermore Lawrence Livermore Lab Environmental Sciences Div.

**ENVIRONMENT, HEALTH, SOCIOECONOMIC AND ENVIRONMENTAL CONTROL TECHNOLOGY EXECUTIVE SUMMARY**

David W. Layton Oct 1980 38 p refs

(Contract W-7405-eng-48)

(DOE/TIC-11308) Avail. NTIS HC A03/MF A01

The important findings of a two volume report that deals with the potential impacts and environmental controls associated with the operation of geothermal power plants in California's Imperial Valley are summarized. The valley contains nearly a third of the nation's total energy potential for identified hot water resources. Possible impacts of developing those resources include violation of air quality standards if emissions of hydrogen sulfide are not abated, negative ecological effects resulting from increases in the salinity of the Salton Sea, and damage to irrigation systems caused by land subsidence induced by the extraction of geothermal fluids. Other minor impacts concern occupational health and safety, socioeconomics, and hazardous wastes. Analyses of environmental impacts and the control measures for minimizing negative impacts are based primarily on a projected production of 3000 MW of electrical power by the year 2010. DOE

**N81-18576#** California Univ., Los Angeles Lab. of Nuclear Medicine and Radiation Biology.

**MICROENVIRONMENTAL CHANGES AND PLANT RESPONSES DUE TO SHADING AND WIND DEFLECTION BY SOLAR COLLECTORS: A SIMULATION STUDY**

Duncan T. Patten and S. D. Smith Nov 1980 71 p refs

(Contract DE-AC03-76SF-00012)

(UCLA-12/1268) Avail. NTIS HC A04/MF A01

The potential changes were investigated in a Sonoran Desert. The simulated array consisted of twelve panels designed to exhibit a similar shape, tilt, and spacing as is expected to occur in heliostat fields of solar thermal facilities or in arrays of photovoltaic collectors. The experimental design was based on comparing two microsites in the simulated array versus the open desert. Presence of the panels results in up to a 90% reduction in solar radiance during the midday period, with microsites beneath each panel receiving about 14% of the open desert irradiance over the whole day. The array of panels also effected a 14% to 60% reduction in monthly accumulated wind flow in the center of the array. The combination of reduced radiant energy input and wind deflection resulted in significantly reduced surface and soil temperatures in the heavily shaded sites, and moderately reduced surface and soil temperatures in the sunny microsites. DOE

**N81-18577#** Oak Ridge National Lab., Tenn.

**A COMPARISON OF ENVIRONMENTAL ISSUES RELATED TO DEVELOPMENT OF SMALL HYDROPOWER RESOURCES AT NEW VERSUS EXISTING SITES**

J. M. Loar and S. G. Hildebrand 1980 20 p refs

Presented at 3rd Miami Intern. Conf. on Alternative Energy Sources, Miami Beach, Fla., 15 Dec 1980

(Contract W-7405-eng-26)

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

(CONF-801210-13) Avail NTIS HC A02/MF A01

Many of the ecological issues associated with the development of small hydropower resources are similar at both new (undeveloped) sites and those with existing dams that will be retrofitted for hydroelectric generation. Issues that could occur with both types of development are blockage of fish migration routes, water level fluctuations, instream flows, water quality, dredging and dredged material disposal, and threatened or endangered species. However, new site development projects require the alteration of existing aquatic and terrestrial ecosystems that will be, in most cases, significantly greater than the environmental changes associated with the retrofitting of existing dams. Although project design and operation are important factors controlling the nature and magnitude of the environmental impacts of small hydropower resource development, the mitigation of adverse impacts (and the optimization of beneficial effects) is dependent, in large measure, on our ability to accurately predict physical, chemical, and biological changes. DOE

**N81-18578#** Oak Ridge National Lab., Tenn. Environmental Sciences Div.

### STRATEGIES FOR ECOLOGICAL EFFECTS ASSESSMENT AT DOE ENERGY ACTIVITY SITES

F. S. Sanders, S. M. Adams, L. W. Barnhouse, J. M. Giddings, E. E. Huber, K. D. Kumar, D. Lee, B. Murphy, G. W. Suter, and W. VanWinkle. Dec 1980. 389 p. refs. (Contract W-7405-eng-28)

(ORNL/TM-6783) Avail NTIS HC A17/MF A01

Guidance for the monitoring and assessment of ecological impacts resulting from DOE energy production activities was developed to improve the accuracy of analysis under the National Environmental Policy Act. Basic concepts in monitoring and assessment that can be adapted to site specific circumstances are stressed. Four major areas of activity that should be integrated into a comprehensive interdisciplinary assessment program are: field monitoring, laboratory studies, experimental field perturbation studies, and mathematical modeling, both statistical and ecological. Each of these areas is discussed with respect to terrestrial, marine, and freshwater environments. Appendices are included that provide references to sampling methodologies. DOE

**N81-18580#** National Academy of Sciences - National Research Council, Washington, D. C.

### LONG-RANGE ENVIRONMENTAL OUTLOOK

May 1980. 210 p. refs. Workshop held at Washington, D. C., 15-16 Nov 1979.

(PB81-114977, ISBN-0-309-03038-2, LC-80-16190) Avail NTIS HC A10/MF A01 CSCL 13B

Proceedings of a workshop to address a long range environmental outlook are reported. Task groups were established to discuss future trends in energy, agriculture, toxic substances, and hazards of facility siting and the potential environmental problems that may develop. The charge to each group was to identify specific future problems, establish the priority of importance and recommend research. GRA

**N81-18620** Oklahoma State Univ., Stillwater. **DEVELOPMENT OF AN IMPROVED DEGREE-DAY CONCEPT BY ANALYSIS OF HISTORICAL WEATHER DATA FOR PREDICTING ENERGY REQUIREMENTS OF BUILDINGS** Ph.D. Thesis

Nader Sharabianlou. 1980. 161 p.

Avail. Univ. Microfilms. Order No. 8103331

Computational experiments were conducted to determine the effects of weather parameters on thermal response of buildings and to identify the significant environmental parameters. The significant environmental parameters were utilized in development of an improved degree day concept. A methodology was developed estimating energy demand of commercial structures via simple expressions which require evaluation of the product of two terms. These terms are distinct functions of the significant building and weather parameters. A procedure for estimating seasonal heating and cooling efficiency parameters was developed for estimating energy consumption. The significant environmental parameters identified by sensitivity analysis of the thermal

response of buildings to perturbations in the climate were bulb temperature, solar insolation, humidity ratio difference of indoor and outdoor air, and the daily temperature range. Dissert. Abstr.

**N81-18931#** Policy and Management Associates, Inc., Boston, Mass.

### THE EFFECT OF ECONOMIC REGULATION ON FUELUSE EFFICIENCY IN PRIVATE TRUCKING-OPERATIONS. Final Report

Apr. 1980. 105 p. refs.

(Contract DOT-OS-90023)

(PB81-114753; DOT-P-50-37) Avail. NTIS HC A06/MF A01 CSCL 05C

Private trucking operations are a substantial component of the motor carrier industry. The description of private carriage covers magnitude and growth, reasons for use, traffic characteristics, fleet operations, relations with other modes; and the effect of the regulatory system on private trucking operations. An analysis of how regulations affect private trucking fuel use efficiency and an attempt to forecast the effects of regulatory change are included. GRA

**N81-18935#** Mechanical Technology, Inc., Latham, N. Y. **ADVANCED PROPULSION SYSTEM CONCEPT FOR HYBRID VEHICLES**

Suresh Bhatte, Hsin Chen, and George Dochat. Dec 1980. 169 p. refs.

(Contracts DEN3-92, EC-77-A-31-1044)

(NASA-CR-159772, DOE/NASA/0092-80/1; MTI-80TR25)

Avail. NTIS HC A08/MF A01 CSCL 13F

A series hybrid system, utilizing a free piston Stirling engine with a linear alternator, and a parallel hybrid system, incorporating a kinematic Stirling engine, are analyzed for various specified reference missions/vehicles ranging from a small two passenger commuter vehicle to a van. Parametric studies for each configuration, detail tradeoff studies to determine engine, battery and system definition, short term energy storage evaluation, and detail life cycle cost studies were performed. Results indicate that the selection of a parallel Stirling engine/electric hybrid propulsion system can significantly reduce petroleum consumption by 70 percent over present conventional vehicles. J. M. S.

**N81-18951#** Societe Nationale Industrielle Aerospatiale, Les Mureaux (France). Div. Systemes Balistiques et Spatiaux.

### EXAMPLE OF A FAVORABLE POLICY FOR SPACE TECHNOLOGY TRANSFER TO OTHER FIELDS. [EXEMPLE D'UNE POLITIQUE DE VALORIZATION DE RETOMBES TECHNOLOGIQUES SPATIALES DANS D'AUTRES DOMAINES]

Didier G. Compard. In: ESA Econ. Effects of Space and Other Adv. Technol., Sep 1980. p. 153-168. In FRENCH.

Avail. NTIS HC A12/MF A01

The technology transfer policy of an aerospace industry is described. Several examples, including kinetic energy storage, the SOPHOCLE program for solar energy conversion, the SYSCOMORAM medical data acquisition and data processing system, industrial safety programs, and new materials applications are cited. The benefits of planning for technology transfer include diversification of risks, faster response to changing markets, establishment of new clients, and improving the public image of the company. Author (ESA)

**N81-19110#** National Academy of Sciences - National Research Council, Washington, D. C. Ad Hoc Committee on Aircraft Energy.

### AN EVALUATION OF NASA'S PROGRAM FOR IMPROVING AIRCRAFT FUEL EFFICIENCY. Final Report

1980. 25 p. refs.

(Contract NASw-2342)

(NASA-CR-164015, PB81-116790)

Avail. NTIS

HC A02/MF A01 CSCL 01C

The report provides commentary and recommendations where appropriate on each of the major elements of the program. Key findings of the committee included a recommendation that closer

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

ties be established between NASA and the FAA to expedite the use and acceptance of the new technology. The committee also cited the potential for fuel savings through an improved air traffic control system and recommended that the management of NASA and the FAA discuss ways and means to work together to exploit more effectively the capabilities and responsibilities of each to develop air traffic control. **GRA**

**NS1-19329#** Los Alamos Scientific Lab., N. Mex. Energy Programs Office

### **USE OF NON-PETROLEUM FUELS TO REDUCE MILITARY ENERGY VULNERABILITIES: SELF-SUFFICIENT BASES AND NEW WEAPON PROPULSION SYSTEMS**

David A. Fraiwall. 1980. 19 p. refs. Presented at the 48th Mil. Operations Res. Soc. Meeting, Newport, R.I., 2-4 Dec. 1980.

(Contract W-7405-eng-38)

(LA-UR-80-3445, CONF-801239-1)

Avail. NTIS

HC A02/MF A01

An approach is outlined which is directed towards moving the U.S. military in the direction of energy self-sufficiency without having to rely on frequent deliveries of military fuels from off-base sources. The various pathways and options of this approach are considered. It is shown that the nuclear and hydrogen pathway is most likely to yield the best possibility for ultimate self-sufficiency. **RCT**

**NS1-19353#** Battelle Pacific Northwest Labs., Richland, Wash. ANALYSIS OF ALTERNATIVE STRATEGIES FOR ENERGY CONSERVATION IN NEW BUILDINGS

Jeffrey M. Fang and Jack Tawil. J. Dec. 1980. 89 p. refs.

(Contract DE-AC06-76RL-01830)

(PNL-3309) Avail. NTIS HC A05/MF A01

The policy instruments considered include: greater reliance on market forces, research and development, information, education and demonstration programs, tax incentives and sanctions, mortgage and finance programs, and regulations and standards. The analysis starts with an explanation of the barriers to energy conservation in the residential and commercial sectors. Individual policy instruments are described and evaluated with respect to energy conservation, economic efficiency, equity, political impacts, and implementation and other transitional impacts. Five possible strategies are identified: (1) increased reliance on the market place; (2) energy consumption tax and supply subsidies; (3) Building Energy Performance Standards (BEPS) with no sanctions and no incentives; (4) BEPS with sanctions and incentives (price control); and (5) BEPS with sanctions and incentives (no price controls). A comparative analysis is performed. Elements are proposed for inclusion in a comprehensive strategy for conservation in new buildings. **DOE**

**NS1-19404#** Cyclomatic Industries, Inc., San Diego, Calif.

### **HIGHLY EFFICIENT WELDING POWER SUPPLY** Final Report, 1 May 1978 - 30 Sep. 1980

J. M. Thommes. Sep. 1980. 103 p. refs.

(Contract DE-AC03-78CS-40023)

(DOE/CS-40023/T2) Avail. NTIS HC A06/MF A01

The results and findings of an energy efficient welding power development project are presented. The power source developed is to be used for electric arc welding processes in which 3.5 trillion Btu of energy can be saved annually. The power source developed incorporates the use of switch mode power supply techniques in order to convert industrial supply mains to appropriate welding voltages and currents. A series capacitor switch mode power circuit was the circuit technique chosen in order to optimize energy efficiency, costs, reliability, size/weight, and welding performance. Test results demonstrated an effective efficiency (taking into account idle power consumption) of 80 to 91 percent for the energy efficient power source while the conventional types of power sources tested ranged from 41 to 74 percent efficiency. Line power factor was also improved for the energy efficient power source. Field tests indicated additional refinements of weld process performance and power source audible noise emission reduction could be beneficial. **DOE**

**NS1-19463#** Argonne National Lab., Ill. Energy and Environmental Systems Div.

### **CLASSIFICATION AND EVALUATION OF ELECTRIC MOTORS AND PUMPS**

Sep. 1980. 267 p. refs. Prepared in cooperation with Little (Arthur D.), Inc., Cambridge, Mass. and Energy and Environmental Analysis, Inc., Arlington, Va.

(Contract W-31-109-eng-38)

(DOE/TIC-11339) Avail. NTIS HC A12/MF A01

Electric motors and pumps are evaluated to determine standard classifications with respect to size, function, type of energy used, method of manufacture, and the practicability and effects of requiring all or part of such classes of electric motors and pumps to meet performance standards establishing minimum levels of energy efficiency. Two specific conservation strategies for improving the energy efficiency of standardized electric motors and pumps are analyzed: labeling rules, and energy efficiency standards. **DOE**

**NS1-19576#** Air Force Engineering and Services Center, Tyndall AFB, Fla. Engineering and Services Lab.

### **THE US AIR FORCE ACADEMY SOLAR ENERGY RESEARCH PROJECT SUMMARY REPORT** Progress Report, Apr. 1975 - Jan. 1980

Kenneth A. Cornelius. Jul. 1980. 103 p. refs.

(AF Proj. 2054)

(AD-A094802; AFESC/ESL-TR-80-35)

Avail. NTIS

HC A06/MF A01 CSCL 13/1

This report summarizes the solar energy research which was conducted by the U.S. Air Force Academy from April 1975 to January 1980. This research consisted of investigations on a retrofit space heating system which was installed on a typical Military Family Housing (MFH) unit. This summary uses a lessons learned and designer tips approach in its discussion of the solar system's operation. This discussion is organized around the many areas of solar technology which were investigated during the course of this project. Those major areas were energy conservation effects, solar collectors, thermal storage, control systems, Thermography studies, performance comparison to a design model, and homeowner and maintenance manual development. A thermal performance summary of the solar system is also presented. The report concludes with numerous recommendations regarding policy initiatives which the Air Force should take to foster conversion to solar technology. **GRA**

**NS1-19584#** Harbridge House, Inc., Washington, D.C. Office of Environmental Assessments.

### **GROUND WATER AND ENERGY: PROCEEDINGS OF THE US DEPARTMENT OF ENERGY'S NATIONAL WORKSHOP**

Nov. 1980. 213 p. refs. Workshop held in Albuquerque, N. Mex., 28-31 Jan. 1980.

(Contract W-7405-eng-38)

(CONF-800137) Avail. NTIS HC A10/MF A01

This national workshop on ground water and energy was conceived by the US Department of Energy's Office of Environmental Assessments. Generally, OEA needed to know what data are available on ground water, what information is still needed, and how DOE can best utilize what has already been learned. The workshop focussed on three areas: (1) ground water supply, (2) conflicts and barriers to ground water use, and (3) alternatives or solutions to the various issues relating to ground water. **DOE**

**NS1-19589#** McDonnell-Douglas Astronautics Co., Huntington Beach, Calif.

### **DEVELOPMENT OF A PROTOTYPE HEAT ENGINE FOR ENERGY CONSERVATION** Progress Report, Oct. - Dec. 1979

W. S. Ginell. Jan. 1980. 9 p.

(Contracts DE-AC05-78OR-06028; ET-78-C-05-6028)

(DOE/OR-06028/T6) Avail. NTIS HC A02/MF A01

The goals of this program are to produce a 1 hp Nitinol heat engine, to obtain a set of performance measurements over a range of operating conditions, and to establish design relations between performance and hardware configuration, engine dimensions, and Nitinol characteristics. The principal efforts were directed toward completion and initial operation of the Nitinol

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

Engine Module (MOD) Diagnostic instrumentation was completed and a computerized data acquisition system was installed. Nitinol elements for MOD were conditioned and installed and the MOD was operated briefly. The first samples of Nitinol manufactured and processed at ORNL (Type 3) were characterized, and a second sample (Type 5) was received. DOE

**N81-19590#** Computer Sciences Corp., Vienna, Va.  
**REVIEW OF ACTIVITIES AND PLANS FOR SOLAR ENERGY IN FEDERAL BUILDINGS**

Oct 1980 35 p refs

(Contract DE-AC01-79CR-10001)

(DOE/CR-10001/T2) Avail: NTIS HC A03/MF A01

Federal Buildings Program and plans regarding the use of solar energy are reported. Recommendations concerning the solar Federal Buildings Program's plan are given, specifically an analysis of agencies' Ten Year Buildings construction, leasing and retrofit plans to provide visibility for and detailed knowledge of Federal agencies planning regarding solar and other renewable resources. Statistical information regarding planned solar projects, and recommendations concerning the SFBP plans are presented. DOE

**N81-19596#** Los Alamos Scientific Lab., N. Mex.

**SOME LONG-TERM ENERGY OPTIONS**

J. R. Bartlett and F. J. Edeskuty Dec. 1980 8 p refs

(Contract W-7405-eng-36)

(LA-8628-MS) Avail: NTIS HC A02/MF A01

Some energy options, although of little immediate use, still offer advantages which make them worthy of continued investigation to determine their feasibility and their potential. These technologies include, the possibility of recovering vast amounts of methane from naturally occurring methane hydrates and the use of hydrogen as a fuel. The inherently high risk of these technologies for short term payoff makes them a particularly appropriate concern for national laboratories. DOE

**N81-19599#** Oak Ridge National Lab., Tenn. Energy Div  
**DESIGN OPTIMIZATION OF CONVENTIONAL HEAT PUMPS: APPLICATION TO STEADY STATE HEATING EFFICIENCY**

C. K. Rice, S. K. Fischer, R. D. Ellison, and W. L. Jackson  
1981 28 p refs Presented at the ASHRAE Meeting, Chicago, 25 Jan. 1981

(Contract W-7405-eng-26)

(CONF-810101-5) Avail: NTIS HC A03/MF A01

A physically based heat pump model was connected to an optimization program to form a computer code for use in the design of high efficiency heat pumps. The method used allows for the simultaneous optimization of selected design variables, taking proper account of their interactions, while constraining other parameters to chosen limits or fixed values. For optimization of the steady state heating efficiency of conventional heat pumps, ten variables were optimized while heating capacity was fixed; the results may, however, be scaled to other capacities. Calculations were made for a range of component efficiencies and heat exchanger sizes. The results predict substantial improvement in heating performance due to both optimal system configuration and the use of improved components. Sensitivity analyses show that there is considerable latitude for deviating from the optimum design to make use of available component sizes and for accommodating the compromises needed for good cooling performance. DOE

**N81-19603#** Rice Univ., Houston, Tex., Dept. of Sociology.  
**SOCIAL ACCEPTABILITY OF SATELLITE POWER SYSTEMS (SPS). THE NEAR TERM OUTLOOK**

S. L. Klineberg May 1980 61 p refs

(Contract DE-AS05-79ER-10072)

(DOE/ER-10072/1) Avail: NTIS HC A04/MF A01

Current public attitudes make it appear unlikely that a consensus will evolve during the 1980s favoring costly efforts to develop vast new supplies of conventional energy. Opinion polls reveal a pervasive worry over inflation, a broadening of aspirations to encompass quality of life concerns, a growing

distrust of central governments, large corporations, big science and technology, and a continuing commitment to environmental protection - all of which suggests a social environment that is likely to resist the development of a major new high technology energy system such as the SPS. DOE

**N81-19608#** National Association of Home Builders (NAHB)  
Research Foundation, Inc., Rockville, Md.

**APPLIANCE ENERGY EFFICIENCY IN NEW HOME CONSTRUCTION Final Report**

30 Nov 1980 31 p

(Contract DE-AC01-80CS-23999)

(DOE/CS-23999/T1) Avail: NTIS HC A03/MF A01

A survey of 224 builders was conducted to which 180 builders responded. Each respondent completed between one and seven separate questionnaires. Each of the seven questionnaires were designed to collect information about one type of equipment or major appliance. These are heat pump, heating system, air conditioner, domestic water heater, dishwasher, range, and refrigerator. Analyses of the resulting 406 questionnaires indicated that builders were primarily responsible for brand selection. These choices were made primarily without regard for the secondary efficiency of the product. A similar apparent lack of consideration of energy efficiency during brand and model selection was found among home buyers and specialized subcontractors. DOE

**N81-19620#** Illinois Univ., Urbana. Dept. of Agricultural Engineering

**SURFACE-HEATING GREENHOUSES WITH WASTE HEATED WATER Final Report**

P. N. Walker Dec 1980 13 p refs Prepared in cooperation with Illinois Power Co., Decatur

(Contract DE-FG02-79R5-10107)

(DOE/R5-10107/T1) Avail: NTIS HC A02/MF A01

An aluminum framed glass greenhouse was constructed. The outside surface of this greenhouse was heated by flowing power plant cooling water over it. The water was applied at the ridge and allowed to run over the roof and sidewalls and into gutters where it was returned to the power plant's discharge canal. One season's heating performance data and resulting conclusions are presented. These results show that surface heating reduced conventional heat requirements by one third on the test greenhouse. However, when these results are projected to a commercial greenhouse the heating energy costs can be reduced by 67 percent. These cost savings would be 28 percent if 5 C cooler water were used and 90 percent if 5 C warmer water were used. DOE

**N81-19641#** National Bureau of Standards, Washington, D.C.  
**LIFE-CYCLE COST MANUAL FOR THE FEDERAL ENERGY MANAGEMENT PROGRAM Final Report**

Rosalie T. Ruegg Dec. 1980 240 p refs Sponsored in part by DOE

(PB81-136269; NBS-HB-135) Avail: NTIS HC A11/MF A01  
CSCL 05C

The manual is a guide to understanding the life cycle costing method and an aid to calculating the measures required for evaluating energy conservation and renewable energy investments in all Federal buildings. It expands upon life cycle costing criteria contained in the Program Rules of the Federal Energy Management Program (Subpart A of Part 436, Title 10, U.S. Code of Federal Regulations) and is consistent with those criteria. Its purpose is to facilitate the implementation of the Program Rules by explaining the life cycle costing method, defining the measures, describing the assumptions and procedures to follow in performing evaluations, and giving examples. GRA

**N81-19645#** Applied Physics Lab., Johns Hopkins Univ., Laurel, Md.

**GEOHERMAL ENERGY MARKET STUDY ON THE ATLANTIC COASTAL PLAIN. DEFINITION OF MARKETS FOR GEOHERMAL ENERGY IN THE NORTHERN ATLANTIC COASTAL PLAIN**

William J. Toth May 1980 218 p refs

(Contract EX-76-A-36-1008)

(PB81-123861, JHU/APL/GEMS-002, JHU/APL/QM-80-075)  
 Avail: NTIS HC A10/MF A01 CSCL 05C

The cost and revenue streams for each year in the lifetime of a geothermal energy conversion project are calculated by the Geothermal Resource Interactive Temporal Simulation (GRITS) computer program. The program gives preliminary economic evaluations of projects under a wide range of resource, demand, and financial conditions. T.M.

**N81-19646#** Applied Physics Lab., Johns Hopkins Univ., Laurel, Md.

**GEOTHERMAL ENERGY MARKET STUDY ON THE ATLANTIC COASTAL PLAIN. GRITS: A COMPUTER PROGRAM FOR THE ECONOMIC EVALUATION OF DIRECT-USE APPLICATIONS OF GEOTHERMAL ENERGY**

William Barron, Peter Kroll, Richard Weissbrod, and William J.

Toth Jun 1980 84 p refs

(Contract EX-76-A-36-1008)

(PB81-119786, JHU/APL/QM-80-077; JHU/APL/GEMS-008; MCGER-80-002) Avail: NTIS HC A05/MF A01 CSCL 05C

The Geothermal Resource Interactive Temporal Simulation (GRITS) model calculates the cost and revenue streams for each year in the lifetime of a project that utilizes low to moderate temperature geothermal resources. With these two estimates, the net present value of the project can be determined for each year. The GRITS model allows preliminary economic evaluations of direct use applications of geothermal energy under a wide range of resource, demand, and financial conditions, some of which change over the lifetime of the project. GRA

**N81-19652#** National Academy of Sciences - National Research Council, Washington, D. C. Committee on Offshore Energy Technology.

**ENVIRONMENTAL EXPOSURE AND DESIGN CRITERIA FOR OFFSHORE AND GAS STRUCTURES**

May 1980 230 p refs

(Contract N00014-76-C-0309)

(AD-A094651) Avail: NTIS HC A11/MF A01 CSCL 08/9

One of the tasks of the Committee on Offshore Energy Technology was to review the availability of engineering field data, methods, and procedures for adequately describing and interpreting the environmental conditions that go into criteria for the design, verification, and inspection of offshore oil and gas structures. Accordingly, the committee examined how industry obtains environmental data, how it uses the data to evaluate environmental exposures, and how it uses environmental exposures to establish criteria to design, build, install, and operate offshore platforms. The committee examined all three phases of developing offshore petroleum reserves: pre-lease, exploration, and production. The purpose was to find where and what types of data were needed by government and industry. GRA

**N81-19653#** Argonne National Lab., Ill. Energy and Environmental Systems Div.

**LOCAL AIR QUALITY CONSTRAINTS ON ENERGY GROWTH, 1985-1990**

D G Streets Mar. 1980 65 p refs

(Contract W-31-109-eng-38)

(ANL/EES-TM-114) Avail: NTIS HC A04/MF A01

This report examined the potential future conflict between energy growth and environmental protection from the perspective of siting constraints imposed by requirements of the Clean Air Act Amendments of 1977. County-level projections of additional utility powerplant capacity and increases in industrial coal, oil, and gas consumption were derived for the period 1985 to 1990. Emissions of sulfur dioxide and particulate matter, after the application of appropriate control systems, were converted to changes in ambient air quality using a proportional modeling approach. These changes were then compared with Nonattainment and Prevention of Significant Deterioration requirements, and the energy activity is considered to be constrained if a violation is projected. Total percentages of constrained energy activity were developed for the nation, and the geographical patterns of significant impacts are presented. Author

**N81-19655#** Ames Lab., Iowa.

**AIR POLLUTION CONTROL TECHNOLOGY FOR MUNICIPAL SOLID WASTE-TO-ENERGY CONVERSION FACILITIES: CAPABILITIES AND RESEARCH NEEDS**

Joseph F. Lynch and James C. Young Sep. 1980 53 p refs (Contract W-7405-eng-82)

(DOE/EV-0115) Avail: NTIS HC A04/MF A01

Three major categories of waste to energy conversion processes in full scale operation or advanced demonstration stages in the US are co-combustion, mass incineration, and pyrolysis. These methods are described and some information on US conversion facilities was tabulated. Conclusions and recommendations dealing with the operation, performance, and research needs for these facilities are given. Research needs concerning air pollution aspects of the waste to energy processes were identified and significant operating and research findings for the co-combustion, mass incineration, and pyrolysis waste to energy systems were reviewed. DOE

**N81-19674#** Calspan Advanced Technology Center, Buffalo, N.Y.

**AEROSOL FORMATION FROM DIESEL EXHAUST AND SO<sub>2</sub>. A CHAMBER STUDY Final Report, Sep. 1978 - Mar. 1980**

R. J. Anderson and J. T. Hanley Dec 1980 110 p refs

(Contract EPA-68-02-2987)

(PB81-121147; EPA-600/3-80-095)

Avail: NTIS

HC A06/MF A01 CSCL 13B

Dilute diesel emission systems were studied in a 600 cu m indoor smog chamber under various conditions likely to be encountered in an urban environment. Aerosol formation and growth in an irradiated diesel emission/SO<sub>2</sub>/propylene system was primarily attributed to sulfate formation. During irradiated experiments, the rate of SO<sub>2</sub> oxidation experienced a maximum of about 5 percent/hr in the period when the O<sub>3</sub> concentration was increasing rapidly. Following the peak in the O<sub>3</sub> concentration, the rate of SO<sub>2</sub> oxidation decreased to about 1 percent/hr. GRA

**N81-19672#** Sheffield Univ. (England). Dept. of Control Engineering

**AN OPTIMAL CONTROL APPROACH TO ENERGY MINIMIZATION IN ELECTRIC VEHICLES**

J. B. Edwards and K. Pacey (Chloride Legg Ltd) Apr. 1980 23 p refs Presented at Inst. of Mech. Engr. Conf. on System Eng. in Land Transport, Sussex, England, 24-25 Sep 1980 (Rept-109) Avail: NTIS HC A02/MF A01

An optimal control strategy designed to minimize the energy losses incurred by an electric vehicle in making a journey of prespecified time and distance was analyzed. A boundary value iteration method was successfully applied to a series-motordriven vehicle on undulating gradient profiles. A significant influence of drive characteristics on the optimal driving strategy was found. The need for continuing investigation into the optimal control of a wide range of drives is emphasized. Author (ESA)

**N81-20077** General Accounting Office, Washington, D. C.

**A LOOK AT NASA'S AIRCRAFT ENERGY EFFICIENCY PROGRAM**

General Accounting Office 28 Jul. 1980 4 p

(PSAD-80-50) Avail: NTIS HC A02/MF A01

The status of the Aircraft Energy Efficiency (ACEE) program the coordination effectiveness between NASA and the Department of Defense (DOD), the need for periodic reporting to the Congress on efforts as ACEE, and NASA's role in aeronautical R&D are examined. The ACEE program accounted for over one third of NASA's aeronautical budget for fiscal year 1980 and will decrease to 29 percent in fiscal year 1981. Details on ACEE costs and funding for NASA's aeronautical research and technology program are appended. E A K.

**N81-20318#** National Bureau of Standards, Washington, D.C. Center for Building Technology

**A REFERENCE BUILDING APPROACH TO BUILDING ENERGY PERFORMANCE STANDARDS FOR SINGLE-FAMILY RESIDENCES Final Report**

Stephen R. Petersen and Jim L. Heldenbrand Oct 1980 40 p



## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

refs

(Contract EA-77-A-01-6010)  
(PB81-135642, NBSIR-80-2161) Avail NTIS  
HC A03/MF A01 CSCL 13A

A reference building approach to building energy performance standards is described. Each proposed building design would be compared with a reference building design and operating profile. In order to comply with the standard, the design energy requirements of the new building would not be allowed to exceed those of the reference building when evaluated by a parallel modeling process. GRA

**N81-20441#** Cyclomatic Industries, Inc., San Diego, Calif.  
**HIGHLY EFFICIENT WELDING POWER SUPPLY** Final Report, 1 May 1978 - 30 Sep. 1980

James M. Thommes Sep. 1980 99 p refs  
(Contracts DE-AC03-78CS-40023; EM-78-C-03-1837)  
(DOE/CS-40023/T1) Avail. NTIS HC A05/MF A01

The results and findings of an energy efficient welding power source development project are reported. The power source developed is to be used for electric arc welding processes in which 3.5 trillion Btu of energy can be saved annually. The power source development incorporates the use of switch mode power supply techniques in order to convert industrial supply mains (230/460 VAC 3 phi 60 Hz) to appropriate welding voltages and currents (up to 32 volts/up to 300 amps). A series capacitor switch mode power circuit was the circuit technique chosen in order to optimize energy efficiency, costs, reliability, size/weight, and welding performance. Test results demonstrated an effective efficiency of 80% to 91% for the energy efficient power source while the conventional types of power sources tested ranged 41% to 74% efficiency. DOE

**N81-20538#** General Electric Co., St. Petersburg, Fla.  
Corporate Research and Development.

**MONITORING AND CONTROL REQUIREMENT DEFINITION STUDY FOR DISPERSED STORAGE AND GENERATION (DSG), VOLUME 1** Final Report

Oct. 1980 330 p refs Sponsored by NASA and New York State Energy Research and Development Authority Prepared for JPL 5 Vol.

(Contract JPL-955456)  
(NASA-CR-164051; SRD-80-042-I-Vol-1; DOE/JPL-955456-1; JPL-9950-419) Avail. NTIS HC A15/MF A01 CSCL 10A

Twenty-four functional requirements were prepared under six categories and serve to indicate how to integrate dispersed storage generation (DSG) systems with the distribution and other portions of the electric utility system. Results indicate that there are no fundamental technical obstacles to prevent the connection of dispersed storage and generation to the distribution system. However, a communication system of some sophistication is required to integrate the distribution system and the dispersed generation sources for effective control. The large-size span of generators from 10 KW to 30 MW means that a variety of remote monitoring and control may be required. Increased effort is required to develop demonstration equipment to perform the DSG monitoring and control functions and to acquire experience with this equipment in the utility distribution environment. A.R.H.

**N81-20539#** General Electric Co., St. Petersburg, Fla.  
Corporate Research and Development.

**MONITORING AND CONTROL REQUIREMENT DEFINITION STUDY FOR DISPERSED STORAGE AND GENERATION (DSG), VOLUME 2, APPENDIX A: SELECTED DSG TECHNOLOGIES AND THEIR GENERAL CONTROL REQUIREMENTS** Final Report

Oct. 1980 168 p refs Sponsored by NASA and New York State Energy Research and Development Authority Prepared for JPL 5 Vol.

(Contract JPL-955456)  
(NASA-CR-164052; SRD-80-042-II-Vol-2; DOE/JPL-955456-1, JPL-9950-419) Avail. NTIS  
HC A08/MF A01 CSCL 10A

A consistent approach was sought for both hardware and software which will handle the monitoring and control necessary to integrate a number of different DSG technologies into a common

distribution dispatch network. It appears that the control of each of the DSG technologies is compatible with a supervisory control method of operation that lends itself to remote control from a distribution dispatch center. T.M.

**N81-20540#** General Electric Co., St. Petersburg, Fla.  
Corporate Research and Development.

**MONITORING AND CONTROL REQUIREMENT DEFINITION STUDY FOR DISPERSED STORAGE AND GENERATION (DSG), VOLUME 3, APPENDIX B: STATE OF THE ART, TRENDS, AND POTENTIAL GROWTH OF SELECTED DSG TECHNOLOGIES** Final Report

Oct. 1980 46 p refs Sponsored by NASA and New York State Energy Research and Development Authority Prepared for JPL 5 Vol.

(Contract JPL-955456)  
(NASA-CR-164054; SRD-80-042-III-Vol-3; DOE/JPL-955456-1, JPL-9950-419) Avail. NTIS  
HC A03/MF A01 CSCL 10A

Present and future relatively small (< 30 MW) energy systems, such as solar thermal electric, photovoltaic, wind, fuel cell, storage battery, hydro, and cogeneration can help achieve national energy goals and can be dispersed throughout the distribution portion of an electric utility system. Based on current projections, it appears that dispersed storage and generation (DSG) electrical energy will comprise only a small portion, from 4 to 10 percent, of the national total by the end of this century. In general, the growth potential for DSG seems favorable in the long term because of finite fossil energy resources and increasing fuel prices. Recent trends, especially in the institutional and regulatory fields, favor greater use of the DSGs for the future. A.R.H.

**N81-20541#** General Electric Co., St. Petersburg, Fla.  
Corporate Research and Development.

**MONITORING AND CONTROL REQUIREMENT DEFINITION STUDY FOR DISPERSED STORAGE AND GENERATION (DSG), VOLUME 4, APPENDIX C: IDENTIFICATION FROM UTILITY VISITS OF PRESENT AND FUTURE APPROACHES TO INTEGRATION OF DSG INTO DISTRIBUTION NETWORKS** Final Report

Oct. 1980 77 p Sponsored by NASA and New York State Energy Research and Development Authority Prepared for JPL 5 Vol.

(Contract JPL-955456)  
(NASA-CR-164055; SRD-80-042-IV-Vol-4; DOE/JPL-955456-1, JPL-9950-419) Avail. NTIS  
HC A05/MF A01 CSCL 10A

Visits to four utilities concerned with the use of DSG power sources on their distribution networks yielded useful impressions of present and future approaches to the integration of DSGs into electrical distribution network. Different approaches to future utility systems with DSG are beginning to take shape. The new DSG sources will be in decentralized locations with some measure of centralized control. The utilities have yet to establish firmly the communication and control means or their organization. For the present, the means for integrating the DSGs and their associated monitoring and control equipment into a unified system have not been decided. A.R.H.

**N81-20542#** General Electric Co., St. Petersburg, Fla.  
Corporate Research and Development.

**MONITORING AND CONTROL REQUIREMENT DEFINITION STUDY FOR DISPERSED STORAGE AND GENERATION (DSG), VOLUME 5, APPENDIX D: COST-BENEFIT CONSIDERATIONS FOR PROVIDING DISPERSED STORAGE AND GENERATION FOR ELECTRIC UTILITIES** Final Report

Oct. 1980 42 p Sponsored by NASA and New York State Energy Research and Development Authority Prepared for JPL 5 Vol.

(Contract JPL-955456)  
(NASA-CR-164053; DOE/JPL-955456-1; JPL-9950-419; SRD-80-042-V-Vol-5) Avail. NTIS HC A03/MF A01 CSCL 10A

Cost benefit considerations are extremely important in obtaining the acceptance of dispersed storage and generation

(DSG) by the electric utilities. These considerations involved somewhat different economic analyses depending on whether the generation is utility, customer, or combined ownership. It is necessary to get acceptance of more easily understood methods for evaluating the economics of DSG because much of the benefits of DSG may accrue in the generation and transmission portions of the utility system while the costs tend to be centered in the distribution portion of that system. The influence of factors, such as reliability, capital costs, and other economic measures were also investigated. T.M.

**N81-20563#** Acres Shawnigan Ltd., Toronto (Ontario).  
**STUDY OF THE POTENTIAL FOR COGENERATION IN CANADA: INDUSTRIAL STEAM TURBINES. VOLUME 1: MAIN REPORT**

Dec. 1979 176 p refs  
 (NP-25187-Vol-1) Avail. NTIS (US Sales Only)  
 HC A09/MF A01, DOE Depository Libraries

Results of a study to determine the potential for cogeneration in Canada are presented. National, provincial, and industrial potentials for cogeneration based on responses to a questionnaire from 211 plants operating boiler plants are developed. Each of the 211 plants were subjected to a common analysis procedure to determine cogeneration capability and cost. The study defined cogeneration, and addressed the technical potential for cogeneration, the economic implications of cogeneration, and the institutional barriers which have to be overcome before cogeneration is fully accepted as an energy supply option in Canada.

DOE

**N81-20573#** Volvo Flygmotor A.B., Trollhaetten (Sweden).  
**DEVELOPMENT OF METHOD AND EQUIPMENT FOR ENERGY RECOVERY FROM THE EXHAUST GASES OF THE OIL-FUELED SMELTING AND HOLDING FURNACES**

Aks Holm Mar. 1980 14 p In SWEDISH  
 (STU-78-8895) Avail. NTIS (US Sales Only)  
 HC A02/MF A01

A heat recovery system was tested. The system consists of a flat ceramic heat exchanger and a high temperature burner for preheated combustion air. The fuel saving tests were made with a smelting furnace for aluminum. The furnace can be used as a holding furnace and for a combination of smelting and holding. When the modified furnace is used for holding only, there is 50 percent reduction of fuel consumption. Combined use renders 30 to 35 percent saving of fuel. The yearly savings are about 75,000 Skr in this case. Long time tests (about 5000 h) show no change. The equipment can be adapted to various types of oil fueled furnaces for smelting, forging, and in the glass industry.

DOE

**N81-20598#** Argonne National Lab., Ill.  
**ENVIRONMENTAL ASSESSMENT FOR THE SATELLITE POWER SYSTEM CONCEPT DEVELOPMENT AND EVALUATION PROGRAM. ATMOSPHERE EFFECTS**

D M Rote, K L Brubaker, and J L Lee Nov 1980 128 p refs  
 (Contract W-31-109-eng-38)

(DOE/ER-0090) Avail. NTIS HC A07/MF A01

The issues associated with SPS activities in the troposphere were examined. These include tropospheric weather modification related to rectenna operations and rocket launches, and air quality impacts related to rocket launch ground clouds. Then progressing upward through the various levels of the atmosphere, the principal middle and upper atmospheric effects associated with rocket effluents were analyzed. Finally, all of the potential SPS atmospheric effects are summarized.

DOE

**N81-20604#** Ford, Bacon and Davis, Inc., New York  
**ENERGY EMERGENCY CONTINGENCY PLAN**

Nov 1980 179 p refs Prepared in cooperation with Tri-State Regional Planning. Sponsored in part by DOT Commission, New York

(PB81-128704, UMTA-NY-09-0054-80-1) Avail. NTIS  
 HC A09/MF A01 CSCI 08L

The feasibility of implementing certain contingency measures

to relieve or eliminate capacity shortfalls on subsidized bus transportation under the auspices of the New Jersey Transit Corporation is detailed. The primary purpose is to evaluate effective short range strategies to expand existing transit services, capable of being implemented within two weeks, should a reduction of fuel supplies curtail travel by automobile. The study area is in the nine northern counties of New Jersey under Tri-State jurisdiction.

GRA

**N81-20620#** Environmental Protection Agency, Ann Arbor, Mich.  
**Control Technology Assessment and Characterization Branch  
 COMPARISON OF GAS PHASE HYDROCARBON EMISSIONS FROM LIGHT-DUTY GASOLINE VEHICLES AND LIGHT-DUTY VEHICLES EQUIPPED WITH DIESEL ENGINES**

Penny Carey and Janet Cohen Sep 1980 31 p refs  
 (PB81-122896; EPA-AA-CTAB/PA-80-5) Avail. NTIS  
 HC A03/MF A01 CSCI 13F

Existing data on gas phase hydrocarbon exhaust emissions from both gasoline vehicles and vehicles equipped with diesel engines are consolidated. Recent studies show that diesel emissions contain compounds of high molecular weight. This high molecular weight component is dominated by particle bound hydrocarbons; however, the potential health risk associated with heavy hydrocarbons merits examination of the gas phase as well. Particular emphasis is placed on the comparison of emissions and their potential carcinogenicity. Other areas discussed include evaporative hydrocarbon emissions and the effect of fuel composition on gasoline gaseous hydrocarbon emissions.

GRA

**N81-21161#** Argonne National Lab., Ill. Energy and Environmental Systems Div.  
**ENERGY AND MATERIALS FLOWS IN THE PRODUCTION OF OLEFINS AND THEIR DERIVATIVES**

L. L. Gaines and S. Y. Shen Aug 1980 184 p refs  
 (Contract W-31-109-eng-38)

(ANL/CNSV-9) Avail. NTIS HC A09/MF A01

Production of olefins and their derivatives uses almost 3.5% of the oil and gas consumed annually in the United States. It is estimated that their production requires an input energy of 2 Q, which is 50% of the energy used in the production of all petrochemicals. Substantial amounts of this energy could be recovered through recycling. For example, recycling of a single plastic product, polyester soft drink bottles, could have recovered about 0.014 Q in 1979. Petrochemical processes use fuels as feedstocks, as well as for process energy, and a portion of this energy is not foregone and can be recovered through combustion of the products. The energy foregone in the production of ethylene is estimated to be 7800 Btu/lb. The energy foregone in plastics production ranges from 12,100 Btu/lb for the linear low density polyethylene to 77,200 Btu/lb for nylon 66, which is about 60% of the total energy input for that product.

DOE

**N81-21216#** Tennessee Valley Authority, Muscle Shoals, Ala.  
**Div. of Chemical Development  
 ENVIRONMENTAL CONSIDERATION FOR TVA'S AMMONIA FROM COAL PROJECT**

P C Williamson and D. A. Waitzman 1980 18 p Presented at the Fertilizer Inst. Environ. Symp., New Orleans, 7-10 Apr 1980

(CONF-8004137-1) Avail. NTIS HC A02/MF A01

The project involves retrofitting a coal gasification process to the front end of its existing 225 ton-per-day ammonia plant. The purpose of the project is to develop design and operating data to assess the technological, economic, and environmental aspects of substituting coal for natural gas in the manufacture of ammonia. The gasification plant and process are described. Solid wastes are to be disposed of in a sanitary landfill. Precautionary measures are described. Environmental study areas are outlined. These include: gaseous, liquid, and solid waste monitoring and characterization; radiological characterization; medical surveillance; and basic industrial hygiene. Possible hazardous agents are described.

DOE

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

**N81-21371#** Environmental Protection Agency, Ann Arbor, Mich  
Test and Evaluation Branch

### **EMISSIONS AND FUEL ECONOMY OF A COMPREX PRESSURE WAVE SUPERCHARGED DIESEL**

Edward Anthony Barth and Richard N Burgenson Oct. 1980  
10 p refs

(PB81-133399, EPA-AA-TEB-81-1) Avail NTIS  
HC A02/MF A01 CSCL 21E

In order to increase public interest in vehicles equipped with diesel engines, methods of improving diesel fueled engine performance, as compared to current gasoline fueled counterparts, are investigated. One method to increase performance is to supercharge or turbocharge the engine. An EPA assessment of a supercharging technique previously evaluated is described.

GRA

**N81-21467#** Oak Ridge National Lab., Tenn. Chemical Technology Div

### **FUTURE US ENERGY SUPPLY: CONSTRAINTS BY NONFUEL MINERAL RESOURCES**

H E Goeller Dec 1980 114 p refs

(Contract W-7405-eng-28)

(ORNL-5656) Avail. NTIS HC A06/MF A01

Current energy-related requirements for the various elements and mineral products are established. Domestic and world reserves and resources for each nonrenewable resource are assessed and a ranking made of impending domestic scarcities by using resource-to-demand ratios. Special problems on by-products production are noted, followed by a discussion on import dependency. The roles of recycle and substitution are assessed, and the possibilities for synthesis of nonelement commodities are reviewed. Detailed requirements for the more widely used materials in a large number of energy supply systems are provided, followed by newer future requirements for more advanced energy systems anticipated to be in widespread use in the next century. Finally, the various problems associated with 16 elements deemed most likely to become scarce within the next 50 years are resummarized, and general conclusions are provided.

DOE

**N81-21490#** International Institute for Applied Systems Analysis, Laxenburg (Austria)

### **EFFECTS OF ACCOUNTING RULES ON UTILITY CHOICES OF ENERGY TECHNOLOGIES IN THE UNITED STATES**

Bernard I Spinrad Jul 1980 35 p refs

(IIASA-RR-80-27) Avail. Issuing Activity

Comparisons of the costs of power systems, specifically the cost of nuclear versus other power systems, are discussed. The effects of inconsistent accounting are examined. Five systems that supply electrical power are cost analyzed: (1) light water reactors, (2) liquid metal fast breeder reactors, (3) coal plants, with scrubbers, burning low sulfur or processed high sulfur coal, (4) coal plants with fluidized bed combustion of high sulfur coal, and (5) solar power plants with sufficient storage for baseload use. Cost estimates for the system are made and justified. Cost comparison results show that, contrary to currently accepted conclusions, light water reactors have a decisive cost advantage over coal, if assumed target costs are met, after development, liquid metal fast breeder reactor would be the cheapest system, and if postdevelopment target costs are met, solar power plants are almost competitive with the nuclear systems and are much cheaper than coal.

Author (ESA)

**N81-21559#** Princeton Univ., N J. Center for Environmental Studies

### **ALTERNATIVE ENERGY FACILITY SITING POLICIES FOR URBAN COASTAL AREAS: EXECUTIVE SUMMARY OF FINDINGS AND POLICY RECOMMENDATIONS**

David Morell and Grace Singer Nov 1980 29 p refs

(Contract DE-AS03-77EV-01528)

(DOE/EV-01528/T1) Avail. NTIS HC A03/MF A01

An analysis was made of siting issues in the coastal zone, one of the nation's most critical natural resource areas and one which is often the target for energy development proposals. The analysis addressed the changing perceptions of citizens toward energy development in the coastal zone, emphasizing urban communities where access to the waterfront and revitalization

of waterfront property are of interest to the citizen. The case studies demonstrate the significance of local attitudes and regional cooperation in the siting process.

DOE

**N81-21560#** Los Alamos Scientific Lab., N Mex.  
**WATER SUPPLY AND DEMAND IN AN ENERGY SUPPLY MODEL**

David Abbey and Verne Loose Dec. 1980 61 p refs

(Contract DE-AC04-80EV-10180)

(DOE/EV-10180/2) Avail. NTIS HC A04/MF A01

The model allows adjustments in the input mix and plant siting in response to water scarcity. Thus, on the demand side energy conversion facilities can substitute more costly dry cooling systems for conventional evaporative systems. On the supply side groundwater and water purchased from irrigators are available as more costly alternatives to unappropriated surface water. Water supply data is developed for 30 regions in 10 western states. Preliminary results for a 1990 energy demand scenario suggest that, at this level of spatial analysis, water availability plays a minor role in plant siting. Future policy applications of the modeling system are discussed including the evaluation of alternative patterns of synthetic fuels development.

DOE

**N81-21561#** Battelle Columbus Labs., Ohio  
**ANALYSIS OF FIELD TEST DATA ON RESIDENTIAL HEATING AND COOLING** Final Report

S G Talbert Dec 1980 129 p refs Sponsored by Electric Power Research Inst

(EPRI Proj 1364-1)

(EPRI-EA-1849) Avail. NTIS HC A07/MF A01

The computer program using field site data collected on 48 homes located in six cities in different climatic regions of the United States is discussed. In addition, a User's Guide was prepared for the computer program which is contained in a separate two-volume document entitled User's Guide for REAP. Residential Energy Analysis Program. Feasibility studies were conducted pertaining to potential improvements for REAP, including the addition of an oil-furnace model, improving the infiltration subroutine, adding active and/or passive solar subroutines, incorporating a thermal energy storage model, and providing dual HVAC systems (e.g., heat pump-gas furnace). The purpose of REAP is to enable building designers and energy analysts to evaluate how such factors as building design, weather conditions, internal heat loads, and HVAC equipment performance, influence the energy requirements of residential buildings.

DOE

**N81-21565#** California Univ., Livermore Lawrence Livermore Lab

### **US ENERGY CONSUMPTION AND SUPPLY**

C. M VanAtta 13 Jan 1981 44 p refs

(Contract W-7405-eng-48)

(UCID-18856) Avail. NTIS HC A03/MF A01

Energy consumption and cost in 1978 and 1979 are discussed with emphasis on the effect of imported oil on the economy of the United States. Some of the international aspects of energy supply are described, and actions to meet the probability of a cutoff of oil imports from the Persian Gulf area are suggested. Short and long range strategies for ensuring energy self sufficiency are discussed. A rationale for major, long range dependence on fission and fusion power is given, and the possible advantages of a nearly all electric energy system are mentioned. Projection of energy consumption and supply to the year 2020 based upon economic and demographic models is discussed.

DOE

**N81-21576#** Midwest Research Inst., Golden, Colo Solar Energy Research Inst

### **SOLAR ENERGY IN ITALY: A PROFILE OF RENEWABLE ENERGY ACTIVITY IN ITS NATIONAL CONTEXT**

Carol A Shea Dec 1980 76 p refs

(Contracts DE-AC02-77CH-00178; EG-77-C-01-4042)

(SERI/SP-763-718) Avail. NTIS HC A05/MF A01

The energy profile includes imported energy sources, solar research and development, solar energy organizations, solar energy related legislation and administration policies, and international

agreements, contacts, manufacturers, and projects. The country overview includes: Italian Republic geopolitical analysis, economic analysis; and cultural aspects T.M.

**N81-21580# PRC Energy Analysis Co., Los Angeles, Calif. SATELLITE POWER SYSTEM (SPS) SOCIETAL ASSESSMENT**

Dec 1980 57 p refs Sponsored by NASA  
(Contract DE-AC01-79ER-10041)  
(NASA-CR-184153; DOE/ER-10041/T12) Avail: NTIS  
HC A04/MF A01 CSCL 10A

Construction and operation of a 80-unit (300 GW) domestic SPS over the period 2000 to 2030 would stress many segments of U.S. society. A significant commitment of resources (land, energy, materials) would be required, and a substantial proportion of them would have to be committed prior to the production of any SPS electricity. Forty-four concerns about the SPS were identified via a public outreach experiment involving 9000 individuals from three special interest organizations. The concerns focused on environmental impacts (particularly the effects of microwave radiation) and the centralizing tendency of the SPS on society. DOE

**N81-21583# Bonneville Power Administration, Portland, Oreg. Div. of Power Resources.**

**WIND ENERGY INTEGRATION STUDY**

Aug. 1980 77 p  
(Contract DE-AC79-79BP-10552)  
(DOE/BP-10552/17) Avail: NTIS HC A05/MF A01

The feasibility of integrating a simulated 3000 megawatt (MW) wind energy conversion network into the Pacific Northwest hydro-thermal generation system was investigated. The following areas were identified for preliminary analysis: seasonal power planning (regulation); secondary energy (surplus); energy reserve planning; peak reserves; and hourly planning. DOE

**N81-21595# Alaska State Div. of Energy and Power Development, Anchorage.**

**ALASKA REGIONAL ENERGY RESOURCES PLANNING PROJECT. PHASE 2: COAL HYDROELECTRIC AND ENERGY ALTERNATIVES. VOLUME 1: BELUGA COAL DISTRICT ANALYSIS**

Gene Rutledge, Darlene Lane, and Greg Edblom 1980 452 p refs 3 Vol.  
(Contract DE-AT06-77EV-73002)  
(DOE/EV-73002/1-Vol-1, DEPD-81-001-1-Vol-1) Avail: NTIS  
HC A20/MF A01

Socio-economic implications of the development and management alternatives are discussed. A review of permits and approvals necessary for the initial development of Beluga Coal Field is presented. Major land tenure issues in the Beluga Coal District as well as existing transportation routes and proposed routes and sites are discussed. The various coal technologies which might be employed at Beluga are described. Transportation options and associated costs of transporting coal from the mine site area to a connecting point with a major, longer distance transportation mode and of transporting coal both within and outside (exportation) the state are discussed. DOE

**N81-21596# Alaska State Div. of Energy and Power Development, Anchorage.**

**ALASKA REGIONAL ENERGY RESOURCES PLANNING PROJECT. PHASE 2: COAL HYDROELECTRIC AND ENERGY ALTERNATIVES. VOLUME 2: HYDROELECTRIC DEVELOPMENT**

Gene Rutledge, Darlene Lane, and Greg Edblom 1980 177 p refs  
(DOE/EV-73002/1-Vol-2; DEPD-81-001-2-Vol-2) Avail: NTIS  
HC A09/MF A01

More than 600 sites for possible hydroelectric power development were identified in Alaska. The power potential of these sites is 200 times as great as the currently developed hydroelectric capacity of 131 MW. Information is presented on the location and characteristics of Alaska's hydropower sites, licensing and cost requirements for site development, the

environmental impact of hydroelectric development, and a review of hydroelectric technology including low head, ocean wave, and tidal hydropower and the equipment for hydropower conversion DOE

**N81-21597# Alaska State Div. of Energy and Power Development, Anchorage**

**ALASKA REGIONAL ENERGY RESOURCES PLANNING PROJECT. PHASE 2: COAL HYDROELECTRIC AND ENERGY ALTERNATIVES. VOLUME 3: ALASKA'S ALTERNATIVE ENERGIES AND REGIONAL ASSESSMENT INVENTORY UPDATE**

Gene Rutledge, Darlene Lane, and Greg Edblom 1980 300 p refs  
(Contract DE-AT06-77EV-73002)  
(DOE/EV-73002/1-Vol-3; DEPD-81-001-3-Vol-3) Avail: NTIS  
HC A13/MF A01

Topics include the utilization of windpower and geothermal resources, the utilization of very small hydropower systems, and the use of fuel cells. Waste energy utilization is also discussed and emphasis is placed on the use of wood residues and waste heat for energy conversion. Siting criteria for each of the alternate energy systems is presented T.M.

**N81-21606# Oak Ridge National Lab., Tenn Engineering Technology Div.**

**FUEL CYCLE ANALYSIS FOR FOSSIL ENERGY SYSTEMS: COAL COMBUSTION**

W. L. Greenstreet and R. L. Carmichael Feb 1981 392 p refs Submitted for publication  
(Contract W-7405-eng-26)  
(ORNL-5661) Avail: NTIS HC A17/MF A01

Elements of the fuel cycle for coal combustion in power generation are examined; and information on economics, technological status, energy efficiencies, and environmental issues is reviewed. Overall background information is provided for guidance in identifying issues and establishing needs and priorities for engineering research, development, and demonstration. The elements treated include mining, transportation, coal preparation, direct combustion, and environmental control technology. The treatment used differs from that of usual compendiums in its emphasis on integrated examination and presentation directed primarily toward providing bases for general assessment and for guidance in program development. Emphasis is on program identification as opposed to advocacy. DOE

**N81-21611# Los Alamos Scientific Lab., N. Mex. CERAMIC HEAT PIPE DEVELOPMENT Annual Report, 1 Oct. 1979 - 30 Sep. 1980**

M. Merrigan Dec. 1980 30 p refs  
(Contract W-7405-eng-36)  
(DOE/TIC-11389) Avail: NTIS HC A03/MF A01

Progress in developing ceramic heat pipe recuperators for recovering heat from industrial processing furnaces is reported. Information is included on the design, materials procurement, fabrication, materials testing, performance testing, performance and cost of ceramic heat pipes, especially tungsten-coated silicon carbide and SiC-W-Mo heat pipes. DOE

**N81-21613# California Univ., Berkeley. Lawrence Berkeley Lab.**

**ENVIRONMENTAL ASSESSMENT FOR THE SATELLITE POWER SYSTEM CONCEPT DEVELOPMENT AND EVALUATION PROGRAM: NONMICROWAVE HEALTH AND ECOLOGICAL EFFECTS**

Margaret R. White Nov. 1980 89 p refs  
(Contract W-7405-eng-48)  
(DOE/ER-0089) Avail: NTIS HC A05/MF A01

A preliminary reference system was developed. The assessment is summarized as to scope, methodology, impacts of terrestrial development, launch and recovery of spacecraft, space activities (including health effects of the space environment, ionizing radiation, electromagnetic exposure, spacecraft charging and environmental interactions, occupational hazards, etc.) and

## 01 ENERGY POLICIES AND ENERGY SYSTEMS ANALYSIS

construction and operation of rectenna (ground receiving station). DOE

**N81-21618#** Midwest Research Inst., Golden, Colo. Solar Energy Research Inst  
**CURRENT AND FUTURE INDUSTRIAL ENERGY SERVICE CHARACTERIZATIONS, VOLUME 1**

Frank Krawiec, Tom Thomas, Frederick Jackson, Dilip R. Limaye, Steve Isser, Ken Karnofsky, and Todd D. Davis Oct. 1980 243 p refs Prepared in cooperation with Synergetic Resources Corp.

(Contracts DE-AC02-77CH-00178; EG-77-C-01-4042)  
(SERI/TR-733-790-Vol-1) Avail: NTIS HC A11/MF A01

Current and future energy demands, end uses, and cost used to characterize typical applications and resultant services in the industrial sector of the United States are examined. A review and evaluation of existing industrial energy data bases was undertaken to assess their potential for supporting SERI research on: (1) market suitability analysis; (2) market development; (3) end use matching; (4) industrial applications case studies; and (5) identification of cost and performance goals for solar systems and typical information requirements for industrial energy end use. The focus was on fuels and electric energy used for heat and power purchased by the manufacturing subsector and listed by 2, 3, and 4 digit SIC, primary fuel, and end use. The effects of federal and state industrial energy conservation programs on future industrial sector demands were assessed. DOE

**N81-21622#** Sandia Labs., Albuquerque, N Mex Energy Systems Studies Div  
**SURVEY OF US INDUSTRIAL PROCESS HEAT USAGE DISTRIBUTIONS**

J J Iannucci 1981 30 p refs Sponsored by DOE  
(SAND-80-8234) Avail: NTIS HC 03/MF A01

The energy use characteristics of industry are examined in terms of the potential for penetration of solar thermal energy into the industrial process heat market. Data on 1972 United States industrial energy consumption (grouped by standard industrial classifications) were used along with the number of energy consuming establishments to generate estimates of the average consumption rate (megawatts) of energy at any site. Known temperature requirements for those industrial types were incorporated to calculate the power ratings required at various temperatures. These data were combined to yield distributions of energy consumption facility sizes at various temperatures. In terms of number of facilities, the small, lower temperature end users dominate. However, in terms of total energy consumed, the larger users (> 10 MW) and higher temperatures dominate. J.M.S

**N81-21624#** Battelle Pacific Northwest Labs., Richland, Wash.  
**THE ECONOMICS OF RESIDENTIAL ENERGY EFFICIENCY**

Richard P. Mazzocchi and Wally J. Hopp Jun 1980 16 p refs

(Contract DE-AC06-76RL-01830)  
(PNL-SA-8698; CONF-800828-3) Avail: NTIS HC A02/MF A01

The building thermal analysis program is utilized to analyze various measures for reducing energy consumption in single-family dwellings in northeastern Oregon. The results from the program are combined with energy price data and other economic assumptions to produce a ranking of the conservation measures according to their economic attractiveness. An evaluation is given of the utility and cost-effectiveness of the program as a tool for the design of energy efficient housing for specific climatic locations. S.F.

**N81-21630#** General Accounting Office, Washington, D. C. Energy and Minerals Div.

**IMPROVED DATA AND PROCEDURES NEEDED FOR DEVELOPMENT AND IMPLEMENTATION OF BUILDING ENERGY PERFORMANCE STANDARDS**  
23 Dec. 1980 38 p

(PB81-138422; EMD-81-2) Avail: NTIS HC A03/MF A01  
CSCL 13A

Energy conservation standards for new buildings being developed by the Department of Energy are discussed. Specifically, it addresses: what still needs to be done before sound standards can be issued; the need to transfer implementation responsibility for the standards from the Department of Housing and Urban Development to the Department of Energy; and the inappropriateness of the proposed sanction for noncompliance in view of the large decrease in expected energy savings. GRA

**N81-21631#** Resource Planning Associates, Inc., Washington, D. C.

**REGIONAL ANALYSIS OF RESIDENTIAL/COMMERCIAL GAS DEMAND Final Report**

Dec. 1980 93 p  
(Contract GRI-5014-310-0238)

(PB81-134496; RPA-RA-80-0429(2); GRI-80/0011) Avail: NTIS HC A05/MF A01 CSCL 13A

The market for the following systems for space conditioning is analyzed: deluxe gas furnace/central air-conditioner; oil furnace/central air-conditioner; electronic furnace/central air-conditioner, gas pulse-combination furnace/central air-conditioner, gas absorption heat pump; gas mechanical heat pump; advanced electric heat pump. The methodology used for forecasting regional characteristics affecting regional gas demand; forecasting regional gas demand; and analyzing the economics of and developing market shares for each of the above systems regionally. GRA

**N81-21639#** New Mexico State Univ., Las Cruces. New Mexico Energy Inst.

**ENVIRONMENTAL OVERVIEW FOR THE DEVELOPMENT OF GEOTHERMAL RESOURCES IN THE STATE OF NEW MEXICO Final Report**

M. Bryant, Arlene H. Starkey, and William A. Dick-Peddie Jun. 1980 268 p refs Prepared for California Univ., Livermore. Lawrence Livermore Lab  
(Contract W-7405-eng-48)

(UCRL-15317) Avail: NTIS HC A12/MF A01

Technologies and environmental impacts are considered at all points on the pathway of development resource exploration: well field, plant and transmission line construction; and plant operation. The technologies for electrical generation direct, dry steam conversion; separated steam conversion; single flash conversion, separated steam/single flash conversion and binary cycle conversion and the heat exchanger, down the hole heat exchanger and heat pump are described. A summary of the geothermal technologies planned or in operation within New Mexico geothermal areas is provided. A review of regulations that affect geothermal development and its related environmental impact in New Mexico is presented. DOE

**N81-21640#** California Univ., Livermore Lawrence Livermore Lab.

**MANAGEMENT PLAN FOR FISCAL YEAR 1981: ENVIRONMENTAL CONTROL TECHNOLOGY PROJECT GEOTHERMAL DEVELOPMENT**

W. F. Morris and F. B. Stephens 14 Oct. 1980 31 p refs  
(Contract W-7405-eng-48)

(UCID-18903) Avail: NTIS HC A03/MF A01

The management of four assessment tasks are discussed. The tasks were: current progress in H2S abatement technology; solid wastes from geothermal power production operations, characterization, handling, and disposal; problems associated with the use of agricultural drainage water for geothermal power plant cooling in the Imperial Valley; and liquid dominated, low total dissolved solids geothermal resources; characterization and evaluation of potential problems due to composition. DOE

**N81-21641#** Department of Energy, Washington, D. C. Office of Fossil Energy.

**ENVIRONMENTAL DEVELOPMENT PLAN: COAL LIQUEFACTION**

Aug. 1980 78 p  
(DOE/EDP-0044) Avail: NTIS HC A05/MF A01

This Environmental Development plan (EDP) examines environmental concerns being evaluated for the technologies in DOE's Coal Liquefaction Program. It identifies the actions that are planned or underway to resolve these concerns while the technologies are developed. Research is scheduled on the evaluation and mitigation of potential environmental impacts. The major unresolved environmental concerns associated with the coal liquefaction subactivities and projects are summarized. DOE

**NS1-21842# Battelle Pacific Northwest Labs., Richland, Wash  
ENVIRONMENTAL ASSESSMENT FOR THE SATELLITE  
POWER SYSTEM CONCEPT DEVELOPMENT AND EVALUA-  
TION PROGRAM-ELECTROMAGNETIC**

K A Davis, W. B. Grant, E. L. Morrison, and J. R. Juroshek  
Jan. 1981 93 p refs Prepared in cooperation with Institute  
for Telecommunication Sciences  
(Contract DE-AC06-78RL-01830)  
(DOE/ER-0096) Avail: NTIS HC A05/MF A01

An initial quantitative indication of the scope of potential electromagnetic compatibility (EMC) problems is provided and the importance of EMC considerations in rectenna site selection are indicated. The effects of satellite power system (SPS) microwave emissions on important categories of electronic systems and equipment are summarized, with many examples of test results and demonstrated techniques for mitigation of problems encountered. The SPS effects on other satellite systems are presented. Astronomical research frequently involves measurement of extremely low levels of electromagnetic radiation and is thus very susceptible to interference. The concerns of both radio astronomy with microwave emissions from SPS and optical astronomy with sunlight scattered from SPS spacecraft are discussed. Summaries of mitigation techniques, cost estimates, and conclusions are presented. DOE

**NS1-21846# Texas Univ., Austin. Bureau of Economic  
Geology  
ENVIRONMENTAL ANALYSIS OF GEOPRESSURED-  
GEOTHERMAL PROSPECT AREAS, DEWITT AND COLO-  
RADO COUNTIES, TEXAS Final Report, 1 Mar. - 31 Aug.  
1979**

Thomas C Gustavson, Florette S Reeder, and Elizabeth A. Badger  
Feb. 1980 282 p refs  
(Contract DE-AS05-79ET-27127)  
(DOE/ET-27127/1) Avail: NTIS HC A13/MF A01

Information collected and analyzed for a preliminary environmental analysis of geopressured geothermal prospect areas in Colorado and DeWitt Counties, Texas is presented. Specific environmental concerns for each geopressured geothermal prospect area are identified to: (1) conduct an environmental analysis to identify more and less suited areas for geopressured test wells; and (2) provide an environmental data base for development of geopressured geothermal energy resources. A series of maps and tables are included to illustrate environmental characteristics including geology; water resources, soils; current land use; vegetation, wildlife, and meteorological characteristics, and additional relevant information on cultural resources, power and pipelines, and regulatory agencies. DOE

## 02

### SOLAR ENERGY

Includes solar collectors, solar cells, solar heating and cooling systems, and solar generators.

**A81-19698** Diffusion length measurements in CdS and CdSe Schottky barrier junctions. S. Mora, N. Romeo, and L. Tarricone (Parma, Università, CNR, Gruppo Nazionale di Struttura della Materia, Parma, Italy). *Nuovo Cimento B, Serie 11*, vol. 60B, Nov. 11, 1980, p. 97-105. 16 refs.

The minority carrier diffusion length has been measured on CdS and CdSe single crystals by means of the surface photovoltage method. By illuminating the samples through semitransparent metal semiconductor Schottky barriers and for a given photovoltage signal, a linear relation was found between the intensity of light and the absorption length. By extrapolating to zero light intensity such a straight line, the diffusion length was obtained as the intercept with the x-axis. For good accuracy, a least-square fit method was employed to calculate the diffusion length values. The agreement of measurements performed on some Schottky diodes prepared in different ways and displaying different spectral responses confirmed a near independence of the SPV technique on some material parameters and experimental conditions. (Author)

**A81-19766 \*** Titanium dioxide antireflection coating for silicon solar cells by spray deposition. W. Kern and E. Tracy (RCA Laboratories, Princeton, N.J.). *RCA Review*, vol. 41, June 1980, p. 133-180. 66 refs. Research sponsored by the U.S. Department of Energy; Contract No. JPL-954868.

A high-speed production process is described for depositing a single-layer, quarter-wavelength thick antireflection coating of titanium dioxide on metal-patterned single-crystal silicon solar cells for terrestrial applications. Controlled atomization spraying of an organotitanium solution was selected as the most cost-effective method of film deposition using commercial automated equipment. The optimal composition consists of titanium isopropoxide as the titanium source, n-butyl acetate as the diluent solvent, sec-butanol as the leveling agent, and 2-ethyl-1-hexanol to render the material uniformly depositable. Application of the process to the coating of circular, large-diameter solar cells with either screen-printed silver metallization or with vacuum-evaporated Ti/Pd/Ag metallization showed increases of over 40% in the electrical conversion efficiency. Optical characteristics, corrosion resistance, and several other important properties of the spray-deposited film are reported. Experimental evidence indicates a wide tolerance in the coating thickness upon the overall efficiency of the cell. Considerations pertaining to the optimization of AR coatings in general are discussed, and a comprehensive critical survey of the literature is presented. (Author)

**A81-19813** On the possible use of MHD generators in solar energy systems. H. Branover, I. Borde, A. El-Boher, and A. Leitner (Negev, University, Beersheba, Israel). In: *MHD-flows and turbulence*. II. Jerusalem, Israel Universities Press, 1980, p. 197-205. 5 refs.

It is shown that electric power can be obtained as a by-product of solar water heating using flat-plate collectors with maximum temperatures of only 80-90 C. An MHD system using solar energy heats liquid metal in the heat exchanger which receives heat from a flat collector, a solar pond, or a concentrator; the thermodynamic cycle consists of an upper basic Rankine cycle and a bottom Rankine cycle with isothermal expansion. The efficiencies of the MHD generator, pumps, heat exchanger, and solar collector are determined, with the total efficiency of 5.6% at 105 C for liquid metal collectors. A.T.

**A81-19849** Optimization of fin and tube parameters in a flat-plate collector. H. P. Garg, U. Rani, and R. Chandra (Indian Institute of Technology, New Delhi, India). *Energy* (UK), vol. 6, Jan.

1981, p. 83-92. 16 refs.

A theoretical investigation for optimizing collector-cost effectiveness is carried out by considering various tube diameters, materials, tube spacing, fin materials, and thicknesses for black and other paints. The bond conductance is taken into account for various joining techniques. Various tube geometries are considered and the convective heat-transfer coefficients are calculated. The pressure drops are calculated with allowance for the friction factor due to the skin effect. Since the friction factor for bends and fittings is negligibly small in the laminar flow regime, the pressure drop is calculated for skin friction alone. Efficiency and costs are computed to determine an optimal system. (Author)

**A81-19951** New method for maximum power consideration in solar cells with and without resistive losses. K. K. Govil and K. K. Aggarwal (Regional Engineering College, Kurukshetra, India). *Electronics Letters*, vol. 17, Jan. 8, 1981, p. 5, 6.

**A81-20007** The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells. A. Rothwarf (Drexel University, Philadelphia, Pa.) and H. Windawi (Delaware, University, Newark, Del.). *IEEE Transactions on Electron Devices*, vol. ED-28, Jan. 1981, p. 64-69. 33 refs. Research supported by the Solar Energy Research Institute; Contract No. EG-77-C-01-4042.

**A81-20008** Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells. P. C. Mathur, J. D. Arora (Delhi, University, Delhi, India), and H. L. Hartnagel. *IEEE Transactions on Electron Devices*, vol. ED-28, Jan. 1981, p. 69-71. 18 refs.

**A81-20010 \*** The properties of polycrystalline silicon solar cells with controlled titanium additions. A. Rohatgi, R. H. Hopkins, and J. R. Davis, Jr. (Westinghouse Research and Development Center, Pittsburgh, Pa.). *IEEE Transactions on Electron Devices*, vol. ED-28, Jan. 1981, p. 103-108. 18 refs. Research sponsored by the Department of Energy and NASA.

By coupling the results of electrical measurements, such as spectral response, lighted and dark I-V determinations, and deep-level-transient spectroscopy with optical and laser scan photomicroscopy, the effects of grain boundaries and impurities on silicon solar cells were evaluated. Titanium, which produces two deep levels in silicon, degrades cell performance by reducing bulk lifetime and thus cell short-circuit current. Electrically active grain boundaries induce carrier recombination in the bulk and depletion regions of the solar cell. Experimental data imply a small but measurable segregation of titanium into some grain boundaries of the polycrystalline silicon containing high Ti concentration. However, for the titanium-contaminated polycrystalline material used in this study, solar cell performance is dominated by the electrically active titanium concentration in the grains. Microstructural impacts on the devices are of secondary importance. (Author)

**A81-20011 \*** Determination of lifetimes and recombination currents in p-n junction solar cells, diodes, and transistors. A. Neugroschel (Florida, University, Gainesville, Fla.). *IEEE Transactions on Electron Devices*, vol. ED-28, Jan. 1981, p. 108-115. 22 refs. Research supported by the University of Florida; Grant No. NSG-3018.

New methods are presented and illustrated that enable the accurate determination of the diffusion length of minority carriers in the narrow regions of a solar cell or a diode. Other methods now available are inaccurate for the desired case in which the width of the region is less than the diffusion length. Once the diffusion length is determined by the new methods, this result can be combined with measured dark I-V characteristics and with small-signal admittance characteristics to enable determination of the recombination currents in each quasi-neutral region of the cell - for example, in the emitter, low-doped base, and high-doped base regions of the BSF (back-surface-field) cell. This approach leads to values for the effective

## 02 SOLAR ENERGY

surface recombination velocity of the high-low junction forming the back-surface field of BSF cells or the high-low emitter junction of HLE cells. These methods are also applicable for measuring the minority-carrier lifetime in thin epitaxial layers grown on substrates with opposite conductivity type (Author)

**A81-20295 \*** Interactions of efficiency and material requirements for terrestrial silicon solar cells. D. L. Bowler and M. Wolf (Pennsylvania, University, Philadelphia, Pa.). (*Institute of Electrical and Electronics Engineers and Electronic Industries Association, Electronic Components Conference, 30th, San Francisco, Calif., May 11-13, 1980.*) *IEEE Transactions on Components, Hybrids, and Manufacturing Technology*, vol. CHMT-3, Dec. 1980, p. 464-472, 17 refs. Research supported by the U.S. Department of Energy and NASA.

The transport velocity transformation method was used to analyze solar cell designs to determine optimum cell structures. It was found that low resistivity materials should be used up to the onset of Auger recombination; a properly designed three-layer structure permits base region approaching an ideal device in performance, and that higher resistivity front regions will need more sophisticated grid metallization structures than those used now. It was concluded that new features will provide idealized silicon cell structures yielding airmass 1 efficiencies in the 24-26.5% range, with real efficiencies near 22%. A.T.

**A81-20490** A review of the application of modern control theory to solar energy systems. P. Dorato (New Mexico, University, Albuquerque, N. Mex.). In: Conference on Decision and Control, and Symposium on Adaptive Processes, 18th, Fort Lauderdale, Fla., December 12-14, 1979, Proceedings. Volume 2. Piscataway, N.J., Institute of Electrical and Electronics Engineers, Inc., 1979, p. 907-910. 34 refs.

The application of modern control theory to the problem of solar energy temperature control is discussed. Attention is given to classical temperature control and to some of the basic model components required for solar systems. A number of optimization techniques that have been proposed in the literature for solar systems, including linear-quadratic optimization, optimal on-off control, singular control, periodic optimization, optimal-adaptive control, and stochastic optimization, are discussed. Attention is also given to the role to be played by microprocessors. The need for commonly accepted criteria for evaluating control systems is stressed. C.R.

**A81-20492** Solar Energy Management System. R. L. Moen (Honeywell Energy Resources Center, Minneapolis, Minn.). In: Conference on Decision and Control, and Symposium on Adaptive Processes, 18th, Fort Lauderdale, Fla., December 12-14, 1979, Proceedings. Volume 2. Piscataway, N.J., Institute of Electrical and Electronics Engineers, Inc., 1979, p. 917-919. Research supported by the U.S. Department of Energy.

The Solar Energy Management System (SEMS), a general-purpose, flexible system for the residential solar energy market based on microprocessors, is analyzed. The modes resident in the SEMS controller are enumerated, for example, purge excess energy and charge heat storage tank, and the system's ability to assign priority to modes is described. The controller examines analog temperature sensor inputs and thermostat demands first to arrive at preliminary mode requests for each mode. The resulting requests are then processed in order of priority to determine the state of each relay. As each requested mode is processed, conflicting relay states in the mode/relay table may lead the latest mode to be precluded. When all requested modes have been processed, any relays that are not explicitly commanded to be energized or de-energized will be commanded to their default state C.R.

**A81-20493** Capacity modulation of solar-fired absorption chillers with single and multi-temperature energizing sources. A. Davis (Rho Sigma, Inc., North Hollywood, Calif.) and A. B. Newton. In: Conference on Decision and Control, and Symposium on

Adaptive Processes, 18th, Fort Lauderdale, Fla., December 12-14, 1979, Proceedings. Volume 2. Piscataway, N.J., Institute of Electrical and Electronics Engineers, Inc., 1979, p. 920, 921.

This paper discusses two approaches to improve performance of solar-energized absorption systems. The first approach improves part-load performance of the absorption chiller by modulating the energizing temperature to track the load and the cooling tower water temperature. The second approach improves the heat collection of the solar array by using solar storage tanks at different temperatures, and selecting the storage tank which is most appropriate to drive the absorption chiller to meet the load. (Author)

**A81-20600 \* #** Solar-pumped gas laser development. J. W. Wilson (NASA, Langley Research Center, Hampton, Va.). *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St Louis, Mo., Jan. 12-15, 1981, Paper 81-0098*. 15 p 33 refs.

The direct conversion of solar radiation into an inverted population for extraction in an optical cavity holds promise as a relatively simple system design. Broad-band photoabsorption in the visible or near-UV range is required to excite large volumes of gas and to ensure good solar absorption efficiency. The state excited must be a metastable state which is not quenched by the parent gas. The emission bandwidth must be less than approximately 10 Å. The system should show chemical reversibility and an insensitivity to increasing temperature. Other properties such as good quantum efficiency and kinetic efficiency are also implied. A search of electronic-vibrational transitions in diatomic molecules satisfying these conditions is now in progress. A photodissociation-pumped atomic iodine laser is now being tested under solar pumping conditions. Photodissociation studies for thallium spin-flip metastable formation will begin in the near future. (Author)

**A81-20787 #** Temperature stratification in hot water solar thermal storage tanks. S. M. Koldhekar (ITT General Controls, Glendale, Calif.). *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St Louis, Mo., Jan. 12-15, 1981, Paper 81-0368*. 10 p. 5 refs. Research supported by the Arizona Solar Energy Research Commission.

The overall efficiency of solar domestic hot water systems using liquid sensible heat storage can be enhanced by temperature stratification in the storage tank. An experimental apparatus was designed to study how the storage tank stratified for three different hot water load schedules (morning peak, evening peak and distributed), three solar-inputs (clear day, cloudy day and intermittent), three flow rates (1.6, 1.0 and 0.5 gpm) and two inlet configurations (vertical pipe and horizontal diffuser). Criteria were developed to evaluate the effect of these variables on temperature stratification in the preheat tank. A hot water load schedule and the ratio of flow rates in the collector-heat exchanger and heat exchanger-storage loops were selected using these criteria. Finally a novel hot water load schedule was designed which will provide the greatest degree of temperature stratification. (Author)

**A81-20906** Interaction in Si<sub>3</sub>N<sub>4</sub>-C and BN-C systems under conditions of radiation heating. A. A. Korol, V. S. Dvornikov, and G. S. Elicheva (Akademiia Nauk Ukrainskoi SSR, Institut Problem Materialovedeniia, Kiev, Ukrainian SSR) (*Geliotekhnika*, vol. 16, no. 2, 1980, p. 11-14.) *Applied Solar Energy*, vol. 16, no. 2, 1980, p. 9-12. 7 refs. Translation.

The physicochemical, thermophysical, and operating properties of high-temperature materials are changed when the nonmetallic nitrides and carbon they contain interact during exposure to powerful thermal fluxes. Specimens of Si<sub>3</sub>N<sub>4</sub>-C and BN-C were irradiated by a solar-energy concentrator which provided a radiant flux density of 0.07-1400 W/sq cm in a focal spot 8 mm in diameter. Weight loss of the specimens was measured against the magnitude of incident radiant flux, the regenerated layer then subjected to phase and macrostructural analyses. Silicon carbide first appeared in the Si<sub>3</sub>N<sub>4</sub>-C at 210 W/sq cm, with a 10% weight loss. Sintering occurred



at 420 W/sq cm. The critical value for the BN-C system - that is, the point at which B4C was first detected - was 1050 W/sq cm; there was no accompanying loss of weight. Optimum thermal flux for this system was determined to be 1430 W/sq cm. R.S

**A81-20907** Method of calculating shading of heliostats in tower-type solar power plants. R. R. Aparisi (Gosudarstvennyi Nauchno-Issledovatel'skii Energeticheskiy Institut, Moscow, USSR). (*Geliotekhnika*, vol. 16, no. 2, 1980, p. 22-27.) *Applied Solar Energy*, vol. 16, no. 2, 1980, p. 20-25. Translation.

**A81-20908** Heliostats and concentrators with variable reflecting-surface geometry. V. K. Baranov. (*Geliotekhnika*, vol. 16, no. 2, 1980, p. 28-33.) *Applied Solar Energy*, vol. 16, no. 2, 1980, p. 26-30. Translation.

**A81-20910** Solar electric propulsion systems - A survey. V. A. Grilikhes, G. M. Zav'yalova, and L. B. Popov. (*Geliotekhnika*, vol. 16, no. 2, 1980, p. 65-72.) *Applied Solar Energy*, vol. 16, no. 2, 1980, p. 62-68. 10 refs. Translation.

The Solar Electric Propulsion System (SEPS) currently under development in the United States offers several advantages as a third-stage power system for interplanetary and inter-earth-orbit flights. Its electric propulsion motors (EPM), with the relatively large specific impulse of 30,000 m/sec each, consume less propellant than do chemical rocket motors or compressed-gas engines, and constitute, with the solar batteries, 50% of the SEPS dry mass. Outfitted with 8-10 energy converters with attainable efficiency of 92%, SEPS is being considered for missions that range from the transport of payloads to geosynchronous orbit to an interplanetary rendezvous with Halley's Comet. The paper also presents configuration options and subsystem parameters. R.S.

**A81-20973** Coatings with induced transmission. P. H. Lissberger (Belfast, Queen's University, Belfast, Northern Ireland). *Applied Optics*, vol. 20, Jan. 1, 1981, p. 95-104. 14 refs.

A brief review is given of how fundamental concepts of thin film optics (potential transmittance, the two-effective-interfaces theorem, the principle of equivalent layers, matching conditions and absentee layers) are used to design optical coatings with controlled absorbance. The general principles are illustrated by a discussion of interference filters containing both dielectric and metallic layers, including the design and preparation of induced transmission filters. Reference is also made to coatings for optimizing the photon efficiencies of photodetectors. Further insight into how coatings with absorbing layers function is provided by consideration of the electric field distribution of radiation within the coatings. (Author)

**A81-21029** Optimal and suboptimal control policies for a solar collector system. C. Rorres, R. Fischl (Drexel University, Philadelphia, Pa.), and A. Orbach (J. Deere and Co., Waterloo, Iowa). *IEEE Transactions on Automatic Control*, vol. AC-25, Dec. 1980, p. 1085-1091. 8 refs. Contract No. E-8-77-5-02-4512.

An optimal control policy to maximize the net energy gathered by a flat-plate solar collector by controlling the fluid flow rate is formulated in terms of a distributed parameter system solved by the method of characteristics. The optimal control policy instantly switches between the zero and maximum rates if the pump of the collector loop has power which is greater than the linear function of the fluid velocity. The switching function can be decomposed into a portion which depends on the state of the system and a suboptimal policy which can be implemented by an on/off feedback controller. The two policies are identical on a clear day with sufficient solar insulation; under other weather conditions, the suboptimal controller will keep the pump off for a slightly shorter time period. A.T.

**A81-21030** Design of self-calibrating controllers for heliostats in a solar power plant. R. S. Baheti and P. F. Scott (General Electric Co., Schenectady, N.Y.). *IEEE Transactions on Automatic Control*, vol. AC-25, Dec. 1980, p. 1091-1097.

A self-calibrating controller is developed for reducing installa-

tion and drive errors in a heliostat (steerable mirror used in solar/electric energy conversion). In this scheme, the heliostat periodically tracks the sun, which serves as a precision position reference. The difference between commanded and actual drive angles is used to estimate the coefficients of a model representing installation and drive errors. The calibrated model is then used to correct the drive actuator commands for these error sources when the heliostat is in a tracking mode (its principle mode of operation). Simulation results are given for a typical heliostat configuration with realistic errors. The algorithm is very effective in reducing beam steering errors. The concept is demonstrated using a prototype test apparatus and is shown to achieve an error reduction of more than 5.1. (Author)

**A81-21113** # Analysis and design of hybrid double-absorption cooling systems for low grade thermal energy applications. C. S. P. Peng and J. R. Howell (Texas, University, Austin, Tex.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/HT-44*. 10 p. 16 refs. Members, \$2.00; nonmembers, \$4.00.

A hybrid double-absorption system using LiCl-H<sub>2</sub>O solution as a working fluid is proposed in this paper. This system can operate at low source temperature (55 C-80 C), requires lower blower power than a desiccant system, and has a higher system C.O.P. A modification of this system, a double absorption-evaporation system that provides even higher C.O.P. is also proposed. Both closed and open regeneration of the working fluid are considered in the system design. Performance equations for these hybrid systems are presented. A computer code HYBRID is written to do parametric analysis for these systems under steady state conditions. The operating range and optimum design conditions are determined through both theoretical analysis and computer simulation. It is shown that these hybrid absorption systems have definite advantages over conventional absorption and desiccant systems for low grade thermal energy applications. (Author)

**A81-21129** # Performance of solar collectors - An evaluation of standard ratings. D. Jones, L. Shaw, and G. O. G. Lof (Solaron Corp., Englewood, Colo.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-1* 7 p. 7 refs. Members, \$2.00, nonmembers, \$4.00.

This paper is a critique of the Solar Energy Industry Association (SEIA) Collector Rating Method and Directory. Yearly average collector output values calculated using the FCHART method for a domestic water heating system with two collectors rated by SEIA are compared to calculated values for a domestic water heating application using SEIA certified data and recommended procedures. Results indicate that both collector energy output and relative output vary substantially from FCHART predictions and vary with location and system size. It is concluded that use of the SEIA rating method in its present form is a very poor method of selecting a solar collector, suggestions for improving the rating method are included. (Author)

**A81-21130** # Temperature variation in the absorber plate of an air heating flat plate solar collector. L. A. Diaz and N. V. Suryanarayana (Michigan Technological University, Houghton, Mich.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-2*. 7 p. 11 refs. Members, \$2.00, nonmembers, \$4.00. Research supported by the Michigan Technological University.

A flat plate solar collector is modelled as a rectangular channel of high width to gap ratio with air entering the collector with a fully developed turbulent velocity profile. One plate of the collector is subjected to a uniform heat flux with the other plate heavily insulated. Experimental values of friction factor and heated plate temperature in the thermal entrance region are presented and compared with analytical predictions. It is shown that there will be significant plate temperature variation in the thermal entrance region particularly at low flow rates. It is also shown that neglecting conduction effects in the absorber plate will not lead to any significant errors in estimating absorber plate temperature variation.

## 02 SOLAR ENERGY

Tabulated values of dimensionless plate temperature for different values of the dimensionless distance from the leading edge for several Reynolds number are presented. (Author)

**A81-21131 # Analytical predictions of liquid and air photovoltaic/thermal flat-plate collector performance.** P. Raghuraman and S. D. Hendrie (MIT, Lexington, Mass.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-3.* 8 p. 12 refs. Members, \$2.00, nonmembers, \$4.00. Research sponsored by the U.S. Department of Energy.

Two separate one-dimensional analyses have been developed for the prediction of the thermal and electrical performance of both liquid and air flat-plate photovoltaic/thermal (PV/T) collectors. The analyses account for the temperature difference between the primary insolation absorber (the photovoltaic cells) and the secondary absorber (a thermal absorber flat plate). The results of the analyses are compared with test measurements, and therefrom design recommendations are made to maximize the total energy extracted from the collectors. (Author)

**A81-21132 # Modeling and analysis of an all-fiberglass flat plate solar collector.** L. D. Russell (Mississippi State University, Mississippi State, Miss.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-4.* 5 p. 5 refs. Members, \$2.00, nonmembers, \$4.00.

The concept of an all-fiberglass liquid flat plate solar collector was studied. Such a collector eliminates the need for coatings, metals, and all other materials except fiberglass. The concept appears to offer possibilities for the mass production of a low-cost lightweight solar collector which is reasonably efficient. Mathematical models were developed for study of this concept. Convection and nonlinear radiation between the covers was computed in all of the models. In addition, absorptance and conduction in the cover(s) and the fluid cover plate were studied in order to determine their effects on the panel performance. A model panel was fabricated, and computer results were compared with test data for the efficiency of the panel. (Author)

**A81-21133 # Design and evaluation of a computer controlled solar collector simulator.** J. F. Kotas and B. D. Wood (Arizona State University, Tempe, Ariz.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-6.* 7 p. 13 refs. Members, \$2.00, nonmembers, \$4.00. Contract No. DE-AC03-79CS-30203.

A computer-controlled system has been developed to simulate the thermal processes of a flat-plate solar collector. The simulator is based on four water heaters of capacities of 1.5, 2.5, 5.0 and 5.0 kW providing a maximum design output of 14.0 kW which are controlled by a Nova 3 minicomputer, which also monitors temperatures in the fluid stream. Measurements have been obtained of the steady-state operating values and time constants of the individual heaters at different flow rates in order to utilize effectively their thermal outputs. Software was designed to control the heater system so the total thermal output closely approximates that of an actual heater array, utilizing steady-state or dynamic control modes. Simulation of the heat output of a previously tested collector has resulted in simulated values differing from actual output by a maximum of 3% under identical operating conditions, thus indicating that the simulator represents a viable alternative to the testing of a large field of collectors. A.L.W.

**A81-21134 # Radiation and free convection shield for passive thermal control.** J. K. E. Ortega (Solar Energy Research Institute, Golden, Colo.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-7.* 6 p. 5 refs. Members, \$2.00; nonmembers, \$4.00.

A radiation and free convection shield (RFS), when used with a thermal storage wall, can enhance the thermal performance of the storage wall and provide passive thermal control. In order to optimize the performance of the RFS, it is desirable to know how

the impedance provided by the use of an RFS varies with the thermophysical properties of materials used to construct it. A numerical nodal thermal model was constructed to evaluate the impedance as a function of the thermophysical properties of the RFS. Two RFS thermophysical properties are identified as the most important in controlling the impedance from the storage wall to the room: thermal conductivity and total surface emissivity. A decrease in the RFS surface-to-surface thermal conductance, a decrease in the RFS total surface emissivity, or both, substantially increases the impedance from the storage wall to the room. (Author)

**A81-21135 # Design procedure and application of solar-assisted series heat pump systems.** C. D. Svard, J. W. Mitchell, and W. A. Beckman (Wisconsin, University, Madison, Wis.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-9.* 10 p. 9 refs. Members, \$2.00, nonmembers, \$4.00. Research supported by the U.S. Department of Energy.

A general design procedure is presented for solar assisted series heat pump systems for space heating and process water heating. The procedure accounts for the variable efficiency and rate of energy delivery by the heat pump. The performance results from this design procedure are compared against detailed computer simulations on a monthly and seasonal basis. For low temperature space heating applications, the maximum difference between the design procedure and computer simulations is 3% on a seasonal basis while for high temperature process water heating systems, the maximum differences are 3-6%. This design procedure is then used to investigate high temperature series heat pump systems for providing hot water for industrial processes. Recommendations are given for high temperature series heat pump system design. (Author)

**A81-21136 # Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems.** M. K. Choi and J. H. Morehouse (Science Applications, Inc., McLean, Va.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-10.* 10 p. 9 refs. Members, \$2.00, nonmembers, \$4.00. Research supported by the U.S. Department of Energy.

This study performed an analysis of ground-coupled stand-alone and series configured solar-assisted liquid-to-air heat pump systems for residences. The year-round thermal performance of these systems for space heating, space cooling, and water heating were determined by simulation and compared against non-ground-coupled solar heat pump systems as well as conventional heating and cooling systems in three geographic locations: Washington, D.C., Fort Worth, Tex., and Madison, Wis. The results indicate that without tax credits a combined solar/ground-coupled heat pump system for space heating and cooling is not cost competitive with conventional systems. Its thermal performance is considerably better than non-ground-coupled solar heat pumps in Fort Worth. Though the ground-coupled stand-alone heat pump provides 51% of the heating and cooling load with non-purchased energy in Fort Worth, its thermal performance in Washington and Madison is poor. (Author)

**A81-21137 # Economic analysis and optimization of solar residential space heating.** C. L. Buck, R. I. Vachon (Minnesota, University, Minneapolis, Minn.), and J. S. Goodling (Auburn University, Auburn, Ala.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-11.* 9 p. 18 refs. Members, \$2.00, nonmembers, \$4.00.

Current economic analyses for residential solar heating and hot water systems have numerous problems and are cumbersome for users as decision making aids. By development of the concept of a utilization factor and a correlation for it, the economic analyses can be expressed in dimensionless forms. These dimensionless expressions are more easily used and make the economic analyses independent of the system design, system size, the relative contribution of the solar energy system, and the geographic location of the system. This study should facilitate the use of such economic information in the decision making process. (Author)

**A81-21139 #** Dynamic modeling and experimental simulation of active solar energy systems for the evaluation of control strategies. S. R. Schiller, M. L. Warren, and M. Wahlig (California, University, Berkeley, Calif.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-14* 8 p 15 refs. Members, \$2 00, nonmembers, \$4.00. Contract No. W-7405-eng-48

Dynamic modeling and experimental simulation are used to evaluate control strategies for active solar energy systems. Performance of proportional and on/off collector loop controllers are evaluated and compared using a theoretical dynamic collector model. Use of the experimental test facility at Lawrence Berkeley Laboratory for evaluating the effect of controls and control strategies on hydronic space heating system performance is also discussed. Both the computer model and the test facility allow evaluation of control strategies using various flow rates, controller set points, insolation patterns, ambient temperature conditions, and collector types. The test facility also allows comparison of collector and load loop flow strategies based on various system configurations and building load demands. (Author)

**A81-21140 #** Frequency response analysis of fluid control systems for parabolic-trough solar collectors. R. Schindewolf (Sandia Laboratories, Albuquerque, N. Mex.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-15*. 8 p. 6 refs. Members, \$2.00, nonmembers, \$4.00.

Previous studies of solar-collector fluid-control systems have used computer simulations of collector and piping dynamics to evaluate stability and response characteristics. To obtain reasonable simulation accuracy requires substantial computer memory and time, and is well beyond the capability of small desk-top computers. This paper derives a linearized steady-state frequency response for parabolic-trough collectors and for connecting piping that can be used in standard gain-phase analyses to evaluate system stability and closed-loop frequency response. The frequency-response characteristics of a typical collector string and piping are used in a gain-phase analysis to get some insight into the effect on system stability of various system parameters such as controller gain, sensor and controller-time constants, and sensor location. (Author)

**A81-21144 \* #** High temperature solar thermal technology. L. P. Leibowitz, E. J. Hanseth, and M. L. Peelgren (California Institute of Technology, Jet Propulsion Laboratory, Solar Thermal Technology Group, Pasadena, Calif.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-20* 8 p 6 refs. Members, \$2 00, nonmembers, \$4.00. Research sponsored by the U.S. Department of Energy and NASA

Some advanced technology concepts under development for high-temperature solar thermal energy systems to achieve significant energy cost reductions and performance gains and thus promote the application of solar thermal power technology are presented. Consideration is given to the objectives, current efforts and recent test and analysis results in the development of high-temperature (950-1650 C) ceramic receivers, thermal storage module checker stoves, and the use of reversible chemical reactions to transport collected solar energy. It is pointed out that the analysis and testing of such components will accelerate the commercial deployment of solar energy. A L.W.

**A81-21145 \* #** Thermal storage requirements for parabolic dish solar power plants. L. Wen and H. Steele (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-21* 10 p 12 refs. Members, \$2 00, nonmembers, \$4 00. Research sponsored by the U.S. Department of Energy and NASA.

The cost effectiveness of a high temperature thermal storage system is investigated for a representative parabolic dish solar power plant. The plant supplies electrical power in accordance with a

specific, seasonally varying demand profile. The solar power received by the plant is supplemented by power from fuel combustion. The cost of electricity generated by the solar power plant is calculated, using the cost of mass-producible subsystems (specifically, parabolic dishes, receivers, and power conversion units) now being designed for this type of solar plant. The trade-off between fuel and thermal storage is derived in terms of storage effectiveness, the cost of storage devices, and the cost of fuel. Thermal storage requirements, such as storage capacity, storage effectiveness, and storage cost are established based on the cost of fuel and the overall objective of minimizing the cost of the electricity produced by the system. As the cost of fuel increases at a rate faster than general inflation, thermal storage systems in the \$40 to \$70/kWth range could become cost effective in the near future. (Author)

**A81-21148 #** The Solar-Meteorological Research Program for the South-Central U.S. J. E. Rudzki, G. Clark (Trinity University, San Antonio, Tex.), F. Loxsom, and L. Micek. *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-24*. 12 p 11 refs. Members, \$2 00; nonmembers, \$4 00. Research supported by the U.S. Department of Energy.

In assessing a six-state region comprising Texas, Oklahoma, Arkansas, Kansas, Louisiana, and Missouri, the Solar-Meteorological Research Program for the South-Central U.S. hopes to assemble a data base that will predict the performance of various solar systems and enable the development of design tools for both active and passive systems. Data sources include the long-term record accumulated at the National Climatic Center of the National Weather Service as well as new airborne and ground-based measurements of meteorological and radiation parameters of the region. Administered by the Solar Data Center at Trinity University in San Antonio, Texas, the program conducts workshops on insolation measurements and modelling. R.S.

**A81-21150 #** Diffuse sky measurements and determination of corrected shadow band multiplication factors. A. Mujahid and W. D. Turner (Arkansas, University, Fayetteville, Ark.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-26* 7 p. 15 refs. Members, \$2.00; nonmembers, \$4.00. Contract No. EG-77-05-5565

A meteorological monitoring station has been in operation at Blytheville, Arkansas, from April 1978 to April 1980. Direct normal, global, and diffuse sky radiation have been monitored. From these data, models have been developed for the prediction of solar radiation, and discussions of several diffuse solar radiation models are included herein. Comparisons are made with these current diffuse models, and the correlation is quite good. In addition, instantaneous shadow band correction factors are presented which will allow a more accurate correction to be applied to the measured diffuse-sky reading. The instantaneous correction factors are keyed to the global radiation measurement. Therefore, instead of applying a fixed correction factor to the diffuse measurement, regardless of sky condition, a variable factor can be applied. This will solve some of the current errors observed in diffuse measurements, because the current factors overpredict the diffuse radiation on cloudy days and underpredict the diffuse on clear days. (Author)

**A81-21152 #** Comparison of several models for long term monthly average daily insolation on horizontal surfaces and the estimation of horizontal surface insolation for 16 U. S. locations. T. K. Goswami (Continental Oil Co., Ponca City, Okla.) and D. E. Klett (North Carolina Agricultural and Technical State University, Greensboro, N.C.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-28* 9 p 15 refs. Members, \$2 00, nonmembers, \$4 00.

Six models for estimating monthly average daily total insolation were compared with rehabilitated measured data for seven U.S. locations. The models compared are those of Bennett, Barbaro, et al., Sabbagh, et al., Reddy, Danashyar, and Swartman and Ogunlade. As a result of the comparison, the Barbaro model was chosen to

## 02 SOLAR ENERGY

estimate the insolation for U.S. locations for which the required climatological input data exists but for which no insolation data is available. The model was modified by a constant multiplier and used to generate average daily insolation values for the 16 locations. The results are tabulated for use by solar system designers (Author)

**A81-21153 # Analysis of two-phase flow solar collectors with application to heat pumps.** K. Chaturvedi, Y. F. Chiang, and A. S. Roberts, Jr. (Old Dominion University, Norfolk, Va.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-32* 12 p. 14 refs. Members, \$2.00, nonmembers, \$4.00

A thermodynamic model is developed to analyze the thermal performance of two phase solar collectors. The well-known equilibrium homogeneous theory is used to model the two phase flow in the solar collectors. The resultant set of coupled ordinary differential equations for saturated pressure and quality of working fluids in the collector tubes are solved by an iterative procedure using a fourth order Runge-Kutta method. The results are then applied to determine the thermal performance of a solar assisted heat pump which uses two phase flow collectors as the evaporator. The results indicate that even with the use of less expensive bare solar collectors as evaporator for the heat pump, the heating coefficient of performance (COPH) as high as 6, can be obtained under realistic ambient conditions provided a proper matching exists between the collector's evaporative capacity and the compressor's pumping capacity (Author)

**A81-21155 # Nocturnal radiation from a solar collector.** H. F. Wang and C. W. Chiang (South Dakota School of Mines and Technology, Rapid City, S. Dak.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-35* 6 p. 10 refs. Members, \$2.00, nonmembers, \$4.00.

As the sky temperature during the night is relatively low compared to the ambient temperature, the temperature of the absorber plate in a solar collector can be lower than the ambient temperature due to nocturnal radiation. Measurements have been made for Lennox Solar Collectors installed in a solar heating and cooling project, a same collector in Rapid City and a simple home-made collector in the laboratory. The home-made collector consists of a brass-copper plate sprayed with flat-black paint, covered with glass sheets and boxed with two inch thick styrofoam insulation. A cooling as much as 10 C in winter has been observed. It is expected to be appreciably more in summer. This suggests a potential utilization of nocturnal radiation for air conditioning. Theoretical analysis is presented. (Author)

**A81-21156 # Comparison of liquid solar thermal storage subsystems in the national solar data network.** M. J. Kennedy, S. J. Sersen, and S. M. Rossi (Automation Industries, Inc., Vitro Laboratories, Silver Spring, Md.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-36* 11 p. 16 refs. Members, \$2.00, nonmembers, \$4.00.

A performance comparison is presented of liquid solar thermal storage subsystems whose design is determined by architectural and retrofit constraints. Several models proposed for simulating water solar thermal storage are based on assumptions regarding mixing, inlet pipe Reynolds numbers, and stratification and load profiles. Analysis by the National Solar Data Network found that well mixed tanks will be common during and at the end of a charge cycle despite initial stratified temperature profiles, the inlet Reynolds number from the collector heat exchanger has a significant effect in vertical inlet storage tanks, and solar assisted pumps have large demand flow rates which will keep storage tanks well mixed during demand intervals. A.T.

**A81-21157 # Design of solar cells for use in photovoltaic/thermal collectors.** C. H. Cox, III (MIT, Lexington, Mass.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-37* 7 p. 7 refs. Members,

\$2.00, nonmembers, \$4.00. Research sponsored by the U.S. Department of Energy

A promising design development for combined photovoltaic/thermal (PV/T) collectors is one in which the photovoltaic (PV) cell is both the conversion device for electrical energy and the absorber of thermal energy. To accomplish this, the PV cell design is modified to utilize the approximately 25% of the AM 1 spectrum at 1.1 microns which is currently rejected by the cell. The parameters investigated are cell back metallization, back surface field, texture etching, and AR coating. A model indicating the increase in absorptance as a function of these parameters is presented, together with the results of experimental measurements. A PV/T collector design which incorporates the improved cells, has 10% greater thermal output than current PV/T collectors, and exhibits no degradation in electrical output is discussed (Author)

**A81-21158 # Parametric analysis of louvered air-heating solar collectors.** D. M. Christopher and J. T. Pearson (Purdue University, West Lafayette, Ind.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-38* 13 p. 13 refs. Members, \$2.00, nonmembers, \$4.00. Contract No. EM-78-C-04-5366

A family of air-heating collectors having inclined louvered absorber surfaces has been studied using an analysis which accounts for conduction, forced convection, and thermal radiation exchange. A two-band radiation exchange model describes the surface and material properties for the solar and thermal radiation bands. After calculating the steady-state temperature distribution, the pressure drop across the collector is determined by a model accounting for viscous, thermal, and gravitational effects. A parametric study is performed to determine the effects of collector and louver geometry, solar angle, and operational parameters. The results are presented graphically for normal ranges of the parameters influencing the collector performance. When combined with manufacturing, installation, and energy cost information, these results can aid in the design of louvered solar collectors according to regional, environmental, and economic situations (Author)

**A81-21159 # Operational characterization of the solar-thermal power system near Willard, New Mexico.** G. A. Krivokapich, D. L. Fenton, G. H. Abernathy (New Mexico State University, Las Cruces, N. Mex.), and J. V. Otts (Sandia Laboratories, Albuquerque, N. Mex.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-39* 7 p. 6 refs. Members, \$2.00; nonmembers, \$4.00. Research supported by the U.S. Department of Energy.

The output capacity of the solar-thermal power system located near Willard, N. Mex., is 19 kW (25 hp) where the primary application is irrigation pumping. Solar radiation is collected with east/west tracking parabolic trough collectors with a total aperture area of 1275 sq m. Thermal storage is adequate for 20 hr of power system operation utilizing a reaction-type turbine in conjunction with an organic Rankine cycle engine. Operating efficiencies for the turbine component, organic Rankine cycle engine, and the complete power system are 65-80, 10-16, and 4-6%, respectively. Examples of component operation under transient environmental conditions are presented for the winter season. Maintenance experience with the Willard system is also given. (Author)

**A81-21160 # The parallel heat pump and photovoltaic heating and cooling - Phase II.** G. Darkazalli (Texas, University, Arlington, Tex.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-40* 5 p. Members, \$2.00, nonmembers, \$4.00.

Results are presented from Phase II experimental evaluation of the Photovoltaic/Thermal Solar experiment. The facility consists of a 145 sq m single family residence with a passive design, an 8-kW peak flat-plate photovoltaic array, and a 55 sq m flat-plate thermal collector array. The heating and cooling system utilizes a 'parallel' air-to-air heat pump. The thermal system operation includes direct solar heating, heat pump heating, direct heat pump cooling, and

off-peak heat pump cooling of a low temperature thermal storage. The photovoltaic electricity generated is used directly by the residence. Excess photovoltaic energy is either thermally stored or fed back to the electric company lines. (Author)

**A81-21161 # Heat transfer and the future of solar energy utilization.** F. Kreith (Solar Energy Research Institute, Golden, Colo.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov. 16-21, 1980, Paper 80-WA/Sol-41*. 10 p. 14 refs. Members, \$2.00; nonmembers, \$4.00.

Research tasks in the field of heat transfer to accelerate the development of large scale commercial solar energy conversion systems are examined. Projects are investigated in relation to basic research, applied research, and exploratory development, and evaluated according to a system of priorities by Jadyadev and Roessner (1980). An active solar heating and cooling program to provide domestic hot water, heating, and cooling to buildings is discussed along with passive solar heating and cooling systems to make full use of natural terrain and available sunshine in architectural designs. Biomass and alcohol systems, and methods to extract energy from the ocean are also examined. R.C.

**A81-21584 Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium (Convection dans des canaux rectangulaires verticaux ouvert et fermé juxtaposés en interaction thermique avec le milieu ambiant).** H. Mouton, J. C. Couanon, and M. Roiland (Nantes, Université, Nantes, France). *Letters in Heat and Mass Transfer*, vol. 7, Nov.-Dec. 1980, p. 447-456. 12 refs. In French. Research supported by the Ministère de l'Environnement et du Cadre de Vie.

Convection in contiguous open and closed vertical channels with slightly insulating walls is considered for application to solar energy collection with three glass covers. A method for wall temperatures distributions and convective efficiency prediction is developed. (Author)

**A81-21674 # Electrochemical semiconductor solar energy converters (Poluprovodnikovye elektrokhimicheskie preobrazovateli solnechnoi energii).** A. T. Vas'ko, P. P. Pogoretskii, and S. K. Kovach (Akademiia Nauk Ukrainiskoi SSR, Institut Obshchei i Neorganicheskoi Khimii, Kiev, Ukrainian SSR). In *Electrode processes in aqueous solutions (Elektroodnye protsessy v vodnykh rastvorakh)*. Kiev, Izdatel'stvo Naukova Dumka, 1979, p. 20-44. 30 refs. In Russian.

The present paper deals with the design and properties of solar energy converters employing photoelectrolysis and converters employing electrochemical photolysis of water at a semiconductor electrode. The conversion efficiency is calculated, and the photoelectrochemical behavior of coated and uncoated semiconductor electrodes is examined. The stability aspects of such electrodes are discussed. V.P.

**A81-21939 Transparent heat mirrors - Influence of the materials on the optical characteristics.** J. A. Pracchia and J. M. Simon (Buenos Aires, Universidad, Buenos Aires, Argentina). *Applied Optics*, vol. 20, Jan. 15, 1981, p. 251-258. 10 refs. Research supported by the Comisión Nacional de Investigaciones Espaciales.

Transparent heat mirrors of the antireflecting metal type with a dielectric/metal/dielectric structure are studied. It is found that dielectrics of lower refractive index give a higher cutoff wavelength, but the transition becomes more gradual. The angular behavior of these mirrors is also analyzed. The optimum mechanical efficiency obtainable with a plain collector and a Carnot engine is given for different concentrations and refractive indices. Moreover it appears that using Al instead of Ag introduces appreciable absorption losses (approximately 25-35 percent). (Author)

**A81-21954 # Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems.** M. Conti and A. Modelli (SGS-ATES Componenti Elettronici S.p.A., Milan, Italy). *Alta Frequenza*, vol. 49, Nov.-Dec. 1980, p. 419-423. 6 refs. Research

supported by the Consiglio Nazionale delle Ricerche, European Economic Communities Contract No. 456-78-1.

The design, fabrication and performance of a high efficiency 2-arcsec silicon solar cell are described. This cell is based on the n(+)-p structure which was optimized to deliver the maximum power under concentrated sunlight, typically 20-50 X. The cell is soldered on a metal base which provides a quick and reliable mounting and interconnection. Its reliability, as ascertained by a test program which includes a humidity test, salt spray and thermal fatigue, allows the prediction of a satisfactory life performance for a long period of time. (Author)

**A81-21956 A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques.** V. C. Sharma (Benin, University, Benin City, Nigeria). *Energy*, (UK), vol. 6, Feb. 1981, p. 133-138. 13 refs.

**A81-21957 Performance study of air-heated packed-bed solar-energy collectors.** C. B. Mishra and S. P. Sharma (Birla Institute of Technology, Mesra, India). *Energy*, (UK), vol. 6, Feb. 1981, p. 153-157. 6 refs.

A performance study of three packed-bed solar collectors for air-heating is presented. Iron chips, aluminum chips, and pebbles have been used as packing materials. It is observed that the performance of plane collectors improves appreciably by packing with blackened metallic materials. Moreover, the packed-bed collector also works nicely as a thermal storage system. Iron-chips packed-bed collectors show the best performance. (Author)

**A81-21958 Frameworks for modeling learning on the supply side of solar technology market penetration studies.** J. H. Herbert. *Energy* (UK), vol. 6, Feb. 1981, p. 159-166. 14 refs.

We have previously suggested that the concept of learning is critical for determining the expected future market penetrations of solar technologies. This article presents economic frameworks suitable for analytic examinations of learning. Learning is considered within the context of economic production and supply functions for solar technology firms. Such functions are important for economic analysis of such issues as the expected future price of solar technology products and the expected future demand for capital and labor inputs by solar technology firms. (Author)

**A81-22148 Surface charge and specific ion adsorption effects in photoelectrochemical devices.** P. Singh, R. Singh, R. Gate, K. Rajeshwar, and J. DuBow (Colorado State University, Fort Collins, Colo.). *Journal of Applied Physics*, vol. 51, Dec. 1980, p. 6286-6291. 29 refs. Contract No. XP-9-8002-9.

The importance of specific ion adsorption and surface charge effects in the design and operation of PEC devices is demonstrated by experimental data on the n-GaAs/electrolyte and n-Si/electrolyte interface. A direct correlation between the extent of specific adsorption of Cl(-) ions and photovoltaic output parameters is established for the n-GaAs/AlCl<sub>3</sub>-BPC, ferrocene/ferricinium ion couple/C PEC cell. Anomalous PEC behavior is observed at the n-Si/AlCl<sub>3</sub>-BPC interface brought about by modification of the electrode/electrolyte interface either by specific adsorption of Cl(-) ions or by electrodeposition of a thin layer of aluminum on the n-Si electrode surface. Model calculations show that considerable voltage drops may occur across the interphasal region in the case of high surface-state densities (greater than 10 to the 12th per sq cm) and for thick Helmholtz layers (5-10 Å). B.J.

**A81-22155 The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states.** M. Spitzer (Spire Corp., Bedford, Mass.), J. Shewchun (Syracuse University, Syracuse, N.Y.), and D. Burk (Florida, University, Gainesville, Fla.). *Journal of Applied Physics*, vol. 51, Dec. 1980, p. 6399-6404. 17 refs. Contract No. E(04-3)-1203.

Previous studies have shown that the characteristics of the

## 02 SOLAR ENERGY

semiconductor-insulator-semiconductor (SIS) solar cell can be controlled by the thin interfacial layer. In this paper, the results of a theoretical investigation of the role of interface states at the SiO<sub>2</sub>-Si interface in the ITO-SiO<sub>2</sub>-Si SIS solar cell are presented. A numerical solution of the governing transport equations yields the dependence of efficiency, short-circuit current, and open-circuit voltage on interface state density. It is shown theoretically that occupied acceptorlike interface states lower the barrier height and thus raise the dark saturation current while lowering the open-circuit voltage. Experimental results are presented which relate the saturation current to the process step which forms the interfacial layer and which support the model. (Author)

**A81-22197** Two-dimensional analysis of the interdigitated back-contact solar cell. D. J. Chin and D. H. Navon (Massachusetts, University, Amherst, Mass.). *Solid-State Electronics*, vol. 24, Feb. 1981, p. 109-114. 17 refs

The behavior of the interdigitated back-contact solar cell (IBC) under high illuminating levels has been analyzed by two-dimensional numerical techniques. The effects of cell geometry and surface recombination on efficiency are examined. The IBC cell with a doping gradient at the front surface is also considered. V. L.

**A81-22198 \*** Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells. C. T. Ho and J. D. Mathias (Mobil Tyco Solar Energy Corp., Waltham, Mass.). *Solid-State Electronics*, vol. 24, Feb. 1981, p. 115-120. 10 refs. Research supported by the U.S. Department of Energy, Contracts No. NAS7-100, No. JPL-954355.

The influence of short wavelength light on the characteristic bulk minority carrier diffusion length of the ribbon silicon photovoltaic cell has been investigated. We have measured the intensity and wavelength dependence of the diffusion length in an EFG ribbon cell, and compared it with a standard Czochralski grown silicon cell. While the various short wavelength illuminations have shown no influence on the diffusion length in the CZ cell, the diffusion lengths in the ribbon cell exhibit a strong dependence on the volume generation rate as well as on the wavelength of the superimposed lights. We have concluded that the trap-filling phenomenon at various depths in the bulk neutral region of the cell is consistent with the experimental observation. (Author)

**A81-22200** Theory of photo induced open circuit voltage decay in a solar cell. S. C. Jain (Solid State Physics Laboratory, Delhi, India). *Solid-State Electronics*, vol. 24, Feb. 1981, p. 179-183. 13 refs.

**A81-22212** FREHEAT - A passive solar system simulation program. J. C. Chapman, P. J. Burns, and C. B. Winn (Colorado State University, Fort Collins, Colo.). In: Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings Volume 1. New York, Institute of Electrical and Electronics Engineers, Inc., 1979, p. 107-115. 10 refs.

FREHEAT is a finite-difference nodal computer simulation developed to handle various passive solar components and systems. Mass wall and direct gain systems can be analyzed. Various overhang geometries, thermocirculation heat transfer, variable thermal mass, secondary lumped thermal mass, heat pipes, selective surfaces, night insulation, and thermosyphon systems are options available in the two versions of FREHEAT. Various auxiliary heating, venting, and cooling options are available with low and high thermostat set temperatures. B. J.

**A81-22349** Solar energy conversion by chloroplast photoelectrochemical cells. R. Bhardwaj, R. L. Pan, and E. L. Gross (Ohio State University, Columbus, Ohio). *Nature*, vol. 289, Jan. 29, 1981, p. 396-398. 17 refs. Contract No. DE-FG02-79ER-10538.

A photoelectrochemical cell based on chloroplasts which generates large photovoltages and photocurrents from solar energy is presented. The cell contains broken Type C chloroplasts placed on a filter separating compartments containing an electron acceptor and

electron donor with platinum electrodes in each. Photovoltages were observed across a load resistance of 3000 ohms with either flavin mononucleotide or anthraquinone 2-sulphonate as the electron acceptor and dichlorophenol indophenol as the donor, and persisted for 1-2 hr after the light was turned off. The powers and short circuit currents obtained in the chloroplast cells are nearly equal to those obtained in cells based on isolated photosystem I particles. Finally, an efficiency of 2.3% has been measured for the chloroplast contribution to the total power in flavin mononucleotide cells.

A. L. W.

**A81-22695** Analysis by real-time holographic interferometry of heat transfer at the surface of cold solar collectors. J. Guerry, J. P. Hot, and C. Durou (Toulouse III, Université, Toulouse, France). In: European Congress on Optics Applied to Metrology (METROP), 2nd, Strasbourg, France, November 26-30, 1979, Proceedings. Bellingham, Wash., Society of Photo-Optical Instrumentation Engineers, 1980, p. 178-185. 8 refs. Research supported by the Ministère de l'Environnement et du Cadre de Vie.

The rate of convective heat transfer at the surface of a solar collector is measured by means of a real-time holographic interferometry system as part of a study of the suitability of cold solar collectors. Holograms were recorded in rapid sequence on photographic plates and continuously on magnetic by the use of a video system for both surfaces of a flat rectangular collector which was heated and cooled to temperatures 20 C above and 10 C below ambient and tilted at various angles of inclination. A zone of laminar flow with a heat transfer coefficient decreasing from 5 to 3.5 W/K per min with distance from the edge of the vertical plate is found, followed by a transition into a turbulent regime in which the heat transfer coefficients remain nearly constant at 3 W/K per min. As the plate is tilted, the heat transfer coefficient on the upper face is observed to exceed that of the lower face, accompanied by greater turbulence on the upper face. Results thus indicate that a 1-sq m collector inclined at 45 deg and maintained at 2 C in a still 12-C atmosphere will collect 70 W of ambient energy by free convection, in addition to the 200 W recoverable from diffuse solar radiation.

S. C. S.

**A81-22763 \* #** Utility of and technology for a space central power station. P. F. Holloway and L. B. Garrett (NASA, Langley Research Center, Hampton, Va.). *American Institute of Aeronautics and Astronautics, Conference on Large Space Platforms Toward Permanent Manned Occupancy of Space, 2nd, San Diego, Calif., Feb. 24, 1981, Paper 81-0449*. 23 p. 31 refs.

The technological and economic impact of a large central power station in earth orbit on the cost and performance of future spacecraft and their orbital-transfer systems are examined. The three systems considered for the space central power station are a photovoltaic array, a direct nuclear-pumped laser and a direct solar-pumped laser. It is noted that laser transmitters/receivers will be required to make central power stations feasible. While the remote transmission of power solely to meet the needs of earth orbiting satellites will not be cost-effective in the near future, the remote-power transmission for propulsion of orbital-transfer vehicles promises many cost benefits. L. S.

**A81-22838 #** Effects of a satellite power system on ground-based radio and radar astronomy. A. R. Thompson (National Radio Astronomy Observatory, Socorro, N. Mex.). *Radio Science*, vol. 16, Jan.-Feb. 1981, p. 35-45. 22 refs.

It is noted that when the satellite power system (SPS) is in operation, the power signal and its harmonics, which fall close to radio astronomy bands, may cause overloading of input stages. Mitigation will require the development of cryogenically cooled filters. Radiation within radio astronomy bands can arise from transmitter-generated noise, thermal noise from the large solar cell arrays, and possibly from intermodulation, component failures, and turn-on transients. It is noted that noise and harmonics can also be generated by the power-collecting rectennas, and that there may be propagation effects resulting from ionospheric heating. It is concluded

ed that for any radio telescope, a zone of sky will be centered on the arc of satellites and observations here with high sensitivity will be precluded. It is estimated that the width of the zone, as determined by thermal radiation, will vary from about 30 deg for single-antenna telescopes to a few degrees for high-resolution arrays and interferometers. It is noted that since there will be some degradation in performance in bands close to the power signal and its second harmonic, adequate shielding by terrain between radio observatories and power receiving sites will be necessary. C.R.

**A81-22861** Comparison of solar cell performance to calculations using different energy band-gap narrowing models. H. T. Weaver (Sandia Laboratories, Albuquerque, N. Mex.). *Applied Physics Letters*, vol. 37, Dec. 1, 1980, p. 1009-1011. 11 refs. Research supported by the U.S. Department of Energy.

Three different energy band-gap narrowing models were used for exact numerical calculations of silicon solar cell performance. The results are compared to data from high-efficiency cells. Two of the gap narrowing models are derived empirically from other types of devices, and the third is theoretical. The applicability of the models to these cells is demonstrated. (Author)

**A81-22872** Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells. Y. W. Lam, M. A. Green, and L. W. Davies (New South Wales, University, Kensington, Australia). *Applied Physics Letters*, vol. 37, Dec. 1980, p. 1087-1089. 10 refs. Research supported by the Australian Research Grants Committee.

Several newer solar cell structures rely on charges in antireflection coatings to induce a charge layer along the surface of the semiconductor region of the cell. The present letter describes experimental results for time-dependent electrostatic effects in such devices, with particular reference to inversion-layer metal-insulator-semiconductor solar cells. It is shown experimentally that, over a period of several weeks, a charge layer builds up on the outside of the antireflection coating, which reduces its effectiveness as a charge inducer. Although devices can be designed to accommodate this effect, a preferable approach is to prevent this layer from building up. (Author)

**A81-22874** Molecular beam epitaxial GaAs heteroface solar cell grown on Ge. D. L. Miller and J. S. Harris, Jr. (Rockwell International Electronics Research Center, Thousand Oaks, Calif.). *Applied Physics Letters*, vol. 37, Dec. 15, 1980, p. 1104-1106. 8 refs. Research supported by the Solar Energy Research Institute; Contract No. F33615-78-C-2036.

GaAs/AlGaAs heteroface solar cells having AM1 efficiencies up to 17% have been grown by molecular beam epitaxy (MBE) directly on Ge(100) substrates. These cells on Ge have efficiencies identical to cells grown simultaneously on GaAs. The cells reported here are the highest efficiency MBE solar cells reported to date and are the first high-efficiency GaAs solar cells grown directly on Ge by MBE. (Author)

**A81-22897 \*** A dish-Stirling solar-thermal power system. R. L. Pons and T. B. Clark (Ford Aerospace and Communications Corp., Newport Beach, Calif.). *International Journal of Ambient Energy*, vol. 1, July 1980, p. 133-148. 14 refs. Contract No. JPL-955115.

This paper presents results of a preliminary design/economic study of a first-generation point focusing distributed receiver solar-thermal electric system optimized for application to industrial and small community power plants at power levels up to 10 MWe. Power conversion is provided by small Stirling cycle engines mounted at the focus of paraboloidal solar concentrators. The output of multiple power modules (concentrator, receiver, engine, and electric generator) is collected by means of a conventional electrical system and interfaced with a utility grid. Based on the United Stirling P-75 engine, a 1 MWe system employing mass-produced components (100,000 modules/year) could produce electricity at costs competitive with those projected for electricity generated by more conventional means, e.g. with fossil fuels. (Author)

**A81-22898** The potential for solar space heating in Scotland. A. W. K. MacGregor (Napier College of Commerce and Technology, Edinburgh, Scotland). *International Journal of Ambient Energy*, vol. 1, July 1980, p. 149-153. 9 refs.

This paper investigates the relative effectiveness of passive-type solar-assisted space heating systems at various latitudes within the British Isles. A comparison is made of the useful solar gain of the same system linked to the same house at four different locations. Month-by-month energy balances indicate that the annual useful solar contribution at the highest latitude (Lerwick, 60 deg N) is about 35% higher than at the lowest latitude (Kew, 53 deg N). The main reason for this difference is the higher heating loads in the north, particularly outside the winter months. The estimated available irradiation on south-facing vertical surfaces was almost the same at all four locations. Previous work in the UK indicates that, contrary to the conclusions in this paper, more southerly latitudes were the most favorable for solar space heating. The reasons for the disparity are discussed. It is recommended that research and development of passive solar-assisted space heating systems should be most vigorously pursued in the more northerly latitudes of the British Isles, where both the potential benefit and the need are greatest. (Author)

**A81-23007** Mapping of solar radiation for use in the Sudanese-Sahelian region of Africa (Contribution à la cartographie du rayonnement solaire utilisable en Afrique soudano-sahélienne). J. Amado, C. Delorme, C. Delorme, and Y. Vuillaume (Groupeement pour le Développement de la Télédétection Aérospatiale, Toulouse, France). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 11-14. In French. Research supported by the Commissariat à l'Energie Solaire.

Two complementary methods to evaluate the variation of the available solar energy for a system of conversion are presented. The first one, based on data available in meteorological station describes the evolution of energy versus time, the second method yields the instantaneous evolution versus geographical location from Meteosat digital imagery. (Author)

**A81-23008** Solar input and solar energy resources (Intrant solaire et gisement solaire). L. Alache, M. Bachir-Rao, J.-P. David, and J. Guérin (Aix-Marseille III, Université, Aix-en-Provence, France). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester 1980, p. 15-20. 11 refs. In French.

Systems theory is applied to the determination of the absolute solar energy input at a given location. A method is proposed for absolute input determination based on the measurement of state variables of solar radiation, so that measurements may be applicable to any type of solar energy conversion system. Solar input is treated as a stochastic signal, with processing designed to evaluate the instantaneous and mean luminances, their variance and correlations, which take into account parameters such as mean cloud size and prevailing wind. Shape classification and recognition methods are used to provide a framework within which different types of measurements may be compared. Experimental results have been obtained for the Saint-Jérôme station. A.L.W.

**A81-23009** A simplified non-linear model leading to full range valid calibration test of thermal solar collectors through simple experimental procedure. G. Y. Saunier (Asian Institute of Technology, Bangkok, Thailand). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 21-29.

This semiphenomenological model provides designers of solar energy power plant with a powerful tool for evaluating the performances of flat-plate or semiconcentrating type solar collectors under specific working conditions. The main feature of the model is that once a set of parameters is given by the manufacturer, the performances of a solar collector could be accurately evaluated by means of a very simple analytic expression. This performance evaluation is accurate, regardless of the outlet temperature of the



## 02 SOLAR ENERGY

heat carrier fluid which could be as close as desired to the stagnation temperature, as well as the solar flux, the wind speed, and the ambient thermal conditions. Comparison of the results of the actual model with those given by a much more sophisticated computer simulation program have shown that the actual model can accurately predict the performance of thermal solar collectors for the whole range of the outlet temperature, under wind of any speed and under solar flux values ranging from 1000 W/sq m to values as low as 400 W/sq m. (Author)

**A81-23010** Energy collected by flat-plate collectors, not oriented toward the south (Energie recueillie par les capteurs plans non orientés vers le sud). R. Bernard (Lyon I, Université, Villeurbanne, Rhône, France). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 34, 35. In French

The global irradiance received by the absorbing material of a flat-plate collector has been evaluated for a given district (Lyon, France) and various periods of the year. Equal energy curves have been plotted for different azimuths and tilts of the collector. It appears that the collector azimuth can be fairly different from the optimum value without losing much of the energy collected. (Author)

**A81-23011** Experimental apparatus for cooling of photovoltaic cells at high concentration. C. Casarosa, B. Consorti, E. Latrofa, and L. Martorano (Pisa, Università, Pisa, Italy). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 36-41. 5 refs. Research supported by the Consiglio Nazionale delle Ricerche.

The efficiency of solar cells generally drops sharply at high levels of energy concentration as a result of the temperature rise at the junction. This paper studies the use and performance of a passive cooling device which keeps the temperature of the cell at the desired value. Analysis is presented for the thermal behavior and the general criteria governing a passive system consisting of a heat pipe which is gravity-assisted only and has no capillary structure. A first set of experiments was performed on a suitable prototype, whose characteristics are reported for different working fluids - water, ethyl alcohol, Freon 11, Freon 113 - and in various working conditions. A second set of experiments was performed using a newly designed heat pipe forming part of a specially designed dual mirror system. The conclusions of this investigation, and the aims of further research, are reported. (Author)

**A81-23012** Identification of a solar pumping installation (Identification d'une installation de pompage solaire). M. Annabi, N. B. Slama, M. Kachouk, M. Ksour (Ecole Normale Supérieure de l'Enseignement Technique, Tunis, Tunisia), and J. Perard (Grenoble I, Université, Grenoble, France). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 42-46. 6 refs. In French.

The process identification of a solar pumping facility is discussed in view of its importance to pump power supply optimization. A method for process identification based on the measurement of the short circuit current, open circuit voltage and in-charge current and voltage of the photovoltaic cell in order to determine the cell illumination and junction temperature is presented, and the determination of pump efficiency from measurements of generator power and actual pumping power is indicated. An application of the method to the identification of the parameters of the Hendi Zitoun pumping station is presented. The optimization of generator power on the basis of the information gained from process identification is then illustrated by the use of a chopper-type static converter installed between the solar panel and the load to optimize the power supplied by providing a constant voltage at a constant junction temperature, and varying the voltage with the temperature. A L W.

**A81-23013** The photovoltaic-aeolian plant at Passo Mandrioli /Italy/. P. U. Calzolari (CNR, Istituto LAMEL, Bologna,

Università, Bologna, Italy), A. Garulli, D. Nobili, and A. Sardo (CNR, Istituto LAMEL, Bologna, Italy). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 47-49.

The use of aeolian-photovoltaic power generation to supply the needs of an isolated farm house in Northern Italy is presented, noting the experimental character of the project. Estimated energy consumption is 1650 kWh for lighting and various appliances. The system includes two power generators (aeolian and photovoltaic) connected in parallel, battery storage, regulation and control circuit, inverter, supplementary generator and a complete data acquisition subsystem. Design characteristics such as the tower height, electrical output and lightning protection are given, together with the parameters to be continuously monitored including meteorological data, wind speed and the angular speed of the propeller. L.S.

**A81-23015** A solar biotechnology based on microalgae (Pour une biotechnologie solaire basée sur les microalgues). C. Gudin, D. Chaumont, O. Desanti, and D. Proline (Laboratoire d'Héliosynthèse, Martigues-Lavéra, Bouches-du-Rhône, France). *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p. 55-62. 35 refs. In French. Research supported by the Communauté Economique Européenne and Commissariat à l'Energie Solaire.

The use of controlled cultures of microalgae in the production of biomass from solar energy is investigated. Algae cultures were grown continuously in tubular chambers with an area of 1 sq m exposed to sunlight near Marseilles. Productivities of up to 21 g/sq m/day of dry biomass were obtained, corresponding to an average solar conversion efficiency of 4 percent out of a theoretical maximum of 6.6 percent. Although biomass yields are greater for microalgae than for other species investigated, the energy required to grow the algae was found to be greater than that produced in biomass, indicating a need for improved growth techniques. The potential of extracellular biomass production, in which microalgae are immobilized on a fixed bed and polysaccharides or hydrocarbons excreted by the cells are collected, is also noted. A L W.

**A81-23026 \*** Solar energy market penetration models - Science or number mysticism. E. H. Warren, Jr. (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). *Technological Forecasting and Social Change*, vol. 16, 1980, p. 105-118. 20 refs. Research sponsored by the U.S. Department of Energy and NASA.

The forecast market potential of a solar technology is an important factor determining its R&D funding. Since solar energy market penetration models are the method used to forecast market potential, they have a pivotal role in a solar technology's development. This paper critiques the applicability of the most common solar energy market penetration models. It is argued that the assumptions underlying the foundations of rigorously developed models, or the absence of a reasonable foundation for the remaining models, restrict their applicability. (Author)

**A81-23497** A Fresnel-Winston tandem concentrator system. T. C. Kandpal, S. S. Mathur, and R. N. Singh (Indian Institute of Technology, New Delhi, India). *International Journal of Energy Research*, vol. 5, Jan.-Mar. 1981, p. 77-82. 8 refs.

The geometrical performance of a solar concentration system employing a Fresnel reflector concentrator and a compound parabolic concentrator (CPC) in tandem is discussed. The concentration of the Fresnel reflector with and without the CPC in tandem is calculated concluding that a significant increase in concentration occurs by using a CPC as a secondary concentrator. The number of reflecting mirrors does not affect the overall concentration of the two stage system. D.K.

**A81-23498** Simple transient thermal model for solar collector/storage water heaters. M. S. Sodha, P. K. Bansal, and S. C. Kaushik (Indian Institute of Technology, New Delhi, India). *Interna-*



*tional Journal of Energy Research*, vol. 5, Jan.-Mar. 1981, p. 95-100. 7 refs.

A simple transient model predicting the thermal performance of novel solar water heaters combining both collection and storage of solar energy is presented. These heaters consist of either an insulated rectangular tank whose top surface is suitably blackened and glazed or an insulated open shallow tank with black bottom/inner sides and a top glass cover (shallow solar pond). Heat losses are reduced by adequately covering the heaters with insulation during the night. The proposed model is based on different characteristic equations during sunshine and off-sunshine hours. It is seen that the model predicts the water temperature in close agreement with the experimental observations and earlier theoretical investigations. An extension of the model can include the demand pattern of hot water. D.K.

**A81-23701** The solar pond - A collector and store of solar energy. M. N. A. Hawlader (University College, Cardiff, Wales). *Sun at Work in Britain*, no. 10, 1980, p. 12-18. 23 refs. Research supported by the Science Research Council.

Experiments on solar ponds in Britain have used highly soluble salts (magnesium chloride being better than sodium chloride) to stop convection effects and heat loss due to evaporation. Findings are that the salinity concentration should be greatest at the bottom and least at the top; the necessary mixed zone at the bottom should not be exceeded beyond the limit set by Nielsen's equation. A density difference of 340 kg/cu m between top and bottom is found to be necessary for a 1 m deep MgCl<sub>2</sub> pond to maintain stability at around 100 C. The daily average efficiency of a typical pond in terms of the absorption of solar radiation is found to be about 25-30%. The solar pond is found to be cost effective for process heating, especially for processes involving low temperatures such as crop drying. D.K.

**A81-23702** Thermochemical storage for solar heating and cooling. C. J. Swet. *Sun at Work in Britain*, no. 10, 1980, p. 20-25. 9 refs.

Thermochemical heat pump storage systems can combine the functions of heat amplification, cooling, and long duration storage. They are being developed primarily for solar space heating and cooling, but the concept is adaptable to solar cooking and other applications. The concept is explained and ultimate performance limits are delineated. Four versions are described, all of which involve two reversible reactions coupled by a common carrier gas. Advantages and limitations of each are discussed, and paths to the solution of some problem areas are indicated. (Author)

**A81-23703** Solar energy research and applications in China. L. Wei De (Peking Solar Energy Research Institute, Peking, Communist China). *Sun at Work in Britain*, no. 10, 1980, p. 27-29.

Solar collectors and silicon solar cells are being used by a dozen or so provinces and municipalities in China, in barbershops, hotels, restaurants and public bath houses, and solar radiation is being used for distillation and power generation. Vacuum-glass tube solar collectors, solar air driers, solar cookers, solar houses, solar welding devices and solar thermal power installations are some of the projects that are being developed. D.K.

**A81-23704** Comparison of commercial and do-it-yourself solar collectors. R. Roy (Open University, Milton Keynes, Bucks., England). *Sun at Work in Britain*, no. 10, 1980, p. 41-50. 19 refs. Research supported by the Open University.

Cost benefits and operating efficiency of commercial versus do-it-yourself solar collectors are analyzed in a 2.5-year comparison experiment. The do-it-yourself collector is found to be identical in thermal performance to the commercial collector, by 1 to 9 years shorter in durability, and about twice as cost-effective unless the commercial collector were to last longer than 15 years. Advantages of self-sufficiency and job-creation benefits of do-it-yourself systems are also discussed. D.K.

**A81-23724** Solar satellites - The trillion dollar question. J. K. Beatty. *Science* 80, vol. 1, Dec. 1980, p. 28-33.

The obstacles facing the solar power satellite system (SPS) are discussed with a view toward the NASA-DOE reference system. The problems identified include the research and environmental issues surrounding the transmission of microwave energy from orbit to the system rectennas and the cost factor. The cost optimistically aims at one trillion dollars for the total, 60 satellite system. The cost per installed kilowatt may fall anywhere from 3100 up to 16,000 dollars. L.S.

**A81-23803** # Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination (Kontsentratsionnye zavisimosti parametrov vysokovol'tnykh fotopreobrazovatelei iz kremniia pri vysokoi osveshchennosti). G. N. Galkin, V. M. Evdokimov, O. I. Koval', L. P. Kudeshova, A. F. Milovanov, D. S. Strebkov, and V. A. Unishkov. *Radiotekhnika i Elektronika*, vol. 26, Jan. 1981, p. 190-194. 5 refs. In Russian.

The paper presents an experimental study of the properties of high-voltage silicon photocells with specific resistances of 0.01, 0.1, 1.0, and 7.5 ohm-cm under radiation intensities of 0.01-3.5 kW/sq cm. Particular attention is given to the concentration dependence of the diffusion length of the minority carriers. The volt-ampere characteristics are determined, and short-circuit current, emf, and power and efficiency are studied as a function of radiation intensity. B J

**A81-23861** Energy from space - A survey of activities for power generation using space technology. D. Kassing and G. Seibert (ESA, Paris, France). *Advances in Earth Oriented Applications of Space Technology*, vol. 1, no. 1, 1981, p. 19-31. 17 refs.

A comprehensive review is presented of solar satellite power systems' conceptual development over the last decade, their current status, possible development schedule, economic viability, and social and environmental impacts. It is suggested that further development and testing of selected system elements may supply the key to greater economy and more rapid implementation. O C.

**A81-24056** A solar-pond power plant. Y. L. Bronicki (Ormat Turbines, Ltd., Yavne, Israel). *IEEE Spectrum*, vol. 18, Feb. 1981, p. 56-59. 5 refs.

Solar pond power plants are discussed in light of the construction and operation of an experimental 150-kW installation in Ein Bokek, Israel. The principle of the collection and storage of solar energy in salt ponds where the salinity increases with depth is introduced, and the six solar ponds constructed by Israel since 1960 to test the theory of solar pond energy conversion are indicated. The facilities and operation of the Ein Bokek plant, which utilizes a 75,000 sq m, 2.5-m deep pond in which the bottom temperature reaches 93 C, are presented, and the design of a basic nonconvecting solar pond for a 20 MW electric power plant is examined, with attention given to the water layers, pumps, evaporator, organic vapor turbogenerator and condenser. The performance characteristics of solar pond power plants, which can be started up in a few minutes and deliver up to ten times or more of their rated output power, are pointed out as the basis for the suggestion that they can be used initially as peaking plants in the power grid. The future plans of the Israeli solar pond program, which expects to be supplying up to 2000 MW by the year 2000, are outlined, and potential sites for solar pond installations in other countries are indicated. S.C.S.

**A81-24332** Optical analysis of point focus parabolic radiation concentrators. P. Bendt and A. Rabl. *Applied Optics*, vol. 20, Feb. 15, 1981, p. 674-683. 15 refs.

A simple formalism is developed for analyzing the optical performance of point focus parabolic radiation concentrators. To account for off-axis aberrations of the parabola, an angular acceptance function is defined as that fraction of a beam of parallel radiation incident on the aperture that would reach the receiver if the optics were perfect. The radiation intercepted by the receiver of a real concentrator is obtained as a convolution of angular acceptance function, of optical error distribution, and of angular brightness distribution of the radiation source. For numerical

## 02 SOLAR ENERGY

calculations this method is more accurate and less time-consuming than the ray-tracing method. (Author)

**A81-24414 Polycrystalline Zn3P2 Schottky barrier solar cells.** M. Bhushan and A. Catalano (Delaware, University, Newark, Del.). *Applied Physics Letters*, vol. 38, Jan. 1, 1981, p. 39-41. 8 refs. Research supported by the U.S. Department of Energy.

Energy conversion efficiencies as high as 5.96% are reported on polycrystalline transparent magnesium Zn3P2 diodes, 0.7 sq cm in area, tested under simulated AM1 illumination. The transparent Mg films with low sheet resistivities are obtained by dc sputtering. The effective minority-carrier diffusion length in Zn3P2 is estimated from spectral response measurements and correlates well with the measured short-circuit current. Loss analysis of the present cells shows a practical upper limit of 9% in conversion efficiency. (Author)

**A81-24426 A consideration of possible receiver designs for solar tower plants.** F. K. Boese, A. Merkel, D. Stahl, and H. Stehle (Interatom Internationale Atomreaktorbau GmbH, Bergisch Gladbach, West Germany) *Solar Energy*, vol. 26, no. 1, 1981, p. 1-7. Research supported by the Bundesministerium für Forschung und Technologie.

The 500-kW Solar Tower Plant in Almeria, Spain, will be provided with a sodium primary circuit. In the present paper detailed information is given on the basic investigations and on the design of the solar receiver of this circuit. Considerations concerning the optimum geometry as well as thermodynamic behavior are described. Different design possibilities and the respective behavior of the receiver with respect to short term transients due to cloud passage, heliostat field or mass flow failure, as well as with respect to optimum operational conditions are discussed. Special stress is placed upon a comparison between receivers with or without a large thermal mass. (Author)

**A81-24428 Solar radiation estimates in Malaysia.** D. G. S. Chuah and S. L. Lee (University of Science, Penang, Federation of Malaysia). *Solar Energy*, vol. 26, no. 1, 1981, p. 33-40. 8 refs.

**A81-24429 An assessment of solar energy availability in different regions of the solar spectrum.** M. Munroe and W. Shepherd (Bradford, University, Bradford, Yorks., England) *Solar Energy*, vol. 26, no. 1, 1981, p. 41-47.

**A81-24430 Solar energy breeders.** D. P. Grimmer (California, University, Los Alamos, N. Mex.) *Solar Energy*, vol. 26, no. 1, 1981, p. 49-53. 15 refs. Research sponsored by the U.S. Department of Energy.

An energy breeder can be defined as a device which creates capacity to generate useful energy without consuming energy stocks. Any solar conversion device (SCD) that delivers in its life-time more energy than needed to maintain and rebuild itself is a solar energy breeder, since some of the surplus energy can be used to build more such SCDs. A breeding SCD must necessarily produce energy of sufficiently high intrinsic quality (e.g. electricity) or high temperature to provide energy at the various temperatures needed for its fabrication and maintenance. Thus, the amount of energy produced by an SCD breeder at various temperatures must be examined, in addition to the simple energy quantity produced over a solar collector lifetime. Capacity breeding rates are calculated for both SCDs producing electricity intrinsically (e.g. photovoltaics) and for SCDs producing both electricity and a significant amount of thermal energy (e.g. total solar energy systems) (Author)

**A81-24431 Availability modeling methodology applied to solar power systems.** A. Unione, E. Burns, and A. Hussein (Science Applications, Inc., Palo Alto, Calif.). *Solar Energy*, vol. 26, no. 1, 1981, p. 55-64. 32 refs.

Availability is discussed as a measure for estimating the expected performance for solar- and wind-powered generation systems and for identifying causes of performance loss. Applicable analysis tech-

niques, ranging from simple system models to probabilistic fault tree analysis, are reviewed. A methodology incorporating typical availability models is developed for estimating reliable plant capacity. Examples illustrating the impact of design and configurational differences on the expected capacity of a solar-thermal power plant with a fossil-fired backup unit are given. (Author)

**A81-24432 Optimum performance of thermal trap collectors.** T. D. M. A. Samuel (Peradeniya, University, Peradeniya, Sri Lanka) and N. E. Wijesundera (Drexel University, Philadelphia, Pa., Peradeniya, University, Peradeniya, Sri Lanka). *Solar Energy*, vol. 26, no. 1, 1981, p. 65-76. 8 refs. Research supported by the University of Sri Lanka.

A steady-state analysis neglecting internal reflections and body radiation shows optimum performance for single-layer, semitransparent-slab thermal trap collectors and its dependence on thickness. The model is extended to multilayer collectors of two kinds, methylmethacrylate and 'glass', with two layers of the former yielding better performance than corresponding one, three or four layer systems. The results show that the number of slabs, in addition to their thickness, is an important parameter in the performance of thermal trap collectors. O.C.

**A81-24434 Irradiance estimates for Zambia.** G. Lewis (University of Zambia, Lusaka, Zambia). *Solar Energy*, vol. 26, no. 1, 1981, p. 81-85. 27 refs.

**A81-24444 Merocyanine-dye photovoltaic cell on a plastic film.** T. Morizumi and K. Kudo (Tokyo Institute of Technology, Tokyo, Japan). *Applied Physics Letters*, vol. 38, Jan. 15, 1981, p. 85, 86. 6 refs.

A flexible photovoltaic cell was produced by depositing a merocyanine-dye layer on a transparent electro-conducting film, which is a polyester film coated with ITO (indium-tin oxide). Two kinds of the layered structures on the films were examined, i.e., Al/merocyanine/ITO and Ag/merocyanine/ZnO/ITO structures. It was found that the latter structure was more promising for a solar cell because of a considerably better output stability and a higher conversion efficiency. (Author)

**A81-24448 Sede Boquer shallow pond project.** A. Kudish (Negev, University, Beersheba, Israel). *Energy (UK)*, vol. 6, Mar. 1981, p. 277-292. 16 refs. Research supported by the Ministry of Commerce, Industry and Tourism.

The use of shallow solar ponds for the conversion of solar energy into low grade thermal energy is examined at Sede Boquer, Israel with an emphasis placed upon the utilization of locally manufactured components. The daily performance of four small-module shallow solar ponds was monitored almost continuously between Aug 1978 and May 1979. The ponds all used PVC lower film but differed in the type of transparent upper film, glazing material or glazing angle. The daily performance is characterized by the maximum daily water temperature achieved, the total daily thermal energy collected, and the daily efficiency. The results indicate that the SSP system can supply approximately 3 GJ per square meter of thermal energy a year under semi-arid climatic conditions. The economic feasibility of the system is analyzed in comparison with oil (heavy fraction), natural gas, and electrical sources of energy. L.S.

**A81-24616 Fluids for energy transport and conversion in solar power stations (Fluide für den Energietransport und die Energiewandlung in Solarkraftwerken).** G. Schmidt (Messerschmidt-Bolkow-Blohm GmbH, Munich, West Germany). *Brennstoff-Wärme-Kraft*, vol. 33, Feb. 1981, p. 49-54. In German.

A solar power station can be optimized with regard to internal losses by the proper choice of heat-carrying fluids. Attention is given to the choice of optimal fluids for heat transmission from the absorber to the engine cycle, as well as within the engine cycle. It is shown how a preliminary choice can be made in a simple way from

the material data of the various fluids without detailed design calculations. B.J.

**A81-24618 \*** **Modeling of a solar-pumped iodine laser.** J. W. Wilson (NASA, Langley Research Center, Hampton, Va.) and J. H. Lee (Vanderbilt University, Nashville, Tenn.). *Virginia Journal of Science*, vol. 31, Fall 1980, p. 34-38. 5 refs.

The direct conversion in space of solar radiation into laser radiation for power transmission to earth, satellites, or deep space probes shows promise as a reasonably simple technology and may have cost advantage in deployment and greater reliability compared to other methods of space power generation and transmission. The main candidates for solar pumping are the gas dynamic, photochemical, and direct photoexcited lasers. Here consideration is given to the photochemical reaction of alkyl iodides which predominantly excite the  $I(2P_{1/2})$  state which then lases at 1.315 microns. The iodine ground state is eventually lost to reconstituting the gas or in the formation of molecular iodine. The rates at which the gas is required to be recycled through the laser system are modest. The side exposure at 100-fold solar concentration of a 100-m long tube with a 1 sq m cross section is estimated to provide 20 kW of continuous laser output. Scaling laws and optimum operating conditions of this system are discussed. (Author)

**A81-24801** **Theoretical efficiency of  $S(p+n)/IS$  solar cells.** K. Sen, B. K. Jain (Dayanand Brijendra Swaroop College, Dehradun, India), and V. K. Srivastava (Roorkee, University, Roorkee, India). *Solar Cells*, vol. 3, Feb. 1981, p. 1-8. 15 refs.

A new  $S(p+n)/IS$  solar cell structure is investigated theoretically. It is noted that this structure helps to increase the open-circuit voltage, the short-circuit current, and ultimately the efficiency. The calculated efficiency is found to be of the order of 36%, far greater than the previously reported maximum (20%) theoretical efficiency for similar  $S(n)/IS$  solar cells. C.R.

**A81-24802** **Optimum cell size for concentrated-sunlight silicon solar cells.** C. M. Singal (Roorkee, University, Roorkee, India). *Solar Cells*, vol. 3, Feb. 1981, p. 9-16. 7 refs. Research supported by the Indian National Science Academy.

The photovoltaic power conversion efficiency of a silicon solar cell varies with the concentration of sunlight on the solar cell. It is shown that, for a given grid structure and cell design, the variation in cell efficiency with sunlight concentration depends on the size of the solar cell and that for a given sunlight concentration there is an upper limit to the solar cell size required to obtain a given cell efficiency. (Author)

**A81-24803** **Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency.** K. Rajkanan, W. A. Anderson, and G. Rajeswaran (New York, State University, Amherst, N.Y.). *Solar Cells*, vol. 3, Feb. 1981, p. 17-25. 10 refs. Contract No. DE-AC03-79ET-23044

**A81-24804** **Method for evaluation of antireflection coatings.** D. Redfield (RCA Laboratories, Princeton, N.J.). *Solar Cells*, vol. 3, Feb. 1981, p. 27-33. Research supported by the RCA Corp.; Contract No. DE-AC01-79ET-23108.

A method for quantitatively evaluating the overall effectiveness of antireflection coatings on optical detectors and solar cells in terms of a single parameter is described. This parameter is the weighted average reflectance of the device, the weighting factor being the product of the incident light flux density and the internal quantum efficiency of the device. Knowledge of the parameter also makes possible an evaluation of the internal electrical properties of the device, independent of the surface reflectance. A simple procedure is presented for measuring the parameter to a good degree of accuracy. Experiments and calculations are included which confirm the simplicity and accuracy of the method. C.R.

**A81-24805** **The effects of intragrain defects on the local photoresponse of polycrystalline silicon solar cells.** N. Inoue, C. W.

Wilmsen, and K. A. Jones (Colorado State University, Fort Collins, Colo.). *Solar Cells*, vol. 3, Feb. 1981, p. 35-43. 11 refs. Contract No. XS-9-8232-1

Intragrain defects in Wacker cast and Monsanto zone-refined polycrystalline silicon materials were investigated using the electron-beam-induced current (EBIC) technique. The EBIC response maps were compared with etch pit, local diffusion length and local photoresponse measurements. It was determined that the Wacker polycrystalline silicon has a much lower density of defects than does the Monsanto polycrystalline silicon and that most of the defects in the Wacker material are not active recombination sites. A correlation was found between the recombination site density, as determined by EBIC, and the local diffusion length. It is shown that a large density of intragrain recombination sites greatly reduces the minority carrier diffusion length and thus can significantly reduce the photoresponse of solar cells. (Author)

**A81-24806** **An analytical model for solar cells.** J. P. Charles, M. Zaghdoudi, P. Mialhe, and A. Marrakchi (Tunis, Ecole Nationale d'Ingénieurs, Tunis, Tunisia). *Solar Cells*, vol. 3, Feb. 1981, p. 45-56. 30 refs.

In this paper we give an analytical treatment of the electrical conduction through a solar cell. By considering both the conductivity and the size of each constituent of a unit cell, an analytical expression for the current  $I$  versus voltage  $V$  is derived. The model is applied to  $I$ - $V$  characteristics and proves to be most useful for estimation of the possible effects of grid design, of the properties of the top conducting layer, of the recombination factor and of related power losses. (Author)

**A81-24807** **Wide band wide angle reflection-reducing coatings for silicon cells.** S. F. Pellicori (Santa Barbara Research Center, Goleta, Calif.). *Solar Cells*, vol. 3, Feb. 1981, p. 57-63. 5 refs.

**A81-24808** **Short wavelength spectral response of the tandem junction solar cell.** P. L. Swart (Rand Afrikaans University, Johannesburg, Republic of South Africa). *Solar Cells*, vol. 3, Feb. 1981, p. 65-71. Research supported by the Rand Afrikaans University, and South African Council for Scientific and Industrial Research.

The effect of surface recombination velocity on the short wavelength response of the tandem junction solar cell is investigated theoretically. The analysis predicts approximately the same dependence of the short-circuit current on surface recombination velocity as for a conventional  $p$ - $n$  junction solar cell. It is concluded that the experimentally observed improvement in the blue response of the tandem junction solar cell is probably due to a small surface recombination velocity as a result of the absence of front-surface metallization. (Author)

**A81-24809** **Heterojunction solar cells on cuprous oxide.** L. Papadimitriou, N. A. Economou (Salonika, University, Salonika, Greece), and D. Trivich (Wayne State University, Detroit, Mich.). *Solar Cell*, vol. 3, Feb. 1981, p. 73-80. 13 refs. Contracts No. ER-78-S-02-4995; No. DE-AC04-79ET-23010.

Heterojunction solar cells were made on  $Cu_2O$  by sputtering  $In_2O_3$ ,  $SnO_2$ ,  $CdO$  and mixtures of  $CdO$  and  $SnO_2$  and by thermal evaporation of  $ZnSe$ . Photovoltaic effects were observed in most cases. High series resistances were an indication of chemical reactions at the interface. Auger surface analysis showed evidence of copper metal at the interface, arising from chemical reactions. For a  $CdO/Cu_2O$  junction formed at room temperature, no copper metal was found at the interface. The  $CdO/Cu_2O$  cells showed  $V_{sub oc} = 0.4$  V and  $I_{sub sc} = 2$  mA/sq cm. The properties appear to be dominated by a multiple-step tunneling at the junction, presumably due to dislocations and impurities in the  $Cu_2O$  samples as prepared. (Author)

**A81-24810** **Inclusion of degeneracy in the analysis of heavily doped regions in silicon solar cells and other semiconductor**

## 02 SOLAR ENERGY

devices M. A. Shbib (Bell Telephone Laboratories, Inc., Reading, Pa.). *Solar Cells*, vol. 3, Feb. 1981, p. 81-85. 12 refs.

A simple analytic approximation of Fermi-Dirac integrals of order 1/2 is presented and is used to derive an expression for the square of the effective intrinsic carrier concentration ( $n_{sub}$  squared) in a semiconductor with energy band gap narrowing and degeneracy of the charge carriers. This expression is useful in the analysis of solar cells and of other semiconductor devices containing regions of heavy doping concentration. (Author)

**A81-24823** Temperature dependence for the power outputs of n-CdSe liquid junction cells. J. F. McCann, M. S. Kazacos, and D. Haneman (New South Wales, University, Kensington, Australia). *Nature*, vol. 289, Feb. 26, 1981, p. 780-782. 10 refs. Research supported by the National Energy Research Development and Demonstration Council.

Thin film n-CdSe photoanodes have great potential as efficient and inexpensive electrodes in liquid junction photovoltaics. This stems from the stability of n-CdSe in the S/S(-2) electrolyte, its direct band gap of 1.7 eV and the large barrier height, of approximately S(-2) interface. The recently reported 8% AM1 conversion efficiency for a cadmium chalcogenide thin film based cell suggests that these low cost devices may soon compete favorably with the conversion efficiencies of the more expensive single crystal solid state photovoltaics. In view of the increasing practical importance of this system, the study of any parameter which may affect its performance is relevant. The dramatic effect of temperature on the power outputs on n-CdSe based cells is reported. (Author)

**A81-24827** Extraction of oxygen and metals from lunar ores. N. Jarrett, S. K. Das, and W. E. Haupin (Alcoa Technical Center, Alcoa Center, Pa.). *Space Solar Power Review*, vol. 1, no. 4, 1980, p. 281-287. 6 refs.

Consideration of the lunar environment suggests modifications of the Bayer-Hall approach leading to a conceptual process for extracting aluminum and oxygen from lunar soil. The process consists of electrowinning aluminum-silicon-iron-titanium alloy and oxygen from unrefined soil in a bipolar fluoride type cell with inert electrodes. Aluminum and other elements would be recovered from the alloy by vacuum fractional distillation. The silicon produced would be used to produce solar cells for additional electrical power. (Author)

**A81-24976** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1 - Solar energy. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.). Washington, D.C., Hemisphere Publishing Corp., 1981. 490 p. Price of nine volumes, \$595.

The book examines such topics as insolation, flat plate collectors, concentrating collectors, and energy storage. Several papers are presented on the static endo-absorbent flat solar collector, the performance of a flat type solar collector composed of selective transparent and absorbing plates, and the solar image characteristics of concentrators. Thermal storage is discussed in papers on the thermal storage cell for high temperature solar systems, a cycle life tester for the long-term stability of phase change materials for thermal energy storage, and membrane-lined thermal storage systems. L.S.

**A81-24977** Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq. H. R. Hamdan and Z. M. Majeed (Al-Mustansiriyah University, Baghdad, Iraq). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 37-45. 8 refs.

**A81-24978** A simulated comparison of the useful energy gain in fixed and tracking flat plate and evacuated tube collectors. P. Drago (U.S. Maritime Administration, Merchant Marine Academy, Kings Point, Total Energy Corp., Bohemia, N.Y.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 47-62. 7 refs.

A computer simulation of the thermodynamic efficiency of fixed, tracking flat plate, and evacuated tube solar collectors was made based on 1977 insolation figures for Kings Point, N.Y. It yielded monthly, seasonal and yearly comparisons for the various devices from which collector cost/useful energy gain merit figures can be derived. It is concluded that tracking collectors should be taken advantage of whenever possible. O.C.

**A81-24979** Static endo-absorbent flat solar collector. L. N. Blanco (Miami, University, Coral Gables, Fla.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 65-72. 6 refs.

The possibility of absorbing solar radiation by means of discrete micro-absorbers completely immersed in a heat transfer fluid is analyzed. This is termed the endo-absorbent concept and does not include designs such as the overlapped-glass plates or the blackened metal screen. The closest realization of this concept is the black liquid collector in which the micro-absorbers are permanently suspended in the heat transfer fluid and travel in it via a closed circuit. As opposed to the above, the static endo-absorbent concept is presented in which the micro-absorbers are not permanently dispersed or suspended in the heat transfer fluid but are instead kept within the limits of the solar radiation absorbing volume while the heat transfer fluid circulates through it. The performance of a collector of this type is studied analytically as well as experimentally. It is shown that designs based on this concept allow not only a higher efficiency but also several other advantages when compared to a traditional tube-and-fin collector and to the black liquid concept. (Author)

**A81-24980** A figure of merit for solar collectors with several separate absorber segments. R. P. Patera and H. S. Robertson (Miami, University, Coral Gables, Fla.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 73-87.

The proposed general figure of merit, Q, has information about the input distribution, the concentration and the acceptance function built into its definition. In addition, the use of a channel matrix to characterize a collector is proposed. The channel matrix enables the figure of merit to be readily calculated for various input distributions. (Author)

**A81-24981** Performance comparison of flat plate collector absorber coatings utilizing NBS Standard 74-635 and the ASHRAE Collector Performance Method. H. A. Ingley, E. A. Farber, and R. Reinhardt (Florida, University, Gainesville, Fla.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 89-100. 12 refs.

Mildly selective (Chemglaze Z306 and Solarsorb C-1077 paints) surfaces, along with flat black paint and untreated copper, were evaluated as flat-plate solar collector coatings according to the National Bureau of Standards and the American Society of Heating, Refrigeration and Air Conditioning Engineers procedures for determining solar absorptivity. The moderately selective surfaces proved less efficient than flat black paint for operating temperatures less than 180 F. Highly selective (black chrome and copper oxide) surfaces, although tested, were not evaluated. O.C.

**A81-24982** Performance of a flat type solar collector composed of the selective transparent and absorbing plates. K. Kanayama, H. Baba, and H. Ebina (Kitami Institute of Technology, Kitami, Japan). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 101-110. 6 refs.

Analytical and experimental results are reported for the performance of a flat plate solar collector whose transparent and absorbing plates have selective characteristics. The analysis of thermal properties extends to heat balances among radiative, convective and conductive processes for both plates. Good agreement between prediction and performance was obtained for all seasons of a one year period. The effect of the wavelength dependence of various transparent plates on the collector efficiency was checked, showing that the effect of glass was highest and that of the PVC was lowest.

O.C.

**A81-24983** Theoretical and experimental investigation of a flat-plate solar collector performance with the use of a solar simulator. G. B. Hanna, M. S. El-Shobokshy, and L. H. Saadi (Riyadh, University, Riyadh, Saudi Arabia). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 111-132. 8 refs.

A solar illumination simulator and computerized temperature monitoring are used to investigate the thermal performance of a flat plate solar collector in indoor tests. Predicted values for overall heat loss coefficients and effective transmittance absorption products show good agreement with experimental results.

O.C.

**A81-24984** Solar collector performance without flow measurement. P. C. Lobo (Paraiba, Universidade Federal, João Pessoa, Brazil). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 133-143.

**A81-24985** Effects of dust on the performance of thermal and photovoltaic flat plate collectors in Saudi Arabia - Preliminary results. B. Nimmo and S. A. M. Said (Petroleum and Minerals University, Dhahran, Saudi Arabia). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 145-152. 10 refs.

One photovoltaic and two thermal panels were tested, and the degradation in performance due to surface dust was determined. The thermal panels showed a decrease in efficiency of about 26 percent as a result of dust accumulated over several months of outdoor exposure. The photovoltaic panel efficiency decreased by 40 percent over a period of about six months.

(Author)

**A81-24986** Solar image characteristics of concentrators. P. Phillips (I. A. Naman and Associates, Inc., Houston, Tex.) and Y. Bayazitoglu (Rice University, Houston, Tex.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 155-172. 5 refs. Research supported by Rice University and I. A. Naman and Associates, Inc.

A model is developed to study solar image characteristics of solar concentrators. The reflecting and absorbing surfaces of the concentrator are represented by finite elements. Each element is considered to have nine nodes. A piecewise ray tracing method is studied such that, instead of representing the reflected beam from an element with one ray, nine rays are used. At each node the solar beam is assumed to be reflected with the same solid angle of the solar disk, which provides a diverging reflected image of the element. This model accommodates the size of the solar disk; can study complex

reflector and absorber geometries and can consider ill-defined or broad incident fields. The computer implementation of the present model is used to study a conical reflector with its base as an absorber. The reflector is chosen such that a ray reflected from the top edge strikes the outer edge of the absorber on the opposite side.

(Author)

**A81-24987 \*** Analysis of a high-performance tubular solar collector. F. L. Lansing and C. S. Yung (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 173-216. 9 refs.

This article analyzes the thermal performance of a new vacuum tube solar collector. The assumptions and mathematical modeling are presented. The problem is reduced to the formulation of two simultaneous linear differential equations characterizing the collector thermal behavior. After applying the boundary conditions, a general solution is obtained which is found similar to the general Hottel, Whillier and Bliss form, but with a complex flow factor. The details of the two-dimensional thermal model of the solar collector at steady state is also presented to include the computer simulation and the performance parameterization. Comparison of the simulated performance with the manufacturer's test data showed good agreement at wide ranges of operating conditions.

(Author)

**A81-24988** Development and study of a flat mirror multivalent concentrator. L. M. Schwartz, R. Louat, and G. Menguy (Lyon I, Université, Villeurbanne, Rhône, France). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 217-224.

A solar concentrator has been designed which is made up of 25 x 25 cm flat mirrors and has a total reflecting area of 4 sq m. The theoretical concentration ratio is 60, so that the temperature reaches 300 C when the intensity of solar radiation is 850 W/sq m. The concentrator could be useful in studies involving the use of direct solar radiation, particularly in poorly insulated areas.

V.L.

**A81-24989** Investigations on the prediction of thermal performance of compound parabolic concentrators. C. R. Hariprasad, R. Natarajan, and M. C. Gupta (Indian Institute of Technology, Madras, India). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 225-238.

An iterative mathematical model is presented for predicting the thermodynamic efficiency of compound parabolic concentrators, for different values of both insolation and collector medium mass flow rate, under steady-state conditions. Collector efficiency for different concentration ratios is computed by subtracting convective and radiative losses from the collector elements' predicted temperatures.

O.C.

**A81-24990** Dynamic response analysis of a solar powered heliostatic fluid-mechanical drive system. N. A. Cope, H. A. Ingley, E. A. Farber, and C. A. Morrison (Florida, University, Gainesville, Fla.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 249-261.

This paper provides a summary of work performed during the design, construction, and subsequent analysis of a solar powered tracking mechanism. The mechanism utilizes basic mechanical and thermodynamic principles in its construction and operation. Data taken during the course of the research and reported in this paper reveal that with a particular combination of system components and working fluid, a high degree of accuracy and wind stability can be achieved with this device when used to drive large concentrating solar

## 02 SOLAR ENERGY

collectors. The tracking mechanism was found to be fully self-correcting during normal daily operation and to reorient itself to the morning sun. (Author)

**A81-24992 Thermal energy storage in aquifers for a solar power plant.** W. J. Schaetzle, C. E. Breet (Alabama, University, University, Ala.), and J. M. Ansari (Petroleum and Minerals University, Dhahran, Saudi Arabia). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 285-298. 16 refs.

Thermal energy storage in confined aquifers for the direct heating and cooling of community buildings in conjunction with a solar power plant is investigated with emphasis on its thermodynamic efficiency and economic feasibility. The per kilowatt plant capacity cost is estimated at \$10,000/kw. The storage system is only \$40/kw or 0.4% of the capital cost. V.L.

**A81-24993 Thermal storage cell for high temperature solar systems.** L. Fellows (U.S. Department of the Interior, National Park Service, Titusville, Fla.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 313-320.

Large scale solar thermal electric power generation is practical at present if higher temperatures can be developed. This has been proven in the United States and other countries with the use of large concentrating collector systems which attain tremendous temperatures and high thermal flux. The concept of solar power as a sole source of power, rather than a supplementary supply, is feasible also, and though further research is needed in this area, a simple, and relatively inexpensive storage method is currently being examined, utilizing high temperature steel alloys. (Author)

**A81-24994 \* Advanced solar thermal storage medium test data and analysis.** H. Saha (Alabama Agricultural and Mechanical University, Normal, Ala.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 321-339. 10 refs. Grant No. NSG-8041.

A comparative study has been made of experimentally obtained heat transfer and heat storage characteristics of a solar thermal energy storage bed utilizing containerized water or phase change material (PCM) and rock or brick. It is shown that (1) containers with an L/D ratio of 0.80 and a mass/surface area ratio of 2.74 in a random stacking arrangement have the optimum heat transfer characteristics; and (2) vertical stacking has the least pressure drop across the test bed. It is also found that standard bricks with appropriate holes make an excellent storage medium. V.L.

**A81-24998 Sensitivity analysis of a community solar system using annual cycle thermal energy storage.** F. Baylin, R. Monte, and S. Sillman (Solar Energy Research Institute, Golden, Colo.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 389-398. 12 refs.

The objective of this research is to assess the sensitivity of design parameters for a community solar heating system having annual thermal energy storage to factors including climate, building type, community size and collector type and inclination. The system under consideration uses a large, water-filled, concrete-constructed tank for providing space heating and domestic hot water (DHW). This presentation outlines results and conclusions about system sizing; a system design study and economic analysis are underway. (Author)

**A81-24999 The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building.** R. Mitchell (Solar Systems Design, Inc., Selkirk, N.Y.) and

J. E. Giansante. In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 399-411.

**A81-25000 Membrane-lined thermal storage systems.** R. C. Bourne (Nebraska, University, Lincoln, Neb.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 413-446.

Background and advantages of membrane-lined liquid thermal storage are presented. Surveys of existing projects and potential liner materials are reviewed. Alternate structural enclosure designs are discussed for basement, crawl space, and slab-on-grade foundation types, and optimal-cost designs are identified. Improved heat transfer methods are investigated. Design and laboratory test results are presented for several concepts providing forced air heating via an air jacket around the storage surface. Test results and cost-effectiveness studies are presented for four types of free-convection domestic water preheaters immersed in the storage container. Preferred storage inlet/outlet designs, and techniques for auxiliary heating of storage, are also discussed. (Author)

**A81-25001 Solar-powered saline sorbent-solution heat pump/storage system.** H. Robison and S. Houston (South Carolina, University, Conway, S.C.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 447-451. 6 refs. Research supported by the Coastal Educational Foundation and Horry County Higher Education Commission.

Coastal Energy Laboratory Chemical Heat Pump (CEL-CHEAP) is a redesigned open-cycle liquid desiccant air conditioner. Heat is discharged to shallow-well water by dehumidification-humidification for cooling and extracted by humidification-dehumidification for heating. Direct solar radiation concentrates the desiccant. For continuous operation, a small uninsulated tank stores concentrated solution. This chemical heat pump needs no mechanical compressor, condenser, vacuum system, or pressure system. The collector-regenerators are inexpensive. The refrigerant is water and the desiccant is calcium chloride. First cost and operating expenses are very low. (Author)

**A81-25005 Numerical resolution of the heat transfer equations in a latent heat solar energy storage system.** D. Gobin (CNRS, Châtenay-Malabry, Hauts-de-Seine, France), D. Levesque (CNRS, Laboratoire de Physique Théorique, Orsay, Essonne, France), and C. Benard (CNRS, Gif-sur-Yvette, Essonne, France). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 477-485. 7 refs.

**A81-25006 Heat transfer through a paraffin wax solar energy storage characterized by a temperature dependent specific heat.** D. Gobin, J. C. Gory (Ecole Centrale des Arts et Manufactures, Châtenay-Malabry, Hauts-de-Seine, France), C. Benard (CNRS, Gif-sur-Yvette, Essonne, France), and D. Levesque (CNRS, Laboratoire de Physique Théorique, Orsay, Essonne, France). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 487-492.

**A81-25007 Trombe-Michel wall using phase change materials.** B. Farouk and S. I. Guceri (Delaware, University, Newark, Del.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 493-502. 15 refs.

A one dimensional numerical model is used to predict the performance of a Trombe-Michel wall using phase change materials (PCM). The usefulness of the PCM wall installed in a building for night-time home heating is investigated by considering the data for Glauber's salt mixture ( $\text{Na}_2\text{SO}_4 \cdot 10\text{H}_2\text{O}$ ) and Sunoco P-116 wax. The weather information for a mid-February day along with data for the Solar One house were used for the system simulation. It is observed that if the PCM wall is designed properly, it eliminates some of the undesirable features of the masonry walls with comparable results.

(Author)

**A81-25009** Experimental results from the first year of operation of the solar ground coupling research facility of Brookhaven National Laboratory. P. D. Metz (Brookhaven National Laboratory, Upton, N.Y.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 527-540. 6 refs. Research sponsored by the U.S. Department of Energy.

**A81-25010** A new formal graphic language for the representation of complex energy distribution systems. E. Benes and F. P. Viehboeck (Wien, Technische Universität, Vienna, Austria). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 541-552.

A schematic notation system for the representation in design and analysis of multi-component heating systems is presented. This graphic language is clear and rigorous and allows quick changes between two basic levels of abstraction, as shown by two examples: a swimming pool with combined solar/electric heating system and the low temperature heating system of the Institute of Molecular Biology in Salzburg, Austria. The notation's 'energy path graphs' are more adequate for judging the relative merits of alternative system configurations than commonly used simplified installation schemes.

O.C.

**A81-25013** Solar water heating demonstration program for public schools in New Mexico. J. T. Pytlinski, E. Lumsdaine, and J. Cherng (New Mexico State University, Las Cruces, N. Mex.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 581-587.

**A81-25014** Method of on site testing for performance rating of solar water heating systems. J. T. Pytlinski (New Mexico State University, Las Cruces, N. Mex.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 589-602. 5 refs.

**A81-25015** Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors. J. Cherng, E. Lumsdaine, J. T. Pytlinski, and B. Blevins (New Mexico State University, Las Cruces, N. Mex.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 603-617. Research supported by the New Mexico Department of Energy and Minerals.

**A81-25016** The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction. J. M. Bradley (Polyset, Inc., Manchester, Mass.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 619-626.

The development of a freeze-tolerant solar water heater with tubes of black cross-linked polyethylene is discussed. This material can withstand repeated freezing and thawing without rupture and also handle the pressure of domestic hot water. The tests demonstrate an absorptivity for sunlight equal to the conventional solar absorber surfaces.

(Author)

**A81-25018** Enhancement of low grade heat via the HYCSOS chemical heat pump. D. M. Gruen, I. Sheft, and G. J. Lamich (Argonne National Laboratory, Argonne, Ill.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 641-649. 20 refs. Research sponsored by the U.S. Department of Energy.

The Argonne HYCSOS demonstration system is a thermally driven chemical heat pump based on two metal hydrides with different free energies of formation that functions in heating, cooling and energy conversion modes. Thermodynamics of hydrides are discussed, and it is shown that a continuous supply of high pressure hydrogen can be generated by the system for doing useful work in an expansion engine-dynamo unit supplying electricity and then be absorbed on the alloy at a lower temperature. The ability of the system to enhance low grade solar energy, obtained from inexpensive flat plate collectors to provide domestic hot water, is also discussed. Using the  $\text{LaNi}_5$  and  $\text{CaNi}_5$  currently in the HYCSOS system, 34 kcal of thermal energy raised the temperature of water from 39 to 66 C.

D.K.

**A81-25021** Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages. A. W. Harris (General Electric Co., Schenectady, N.Y.) and C. N. Shen (Rensselaer Polytechnic Institute, Troy, N.Y.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 677-700. 12 refs.

System diagrams and performance equations are presented for solar-powered water-lithium bromide absorption cycle heat pump systems utilizing two different modes of energy storage. In the ETS system the collector is coupled to the absorption cycle generator through a thermal energy storage external to the other elements of the system. In the ILES system the collector is coupled directly to the absorption cycle generator with latent energy storage internal to the cycle itself. Discrete-time computer models of the systems are constructed to enable operational and parameter studies to be carried out. Generalized weather functions are used to represent insolation and building load demands to the systems. Operating strategies to minimize auxiliary energy requirements and to maximize the utilization of solar energy are described for each system. Parameter studies were carried out in terms of system cost and solar energy supply fraction versus storage size and insolation to load ratio (collector area). Comparisons between the ETS and ILES systems show that the greater capital cost of the ILES system is offset by higher solar energy utilization.

(Author)

**A81-25022** Direct solar air heating in Denmark /56 deg N/. Heating strategies in theory and practice. F. Bason and E. Fogh (Silkeborg Amtsgymnasium, Silkeborg, Denmark). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 703-712. 9 refs.

The use of solar energy in Denmark is discussed with reference to three types of solar heating systems: (1) a solar water heater, (2) a direct air space heating system, and (3) a complementary water-air heating system. It is shown that well loaded water heating systems with average daily loads in the range 1.5-2.0 kWh/sq m per day are already economically feasible and can supply about 50% or more of the yearly hot water requirements in typical situations.

V.L.

## 02 SOLAR ENERGY

**A81-25023 Bi-coolant flat plate solar collector.** W. Y. Chon (New York, State University, Buffalo, N.Y.) and L. L. Green (Johns Hopkins University, Baltimore, Md.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp.,

1981, p. 713-725

The feasibility study of a flat plate solar collector which heats air and water concurrently or separately was carried out. Air flows above the collector absorber plate, while water flows in tubes soldered or brazed beneath the plate. The collector efficiencies computed for the flow of both air and water are compared with those for the flow of a single coolant. The results show that the bi-coolant collector efficiency computed for the entire year in Buffalo, New York is higher than the single-coolant collector efficiency, although the efficiency of the water collector is higher during the warmer months. (Author)

**A81-25025 Solar air conditioning with solid absorbents and earth cooling.** E. Mayer (Universidad Simón Bolívar, Caracas, Venezuela). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 741-748. 12 refs.

An experimental design is described for an efficient desiccant cooling system using natural cold sink to reduce the moisture content of the ambient air. Used in a warm, humid, tropical climate, the unit is shown to provide up to 0.77 ton of refrigeration under extreme conditions with an average daily coefficient of performance of 0.5. Solar heat is applied to regenerate the silica gel. D.K.

**A81-25027 Solar air conditioning in a hot arid climate.** A. A. M. Sayigh (Riyadh, University, Riyadh, Saudi Arabia). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 761-773. 9 refs.

Performance comparisons for a hot, arid climate like that of Riyadh, Saudi Arabia are made for four solar air conditioning systems: Rankine engine-powered, flat-plate solar collector-powered thermochemical absorption, lithium-bromine absorption; and passive convection tower. A typical case is studied for each system and recommendations are made as to most viable size, application, and optimal relationships for system elements. O.C.

**A81-25028 Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems.** G. Darkazali and T. J. Lawley (Texas, University, Arlington, Tex.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 775-783.

Results from the University of Texas at Arlington/Solar Energy Research Facility (UTA/SERF) analytical and experimental study on residential solar heating and cooling systems are given. A description of the 145-sq m solar residence, its basic components, operation, and controls of various combinations of system components is presented. A comparison of solar-powered absorption cooling and solar-assisted electric-powered heat pump cooling for a single family residence is also presented. Solar domestic hot water and space heating systems, with heat pump, are also evaluated. (Author)

**A81-25029 A simple method for computing the dynamic response of passive solar buildings to design weather conditions.** D. B. Goldstein and M. Lokmanhekim (California, University, Berkeley, Calif.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 797-808. 10 refs. Contract No. W-7405-eng-48

In contrast to the lengthy computations required to simulate hour-by-hour building performance using response-factor or thermal network models, design-day performance can be analyzed simply by using a method developed based on Fourier transforms. This paper describes how Fourier response functions are derived from the building's thermal properties and shows how approximations can be made which allow the results to be expressed as algebraic formulas which can be computed rapidly using a hand-calculator. A program written for a hand-calculator which can perform this analysis requires as inputs building design parameters such as 'UA' products (conductances), specific heats of materials, and weather parameters. Since similar materials (e.g. frame walls and ceilings) can be lumped together, data for only a few different construction types are needed. Weather parameters are: daily solar gains for sunny and cloudy design days, length of cloudy design weather cycle, average ambient temperature of the design day and typical diurnal temperature fluctuation. Output from the program is hourly room temperatures for each of the design days. (Author)

**A81-25031 Convertible, tri-mode solar conversion system.** D. A. Kelly (Technidyne Associates, Maspeth, N.Y.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 815-820.

A convertible, tri-mode solar collection system has been developed to provide year-round operation in the Northeastern U.S. Employing a plastic hot air duct-box in addition to conventional linear parabolic concentrators and thermal storage units, the system is able to provide wintertime hot air for residential heating and summertime steam for electrical power generation. Because of its superior utilization factor, it is expected that the device will pay back for an initial investment in a significantly shorter time than present alternatives. O.C.

**A81-25032 Report on the measuring data evaluation of the first large-scale solar heated building in Austria.** F. P. Viehboeck, E. Benes, and L. Wimmer (Wien, Technische Universität, Vienna, Austria). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 821-830. 8 refs. Research supported by the Bundesministerium für Wissenschaft und Forschung

Results of an 18-month testing period are presented for the low temperature solar heating system of the Institute of Molecular Biology in Salzburg, Austria. The system is equipped with a microprocessor-controlled data acquisition and recording system, which collects the readings of 80 meteorological, temperature-sensing and flow-metering transducers. Computer-plotted energy balance diagrams show heat losses for the flat-plate solar collectors' various elements. It was found that long-term mean values of the solar collector efficiency are lower than would be expected from steady-state efficiency specifications. O.C.

**A81-25033 Performance of a solar heating system on the LSU Field House determined from test data.** D. Maples and G. D. Whitehouse (Louisiana State University, Baton Rouge, La.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 831-839

**A81-25034 Domestic utilization of solar energy in the Michigan area.** K. S. Varde (Michigan, University, Dearborn, Mich.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 841-850. 8 refs.

A model has been constructed to determine the heating loads in a typical residential building in the Michigan area and the efficiency



of a solar energy collection system using flat plate collectors. It is found that solar energy when combined with a heat pump, could be an attractive option during the heating season provided that (1) the life of the collector and associated equipment is over 15 years, and (2) the cost of electrical energy more than doubles over the life of the system. V.L.

**A81-25037** Solar energy assisted fluidized bed fruit drying. B. Kilkis (Middle East Technical University, Ankara, Turkey). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 903-918. 14 refs.

The possibility of using the fluidized-bed principle for solar drying of fruits economically and simply is explored. With the aid of computerized design methods, an optimized fluidized bed/packed bed combination was achieved, that in addition functions as a solar air heater. Based on this configuration, a novel apparatus was designed in Turkey for drying Turkish grapes. Comparisons with comparable systems are made. O.C.

**A81-25038** Solar installation for process steam generation for a refinery. L. D. Clark, S. Hudson (Monument Solar Corp., Dallas, Tex.), J. T. Pytlinski, E. Lumsdaine (New Mexico State University, Las Cruces, N. Mex.), and F. Bridgers (Bridgers and Paxton, Albuquerque, N. Mex.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 961-967. 7 refs.

A solar thermal system for steam generation in a refinery is presented. The system is installed in the Southern Union Refinery in Hobbs, New Mexico, U.S.A. The refinery processes 36,000 BPSD of crude oil (42 U.S. gallon barrels of product fuels per steam day). The solar system is a two loop system. A heat transfer oil (Therminol T-55) circulates through an array of parabolic collectors of 936 sq m area while saturated steam at 190 C/12 kg/sq m is generated in the steam generator loop. The steam flow is 658 kg/hr. A data acquisition system (ODAS) was designed and assembled to evaluate the solar system's thermal performance. It is expected that on an annual basis the solar system will provide a thermal process heat equivalent to 93,400 cu m of natural gas. (Author)

**A81-25039** Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy. T. Tanaka, T. Tani, S. Sawata, M. Kamimoto, K. Sakuta, and T. Hirogome (Ministry of International Trade and Industry, Electrotechnical Laboratory, Tokyo, Japan). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 969-978.

A solar energy system that converts sunlight into both heat and electricity by thermochemical means is analyzed. Two liquids that produce heat of dilution, such as sulfuric acid and water, are mixed in multistage vessels and the recovered heat used for domestic and industrial water heating. Steam generated at the final mixing stage was used to run a turbogenerator. A performance analysis of the system was made under various temperature conditions and the effectiveness of heat removal considered by numerical calculation. It is concluded that while space and process heating requirements are met, turbogenerator steam production is insufficient. O.C.

**A81-25041** Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills. G. Kamaraj, V. Ganesan, and K. N. Seetharamu (Indian Institute of Technology, Madras, India). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 991-999. 11 refs.

**A81-25042** New solar still /the wiping spherical still/ - Design and experimentation. G. Menguy, M. Benoit, R. Louat, A. Makki, and M. Schwartz (Lyon I, Université, Villeurbanne, Rhône, France). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1001-1007.

A novel solar still design is described, whose solar collection/vapor distillation surface is spherical and employs a motor-turned conformal internal wiper to accelerate distillate collection and prevent efficiency loss due to re-evaporation. The performance of the new device was compared to that of a conventional still, and performance gains of over 30 percent were determined. O.C.

**A81-25043** Solar desalination by freezing and distillation. G. Kvajic (Miami, University, Coral Gables, Fla.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1009-1046. 13 refs.

It is noted that among seawater desalination processes the absorption-freeze vapor compression processes based on the thermal heat pump, although untested commercially and still in the development stage, appears technically and economically an attractive application of low-grade (exergy) solar heat. The distillation processes proposed here may be conveniently powered by low-grade solar heat (from flat plate solar collectors). It is expected that the scaling problem will be insignificant in comparison with that encountered in the conventional multistage flash process. The novel feature here is the use of enlarged capacity for heat exchange between distillate and brine via latent heat of solid-liquid phase change of a suitable hydrophobic intermediate heat transfer material. C.R.

**A81-25044** High temperature solar power tower plants - Concept considerations and operational criteria. C. Cefaratti (Ente Nazionale per l'Energia Elettrica, Pisa, Italy) and J. Gretz (Commission of the European Communities, Joint Research Centre, Ispra, Italy). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1049-1064. 5 refs.

Conceptual considerations and operational criteria are described for central receiver/distributed heliostat reflector solar power plants, based on experience gained to date with Eurelios, a European Economic Community 1 MW powerplant now under construction in Italy. This installation is described with respect to economic, material, operational and performance requirements, which indicate that there are as yet few grounds for optimism regarding the large-scale implementation of such technology. O.C.

**A81-25045** More on dual purpose solar-electric power plants. F. F. Hall (Stanford University, Stanford, Calif.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1065-1083. 6 refs.

Rationale for such plants is reviewed and plant elements are listed. Dual purpose solar-electric plants would generate both electricity and hydrogen gas for conversion to ammonia or methanol or direct use as a fuel of unsurpassed specific power and cleanliness. By-product oxygen would also be sold to owners of hydrogen age equipment. Evolved gases at high pressure could be fired in compressorless gas turbines, boilerless steam-turbines or fuel-cell-inverter hydrogen-electric power drives of high thermal efficiency as well as in conventional internal combustion engines. (Author)

**A81-25046** Solar power generation by ground thermal energy conversion. P. I. Chen (Portland State University, Portland, Ore.) and W. J. Lehr (Petroleum and Minerals University, Dhahran, Saudi Arabia). In: *Alternative energy sources II; Proceedings of the*

## 02 SOLAR ENERGY

Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1085-1092. 5 refs.

It is known that the earth temperature beneath a certain depth in the ground is generally kept at constant due to thermal insulation of the ground, while on the surface the temperature varies from high in the summer to low in the winter. The variation of the ground thermal gradient can be used to drive a Rankine cycle for power generation. This paper describes the design of a power plant by means of the ground thermal energy conversion (GTEC). The power plant design is centered on the solar energy application in the arid zone. (Author)

**A81-25047** A solar-powered organic vapour power cycle with electricity generation. A. Kenkare (Hatfield Polytechnic, Hatfield, Herts., England). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1093-1112. 13 refs.

An economic and technological assessment is made of Rankine-cycle solar power plants employing an organic working fluid such as Freon 12. Consideration extends to global and seasonal patterns of insolation, and the design and performance of flat-plate collector, turbine, and Freon boiler and condenser elements of a system such as the medium-sized house tested at Hatfield, England. O.C.

**A81-25049** Prospects for developing an efficient photoemissive solar cell. M. Tavel (Vassar College, Poughkeepsie, N.Y.) and J. Regunberg (Regunberg Corp., Poughkeepsie, N.Y.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1133-1138. 15 refs.

The photoemissive solar cell (PEC) is no longer considered a viable device for direct conversion of solar energy to electrical energy because of extremely low efficiencies as compared to the photovoltaic solar cell (PVC). We shall derive a simple phenomenological expression for the efficiency of a PEC and, by identifying the important parameters, show that new, 'negative electron affinity' photoemissive materials offer the possibility of making the PEC competitive with the PVC. We briefly discuss the operation of a PEC. (Author)

**A81-25050** The effects of junction depth and impurity concentration on diffused junction solar cells. R. C. Neville (Northern Arizona University, Flagstaff, Ariz.) and R. Ginsburg (Drain's Solar Distribution Co., Summerland, Calif.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1139-1146. 8 refs.

**A81-25051** Development trends for the mass production of low cost conductor-insulator-semiconductor (CIS) solar cells. R. Singh, J. B. DuBow (Colorado State University, Fort Collins, Colo.), and K. Rajkanan (General Instrument Corp., Hicksville, N.Y.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1147-1156. 31 refs. Research supported by the U.S. Department of Energy.

**A81-25054** Thin film photovoltaic solar energy conversion. L. C. Burton, L. R. Ijaz, and M. A. Ijaz (Virginia Polytechnic Institute and State University, Blacksburg, Va.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1205-1213. 23 refs.

The current status of thin film solar cells is reviewed. The  $\text{Cu}_2\text{S}/\text{Zn}(x)\text{Cd}(1-x)\text{S}$  heterojunction is discussed, especially its poten-

tial advantages and present limitations. Some of the anomalous measurements for this junction can be attributed to lateral and vertical nonuniformities in composition caused by the kinetics of ion-exchange. These measurements are reviewed, and an improved energy band model is presented. (Author)

**A81-25055 \*** The DOE photovoltaic program - An overview. R. R. Ferber and R. G. Forney (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1215-1228. Research sponsored by the U.S. Department of Energy and NASA.

**A81-25056** Design of a 100 kW photovoltaic flat panel system at a Washington, D.C. area waste treatment plant. J. C. Belote, P. A. Borgo, M. R. Hamilton, H. A. Yingst, and S. K. Young (BDM Corp., McLean, Va.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1229-1242.

**A81-25057** Solar thermionic power plant. II. F. Abou-Elfotouh, M. Almassary, and H. Fatmi (Riyadh University, Riyadh, Saudi Arabia). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1243-1251. 7 refs.

It has been shown that the geometric configuration of a central receiver solar electric power plant SEPP can be optimized for the high power density and concentration required for the operation of a thermionic converter. The working period of a TDC constructed on the top of a SEPP in Riyadh area is 5 to 6 hours per day in winter and 6 to 8 hours in summer. At the 25 percent conversion efficiency achieved by a laboratory test model, a reduction in the cost per unit power of 8-12 per cent is expected. The spectral behavior and work functions of the working surface of the thermionic electrodes were investigated. (Author)

**A81-25058** Solar energy power generators with advanced thermionic converters for spacecraft applications. S. Sahin (Lausanne, Ecole Polytechnique Fédérale, Lausanne, Switzerland). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1253-1266. 25 refs.

Space solar energy power generators (SEPGs) using a proposed solar energy advanced thermionic converter (SEATC) are discussed, with detailed attention given to a 50 kW solar energy generator in a geostationary orbit for direct TV-broadcasting and a 10 GW space power plant. Basic engineering outlines are presented for both projects, each using a SEATC whose optimal operating temperatures range from 1100 to 1600 K with parabolic Fresnel mirrors as solar energy concentrators. The mirror concentration ratios may reach up to 10,000 with temperatures up to 4000 K. SEPGs with ordinary converters and those with SEATCs are compared. A comparison of the SEATC with the spacecraft thermionic reactor is also presented. D.K.

**A81-25059** Study of combined photovoltaic-thermal/solar energy systems. R. C. Neville (Northern Arizona University, Flagstaff, Ariz.). In: Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1267-1280. 16 refs.

A theoretical analysis of a combined photovoltaic-thermal energy system for converting solar energy is presented. Optical concentration is employed to intensify the available solar energy density. The thermal energy extraction works both to cool the solar cells and to provide heat energy. Overall system efficiencies (total

output energy, both thermal and electrical, divided by the available insolation) are shown to reach values close to 40%, with predicted capital costs less than 0.1 cent per kWh. C.R.

**A81-25060** An analysis of macroeconomic effects of increased market penetration by solar energy technologies. C. J. Pleatsikas (Urban Systems Research and Engineering, Inc., Washington, D.C.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1333-1344. 5 refs.

**A81-25062** The construction cost of thermal storage for solar systems. T. A. King, J. B. Carlock, and J. G. Shingleton (Mueller Associates, Inc., Baltimore, Md.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1403-1415.

Storage construction costs are presented for 29 completed solar energy systems for commercial buildings which comprise a variety of geographic locations, storage vessel types, and mixtures of new and retrofit designs. It was shown that the storage subsystems represented 8.4% of the total cost; storage costs ranged from 3 to 26% of the system cost; and the type of the storage vessel was the major factor affecting costs. The geographic location was not significant, but the physical placement of the storage vessel was important, with interior tanks proving to be the most expensive. A.T.

**A81-25063** Solar energy for multi-residential water heating - An economic approach. A. Melnik (York University, Downsview, Ontario, Canada). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1427-1442.

This study deals with multiresidence buildings and several size buildings. A general discussion of the economic evaluation of solar systems for residential buildings is given. An approach for evaluating the economic efficiency of a solar system is outlined. The impact on cost of two major variables, level of consumption and building size are considered. (Author)

**A81-25064** Domestic solar water preheating versus solar water heating - An economic evaluation. A. F. Orlando, A. V. Carvalho, Jr., and N. Lassner (Centro de Tecnologia Promon, Rio de Janeiro, Brazil). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1443-1455.

**A81-25066** Solar standards and testing activities in developed and developing countries. J. T. Pytlinski and H. L. Connell (New Mexico State University, Las Cruces, N. Mex.). In: *Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2091-2123. 43 refs.

Solar standards and testing activities in developed and developing countries are described in detail. The process of setting up solar standards in the United States is presented. Testing activities in the United States in the areas of flat-plate solar collectors, photovoltaic cells, solar materials and equipment, solar systems and wind machines are discussed and technical details concerning some of the testing facilities are provided. Solar standards and related testing activities in other countries are also discussed. The importance of solar standards and testing in setting up a healthy international solar market and in establishing a uniform base for solar technology transfer from developed to developing countries is pointed out. (Author)

**A81-25873** Efficient Si solar cells by laser photochemical doping. T. F. Deutsch, J. C. C. Fan, G. W. Turner, R. L. Chapman, D. J. Ehrlich, and R. M. Osgood, Jr. (MIT, Lexington, Mass.) *Applied Physics Letters*, vol. 38, Feb. 1, 1981, p. 144-146. 8 refs. DARPA-USAF-sponsored research

An ArF excimer laser has been used to form p-n junctions in Si. The laser produces dopant molecules by gas-phase photolysis of an organometallic molecule and simultaneously heats the substrate to allow incorporation of the dopant. Solar cells having conversion efficiencies of 9.6% at AM1 without the use of antireflection coatings have been fabricated from these junctions. (Author)

**A81-26355** Cu(x)S/Cd(y)Zn(1-y)S and Cu(x)S/Cd(y)Zn(1-y)S, CdS thin film solar cells using chemically sprayed films. L. W. Chow and H. L. Kwok (Chinese University of Hong Kong, Shatin, Hong Kong). *Journal of Physics D - Applied Physics*, vol. 14, Mar. 14, 1981, p. 463-469. 10 refs.

This work studies the effects of adding Zn to CdS films and solar cells. It was observed that the film surface structures were quite similar to CdS films although the electronic properties showed a marked difference as the film resistivity increased considerably with increasing Zn concentration. Measurements on uniformly doped Cu(x)S/Cd(y)Zn(1-y)S solar cells showed no significant improvements in the photovoltaic response for concentrations up to 10% of Zn. Similar measurements on a Cu(x)S/Cd(0.9)Zn(0.1)S, CdS solar cell, however, showed a significant increase in the open-circuit voltage, suggesting that the high series resistance in Zn-added films could be a cause for the observed low photovoltage. (Author)

**A81-26372** On the dynamic optimal coupling of a solar cell array to a load and storage batteries. A. Braunstein and Z. Zinger (Tel Aviv University, Tel Aviv, Israel). (*Institute of Electrical and Electronics Engineers, Summer Meeting, Minneapolis, Minn., July 13-18, 1980.*) *IEEE Transactions on Power Apparatus and Systems*, vol. PAS-100, Mar. 1981, p. 1183-1188. 13 refs.

A new and more accurate approach to the design of solar cell arrays is presented, based on the analysis of solar cell connections within the array. The method of determining the optimum point is based on the coupling of the load to the solar cell array by means of a two-port with DC transformer characteristics, and in addition defines the optimum way of charging the batteries, given varying load characteristics, radiation levels, and other operational conditions. O.C.

**A81-26373** Dynamic matching of a solar-electrical /photo-voltaic/ system - An estimation of the minimum requirements on the matching system. Z. Zinger and A. Braunstein (Tel Aviv University, Tel Aviv, Israel). (*Institute of Electrical and Electronics Engineers, Summer Meeting, Minneapolis, Minn., July 13-18, 1980.*) *IEEE Transactions on Power Apparatus and Systems*, vol. PAS-100, Mar. 1981, p. 1189-1192.

The power losses due to poor matching of a solar cell array and its electrical system are determined. It is shown that by means of a two-state direct current transformer, efficiency gains of between 5 and 10% can be achieved over a single-state solar array system. Although it was assumed that only insolation varies, changes occur in both storage battery charge and load characteristics. It was also determined that use of a three-state direct current converter did not yield proportionate efficiency gains, and that the proper dynamic matching of array, load and battery variations may result in efficiency gains of as much as 15%. O.C.

**A81-26374** Optimum operation of a combined system of a solar cell array and a dc motor. Z. Zinger and A. Braunstein (Tel Aviv University, Tel Aviv, Israel). (*Institute of Electrical and Electronics Engineers, Summer Meeting, Minneapolis, Minn., July 13-18, 1980.*) *IEEE Transactions on Power Apparatus and Systems*, vol. PAS-100, Mar. 1981, p. 1193-1197.

A novel method for the optimum matching of an electric motor with varying mechanical loads to a solar cell array is presented. This method enables designers, by means of switching procedures of the

## 02 SOLAR ENERGY

array together with flux changes, to ensure maximum mechanical energy supply to the load. The use of a direct current transformer, moreover, overcomes the problem posed by relatively large starting current requirements of the motor. The method for finding the optimum mechanical operation point of the system is simple and relatively short, and should make possible more effective and efficient use of solar power packs. O.C.

**A81-26401** The Total Solar House. L. Starobin (Total Solar, Inc., Blue Bell, Pa.). *Sunworld*, vol. 4, no. 5, 1980, p. 154-159.

A detailed thermodynamic performance report is presented for the Total Solar House, a demonstration facility located in Blue Bell, Pennsylvania. All the energy for house heating, domestic hot water and air conditioning is derived from the sun in this 5000 degree-day climate. The system incorporates roof-mounted flat panel solar collectors, basement rockpile heat/cold storage, domestic water heater and heat exchangers. It is concluded that in light of last winter's carefully monitored performance, the system has sufficient excess capacity to serve well even during unusually severe years. O.C.

**A81-26402** Solar perspectives - Solar pond power, the Israel-California connection. S. Winsberg *Sunworld*, vol. 4, no. 5, 1980, p. 170-173.

The performance to date, and the future potential, of solar saline pond electrical generation systems on the Israeli shores of the Dead Sea, and the Salton Sea in California, are assessed. The environmental cleanliness and low capital costs of saline pond solar energy collection (and inherent thermal storage) is stressed, as well as the near-term impact of such projects due to their use of existing, natural bodies of water. The possibility of incorporating water desalination operations is mentioned as a crucial consideration in many potential areas of use, such as Israel and the American Southwest. A rough estimate suggests that the Great Salt Lake in Utah could yield a maximum 10,000 MW of electrical power. O.C.

**A81-26473** # Performance test of a non-parabolic asymmetrical solar concentrator. C. T. Leung (University of Hong Kong, Hong Kong) and Y. B. Ng (Hong Kong Polytechnic, Hong Kong) *Regional Journal of Energy, Heat and Mass Transfer*, vol. 2, Oct. 1980, p. 229-233. 12 refs.

This paper reviews the geometrical optics for constructing the reflector of a nonparabolic asymmetrical solar concentrator. A prototype concentrator of this kind has been constructed with a concentration ratio of 4.07 and a theoretical optical efficiency of 0.67. Standard performance tests on such a concentrator indicate a heat loss coefficient relative to the collector aperture area of 4.35 and a heat extraction efficiency factor of 0.92. (Author)

**A81-27010** Collection efficiency of low-mobility solar cells. J. Reichman (Grumman Aerospace Corp., Bethpage, N.Y.). *Applied Physics Letters*, vol. 38, Feb. 15, 1981, p. 251-253. 8 refs.

An equation for the collection efficiency (i.e., internal quantum efficiency) is derived that can be used for Schottky barrier, metal-insulator-semiconductor, or semiconductor-electrolyte junction solar cells. It is obtained from an exact solution of the transport equation in the space-charge region and includes the effects of photogenerated majority carriers. It is shown that these carriers can diffuse to the interface and thereby oppose the minority-carrier photocurrent by recombination or emission. This effect is shown to be quite significant in reducing the collection efficiency when the majority-carrier mobility is low and at short wavelengths where the absorption coefficient becomes large. (Author)

**A81-27014** 11.5% solar conversion efficiency in the photocathodically protected p-InP/V(3+)-V(2+)-HCl/C semiconductor liquid junction cell. A. Heller, B. Miller, and F. A. Thiel (Bell Telephone Laboratories, Inc., Murray Hill, N.J.). *Applied Physics Letters*, vol. 38, Feb. 15, 1981, p. 282-284. 18 refs.

The oxidation of the surface of p-InP with alkaline peroxide and treatment with dilute potassium cyanide increase the efficiency of the p-InP/V(2+)-V(3+)-HCl/C cell to 11.5%. The open circuit voltage

of the cell follows the redox potential of the solution over a 0.5 V range. The lack of voltage pinning is consistent with photoemission studies of Spicer et al. (1979, 1980), showing that adsorption of oxygen on p-InP raises the surface Fermi level from a position near the valence band maximum to one near the conduction band minimum. (Author)

**A81-27076** Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. Conference sponsored by the Institute of Electrical and Electronics Engineers, New York, Institute of Electrical and Electronics Engineers, Inc., 1980. 1454 p. Members \$75, nonmembers, \$100.

Papers are presented on developments in thin film solar cells, high-efficiency solar cells and systems and applications of photovoltaics. Specific topics include the ultrahigh speed growth of silicon ribbons, an MIS inversion layer solar cell, the performance of a photovoltaically-powered air conditioning system, high-efficiency wraparound contact solar cells, grain orientations and boundaries in polycrystalline silicon solar cells, the economics of photovoltaics in the commercial, institutional and industrial sectors, CuCdS thin film solar cells, dendritic web silicon in solar cells and modules, progress in cascade solar cells, ion-implanted grating-type silicon solar cells, and the effects of nonuniform illumination on silicon concentrator solar cell performance. Attention is also given to the theoretical efficiency limit of direct gap solar cells, ZnO films and ZnO/CdTe heterojunction preparation, a high-efficiency, radiation damage-resistance space solar cell, low-cost ion implantation and annealing for solar cells, a simulation of a hybrid solar photovoltaic thermal electric power system, a proposed design of a-Si:H solar cells, GaAs shallow homojunction solar cells, and BSR solar cells for space solar arrays. A.L.W.

**A81-27077** # Overview - Cost goals in the LSA project. P. D. Maycock (U.S. Department of Energy, Washington, D.C.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 6-12.

The federal goals and strategy for assisting the U.S. industry in reducing the costs of photovoltaic systems are described. As an example of the process the technical progress in reducing the price of creating silicon sheet from pure silicon is summarized for silicon ribbon growth, dendrite films, silicon on ceramics and heat exchanger crystallization. In conclusion, it appears that the probability of obtaining the price reduction required for broad use of PV systems by the mid-80's is high. (Author)

**A81-27078** \* Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations. J. P. Kalejs, B. H. Mackintosh, E. M. Sachs, and F. V. Wald (Mobil Tyco Solar Energy Corp., Waltham, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 13-18. 9 refs. Research supported by the U.S. Department of Energy, Contract No. JPL-954355.

We report here progress in a program designed to examine the feasibility of large scale production of low-cost silicon sheet substrates for solar cells by the EFG process. A multiple-ribbon EFG station, containing five single-ribbon cartridges, has been continuously operated for a period of 15 hours at a duty cycle of 94%. The average width of the ribbon grown was 5 cm, and the average growth speed was 3.4 cm/min. The cartridge concept of ribbon growth has been extended to successfully grow 10 cm wide ribbon at speeds up to 4 cm/min. Large area (approximately 50 sq cm) solar cells with efficiencies in the range from 8% to 11% (AM1) have been made from ribbon grown in the cartridge systems. (Author)

**A81-27079** Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals. K. Kimura, S. Koyama, and H. Watanabe (Japan Solar Energy Co., Ltd., Kyoto, Japan). In:

Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 19-24. 11 refs

**A81-27080 \*** Development of processes for the production of low cost silicon dendritic web for solar cells. C. S. Duncan, R. G. Seidensticker, J. P. McHugh, R. H. Hopkins, M. E. Skutch, J. M. Driggers, and F. E. Hill (Westinghouse Research and Development Center, Pittsburgh, Pa.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 25-30. 10 refs. Research sponsored by the U.S. Department of Energy and NASA.

High area output rates and continuous, automated growth are two key technical requirements for the growth of low-cost silicon ribbons for solar cells. By means of computer-aided furnace design, silicon dendritic web output rates as high as 27 sq cm/min have been achieved, a value in excess of that projected to meet a \$0.50 per peak watt solar array manufacturing cost. The feasibility of simultaneous web growth while the melt is replenished with pelletized silicon has also been demonstrated. This step is an important precursor to the development of an automated growth system. Solar cells made on the replenished material were just as efficient as devices fabricated on typical webs grown without replenishment. Moreover, web cells made on a less-refined, pelletized polycrystalline silicon synthesized by the Battelle process yielded efficiencies up to 13% (AM1).

(Author)

**A81-27081** Ultra high speed growth of silicon ribbons for solar cells. K. I. Arai, N. Tsuya, and T. Takeuchi (Tohoku University, Sendai, Japan). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 31-35. 6 refs

P-type silicon ribbons with and without p-n junction and n-type silicon ribbons were prepared directly by rapid quenching methods at ultra high speed about 20 m/s. The average grain size was 20 to 30 microns, and the columnar grain structure perpendicular to the ribbon plane was observed. By means of DC conductivity and Hall measurements of ribbons, it was found that the active carrier concentration of the ribbons was nearly the same as the doped carrier concentration from 10 to the 14th to 10 to the 20th/cu cm, and the Hall mobility perpendicular to the ribbon plane was 700 sq cm/V per sec. Solar cells using the present ribbon were made by means of a CVD and a paint on diffusion method, and conversion efficiencies of about 5% were obtained for both cells.

(Author)

**A81-27082 \*** A silicon sheet casting experiment. D. B. Bickler, L. E. Sanchez (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.), and W. J. Sampson (Applied Solar Energy Corp., City of Industry, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 36-38. Research sponsored by the U.S. Department of Energy and NASA.

The casting of silicon blanks for solar cells directly without slicing is an exciting concept. An experiment was performed to investigate the feasibility of developing a machine that casts wafers directly. A Czochralski furnace was modified to accept a graphite ingot-simulating fixture. Silicon was melted in the middle of the ingot simulator in a boron nitride mold. Sample castings showed reasonable crystal size. Solar cells were made from the cast blanks. The performance is reported.

(Author)

**A81-27083 \*** Continuous coating of silicon-on-ceramic. J. D. Heaps, S. B. Schuldt, B. L. Grung, J. D. Zook, and C. D. Butter (Honeywell Corporate Technology Center, Bloomington, Minn.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p.

39-48. 15 refs. Research sponsored by the U.S. Department of Energy and NASA.

Growth of sheet silicon on low-cost substrates has been demonstrated by the silicon coating with inverted meniscus (SCIM) technique. A mullite-based ceramic substrate is coated with carbon and then passed over a trough of molten silicon with a raised meniscus. Solidification occurs at the trailing edge of the downstream meniscus, producing a silicon-on-ceramic (SOC) layer. Meniscus shape and stability are controlled by varying the level of molten silicon in a reservoir connected to the trough. The thermal conditions for growth and the crystallographic texture of the SOC layers are similar to those produced by dip-coating, the original technique of meniscus-controlled growth. The thermal conditions for growth have been analyzed in some detail. The analysis correctly predicts the velocity-thickness relationship and the liquid-solid interface shape for dip-coating, and appears to be equally applicable to SCIM-coating. Solar cells made from dip-coated SOC material have demonstrated efficiencies of 10% on 4-sq cm cells and 9.9% on 10-sq cm cells.

(Author)

**A81-27084** Substrate related problems in RAD solar cells. C. Belouet, J. Schneider, C. Belin, C. Texier, and R. Martres (Laboratoires d'Electronique et de Physique Appliquée, Limeil-Brévannes, Val-de-Marne, France). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 49-53. 11 refs. Research supported by the Commission of the European Communities.

**A81-27085 \*** Epitaxial solar cells on metallurgical grade silicon substrates. P. H. Robinson, R. V. D'Aiello, and D. Richman (RCA Laboratories, Princeton, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 54-57. 7 refs. Research supported by RCA; Contracts No. JPL-954817; No. XS-9-8274.

**A81-27086 \*** Behavior of interdigitated back-contact solar cells. L. J. Cheng and D. C. Leung (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 72-75. 6 refs. Research sponsored by the U.S. Department of Energy and NASA.

This paper presents experimental data concerning operation mechanisms of two versions of interdigitated back-contact solar cells: the tandem junction cell and the front-surface field cell. It is shown that a photogenerated forward bias at the front junction of a tandem junction cell is a critical parameter for cell performance which not only causes photogenerated carriers to migrate to the back junction, but also eliminates the reduction in photoresponse over back p(+) metallization regions. However, no similar light effects are observed in the performance of front-surface field cells. Finally, a discussion on mechanisms concerning the performance of front-surface field and tandem junction cells along with their merits is given.

(Author)

**A81-27087** Performance study of p+/n and n+/p solar cell structures on polycrystalline material. P. Lester, S. J. Fonash, and S. Ashok (Pennsylvania State University, University Park, Pa.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 82-85.

In this paper, the possibility of obtaining an analytical solution for the minority carrier distribution in a grain under illumination is explored. The goal is to be able to analytically undertake a performance study of p(+)/n and n(+)/p solar cell structures on polycrystalline material. It is shown that an analytical solution can be obtained in terms of Fourier and Fourier-Bessel series for a columnar grain under very general conditions. These conditions allow

## 02 SOLAR ENERGY

for grain boundary penetration from the top of a variable depth, grain boundary penetration from the bottom of a variable depth, and an arbitrary degree of passivation in the remainder of the grain boundary. (Author)

**A81-27088** A two-dimensional model of an MIS inversion layer solar cell. P. De Visschere. In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 86-92. 11 refs.

A computer model is proposed which calculates the IV-characteristic of an MIS inversion layer solar cell. The model takes into account the two-dimensional current flow in the device. The general ideas underlying the model are described and calculated efficiencies are presented for an Al-SiO<sub>2</sub>-pSi cell. It is investigated in which way the efficiency is influenced by the finger spacing, the oxide charge density, the doping density, the insulator thickness and the illumination level. (Author)

**A81-27089 \*** Silicon solar cells with high open-circuit voltage. J. A. Minnucci, K. W. Matthei, A. R. Kirkpatrick, and A. McCrosky (Spire Corp., Bedford, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 93-96. Contract No. NAS3-20823.

Open-circuit voltages as high as 0.645 V (AM0-25 C) have been obtained by a new process developed for low-resistivity silicon. The method utilizes high-dose phosphorus implantation, followed by furnace annealing and simultaneous oxide growth to form high-efficiency, shallow junctions. The effect of the thermally grown oxide is a reduction of surface recombination velocity, the oxide also acts as a moderately efficient AR coating. Boron doped silicon with resistivities from 0.1 to 0.3 ohm-cm has been processed according to this sequence, results show highest open-circuit voltage is attained with 0.1-ohm-cm starting material. The effects of bandgap narrowing, caused by high doping concentrations in the junction, were also investigated by implanting phosphorus over a wide range of dose levels. (Author)

**A81-27090** Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts. V. P. Gupta (Science Applications, Inc., McLean, Va.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 109-114. Contract No. DE-AC04-78ET-23063.

**A81-27091** The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport. M. J. O'Neill (E-Systems, Inc., Energy Technology Center, Dallas, Tex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 125-130. Contract No. DE-AC04-78ET-20539.

**A81-27092 \*** High efficiency ultrathin coplanar back contact cells. G. Storti, C. Wrigley, J. Wohlgemuth, D. Whitehouse, and A. Scheinine (Solarex Corp., Rockville, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 137-140. Contract No. NAS3-21250.

Efforts to fabricate high efficiency, ultrathin coplanar back contact cells are described. Included is a description of design considerations, cell fabrication, and theoretical and experimental analyses of loss mechanisms. The results of these efforts have been the fabrication of a 11.8% AMO efficient, 50 micron cell when measured at 25 C. Design and process changes required to increase the efficiency are indicated. (Author)

**A81-27093** Compatibility of BSR and BSF solar cell technology. K.-D. Rasch, K. Roy, R. Schilling, and H. Fischer (Telefunken AG, Heilbronn, West Germany). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 141-145. 5 refs. Research supported by the Bundesministerium für Forschung und Technologie.

**A81-27094 \*** High efficiency wraparound contact solar cells /HEWACS/. M. Gillanders and R. Opjorden (Spectrolab, Inc., Sylmar, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 146-150. Contracts No. NAS3-20065; No. NAS3-21270.

A cell technology, producing high efficiency wrap-around contact solar cells (HEWACS), with both electrical contacts on the back and AMO conversion efficiencies of almost 15%, is presented. A flow chart indicating the baseline process sequence along with the process changes is given. Tests checking for coating delamination and contact integrity, those measuring contact strength, and thermal cycle tests, successfully demonstrated that this cell technology is ready to be moved to the pilot production stage. K.S.

**A81-27095** New developments in vertical junction silicon solar cells. J. Wohlgemuth and A. Scheinine (Solarex Corp., Rockville, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 151-155. 5 refs. Contract No. F33615-78-C-2039.

A report on the development of improved vertical junction cells, with AMO efficiencies greater than 15%, and a high yield manufacture of large numbers of 2 cm x 2 cm, 2 cm x 4 cm, and 2 cm x 6 cm cells, is presented. Materials, structural parameters, and performance parameters of the cells are summarized in table form. Results of the development of thinning techniques indicate that thinner VJ cells, with almost the same power levels as the standard 10 to 12 mil thickness, can be made. New cell geometry has alleviated thermal degradation: covered cells have been subjected to thermal cycles (-120 C to +100 C) without measurable effects. Thinner substrate cells are more radiation resistant, with the effect saturating below a 5-mil thickness. Deep groove cells have better radiation resistance than shallow groove cells. Two-dimensional computer modeling helps in the development of higher efficiency, radiation resistant VJ structures. K.S.

**A81-27097 \*** Thin n-i-p silicon solar cell. A. Meulenber, Jr., J. F. Allison, and R. A. Arndt (COMSAT Laboratories, Clarksburg, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 161-165. Research sponsored by the Communications Satellite Corp.; Contract No. NAS3-21280.

A space solar cell concept which combines high cell output with low diffusion length damage coefficients is presented for the purpose of reducing solar cell susceptibility to degradation from the radiation environment. High resistivity n-i-p silicon solar cells ranging from upward of 83 micron-cm were exposed to AMO ultraviolet illumination. It is shown that high resistivity cells act as extrinsic devices under dark conditions and as intrinsic devices under AMO illumination. Resistive losses in thin n-i-p cells are found to be comparable to those in low resistivity cells. Present voltage limitations appear to be due to generation and recombination in the diffused regions. D.K.

**A81-27099 \*** Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model. C. Goradia, J. Vaughn (Cleveland State University, Cleveland, Ohio), and C. R. Baraona (NASA, Lewis Research Center, Cleveland, Ohio). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January

7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 172-177. 12 refs.

A one-dimensional theoretical model of the tandem junction solar cell (TJC) with base resistivity greater than about 1 ohm-cm and under low level injection has been derived. This model extends a previously published conceptual model which treats the TJC as an npn transistor. The model gives theoretical expressions for each of the Ebers-Moll type currents of the illuminated TJC and allows for the calculation of the spectral response,  $I(sc)$ ,  $V(oc)$ , FF and  $\eta$  under variation of one or more of the geometrical and material parameters and 1MeV electron fluence. Results of computer calculations based on this model are presented and discussed. These results indicate that for space applications, both a high beginning of life efficiency, greater than 15% AMO, and a high radiation tolerance can be achieved only with thin (less than 50 microns) TJC's with high base resistivity (greater than 10 ohm-cm) (Author)

**A81-27100 Improved performance from thin film dielectric wraparound solar cells.** D. K. Zemmerich (Applied Solar Energy Corp., City of Industry, Calif.) and D. Lott (Lockheed Missiles and Space Co., Inc., Sunnyvale, Calif.) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 178-183. 12 refs.

The production of film dielectric wraparound (DWA) solar cells, which offer process, performance, and cost advantages, by depositing a dielectric layer by chemical vapor deposition, is presented. A comparison of the DWA and the junction wraparound (JWA) processes is given. The performance of the wraparound cells exceeds 14.5% AMO for backsurface field (BSF) and backsurface reflector (BSR) structures. The dollar per watt ratio for large area wraparound solar cells (approximately 36 sq cm) is 22% below that of smaller area (2 x 4 cm) wraparound solar cells. K.S.

**A81-27101 The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells.** G. M. Storti, S. M. Johnson (Solarex Corp., Rockville, Md.), H. C. Lin, and C. D. Wang (Maryland, University, College Park, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 191-195. 10 refs.

**A81-27105 Chemical and structural defects in thin film polycrystalline silicon solar cells.** T. L. Chu, E. D. Stokes, S. S. Chu, and R. Abderrassoul (Southern Methodist University, Dallas, Tex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 224-227. Contract No. EY-76-C-03-1285.

The deposition of a silicon film containing a p-n junction on a partially purified and recrystallized metallurgical silicon substrate is a promising approach to the fabrication of low cost solar cells. This type of solar cell contains a high concentration of chemical impurities, such as iron, and structural defects, such as grain boundaries. The heat treatment of solar cell structures after the deposition of the active region has been found to be essential for obtaining solar cells of relative high conversion efficiencies. In this paper, the effects of heat treatment on the photoresponse at defects, investigated by laser scan, steady state surface photovoltage, and EBIC techniques, are discussed. (Author)

**A81-27106 Application analysis of photovoltaic systems for service/commercial/institutional and industrial sectors.** R. A. Whisnant and R. D. Alberts (Research Triangle Institute, Research Triangle Park, N.C.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 246-251. 5 refs. Research supported by the U.S. Department of Energy.

The service, commercial, institutional and industrial (SCII) sectors of the economy comprise a set of potential photovoltaic (PV) system applications with very diverse energy use characteristics. A set of basic technical and financial attributes have been defined to characterize establishments in these sectors. Photovoltaic systems designed to maximize utilization of insolation have been designed and the cost and benefits in terms of electric energy produced have been determined. A ranking of the members of these sectors disaggregated by two-digit Standard Industrial Classification (SIC) codes has been made. Members of the service, commercial and institutional sectors rank substantially higher than those of the industrial sector as viable PV applications, although some small, light industrial applications would also be suitable. (Author)

**A81-27107 The economics of photovoltaics in the commercial, institutional, and industrial sectors.** A. J. Cox (MIT, Cambridge, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 252-258. 8 refs.

This paper describes the application of a model which computes system break-even capital costs, array break-even capital costs and profits from photovoltaic investments in the industrial, commercial and institutional sector. Several tax and accounting combinations are described and utilized in this paper. Results indicate that, at rates of return usually found in the industrial and commercial sectors, photovoltaic investments will not be attractive when the costs of those investments are based on the Department of Energy's cost goals for 1986. (Author)

**A81-27108 Simulation of the performance of a 100-kW-peak photovoltaic system.** B. L. Grossman, B. L. Brench, L. L. Bucciarelli, and F. J. Solman (MIT, Lexington, Mass.) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 266-272. Research sponsored by the U.S. Department of Energy.

The performance of a 100-kW-peak photovoltaic power system designed and currently under construction for the Natural Bridges National Monument, located in a remote part of Utah, is analyzed based on the results of a computer simulation. The simulation models a simplified representation of the stand-alone power system consisting of a solar array field, battery storage subsystem, ac generator feeding a battery charger, inverter and power shedding switches, using as inputs the time-varying insolation, lighting, appliance and utility loads and ambient temperature. Useful relationships are found among system operating characteristics, array output, generator power usage, generator control strategy, storage losses and battery charge/discharge cycles. It is shown that system operating voltage can be set to extract maximum power from the array during the winter, and that generator operating strategy can be designed to minimize adverse effects on the batteries. Losses due to storage are also found to be offset by surplus array energy and generator power. A.L.W.

**A81-27109 # An overview of thin-film polycrystalline silicon research and development.** L. L. Kazmerski (Solar Energy Research Institute, Golden, Colo.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 281-286. 36 refs.

The status and development of the thin-film polycrystalline silicon solar cell are reviewed. The effects of polycrystallinity and thickness upon material and solar cell performance are assessed for the purpose of defining thin film for this semiconductor. The major, existing research problems for this device are discussed, including those relating to material production, growth methodologies, grain boundary passivation, junction formation, contacting, device configurations, technology scale-up, costing and degradation/reliability (Author)



## 02 SOLAR ENERGY

**A81-27110** **Cu<sub>2</sub>S-CdS-thin film solar cells.** W. H. Bloss and G. H. Hewig (Stuttgart, Universität, Stuttgart, West Germany) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 287-290. 8 refs. Research supported by the Bundesministerium für Forschung und Technologie and European Economic Community.

The current state of the art of Cu<sub>2</sub>S-CdS solar cells is presented. The conversion efficiency, which is above nine percent, of the heterojunction device is based on the electronic, optical, chemical, and structural properties of the semiconducting films. The solar cell structure and the heterojunction structure are shown, and production of thin films is discussed. Diagnostic methods, which include EBIC studies, capacitance measurements, and coulometric titration, are used to analyze the correlation of the different methods of film growth and chemical conversion processes. The I-V-characteristic of a 7 x 7 sq cm Cu<sub>2</sub>S-CdS solar cell, with a conversion efficiency of 7.3%, which has been recently developed, is indicated. An integrated generator, consisting of eight cells, with a 4.3 efficiency, based on the total area of the encapsulating front glass, is shown. An evaluation of the loss mechanisms and real efficiencies, is given. K.S.

**A81-27111** **An overview of amorphous silicon solar-cell development.** D. E. Carlson (RCA Laboratories, Princeton, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 291-297. 36 refs. Contract No. XJ-9-8254.

The history and status of amorphous silicon solar cells are reviewed, and the performance limitations of the material are discussed. The major loss mechanisms that limit the conversion efficiency are considered for several amorphous silicon solar-cell structures. A comparison is made of calculated and observed photovoltaic parameters, and future directions for improving device performance are discussed. (Author)

**A81-27113 \*** **Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology.** G. F. Fiegl and A. C. Bonora (Siltec Corp., Menlo Park, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 303-308. Research sponsored by the U.S. Department of Energy and NASA.

The continuous liquid feed (CLF) Czochralski furnace and the enhanced ID slicing technology for the low-cost production of monocrystalline silicon sheets for solar cells are discussed. The incorporation of the CLF system is shown to improve ingot production rate significantly. As demonstrated in actual runs, higher than average solidification rates (75 to 100 mm/hr for 150 mm 1-0-0 crystals) can be achieved, when the system approaches steady-state conditions. The design characteristics of the CLF furnace are detailed, noting that it is capable of precise control of dopant impurity incorporation in the axial direction of the crystal. The crystal add-on cost is computed to be \$11.88/sq m, considering a projected 1986 25-slice per cm conversion factor with an 86% crystal growth yield. D.K.

**A81-27114 \*** **Evaluation and optimization of silicon sheet solar cells.** H. Yoo, P. Iles, D. Tanner (Applied Solar Energy Corp., City of Industry, Calif.), G. Pollock, and F. Uno (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 312-315. Contract No. JPL-955089.

This paper describes the results and procedures to evaluate and improve the efficiency of solar cells made from various unconventional silicon sheets. The performance parameters included photovoltaic characteristics, spectral response, dark I-V characteristics, and diffusion length. The evaluation techniques used provided accurate and reliable information on sheet performance, and self-consistent

results were obtained from the various measurement techniques used. Minority carrier diffusion length (L) was shown to be the ultimate limiting factor for the sheet cell performance (efficiency) and other back-up measurements confirmed this L-dependence. Limited efforts were made to identify defects which influence cell performance, and to use some improved process methods to increase cell efficiency. (Author)

**A81-27115** **Transport properties in 100 mm CZ silicon.** N.-T. Phuoc, E. Fabre (Laboratoires d'Electronique et de Physique Appliquée, Limeil-Brévannes, Val-de-Marne, France), H. Lauvray, and D. Diguët (La Radiotechnique Compelec, Caen, France) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 322-326. 10 refs. Research supported by the Commissariat à l'Energie Solaire

The investigation of the minority carrier transport properties, which govern the conversion efficiency of the solar cells, the starting material being 100-mm Czochralski single-crystal silicon, is carried out. HeNe and YAG laser beam scanning makes the determination of the minority carrier diffusion length and the study of its homogeneity across the surface of the wafer possible. A general degradation of the diffusion length with high temperature annealing and the possibility of minimizing this degradation under specific gettering conditions are noted. The super-linear dependence of the photocurrent upon the light flux, which partly compensates for the degradation of the diffusion length after annealing, is observed. K.S.

**A81-27116 \*** **Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible.** A. H. Kachare, F. M. Uno, T. Miyahira (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.), and R. L. Lane (Kayex Corp., Rochester, N.Y.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 327-331. 8 refs. Research supported by the U.S. Department of Energy, Contracts No. NAS7-100; No. JPL-954888.

Results on the performance of solar cells fabricated on wafers from multiple silicon ingots of large diameter, grown by using a single crucible and a sequential melt replenishment Czochralski (CZO) technique are presented. Samples were analyzed for resistivity, dislocation density and impurity content. Solar cells were fabricated from the seed, center and tang end of each ingot to evaluate the growth reproducibility and material quality. The cell efficiency within a given wafer varies by no more than plus or minus 5% of the average value. A small but consistent decrease in the cell efficiency is observed from the first to the fourth ingot grown from a single crucible. This decrease may be related to an increase in impurity content or dislocation density or a combination of both. The efficiency of the cells fabricated from the tang end of the fourth ingot is about 10% lower than that of the control cell. An impurity effects model is employed to correlate this decrease in efficiency with the impurity build-up in the residual melt. D.K.

**A81-27117 \*** **Solar cells and modules from dendritic web silicon.** R. B. Campbell, A. Rohatgi, E. J. Seman (Westinghouse Electric Corp., Advanced Energy Systems Div., Pittsburgh, Pa.), J. R. Davis, P. Rai-Choudhury (Westinghouse Research and Development Center, Pittsburgh, Pa.), and B. D. Gallagher (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 332-336. 6 refs. Contract No. JPL-954873

Some of the noteworthy features of the processes developed in the fabrication of solar cell modules are the handling of long lengths of web, the use of cost effective dip coating of photoresist and antireflection coatings, selective electroplating of the grid pattern and ultrasonic bonding of the cell interconnect. Data on the cells is



obtained by means of dark I-V analysis and deep level transient spectroscopy. A histogram of over 100 dendritic web solar cells fabricated in a number of runs using different web crystals shows an average efficiency of over 13%, with some efficiencies running above 15%. Lower cell efficiency is generally associated with low minority carrier time due to recombination centers sometimes present in the bulk silicon. A cost analysis of the process sequence using a 25 MW production line indicates a selling price of \$0.75/peak watt in 1986. It is concluded that the efficiency of dendritic web cells approaches that of float zone silicon cells, reduced somewhat by the lower bulk lifetime of the former. D.K.

**A81-27118** Recent progress in the development of the cascade solar cell. S. M. Bedair, S. B. Phatak, M. Timmons (Research Triangle Institute, Research Triangle Park, N.C.), J. Chang, and J. R. Hauser (North Carolina State University, Raleigh, N.C.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 337-340. 11 refs. Contracts No. F33615-78-C-2077; No. XM-9-81361.

The problem of the formation of an ohmic connecting junction for such high bandgap materials as that of the two-junction cascade solar cell is solved by the growth of AlGaAs p(+)/n(+) junctions with Liquid Phase Epitaxy (LPE) techniques. LPE-grown junctions have shown tunneling behavior for bandgaps up to 1.9 eV. Spectral response data for component parts of the cascade solar cell and material properties and junction characteristics for individual junctions and entire cells are discussed. O.C.

**A81-27119** Low bandgap 0.7 to 1.1 eV solar cells in the GaAlAsSb/GaSb system. Y. Z. Liu, H. T. Yang, and J. S. Harris, Jr. (Rockwell International Electronics Research Center, Thousand Oaks, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 341-345. 9 refs. Contracts No. F33615-78-C-2036; No. XS-9-8032-1.

Solar cells with and without window layers made from the alloy system GaAlAsSb/GaSb are compared. A 65% improvement is noted for cells with a window layer, and window layers with higher aluminum content are suggested. Homojunction and heterojunction solar cells demonstrate different characteristics in spectral response curves: heterojunction cells show higher short circuit density while homojunction cells show higher open circuit voltage. Open circuit voltage increased to 0.41 V at approximately 45 suns (AM0) concentration for an 0.8 eV bandgap cell under incident photon energies less than 1.4 eV, indicating that low bandgap cells can contribute significantly to performance in multiple bandgap concentrator solar cell applications. L.S.

**A81-27120** Performance losses in high-efficiency monolithic multijunction solar cells. S. W. Zehr, J. A. Cape, and J. S. Harris, Jr. (Rockwell International Electronics Research Center, Thousand Oaks, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 346-350. 12 refs.

The types and magnitudes of a number of practical losses and their role in limiting the conversion efficiency of several candidate designs of the stacked multibandgap solar cells, under conditions of 500 suns AM2 illumination with converters maintained at a 300 K operating temperature, are considered. Types of photon losses, i.e., shadowing, reflection, shunting and incomplete collection, absorption, and useless spectral fraction are calculated. To explore the relative effects of various losses, the performance of several subcell combinations, along with their AR coatings and the intercell ohmic contact design (IOC options) is examined. The best cell combination seems to be the 1.65/0.9 eV pair (Al<sub>0.2</sub>GaAs/Al<sub>0.15</sub>GaSb). The major conclusion is that all losses must be held to minimum achievable values to realize the 30% efficiency goal under the given conditions. K.S.

**A81-27121** A low-cost manufacturing process for thin-film solar cells. T. W. F. Russell, A. M. Barnett, B. N. Baron, J. V. Masi, and R. E. Rocheleau (Delaware University, Newark, Del.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 354-359. 13 refs.

A preliminary process design for manufacturing of thin film cadmium sulfide/copper sulfide solar cells is outlined. The total product cost is determined from raw materials, utilities, labor, and capital using engineering economic procedures of the chemical processing industry. Results are given for manufacturing facilities with annual throughput of 100 and 1000 megawatts. Batch and continuous modes of operation are compared. Thin film solar cells can be manufactured for less than \$0.5 per watt in a continuous production facility. (Author)

**A81-27124** Pigmented tin oxide solar cell. J. Higgins and H. T. Tien (Michigan State University, East Lansing, Mich.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 369-374. 12 refs.

An important goal of photovoltaic research is the electrolysis of water to produce hydrogen. Energetic requirements make electrolysis cells driven by two-photon processes more efficient in the solar spectrum. This paper reports a new design of this type: n-type SnO<sub>2</sub> made light-sensitive by dye VBB on the photoanode and tetraphenylporphyrin on the photocathode. Characteristics are photopotential 0.4 V, photocurrent (5-8) × 10 to the -6th A/sq cm, fill-factor 0.3, power 8 × 10 to the -7th W/sq cm white light irradiation 100 mW/sq cm, quantum efficiency 1.0%. Absorption is increased by dyes of complementary spectra and by a battery of stacked, nearly transparent cells, which was chemically stable over two months and delivered power close to the theoretical circuit value. (Author)

**A81-27125** Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces. M. Spitzer, J. Shewchun (McMaster University, Hamilton, Ontario, Canada, Brown University, Providence, R.I.), E. S. Vera, and J. J. Loferski (Brown University, Providence, R.I.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 375-380. 8 refs. NSF-supported research, Contract No. XS-9-8233-1.

The theoretical upper limit of the efficiency of silicon p-n junction solar cells is calculated for a cell which incorporates minority carrier mirrors and optical mirrors on both the front and back boundaries of the active part of the device. The two optical mirrors provide optical confinement and greatly reduce the thickness of the cell for optimum performance. If the cells are thin enough, the minority carrier mirrors reduce the saturation current and increase the open circuit voltage. The calculations of the efficiency versus cell thickness show that efficiencies of the order of 27% are possible for silicon cells having a thickness of only 15 microns. Ways to realize the optical confinement and the minority carrier mirrors are discussed. (Author)

**A81-27126** Ion implanted grating type Si solar cells - Junction depth dependence. H. L. Hwang, D. C. Liu, R. S. Tang, Y. R. Kao (National Tsinghua University, Hsinchu, Nationalist China), and J. J. Loferski (Brown University, Providence, R.I.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 381-385. 9 refs. National Science Council of Nationalist China Grant No. 68E-0404-03(05)-1979.

Silicon grating-type solar cells in which the light receiving surface is covered by a finely spaced grating of charge collection barriers were fabricated by ion implantation. The as-fabricated cells exhibited open-circuit voltage of 0.54V, short-circuit current (AM1)

## 02 SOLAR ENERGY

of 32 mA/sq cm (without AR coating), a fill factor of 0.68 and a conversion efficiency of 11%. It was found that annealing at 1100 C for a few minutes followed by a slow cooling rate was required to obtain optimized performance. For a fixed grating geometry deep junctions resulted in better cells than shallow junctions within the boron implants. The paper describes the results of numerical simulation in which the alternating direction implicit method was employed to obtain the collection efficiencies of grating cells with junction depths varied. It also describes the computed AM1 I-V characteristics of grating Si cells. (Author)

**A81-27127** Design considerations for high efficiency polycrystalline silicon MIS solar cells. K. Rajkanan (General Instrument Corp., Hicksville, N.Y.) and W. A. Anderson (New York, State University, Amherst, N.Y.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 386-390. 8 refs. Contract No. DE-AC03-79ET-23044.

Cr-MIS solar cells have been fabricated on p-type wafer poly-Si substrates. Band to band tunneling and tunneling via surface states have been identified in these devices and the role of surface preparation has been determined. Experimentally determined current conduction mechanisms were used in computer simulation of these solar cells. The optimum process parameters and their sensitivity in determining conversion efficiency have been identified. (Author)

**A81-27128** Vacuum deposited polycrystalline silicon solar cells for terrestrial use. C. Feldman, N. A. Blum, and F. G. Satekiewicz (Johns Hopkins University, Laurel, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 391-396. 9 refs. Contract No. ET-78-A-03-2208.

The paper describes an effort aimed at obtaining low-cost, 10%-efficiency solar cells through the development of an all-vacuum fabrication process incorporating vacuum-deposited thin-film polycrystalline silicon. Experimental devices have been constructed in layers: alumina substrate/TiB<sub>2</sub> bottom electrode/p-type polycrystalline silicon film/diffused silicon n-region/Ti-Ag electrode. An important feature of this design is the TiB<sub>2</sub> bottom electrode, which remains conducting after the silicon deposition and subsequent processing. Grain growth, film composition, interfacial characteristics, and photovoltaic characteristics were studied. B.J.

**A81-27129** Contiguous capillary coating of silicon on porous carbon substrates. T. F. Cizek and J. L. Hurd (Solar Energy Research Institute, Golden, Colo.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 397-399.

Contiguous coating of silicon on various porous or grid-like forms of carbon has been investigated as a potential low-cost, low-technology thick-film silicon growth technique. Initial experiments were done on rectangular substrates, although the method would readily lend itself to a reel-to-reel semicontinuous mode of operation. Several types of substrates were investigated, including bulk graphite which was machined into thin perforated sheets and porous reticulated vitreous carbon having 6 to 24 pores per cm. When such substrates are dipped into liquid silicon and withdrawn, the holes or pores are filled and the surfaces are coated. Withdrawal rates of up to 6 cm/min were used and grain sizes were typically 0.1 mm. (Author)

**A81-27130** Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells. W. Hwang, E. S. Yang, H. C. Card, and C. M. Wu (Columbia University, New York, N.Y.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 404-409. 16 refs. Contract No. DE-AC03-79ET-23049.

We describe the results of a theoretical study of the electrical and photovoltaic properties of metal-polycrystalline silicon contacts. An analysis of the dark behavior of these structures reveals that the current may be dominated either by majority carrier or by minority carrier transport, depending upon the conditions of Schottky barrier height and parameters which characterize the grain boundaries. Experimental verification of this theory is provided by our present results for Al-cast polysilicon contacts and by previously reported characteristics for thin films. The implications for solar cell parameters (open-circuit voltage, fill-factor, and conversion efficiency) are also discussed. (Author)

**A81-27131** Variation of diffusion length of ribbon-Si solar cells with light intensity. A. Pogany (IBM East Fishkill Laboratories, Hopewell Junction, N.Y.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 410-413. 8 refs.

Variation of minority-carrier diffusion length  $L_n$  with illumination has been measured for ribbon-Si cells, and for cells doped with heavy metals. The ribbon cells generally show a gradual increase of  $L_n$ , while the metal-doped cells mostly show one or more sharp increases. These effects are attributed to the presence of multilevel centers, and can be used to characterize the recombination properties of the cells. (Author)

**A81-27132** High efficiency silicon concentrator cells. S. Khemthong, F. F. Ho, and P. A. Iles (Applied Solar Energy Corp., City of Industry, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 414-418. 6 refs.

Silicon concentrator cells of significantly increased efficiency are described, in design, fabrication and measurements. For n(+)/pp(+) cells efficiencies above 19% (at 50X), 18% (at 100X) and 16% (at 200X) were achieved for cells of 6-sq-cm area. These results are promising for further improved efficiencies at insolation levels above 200X. Within present process limitations, predictions of the computer model show that 20% efficiency can be achieved for the n(+)/pp(+) configuration. Further increases must be sought in other structures, or by achieving conductivity modulation. The work also showed that very consistent cells could be made in lots of several hundred, and that there is therefore a good chance of further cost reduction. (Author)

**A81-27133** Characterization of p(+)/nn(+)/BSF silicon concentrator solar cells. R. D. Nasby (Sandia Laboratories, Albuquerque, N. Mex.) and J. G. Fossum (Florida University, Gainesville, Fla.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 419-422. 8 refs. Research supported by the U.S. Department of Energy.

The characteristics of high-efficiency p(+)/nn(+)/BSF silicon concentrator solar cells are investigated experimentally and theoretically. Current-voltage characteristics and internal quantum efficiency data are used in conjunction with device analysis to characterize cell behavior, to evaluate physical parameters, and to indicate present limitations on cell performance. (Author)

**A81-27134** A low series resistance silicon photovoltaic cell for high intensity applications. R. I. Frank, J. L. Goodrich (Microwave Associates, Inc., Burlington, Mass.), and R. Kaplow (MIT, Cambridge, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 423-430. 10 refs. Research supported by the U.S. Department of Energy.

A silicon photovoltaic cell is described which is particularly suitable for use at concentrations of 500 to 1000 suns (50 to 100 W/sq cm) incident intensity. The main features of the cell are: (1) As

there is no current flow within the junction planes, the surface area viable for metallization is large compared with the obscured surface area, (2) it has a very low series resistance, permitting the efficiency to increase with increasing intensity, (3) it is tolerant of extremely non-uniform illumination, (4) the temperature coefficient of efficiency decreases by a factor of about 2 as the intensity is increased from 1 to 1000 suns, (5) p+ and n+ contacts are on opposite sides so that it may be soldered directly to a heat sink for effective cooling, (6) it can be fabricated as a number of cells on a single wafer and then cut into single cells with a negligible effect on performance. Efficiencies of the cells range from about 17% at 100 suns for large cells to 20% at 600 suns for small laboratory prototype cells. An efficiency of 21.3% at 1000 suns is expected with a nitride AR coating. D.K.

**A81-27135** The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight. R. W. Sanderson, D. T. O'Donnell, and C. E. Backus (Arizona State University, Tempe, Ariz.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 431-436. 5 refs. Research supported by the U.S. Department of Energy.

The independent effects of either nonuniform illumination or nonuniform temperature distribution on the performance of silicon solar cells under concentrated sunlight are examined. Results from both a theoretical model and experimental observations show that the electrical performance of the concentrator solar cell under nonuniform temperature is dependent on both the magnitude and the location of the nonuniform temperature profile. The model results, however, failed to predict the degree of bending of the open circuit voltage curve which was observed experimentally. For nonuniform illumination, experimental and theoretical results show that both the efficiency and the open circuit voltage are decreased compared with the uniform illumination case. The nonillumination profiles included step changes of illuminated to nonilluminated parts of the cell as well as continuously varying profiles across the geometry of the cell. It is found that the efficiency and the overall voltage of the cell can be increased by illuminating the cell closer to the busbar. D.K.

**A81-27136** Effects of nonuniform illumination on the performance of silicon concentrator solar cells. C. M. Garner and R. D. Nasby (Sandia Laboratories, Albuquerque, N. Mex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 437-442. 6 refs. Research supported by the U.S. Department of Energy.

Nonuniform illumination of silicon solar cells can result in degradation of the fill factor and conversion efficiency. In this study, solar cell performance has been computer modeled to account for the intensity distribution incident on the cell. The results from this model have been found to agree well with experimental data obtained on several n(+)-p cells with conventional front grid patterns that were tested under uniform and nonuniform illumination profiles. Voltage drops in the diffused layer were found to produce most of the degradation of performance and the calculations demonstrate that this degradation can be reduced by decreasing the grid line separation and width. (Author)

**A81-27137** Design of metallization for higher-efficiency solar cells. N. G. Sakiotis (Motorola, Inc., Semiconductor Group, Phoenix, Ariz.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 443-448.

An analytical approach is outlined for the determination of front- and back-surface metallization patterns which provide for optimized overall efficiency under given constraints. Results of numerical calculations for a simple pattern illustrate optimum values of line width and fractional coverage and their dependence upon

metal resistivity, substrate thickness and input concentration

(Author)

**A81-27138** Effects of temperature variation in concentrator cell series resistance measurements. J. A. Cape and S. W. Zehr (Rockwell International Electronics Research Center, Thousand Oaks, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 449-452. 7 refs.

**A81-27139** Cuprous oxide MIS solar cells. E. Y. Wang, D. Trivich, R. J. Komp, I.-F. Huang, and D. J. Brinker (Wayne State University, Detroit, Mich.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 458-461. 12 refs. Contract No. ER-78-S-02-4995.

Cuprous oxide MIS solar cells were made with SiO<sub>2</sub> interfacial layers of thickness ranging from 10 to 100 Å, and semitransparent layers of Au, Cu, Ag and Al. Results from current-voltage measurements show that Au/SiO<sub>2</sub>/Cu<sub>2</sub>O MIS devices are ohmic in nature and have no photovoltaic effect. Ag/SiO<sub>2</sub>/Cu<sub>2</sub>O, Cu/SiO<sub>2</sub>/Cu<sub>2</sub>O and Al/SiO<sub>2</sub>/Cu<sub>2</sub>O exhibit rectifying and photovoltaic characteristics. Capacitance-voltage measurements indicate that the space charge region is approximately 0.5 microns wide. The wavelength dependence of the open-circuit photovoltage has a peak at 2.56 eV which can be correlated with reported Cu<sub>2</sub>O absorption coefficients.

(Author)

**A81-27140** Investigation of Cu<sub>2</sub>O solar cells. L. C. Olsen, F. W. Addis, and R. C. Bohara (Joint Center for Graduate Study, Richland, Wash.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 462-467. Research supported by the U.S. Department of Energy.

This paper includes discussion of an approach used for Cu<sub>2</sub>O substrate fabrication, electrical and optical properties of Cu<sub>2</sub>O, photocurrent analysis and experimental results for Cu<sub>2</sub>O solar cells. An AM1 photocurrent of 8.5 mA/sq cm and AM1 efficiency of 1.8% has been achieved for Cu-Cu<sub>2</sub>O MIS cells based on a tentatively identified I-layer of CuBr. Studies of MIS cells fabricated with an evaporated SiO<sub>2</sub> I-layer are discussed as well as preliminary results for ZnS/Cu<sub>2</sub>O and ZnO/Cu<sub>2</sub>O heterojunctions. (Author)

**A81-27141** Characterization of ZnO for the fabrication of conductor-insulator-semiconductor (CIS) solar cells. D. E. Brodie, R. Singh, J. H. Morgan, J. D. Leslie, C. J. Moore, and A. E. Dixon (Waterloo, University, Waterloo, Ontario, Canada). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 468-471. 16 refs.

**A81-27142** Thin film polycrystalline solar cells prepared by electrodeposition. Z. Shkedi and R. L. Rod (Monosolar, Inc., Inglewood, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 472-475. 5 refs. Contract No. DE-AC04-79ET-23008.

Thin film polycrystalline CdTe photovoltaic cells were prepared by electrodeposition. It is shown that polycrystalline material can be grown at low temperatures. Crystallinity studies of the thin film CdTe material are reported. The first thin film polycrystalline homojunction CdTe cell is reported. I-V characteristics of homojunction and of Schottky barrier cells on electrodeposited CdTe are presented. (Author)

**A81-27143** ZnSe solar spectrum converter for GaAs solar cells. D. Walsh (McGill University, Montreal, Canada) and Y.-H.

## 02 SOLAR ENERGY

Shing (McGill University, Montreal, Xerox Research Centre of Canada, Mississauga, Ontario, Canada) In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. (A81-27076 11-44) New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 476, 477.

A ZnSe solar spectrum converter utilizing the self-activated luminescent property is proposed for improving the efficiency of GaAs solar cells by down-converting the solar photons with energy greater than 2.3 eV. The integrated ZnSe converter and GaAs solar cell assembly can achieve high spectral response, high collection efficiency, low reflection loss, minimum attenuation and low operating temperature. The low-cost ZnSe can also be employed as the substrate for this 'solar matched' GaAs photovoltaic cell

(Author)

**A81-27145 \*** **Low-cost conversion of polycrystalline silicon into sheet by HEM and FAST.** C. P. Khattak and F. Schmid (Crystal Systems, Inc., Salem, Mass.) In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 484-487. 10 refs. Research sponsored by the U.S. Department of Energy and NASA.

The conversion of polycrystalline silicon to sheet form (the wafers produced are 10 cm x 10 cm cross section with minimum surface damage) by the Heat Exchanger Method (HEM) and multi-wire Fixed Abrasive Slicing Technique (FAST), as a means of reducing the cost of solar arrays for adaptation of photovoltaic technology for terrestrial applications, is given. A schematic of a HEM furnace, which includes a silica crucible, and developments in the HEM process are presented. A new machine for slicing with wire was designed and fabricated. The high-speed slicer has been used to slice 19 wafers per cm from 10 cm diameter crystals. Both HEM and FAST are low-cost processes and they have the potential of giving one of the lowest add-on costs (\$6.24 and \$6.48 per square meter of sheet respectively, with the combination add-on cost of \$14.87 per square meter) of this conversion.

K.S.

**A81-27146 \*** **Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis.** L. A. Granon and M. G. Coleman (Motorola, Inc., Semiconductor Group, Phoenix, Ariz.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 488-493. Research supported by the U.S. Department of Energy, Contracts No JPL-954363, No JPL-954847.

The choice of which photovoltaic system (flat plate or concentrator) to use for utilizing solar cells to generate electricity depends mainly on the cost. A detailed, comparative manufacturing cost analysis of the two types of systems is presented. Several common assumptions, i.e., cell thickness, interest rate, power rate, factory production life, polysilicon cost, and direct labor rate are utilized in this analysis. Process sequences, cost variables, and sensitivity analyses have been studied, and results of the latter show that the most important parameters which determine manufacturing costs are concentration ratio, manufacturing volume, and cell efficiency. The total cost per watt of the flat plate solar cell is \$1.45, and that of the concentrator solar cell is \$1.85, the higher cost being due to the increased process complexity and material costs.

K.S.

**A81-27147 \*** **The spectral irradiance of some solar simulators and its effect on cell measurements.** C. H. Seaman, B. E. Anspaugh, R. G. Downing, and R. S. Estey (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 494-499.

Moderate resolution spectral irradiance measurements in the range 300 nm to 1100 nm have been made of eight radiant sources which are currently being used as solar simulators. Spectral irradiance data are presented in graphical form. To demonstrate the interplay of

source spectral distribution and cell spectral response, measurements of short circuit current of five cells of differing response characteristics have been made with these sources. These results are presented in tabular and graphical form.

(Author)

**A81-27152** **The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system.** L. L. Bucciarelli, B. L. Grossman, E. F. Lyon, and N. E. Rasmussen (MIT, Lexington, Mass.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 523-527. Research sponsored by the U.S. Department of Energy.

**A81-27153 \*** **Circuit design considerations for photovoltaic modules and systems.** C. Gonzalez and R. Weaver (California Institute of Technology, Jet Propulsion Laboratory, Applied Mechanics Div., Pasadena, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 528-535.

**A81-27154** **Concepts for GaAs/AlGaAs solar cells with valley-transferred electrons for voltage and efficiency enhancement.** A. G. Milnes (Carnegie-Mellon University, Pittsburgh, Pa.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 536-540. 14 refs.

**A81-27155** **Thick film conductive ink contacts for concentrator cells.** I. R. Lawrence (Spectrolab, Inc., Sylmar, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 541-544. Research supported by the U.S. Department of Energy.

A concentrator cell process utilizing thick film conductive ink technology for the front contact offers the premium performance characteristics of an evaporated metal front contact but without costly vacuum processing. Photosensitive resist is used as a mask to form the narrow, thick contact pattern required to reduce the series resistance for concentrator cells. This process is integrated with advanced flat plate cell processes to achieve further cost reductions. Front contact fingers 35 microns wide on 300 micron centers have been made using this process. Techniques for producing sufficient contact thickness with fingers less than 50 microns wide are being developed.

(Author)

**A81-27156** **Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing.** L. A. Grenon, N. G. Saklotis, and R. A. Pryor (Motorola, Inc., Semiconductor Group, Phoenix, Ariz.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 545-549. 5 refs.

A manufacturing development program has resulted in the fabrication of silicon concentrator solar cells of efficiency greater than 18% at 50 suns AM1. A number of substrate materials and process parameters were examined to optimize the solar cell for 50 sun concentration applications. This paper reviews the criteria used to determine the resistivity, orientation, thickness and diffusion length of the substrate as well as those for the optimization of junction characteristics, the metallization pattern design, and for the selection of compatible process steps capable of producing a high efficiency cell.

(Author)

**A81-27157** **Polka Dot Solar Cell.** R. N. Hall and T. J. Soltys (General Electric Co., Schenectady, N.Y.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 550-553.

The Polka Dot Solar Cell has a shallow collecting junction on its front surface and a deeper junction of the same type over most of the back. Photocurrent is collected by both junctions which are connected in parallel by a multiplicity of small-area interconnect paths, formed by patterning the back and etching pyramidal indentations which barely penetrate through the front surface. All of the metallization is applied to the back which is interdigitated to permit ohmic contact to the substrate. Experimental results are presented and compared with calculated performance. (Author)

**A81-27158** **A monolithic series-connected Al<sub>0.93</sub>Ga<sub>0.07</sub>/As/GaAs solar cell array.** P. G. Borden (Varian Associates, Palo Alto, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 554-562. 7 refs.

**A81-27159** **Designing practical silicon solar cells approaching the 'limit conversion efficiency'.** M. Wolf (Pennsylvania, University, Philadelphia, Pa.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 563-568. 11 refs.

To facilitate rapid low-cost design studies on multilayer solar cells, an analytical method has been developed to replace, for the low-level injection cases, the cumbersome numerical calculations. The method is based on expressing the minority carrier currents as a product of a carrier density and a transport velocity, and on using the superposition principle to the fullest. Each layer can be separately considered as active, i.e., contributing light-generating carriers, or passive, i.e., transporting excess carriers across them. For active layers, the light-generated carrier concentrations at their boundaries are determined. The carrier concentrations and transport velocities are transformed across each passive layer to calculate the total light generated and saturation currents. B.J.

**A81-27160** **Theoretical design considerations for back surface field solar cells.** J. R. Davis and A. Rohatgi (Westinghouse Research and Development Center, Pittsburgh, Pa.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 569-573. 10 refs.

A simple analytic model of a solar cell is described which provides optimum design rules for back surface field structures. The model provides useful insight into the relative impact of surface and bulk recombination on device performance. Results agree well with experimental data. An optimum back surface field structure is shown to consist of a passivated surface and a thin p(+) region with constant doping in the mid 10 to the 18th/cm range. (Author)

**A81-27161** **Two modified single diode models for simulating solar cells with distributed series resistance.** R. T. Otterbein and D. L. Evans (Arizona State University, Tempe, Ariz.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 574-579. 9 refs. Research sponsored by the U.S. Department of Energy.

**A81-27162** **Theoretical limit efficiency of direct gap solar cells.** M. Spitzer, J. J. Loferski (Brown University, Providence, R.I.), and J. Shewchun (McMaster University, Hamilton, Ontario, Canada). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 585-590. 13 refs. Research supported by the U.S. Department of Energy and NSF.

The theoretical upper limit conversion efficiency is calculated as a function of cell thickness and junction position for a homojunction solar cell made from a direct gap semiconductor in which homogeneously doped n- and p-regions are terminated by surfaces having zero surface recombination velocity and in which an optical mirror is

incorporated on the surface opposite that on which light is incident. Most of the calculations are focused on CuInSe<sub>2</sub> with a portion of the effort devoted to GaAs. For CuInSe<sub>2</sub> cells, the principal conclusion is that the thickness at which optimum AM1 efficiency is obtained is somewhat less than 2 microns and that this efficiency is approximately 26%. The effects of finite values of surface recombination velocity are included. (Author)

**A81-27163** **Heterojunction solar cell design and evaluation.** S. J. Fonash and S. Ashok (Pennsylvania State University, University Park, Pa.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 591-595. 10 refs.

A heterojunction solar cell model which explicitly shows the competition among various channels of current flow in these structures is presented. The model gives a general set of criteria for the design and evaluation of p-n window/absorber heterojunction solar cells in terms of a set of dimensionless numbers F(D2), F(I), and F(D1). Other heterojunction models are compared to this very general formulation. Heterojunction solar cell structures are also discussed in the light of this model and the resulting design criteria. (Author)

**A81-27164** **A new method of measuring diffusion length and surface recombination velocity.** Y. S. Kim, C. I. Drowley, and C. Hu (California, University, Berkeley, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 596-600. 8 refs.

In this novel new method, chopped light that may be broadband and of unknown but constant intensity is incident from the bulk side of the test cell. The photocurrent is measured as a function of the effective bulk thickness of the cell, which is varied by varying the junction reverse bias. The diffusion length and the surface recombination velocity of the bulk material can be deduced from the data directly, without curve fitting. The effective surface recombination velocity at an oxidized silicon surface can be varied by applying a bias voltage to a transparent gate electrode. The recombination velocity can exhibit a maximum when the surface is depleted. (Author)

**A81-27165** **Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study.** B. L. Sopori (Motorola, Inc., Semiconductor Group, Phoenix, Ariz.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 606-611.

Inhomogeneities in solar cells fabricated on low cost silicon substrates can be categorized as they give rise to localized variations in cell characteristics (1) lateral (parallel to the junction) and (2) in-depth (normal to the junction). It has been found that the dominant sources of lateral inhomogeneities are localized crystal imperfections in as-grown material, whereas the in-depth inhomogeneities are generally process induced. The influence of either type of nonuniformity on solar cell performance can be represented in terms of an 'effective' minority carrier diffusion length. Techniques for measuring this diffusion length have been developed and it is shown, based on this concept, that cells with each type of nonuniformity can be represented by a simple, phenomenological, lumped equivalent circuit. These large area equivalent circuits can be used to determine the average solar cell performance. (Author)

**A81-27166** **Majority carrier conduction effects in ITO/SIS solar cells.** J. DuBow (Colorado State University, Fort Collins, Colo.) and S. Kar (Indian Institute of Technology, Kanpur, India). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 619-622. Research supported by the U.S. Department of Energy.

## 02 SOLAR ENERGY

**A81-27167** Progress toward large area amorphous silicon solar cells. J. J. Hanak (RCA Laboratories, Princeton, N.J.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 623-628. 14 refs. Research sponsored by RCA; Contract No. XJ-9-8254.

Techniques for fabricating a-Si:H solar cells are suitable for areas of several sq m. However, with increasing area, problems with current collection and electrical shorting escalate. This paper reports the development of two significant, large-area structures. One is a series-connected cell, the monolithic solar cell panel (MSCP), which solves the problem of current collection in arbitrarily large cells. Next is a high voltage, stacked (multiple-junction) monolithic solar cell panel (SMSCP), which has the potential of higher efficiency because of more efficient utilization of light. Methods are reported for locating, removing, and preventing electrical shorts. A drastic reduction in shorts is achieved by using a thin, front, Pt-SiO<sub>2</sub> cermet; further reduction is achieved with a thick, back cermet such as Ni-SiO<sub>2</sub>. (Author)

**A81-27168** The CdSe thin-film solar cell. D. Bonnet and E. Rickus (Battelle Institut, Frankfurt am Main, West Germany). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 629-632. Research sponsored by the Commission of the European Communities and Bundesministerium für Forschung und Technologie.

The deposition conditions for the 3-micron thick evaporated CdSe films have been optimized with regard to solar cell properties. Some problems posed by the starting material have been solved by synthesizing CdSe from its elements. The best insulating layer consists of ZnSe. Using transparent Au contacts, cells have been prepared which show efficiencies around 6 percent, referring to solar light falling upon the CdSe. The influence which CdSe film orientation and morphology have on the cell performance is illustrated and discussed. (Author)

**A81-27169** ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis. J. A. Aranovich, A. L. Fahrenbruch, and R. H. Bube (Stanford University, Stanford, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 633, 634. Research supported by the U.S. Department of Energy

Using the essentially low cost technique of spray pyrolysis, highly transparent ZnO films with a resistivity as low as 0.001 ohm-cm have been produced by suitable control of deposition conditions and post-deposition annealing. A detailed structural, optical, electrical and thermoelectrical characterization of these films has been made. The preparation of ZnO/CdTe heterojunctions by spray pyrolysis deposition of ZnO on single crystal p-type CdTe has been systematically investigated, and a consistent model involving control of forward currents by bulk and interface deep traps has been developed. The best cell prepared to date shows  $V(oc) = 0.54$  V,  $J(sc) = 19.5$  mA/sq cm and solar efficiency of 8.8% referred to active area but uncorrected for reflection losses. (Author)

**A81-27170** Thin polycrystalline Zn<sub>3</sub>P<sub>2</sub> films for photovoltaic cells. A. Catalano, M. Bhushan, and N. C. Wyeth (Delaware, University, Newark, Del.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 641-646. 14 refs. Research supported by the U.S. Department of Energy and Pennsylvania Power and Light Co.

Thin films of zinc phosphide deposited by close space vapor transport onto mica are characterized. The polycrystalline films are highly oriented, and typically have a grain size of 5-10 microns for a 10 micron-thick film. The electrical resistivity of the films is in the

range of 100-300 ohm-cm, and the effective minority carrier diffusion length scales with grain size between 0.5-3.6 microns. The barrier height of Schottky diodes fabricated on thin films of zinc phosphide is close to the 0.81 eV found in single crystals. The Schottky barrier grid devices manufactured on thin films demonstrate a total area conversion efficiency of 1.58% and an active area conversion efficiency of 4.0%. The spectral response of the devices is flat at short wavelength, indicating negligible losses due to surface recombination. L.S.

**A81-27173** Indium phosphide films for photovoltaic devices. T. L. Chu, S. S. Chu (Southern Methodist University, Dallas, Tex.), C. L. Lin, C. T. Chang, Y. C. Tzeng, A. B. Kuper (Poly Solar, Inc., Garland, Tex.), L. L. Kazmerski, and P. J. Ireland (Solar Energy Research Institute, Golden, Colo.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 661-666. 12 refs. Research supported by the Electric Power Research Institute

Indium phosphide films are deposited on coated graphite substrates by the reaction of indium, hydrogen chloride, and phosphine in a gas flow. The important process parameters include the temperature of the substrate, and the flow rates of hydrogen, hydrogen chloride, and phosphine. The rate of indium phosphide nucleation decreases with increasing temperature, and continuous films cannot be obtained at very high temperatures. Schottky barriers prepared from these films are found to exhibit low rectification ratios, high dark currents, and poor photovoltaic response due to grain boundary effects. Thermal oxidation, ruthenium treatment, and nitridation are found to reduce the grain boundary effects and improve the photovoltaic characteristics of the indium phosphide thin-film Schottky barrier devices. L.S.

**A81-27174 \*** Space solar cells - High efficiency and radiation damage. H. W. Brandhorst, Jr. and D. T. Bernatowicz (NASA, Lewis Research Center, Cleveland, Ohio.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 667-673. 22 refs.

The proceedings of the Third Solar Cell High Efficiency and Radiation Damage Meeting are outlined. The topics covered included high efficiency silicon solar cells, silicon solar cell radiation damage, GaAs solar cell performance, and 30 percent conversion devices. The study of radiation damage from a fundamental defect-centered basis is discussed and evaluated as a focus of future work. 18% AMO efficiency and 0.7 V open-circuit voltages are designated as achievable goals for silicon solar cells, and the potential for 30% AMO efficiencies from monolithic tandem cell designs without sunlight concentration is noted. In addition to its potential for 20% AMO efficiencies, the GaAs cell offers the possibility of a radiation-insensitive power supply when operated at temperatures near 200 C. L.S.

**A81-27175** High efficiency silicon solar cells. M. Wolf (Pennsylvania, University, Philadelphia, Pa.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 674-679. 14 refs.

The narrow region design approach for obtaining high open circuit and maximum power point voltages in solar cells is discussed. The design relies heavily on low effective surface recombination velocities in front and back in conjunction with a textured front surface and an optical internally reflecting back surface. The cell design requires a thin cell in the 50-150 micron range with a thicker front region than conventional designs. The low transport velocities at the back of the narrow base layer are attainable by the addition of two layers with one layer including a drift field or a high/low junction, and the other layer having low resistivity with a thickness on the order of one diffusion length. The front region requires surface passivation by an oxide layer. It is noted that high doping effects can be avoided using the proposed design. L.S.

**A81-27176 \*** Review of physics underlying recent improvements in silicon solar-cell performance. F. A. Lindholm and J. G. Fossum (Florida, University, Gainesville, Fla.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 680-683. 20 refs. Research sponsored by the U.S. Department of Energy and NASA.

This paper provides a unifying view of the physics of silicon solar cells, and uses it as a basis for explaining how recent improvements in the performance of these cells have been achieved. The unification is facilitated by a region-by-region analysis of the solar cell, which is also used to compare several recently proposed cell structures. (Author)

**A81-27177** Laser processing for high-efficiency silicon solar cells. R. F. Wood and R. T. Young (Oak Ridge National Laboratory, Oak Ridge, Tenn.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 688-693. 12 refs. Contract No. W-7405-eng-26.

The experimental and theoretical aspects of the physics of pulsed laser annealing are reviewed with attention to the application of laser processing to solar cell fabrication. The approaches to junction formation discussed include ion implantation followed by laser annealing, laser-induced diffusion of surface-deposited dopants, laser recrystallization of doped amorphous films, and laser annealing after dopant implantation by glow and corona discharge. Cells made from 15 ohm-cm base material with junctions formed by ion-implantation and laser annealing or by laser-induced diffusion of surface-deposited dopants give 15% AM1 efficiencies without back surface fields or front surface passivation. Radiation from Q-switched lasers can also be used to clean up the emitter region in cells made by conventional thermal diffusion and to control grain boundary diffusion in polycrystalline materials. L.S.

**A81-27178** An investigation of the Cu(x)/S-CdS structure for photovoltaic conversion using an A11 film vacuum deposited process. T. Vanderwel, F. Scholz, D. Burk, N. Dalacu (McMaster University, Hamilton, Ontario, Canada), R. Clarke (Garrett Manufacturing, Ltd., Toronto, Canada), and J. Shewchun (McMaster University, Hamilton, Ontario, Canada, Brown University, Providence, R.I.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 694-699. 14 refs. National Research Council Grant No. O5X-78-00091.

An all-evaporation process is used to fabricate good efficiency Cu(x)/S-CdS thin film solar cells. Isolated Cu(x)/S layers are prepared using the resistance heated evaporation of specially prepared chalcoite for the evaluation of the individual materials comprising the solar cell. The optical properties of the isolated film are used to determine phase and thickness of the Cu(x)/S layer in the cell. The optical diagnostic method is applied to monitor the film depositions and characterize the post-evaporation treatment required to activate the cell. The preliminary results of heat treatment studies are provided. L.S.

**A81-27179** A microstructural study of the heterojunction materials of the CdS-Cu<sub>2</sub>S solar cell. K. H. Norian and J. W. Edington (Delaware, University, Newark, Del.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 700-705. 8 refs. Contract No. XR-9-8063-1.

The grain size, dislocation density, and microscopic defect structure of CdS films used in photovoltaic cells have been determined. In addition, the topography of the CdS-Cu<sub>2</sub>S interface has been studied. The major features of the Cu<sub>2</sub>S films and the common features of the interface have been delineated. Moreover the various types of defects that can occur if the material is not grown

under ideal conditions are described. Most of these can be avoided by proper control of film growth conditions. The influence of defects on the electrical properties of the cell is discussed. (Author)

**A81-27180** Growth and evaluation of CdS and /CdZn/S films for the fabrication of high performance photovoltaic devices. R. B. Hall, R. W. Birkmire, E. Eser, T. L. Hench, and J. D. Meakin (Delaware, University, Newark, Del.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 706-711. 11 refs. Contract No. XR-9-8063-1.

The CdS and (CdZn)S material characteristics required for the fabrication of high performance solar cells are identified. Resistivity, photoluminescence spectral characteristics, and microstructure are examined. A quantitative model is used to interpret the relationship between the measured material properties and cell parameters. A high yield of CdS films is achieved which satisfies all criteria, and gives test cells with short circuit currents in excess of 20 mA/sq cm and open circuit voltages in excess of 0.510 volts. By adjusting the growth parameters, low-resistivity (CdZn)S films (less than 20 ohm-cm) having zinc compositions of up to 20% are achieved. It is found that post-deposition heat treatments in an H<sub>2</sub> atmosphere reduce the resistivity of the (CdZn)S films which initially fail that criterion. L.S.

**A81-27181** Cu<sub>2</sub>S-CdS sprayed solar cells. M. Perotin, J. Bougnot, J. Marucchi, O. Maris, R. Daures, C. Grill, and M. Savelli (Montpellier II, Université, Montpellier, France). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 712-717. 11 refs.

The properties of spray-deposited CdS layers are discussed with attention to purity and optical characteristics. An apparatus is described for obtaining a homogeneous deposit on a 100 sq cm surface. A rotating driving system permits the nozzle to sweep around the hot plate on which the 25 substrates are placed, and a thermo-couple mounted on a substrate monitor provides control of the substrate heater. During the course of the spraying procedure, the maximum variation of the substrate is approximately 5 C. The resulting Cu<sub>2</sub>-CdS photocells have a conversion efficiency of 6.3 percent. L.S.

**A81-27182** The role of deep levels in controlling the photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction. W. G. Haines and R. H. Bube (Stanford University, Stanford, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 718-721. 8 refs. Research supported by the U.S. Department of Energy.

**A81-27183** Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells. A. Rothwarf and H. Windawi (Delaware, University, Newark, Del.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 722-727. 32 refs. Contracts No. XR-9-8063-1; No. EG-77-C-01-0402.

**A81-27184** Cu/x/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements. L. F. Donaghey, J. A. Duisman, T. M. Peterson, and P. R. Ryason (Chevron Research Co., Richmond, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 728-733. 11 refs.

New techniques for characterizing the Cu(x)/S layer in the CdS-Cu(x)/S thin film solar cell are described. The kinetics of Cu(x)/S film growth by the topochemical reaction of CdS with aqueous CuCl are established by a nondestructive optical method using transient optical absorbance of an He-Ne laser beam from which microstruc-

## 02 SOLAR ENERGY

tural information can be deduced. Different kinetic orders are demonstrated by CdS films prepared by evaporation, spray pyrolysis, and vapor transport. The composition profiles in topochemically formed Cu(x)S films are determined by a galvanic electrochemical method with dilute electrolytes. When strong electrolytes are used, substructural information within the Cu(x)S layer can be obtained. L.S.

**A81-27185** **Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar cell with an interdigitated grid.** J. E. Phillips (Delaware, University, Newark, Del.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 734-737. 6 refs. Contract No. XR-9-8063-1.

A technique is developed for the quantification of the fill factor losses due to the Cu<sub>2</sub>S layer on an operating CdS-Cu<sub>2</sub>S solar cell that neither varies with the light intensity nor assumes that deviations from the ideal diode behavior are caused solely by the Cu<sub>2</sub>S layer. The necessary conditions for measuring the Cu<sub>2</sub>S losses can be met by applying an interdigitated grid consisting of two sets of interleaved parallel grid wires connected to a tab or bus bar at opposite ends of the cell. Testing a cell of this type with each tab individually and with both tabs connected together gives a set of current-voltage characteristics that differ only in effective grid spacing. This grid structure also modifies the solar cell to give a three-terminal device which permits the measurement of the current-voltage characteristics of the Cu<sub>2</sub>S layer decoupled from the rest of the cell. L.S.

**A81-27186** **Cells and modules for linear P.V. concentrator systems with forced cooling.** E. Bellafronte, M. Giuffrida, S. Pidotella, A. Repetto, and P. E. Zani (Ansaldo S.p.A., Genoa, Italy). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 738-742. Research supported by the Consiglio Nazionale delle Ricerche.

Solar cell and module technology using liquid forced cooling is reviewed. The average efficiency of the cell designs under development in Genoa, Italy is over 15% at 30°C. The assembly chosen for the modular element has a total collector area of 47 sq m and a power capacity of 4.5 kW. The assembly is bonded to the cooler system with silicon resin preimpregnated tape. The cooler is aluminum extruded with a flange for coupling with the photovoltaic receiver and the concentrator. The proposed design is easily transportable and permits eventual substitutions. The results of thermal cycling, salt spray and humidity tests are provided. L.S.

**A81-27187** **Optimization of a photovoltaic receiver for a parabolic trough concentrator.** C. M. Garner and F. Biggs (Sandia Laboratories, Albuquerque, N. Mex.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 743-748. Contract No. DE-AC04-76DP-00789.

The optimum receiver design for two models of parabolic trough is considered. Cell size, cell design, and receiver shape are selected on the basis of the maximum cell power attainable with the least sensitivity to changes in the position of the receiver. A description of the concentrator geometry is given, and the model used to calculate the flux-density pattern on the absorber strip is discussed. A code is described that determines the electrical behavior of the photocells corresponding to the calculated flux-density pattern. The best performance of a photovoltaic receiver with a 92 deg rim-angle parabolic trough is achieved at a 30 deg absorber inclination with the Y-axis and 2.5 cm cells for both the Gaussian and wavy-trough models. L.S.

**A81-27188** **Parabolic troughs concentrators photovoltaic module.** M. Giuffrida, M. Bisagni, G. P. Tornielli, S. Pidotella, and A. Repetto (AMN, Ansaldo S.p.A., Genoa, Italy). In Photovoltaic

Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 749-753. 5 refs.

The design characteristics are described of a photovoltaic module with a parabolic trough concentrator under development in Genoa, Italy. The rated power capacity of the module is 4.5 kWp, and the initial reflectivity is 0.92. Two trackers control the elevation movement of the two parabolic troughs by means of a shadow-band photodiode couple, and the third tracker controls the azimuthal movement of the turntable by means of a wide angle acquisition system. The solar cells are 33 x 33 mm single crystal silicon cells bonded on an aluminum cooler. A photovoltaic plant utilizing two of the modules is presently in operation in Perth, Australia. L.S.

**A81-27189** **Low-cost, high-performance, point-focus concentrator array design.** B. D. Shafer, M. W. Edenburn, M. Garner, and H. Togami (Sandia Laboratories, Albuquerque, N. Mex.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 754-759. 7 refs. Research supported by the U.S. Department of Energy.

The design of a point-focus photovoltaic concentrator array that will meet a goal of \$2.80 per peak watt is discussed. The optics are high efficiency Fresnel lenses which are parqueted into the lens arrays with five lenses on each side for low cost fabrication. The silicon cells are mounted on a solid copper stud which incorporates a solder-bonded alumina wafer for electrical standoff and good thermal conduction between the cell and the stud. The 0.15-cm-thick planar heat sink is formed into the box which comprises the module housing, and the modules are mounted on a turntable for two-axis tracking. The structure to be used for tracking the modules will vary with the intended application. L.S.

**A81-27190** **Efficiency and stability of experimental fluorescent planar concentrators /FPC/.** V. Wittwer, K. Heidler, A. Zastrow, and A. Goetzberger (Fraunhofer-Institut für angewandte Festkörperphysik, Freiburg im Breisgau, West Germany). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 760-764. 10 refs. Bundesministerium für Forschung und Technologie Contract No. ET-4190-A.

The limiting operating principles of fluorescent solar energy conversion are reviewed. The typical electrical AM 1.5 Si efficiency of a single stage fluorescent planar concentrator with a dye emitting at 570 nm is improved to 1.1%. The efficiency of a collector stack not yet optimized is 1.7% under AM 1.5. Higher efficiencies are obtained under diffuse weather conditions. Outdoor and indoor stability tests demonstrate that the degradation of many of the dyes investigated is due to a decomposition of the dye leading to additional absorption in the fluorescent region. L.S.

**A81-27191** **Minimizing end shadowing effects on parabolic concentrator arrays.** K. Bardwell, T. J. Lambarski, R. M. Turfler (BDM Corp., Albuquerque, N. Mex.), and C. B. Rogers (Sandia Laboratories, Albuquerque, N. Mex.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 765-770.

The results are presented of two circuit analyses performed to determine the optimal placement of bypass diodes for a 20-foot long, north-south oriented tracking parabolic collector at 35 deg latitude. The modeled collector consisted of four series-connected cell modules containing 22 series-connected cells each, and each of the seven diode configurations studied was chosen to accommodate one 22 cell module. Both the HP-9830 and PV-TAP simulations utilized identical input parameters for cell characteristics, insolation data, and receiver tube and shadow geometry. The most cost effective design located the first cell in the southernmost cell module 15.8 in. from the collector edge. The PV-TAP analysis predicted a 7.8% loss



and the HP-9830 analysis predicted an 8.0% loss in the annual array energy output due to end shadowing for the optimized diode configuration. L.S.

**A81-27192** Active and passive cooling for concentrating photovoltaic arrays. M. W. Edenburn (Sandia Laboratories, Albuquerque, N. Mex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 771-776. Research supported by the U.S. Department of Energy.

Active and passive cooling designs for point-focus Fresnel lens and line-focus parabolic trough concentrating photovoltaic arrays are optimized on the basis of minimum energy cost. Passive cooling is most effective for point-focus lenses smaller than 0.093 sq m and is not cost-effective for larger ones. Point-focus arrays using passive heat exchangers designed for minimum energy cost must have a high cell-temperature defocus capability. Passive cooling will not be cost effective for parabolic trough arrays with 1.83 m apertures and concentration ratios above 20 because the high heat flux results in a large temperature difference across the conduction paths between the cell and the heat-exchange surface. Heat pipe technology may be used to solve this problem. L.S.

**A81-27193** Design and operation of the Solarex two-axis tracking linear concentrating collector system. R. C. Hamilton, A. S. Levine, J. H. Wohlgenuth, and C. Y. Wrigley (Solarex Corp., Rockville, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 777-782. Research supported by the U.S. Department of Energy.

A two-axis tracking photovoltaic collector system is developed based on operating experience with earlier prototype configurations. The collector comprises four east-west tracking mirror troughs on a north-south tracking frame. The low-cost frame structure affords good stability under severe wind loading. A trough efficiency of 10.3% at 28 C coolant temperature is demonstrated with a line-focus receiver incorporating textured-surface silicon cells. A series/parallel cell-interconnect scheme is devised to minimize the effect of illumination nonuniformities along the length of the receiver. Test data are presented for a prototype system designed to deliver 1.2 kWe from each of two four-collector arrays. L.S.

**A81-27194 \*** A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings. T. G. Sparks and R. A. Pryor (Motorola, Inc., Phoenix, Ariz.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 783-786. Contract No. JPL-954847.

**A81-27195 \*** Screenable silver and base metal solar cell contacts. B. Ross (Bernd Ross Associates, San Diego, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 787-792. 15 refs. Research sponsored by the U.S. Department of Energy and NASA.

The metallurgical soundness of the all-metal screenable thick film electrode system is established for silver and copper electrodes. Silver fluoride was identified as a successful etchant material and is found most effective in the liquid phase (435-460 C). Best results were achieved with the eutectic alloys of dopants and semiconductors. The air-fired silver inks were strongly adherent, rugged, and solderable, whereas the hydrogen-fired silver inks had very poor adhesion. A two-step firing process was devised in which copper inks containing silver fluoride were activated in a nitrogen atmosphere, with sintering done at the same or higher temperatures in hydrogen. Good solar cells were made using the copper paste back contacts

demonstrating that the electrodes are not the limiting factors in efficiency. L.S.

**A81-27196 \*** A base-metal conductor system for silicon solar cells. M. G. Coleman, R. A. Pryor, and T. G. Sparks (Motorola, Inc., Phoenix, Ariz.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 793-799. 8 refs. Contracts No. JPL-954847; No. JPL-954869.

Solder, copper, and silver are evaluated as conductor layer metals for silicon solar cell metallization on the basis of metal price stability and reliability under operating conditions. Due to its properties and cost, copper becomes an attractive candidate for the conductor layer. It is shown that nickel operates as an excellent diffusion barrier between copper and silicon while simultaneously serving as an electrical contact and mechanical contact to silicon. The nickel-copper system may be applied to the silicon by plating techniques utilizing a variety of plating bath compositions. Solar cells having excellent current-voltage characteristics are fabricated to demonstrate the nickel-copper metallization system. L.S.

**A81-27197 \*** An all-plated, low cost contact system for silicon solar cells. D. P. Tanner, P. A. Iles (Applied Solar Energy Corp., City of Industry, Calif.), and P. Alexander (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 800-804. Contract No. JPL-955244.

The plating sequences Pd-Cr-Cu and Pd-Ni-Cu are demonstrated. The surface was sensitized with a 50 A-thick Pd layer obtained from an immersion bath. After 15 min heating at 400 C in N<sub>2</sub>, a thin barrier layer of either Cr or Ni was deposited from electroless baths operated at temperatures around 90 C. The sintering process was repeated, and a thin copper layer of 500 A was deposited by electroless means. An electrolytic copper bath was used to build the copper layer to 3-4 micron thicknesses. Cells with good I-V curves were obtained, and the all-plated contacts had good adhesion. Preliminary cost estimates show that the process costs approximately 12 cents per watt excluding the cost of the masking procedure. L.S.

**A81-27198** High performance BSF silicon solar cell with fire through contacts printed on AR coating. T. Nunoi, T. Nammori, H. Sawai, and A. Suzuki (Sharp Corp., Tenri, Nara, Japan). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 805-810.

Low-cost wafer processing techniques are used to fabricate a high-performance silicon solar cell. A doped spin-on diffusion source is prepared by mixing phosphoric-titanate compound into a volatile solvent in order to form an N(+) layer and an antireflection coating for P-type silicon simultaneously. The refractive index of the TiO<sub>2</sub> film after diffusion within a temperature range of 900-930 C is approximately 2. The silver paste on the front surface and the aluminum paste on the rear surface are fired simultaneously. The front paste containing 70% lead oxide is able to fire through the TiO<sub>2</sub> layer, and shows good ohmic contact and adhesion properties. Conversion efficiencies of 13 and 16% are achieved with 75 mm cells without additional treatment such as soldering. L.S.

**A81-27199** Solid source diffusion process for silicon solar cells. R. E. Thomas and A. A. Armstrong (Carleton University, Ottawa, Canada). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 811-814. National Research Council of Canada Grant No. OSX-78-00062.

A solid source diffusion technique for n(+)-p-p(+) or p(+)-n-n(+)

## 02 SOLAR ENERGY

silicon solar cells is outlined. The technique allows packing densities of up to 2500 slices/m of furnace hot zone while offering reduced wafer handling and chemical processing. Thin solid sources containing boron or phosphorus cut to the same area as the silicon substrates are alternately sandwiched with silicon during cell preparation. The stack is loaded into the furnace at a temperature of 1000-1200 C and undergoes diffusion without a carrier gas. A moistened air flow is employed to aid in driving off the organic binders. After separation and cleaning, experimental cells with AM1 efficiencies of 12 and 13% are realized without masking or surface protection. The diffusion may be completed with quartz boats which are automatically loaded and unloaded, eliminating repetitive manual procedures. L.S.

**A81-27200 \*** Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing. R. A. Pryor (Motorola, Inc., Phoenix, Ariz.) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 815-819. Contract No. JPL-955328.

Processing experiments using wire-saw techniques to slice thin silicon wafers are described. Substrates were sliced directly to 17 mil, 8 mil, and 5 mil thicknesses. Some of the 8 mil substrates and all of the 5 mil substrates were chemically etched to 7 and 4 mils, respectively, to guarantee removal of any saw damage. The wafers were sawed to 17 mil thicknesses were processed as reference cells. A baseline process which results in an n(+)-p cell structure, and two advanced processes which provide n(+)-p-p(+) structures were utilized. By using a p(+) enhancement layer on the solar cell back surface, the performance of the 7 mil wafers was increased to exceed that of the 17 mil solar cells with simple n(+)-p structures. Cells fabricated by an ion implantation sequence utilizing elemental boron and phosphorus implants were shown to be capable of equaling or exceeding the performance of cells fabricated by an equivalent all-diffusion process. L.S.

**A81-27201 \*** Low-cost ion implantation and annealing technology for solar cells. A. H. Kirkpatrick, J. A. Minnucci, and A. C. Greenwald (Spire Corp., Bedford, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 820-824. 8 refs. Research supported by the U. S. Department of Energy and NASA.

Ion implantation and thermal annealing techniques for processing junctions and back surface layers in solar cells are discussed. Standard 10 keV (31)p(+) junction implants and 25 keV (11)B(+) back surface implants in combination with three-step furnace annealing are used for processing a range of silicon materials and device structures. Cells with efficiencies up to 16.5% AM1 are being produced, and large-area terrestrial cells with implanted junctions and back fields being fabricated in pilot production exhibit average efficiencies in excess of 15% AM1. Thermal annealing methods for removal of the radiation damage caused by implantation should be replaced by transient processing techniques in future production. Design studies have been completed for solar cell processing implanters to support 10 MW/yr and 100 MW/yr production lines, and analyses indicate that implantation costs can be reduced to approximately 1 cent/watt. L.S.

**A81-27202** Silicon solar cells realized by laser induced diffusion of deposited antimony. R. Stuck, E. Fogarassy, J. C. Muller, A. Grob, J. J. Grob, and P. Siffert (CNRS, Groupe de Physique et Applications des Semiconducteurs, Strasbourg, France). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 829-834. 9 refs.

**A81-27203 #** DLTS spectra and defect effects on irradiated silicon solar cells. P. J. Drevinsky, H. M. DeAngelis, J. T. Schott (USAF, Rome Air Development Center, Bedford, Mass.), and W. P.

Rahilly (USAF, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 835-839. 10 refs.

Defects in as-processed and electron-irradiated high-purity silicon solar cells were detected and identified using deep-level transient spectroscopy. In as-processed cells, the gallium-doped samples demonstrated a non-uniformly distributed carbon-related defect, and the boron-doped samples showed no clearly definable peaks. In the irradiated cells, both the gallium- and boron-doped samples demonstrated two carbon-containing defects as well as divacancy. In the boron-doped samples, a boron-containing minority carrier trap was also present. Irradiation reduced Pmax values for cells with initial efficiencies of 10-15% AMO by about 25%. The spectral response of irradiated cells decreased significantly in the red region, and blue response remained unchanged. L.S.

**A81-27205 \*** Influence of processing on the electrical performance of proton irradiated silicon solar cells. B. E. Anspaugh, J. A. Scott-Monck, R. G. Downing, D. W. Moffett, and T. F. Miyahira (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 847-852. 7 refs. Contract No. NAS7-100.

**A81-27207 \* #** Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells. I. Weinberg and C. K. Swartz (NASA, Lewis Research Center, Cleveland, Ohio). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 858-862. 9 refs.

Deep level transient spectroscopy and the Shockley-Read-Hall recombination theory are used to identify the defect responsible for reverse annealing in 2 ohm-cm n+/p silicon solar cells. This defect, with energy level at Ev + 0.30 eV, has been tentatively identified as a boron-oxygen-vacancy complex. It has been also determined by calculation that the removal of this defect could result in significant annealing at temperatures as low as 200 C for 2 ohm-cm and lower resistivity cells. V.L.

**A81-27208** Nuclear radiation effects on the photovoltaic performance and interface states of Cr, p-type, single crystal, MISi solar cells. R. C. Ferraglio (U.S. Naval Air Engineering Center, Lakehurst, N.J.) and W. A. Anderson (New York, State University, Amherst, N.Y.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 863-869. 19 refs.

Radiation studies have been conducted on Cr-single crystal p-MISi solar cells to investigate the damage effects of 1.0 MeV and 1.6 MeV protons and 1.0 MeV electrons. Current-voltage, high-frequency capacitance, spectral response, and diffusion length measurements have been made for each dosage of radiation. By spectral measurements, the radiation induced change in diffusion length has been isolated as a major contributor to the performance decay of MIS solar cells. The connection between the postradiation photocurrent and the diffusion length is characterized. V.L.

**A81-27209 \*** Summary results of the ATS-6 solar cell flight experiment. L. J. Goldhammer (Hughes Aircraft Co., Space and Communications Group, El Segundo, Calif.) and L. W. Slifer, Jr. (NASA, Goddard Space Flight Center, Greenbelt, Md.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 870-875. 12 refs. Contract No. NAS5-24458.

Synchronous orbit performance data are analyzed for solar cells

of 13 different configurations involved in the ATS-6 solar cell radiation damage experiment. It is found that the cells generally performed as expected through 6 to 9 months in orbit, but that after 2-1/3 years were more severely degraded in current than expected. An anomalous additional degradation of 5-9% in short circuit current has been observed for some cells. V.L.

**A81-27213** Photovoltaic research and development projects in Germany. R. Koepke (Kernforschungsanlage Julich GmbH, Julich, West Germany) In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 893-896.

Photovoltaic research and development efforts in Germany are briefly reviewed with emphasis on the present technical status of silicon cells and generators, amorphous silicon devices, and Cu(x)S-CdS solar cells. The development of the budget is examined, and companies and laboratories involved in the photovoltaic program are mentioned. V.L.

**A81-27214** Growth structure of cast silicon and related photovoltaic properties of solar cells. K. Roy, K.-D. Rasch, and H. Fischer (Telefunken AG, Heilbronn, West Germany) In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 897-901. Research supported by the Bundesministerium für Forschung und Technologie

**A81-27216** POC13 gettering of titanium, molybdenum and iron-contaminated silicon solar cells. A. Rohatgi, R. B. Campbell, J. R. Davis, R. H. Hopkins, P. Rai-Choudhury (Westinghouse Research and Development Center, Pittsburgh, Pa.), H. Mollenkopf, and J. R. McCormick (Hemlock Semiconductor Corp., Hemlock, Mich.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 908-911. 12 refs. Research sponsored by the U.S. Department of Energy

**A81-27217** The outlook for thin solar cells. A. Kran (IBM East Fishkill Laboratories, Hopewell Junction, N.Y.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 918-922.

Current and projected thin sheet solar cell technologies are discussed in terms of technical parameters and cost. It is shown that the well established process based on Czochralski growth (CZO) plus ID slicing is not competitive with the manufacturing technology based on growing sheet silicon directly from the melt (the capillary action shaping technique - CAST) once it is available. For 1986, the CZO plus ID slice sheet price is \$50/sq m as compared to \$17/sq m for CAST sheet. V.L.

**A81-27218 \*** Low cost processes for fabricating silicon solar cells. H. Goldman and M. Wolf (Pennsylvania, University, Philadelphia, Pa.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 923-928. 23 refs. Research supported by the U.S. Department of Energy, Contract No. JPL-954796.

Solar cell fabrication processes, in particular junction formation and metallization, are evaluated in terms of cell efficiencies, process yields, module packing factors, and energy cost effectiveness. It is shown that for junction formation, the diffusion processes provide a relatively low-cost approach. The costs per unit cell area can be further reduced by increased wafer area and mechanized wafer handling. The costs for a large number of metallization processes, excluding the costs of the metal, are roughly comparable. However, their varying influence on cell performance leads to a significant spread in the allowable process costs. V.L.

**A81-27220 \*** Cost effective, high throughput, junction formation techniques using spray-on dopants. S. R. Chitre (Photowatt International, Inc., Tempe, Ariz.) and C. Olson (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 935-940

**A81-27221** Silicon solar cells with screen printed diffusion and metallization. L. Frisson, M. Honoré, R. Mertens, R. Govaerts, and R. Van Overstraeten (Leuven, Katholieke Universiteit, Heverlee, Belgium). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 941, 942. Research supported by the National Fonds voor Wetenschappelijk Onderzoek

This paper deals with the simultaneous use of thick film technology for junction and contact formation. The screen printing diffusion and metallization provides a high volume, fully automated, and low cost process for silicon solar cells. The totally screen printing process can be optimized so that AM1 efficiencies above 11 percent with a high production yield are obtained. (Author)

**A81-27223 \*** Nickel contacts for low cost solar cells. J. R. Anderson and R. C. Petersen (Solarex Corp., Rockville, Md.) In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 948-951. Contract No. JPL-954854.

It is noted that nickel metallization of silicon solar cells offers a relatively inexpensive method of making electrical contact with the surface of the cell. More expensive methods, involving precious metals and costly processes, are widely used, these have been developed for space applications, where considerations of reliability predominate over those of cost. Since recent interest in terrestrial applications of solar cells has led to an increased concern over cost, nickel has assumed a position as a major candidate for solar cell metallization. It is shown that sintering can improve the integrity of the nickel-silicon bond. Evidence that the nickel-silicon contact can survive moderate environmental stress is presented. C.R.

**A81-27225 \*** Encapsulation of PV cells using silicone materials. W. E. Dennis (Dow Corning Corp., Midland, Mich.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 958-961. Research sponsored by the U.S. Department of Energy and NASA.

The use of silicone materials as thin conformal coatings for the protection of photovoltaic cells is investigated. Five silicone materials ranging from soft elastomers to high modulus resins were evaluated after exposure to UV radiation, outdoor weathering, thermal cycling at high humidity and temperature cycling from -40 C to 90 C. The effects of these tests were monitored by periodically measuring the output of two-cell circuit strings encapsulated with the various materials, and one exceptional silicone coating for which no significant changes in cell output were noted after 300 days was chosen as the best of the candidates. Because only a thin coating of the substance is needed, material costs 60% lower than those of previous encapsulants are now possible. O.C.

**A81-27226 \*** An improved lamination technique for solar arrays. A. Garcia, III (Spectrolab, Inc., Sylmar, Calif.) and C. Olson (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 962-964. Research sponsored by the U.S. Department of Energy and NASA

Encapsulating solar cells by lamination has been plagued with

## 02 SOLAR ENERGY

problems such as bubbles, cell shifting, ripples, and cracked cells. A low-cost laminating procedure has been developed using a double vacuum bagging technique and recently improved formulations of ethylene vinyl acetate, successfully minimizing these problems. The lamination fixturing used is described. The causes and cures of various problems are discussed and solutions to these problems presented. The apparent modulus of the face sheet seen by the module being laminated is believed to be the primary variable which must be optimized. Conditions at the module edge are also considered to be important for producing an acceptable product.

(Author)

**A81-27227 \*** **Development of glass encapsulation techniques for terrestrial photovoltaic arrays.** P. R. Younger, R. G. Tobin, G. A. Landis, W. S. Kreisman, and M. J. Nowlan (Spire Corp., Bedford, Mass.) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 965-969. 6 refs. Research supported by the U.S. Department of Energy and NASA.

Two parallel development programs for terrestrial solar cell module encapsulation and fabrication are reviewed, including the status of electrostatic bonding as an encapsulation technique. Current designs of electrostatically bonded modules are discussed, fabrication of which is now routine. The design of a high-efficiency module is presented, for which performance reliability features are discussed. This design is compatible with later generation changes such as the introduction of encapsulation by electrostatic bonding. Application of wire mesh contacts by electrostatic bonding has resulted in I-V curve fill factors of 0.74. Cell designs that would allow existing Pyrex glass to be used in electrostatically bonded modules are presented.

(Author)

**A81-27228** **An outlook for automated CIS solar cell factory.** K. Rajkanan (General Instrument Corp., Hicksville, N.Y.) and R. Singh (Colorado State University, Fort Collins, Colo.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 970-975. 11 refs. Natural Sciences and Engineering Research Council of Canada Grant No. 7879-G0089.

Recent experimental work on single-crystal silicon conductor-insulator-semiconductor (CIS) solar cells indicates that the performance of these devices is close to that of the best p-n junction solar cells. The CIS structure is a candidate in the manufacture of large-scale solar energy conversion arrays. It is noted that the stage is now set for the commercial production of these solar cells. A study of the manufacture of CIS solar cells using a fully automated production facility is discussed. The facility is designed to maximize processing flexibility, control, and testing and to ensure real-time process and product management. It is concluded that if solar-grade silicon can be obtained at \$10/kg (the Department of Energy's projected goal) and if CIS factory production is of the order of 250 MW/year, then the 1986 cost goal of \$0.50 per peak watt can easily be met.

C. R.

**A81-27229 #** **Economic feasibility of photovoltaic energy systems.** A. S. Clorfene (U.S. Department of Energy, Washington, D.C.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 986-989.

The economic feasibility of photovoltaic systems for family residences, intermediate-sized applications, and central power stations is examined. Economic feasibility is anticipated by 1986 for the homeowner market and non-investor-owned utilities (municipal utilities, rural electrical cooperatives, and federal utilities). The investor-owned utilities may achieve economic feasibility by 1990, but ownership of the residential system by the homeowner is preferable to ownership by the utility because of the higher fixed-charge rate for the latter. The system life-cycle cost will be

dominated by balance-of-system items which include marketing and distribution factors

L. S.

**A81-27230** **Photovoltaic concentrators** E. C. Boes (Sandia Laboratories, Albuquerque, N. Mex.) In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 994-1003. 16 refs. Research supported by the U.S. Department of Energy.

The current status of photovoltaic concentrator technology is reviewed. The developmental status of eight array designs is outlined, and performance and cost information is given. Concentrator array components are discussed with attention to high concentration designs, luminescent concentrators, reflective dish designs, and beam splitters. Concentrator cells, cell assemblies, optical concentrators as well as support, tracking, and drive systems are surveyed. The component developments examined include low series resistance silicon cells, multijunction devices, arched and domed acrylic lenses, and chemically strengthened glass.

L. S.

**A81-27231 \*** **Photovoltaic applications - Past and future.** H. L. Macomber (Monegon, Ltd., Gaithersburg, Md.), D. Faehn (U.S. Army, Mobility Equipment Research and Development Command, Fort Belvoir, Va.), S. I. Kaplan (Oak Ridge National Laboratory, Oak Ridge, Tenn.), J. N. Deyo (NASA, Lewis Research Center, Cleveland, Ohio), M. D. Pope (MIT, Lincoln Laboratory, Lexington, Mass.), and D. G. Schueler (Sandia Laboratories, Albuquerque, N. Mex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1004-1017. 25 refs.

This paper presents an overview of photovoltaic systems applications since the initiation of the U.S. National Photovoltaic Program in 1975. Experiences with these applications are summarized and some conclusions are drawn. Implications for future research, technology development and application experiments are drawn from the experiences to date.

(Author)

**A81-27234** **Simulation of a hybrid solar photovoltaic/solar thermal electric power system.** S. M. Moite, J. M. Kallis (Hughes Aircraft Co., Culver City, Calif.), J. A. Castle, E. Aerni (Spectrolab, Inc., Sylmar, Calif.), and R. L. Lessley (Bechtel National, Inc., San Francisco, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1036-1041. Research supported by the U.S. Department of Energy.

The objective of this project was to develop a tool for use in determining whether a hybrid solar electric power system has advantages, in terms of electrical efficiency and cost of electricity, over a pure solar-photovoltaic system or a pure solar-thermal-electric power system. A hybrid system is defined as an actively cooled photovoltaic system in which the waste heat is used to drive a generator. The cost and efficiency of candidate systems predicted by a steady-state design-point calculation were found to agree closely with those predicted by a more time-consuming hour-by-hour simulation.

(Author)

**A81-27235** **Short circuit currents and collection efficiencies in a-SiHx solar cells.** C. R. Wronski, B. Abeles, G. D. Cody, D. L. Morel, and T. Tiedje (Exxon Research and Engineering Co., Linden, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1057-1061. 10 refs.

Hydrogenated amorphous silicon (SiHx) Schottky barrier solar cells, prepared by RF and dc glow discharge decomposition of silane, were characterized by measurements of their AM1 short circuit currents and the spectral dependence of the collection efficiencies. The collection efficiency is interpreted in terms of a simple model

that assumes a constant collection width and photocarrier generation efficiency of unity (Author)

**A81-27236** Design of monolithic, multiple-gap, amorphous Si-Ge solar cells. V. L. Dalal and E. A. Fagen (Delaware, University, Newark, Del.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1066-1069. 19 refs.

The design principles for tandem, multiple-gap photovoltaic cells made from thin film materials with limited diffusion lengths and nonabrupt optical absorption edges are described. The principles are applied to a tandem two-cell a-Si, a-(Si, Ge) structure. It is shown that with optimum design such a structure should be capable of 17-20% solar conversion efficiency, even when the effective diffusion lengths are limited (Author)

**A81-27237** Proposed design of a-Si:H solar cells using ultrathin active layer to increase conversion efficiency. J. C. C. Fan and C. O. Bozler (MIT, Lexington, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1070-1073. 7 refs. USAF-supported research.

The conversion efficiency of amorphous silicon-hydrogen (a-Si:H) solar cells is limited because the minority-carrier collection length is much shorter than the solar absorption length. To overcome this limitation, a novel cell design is proposed utilizing an a-Si:H active layer less than one collection length thick, which is incorporated in a multiple-optical-pass structure so that most of the solar photons are absorbed in this ultrathin layer. Preliminary calculations indicate that this design can result in doubling the photocurrent (Author)

**A81-27238** Optimum design and device physics of the horizontally multilayered high voltage solar cells produced by plasma deposited amorphous silicon. Y. Hamakawa, H. Okamoto, and Y. Nitta (Osaka University, Toyonaka, Japan). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1074-1079. 18 refs.

**A81-27239 \*** Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells. S. S. Li, W. L. Wang, P. W. Lai (Florida, University, Gainesville, Fla.), R. Y. Loo, G. S. Kamath, and R. C. Knechtli (Hughes Research Laboratories, Malibu, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1080-1084. 10 refs. Grant No. NSG-1425.

The deep-level defects produced in high efficiency AlGaAs-GaAs solar cells by proton energies of 50, 100, 200, and 290 keV are investigated. Proton fluences were from 10 to the 10th to 10 to the 13th p/sq cm. The results show that the diode ideality factor varies between 1.9 and 2.1, indicating that the dominant current component is due to the recombination of electron-hole pairs via deep-level traps in the junction space charge region of these diodes. The recombination current increases with increasing proton fluence and proton energy. The reduction of open circuit voltage, short circuit current, and conversion efficiency in the irradiated cells relates directly to the density of the deep-level defects induced by proton irradiation. L.S.

**A81-27240 \*** Simultaneous radiation damage and annealing of GaAs solar cells. J. H. Heinbockel (Old Dominion University, Norfolk, Va.), E. J. Conway, and G. H. Walker (NASA, Langley Research Center, Hampton, Va.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1085-1089. 7 refs.

In this report, concepts and equations are developed to describe the simultaneous radiation damage and annealing of solar cells. The annealing characteristics of three types of defects are employed to study three examples of continuous irradiation and annealing. One example shows that the effective damage could be reduced by a factor of fifty. The difficulty of a laboratory experiment properly simulating the effects in space are discussed. Potential advantages of continuous annealing such as reduction of stable defect formation and omission of radiation cover glasses are presented. (Author)

**A81-27242 \*** High temperature properties of GaAlAs/GaAs heteroface solar cells. G. H. Walker, E. J. Conway (NASA, Langley Research Center, Hampton, Va.), K. H. Hong, and J. H. Heinbockel (Old Dominion University, Norfolk, Va.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1098-1101. 6 refs.

The properties of p-GaAlAs/p-GaAs/n-GaAs heteroface solar cells were determined in the temperature range from 25 C to 350 C. Illumination air mass zero (AM0) current-voltage measurements show that the short circuit current increases as a function of temperature up to 210 C and then decreases up to 350 C. The open circuit voltage and fill factor decrease linearly with increasing temperature. The spectral response shifts toward higher wavelengths with increasing temperature (Author)

**A81-27243** GaAs shallow-homojunction solar cells. J. C. C. Fan, G. W. Turner, R. P. Gale, and C. O. Bozler (MIT, Lexington, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1102-1105. 7 refs. USAF-supported research.

Electron radiation test results are reported for n(+)/p(p(+)) shallow-homojunction GaAs solar cells grown by chemical vapor deposition on single crystal substrates of either GaAs or Ge. It is found that such cells have superior resistance to 1-MeV electron radiation which produces effects approximating those due to space radiation. The possibility of using inexpensive crystalline Si sheets as substrates for GaAs solar cells is also discussed. V.L.

**A81-27244** Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems. J. A. Castle, E. Aerni (Spectrolab, Inc., Sylmar, Calif.), S. M. Moite, and J. M. Kallis (Hughes Aircraft Co., Culver City, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1106-1112. 6 refs. Research supported by the U.S. Department of Energy.

Conceptual designs of solar electrical power plants utilizing both photovoltaic and thermal subsystems have been evaluated. These systems included both distributed and central receiver type concepts using both silicon and gallium arsenide cells. Heat engine cycles covering a wide range of temperatures were evaluated in the overall optimization. An overall system efficiency of 17% was obtained for a hybrid concept utilizing gallium arsenide solar cells in a distributed field using an organic Rankine cycle heat engine. Optimum hybrid systems tend toward low operating temperatures and low thermal-electric conversion. The economic performance is comparable with photovoltaic-only and thermal-only systems. (Author)

**A81-27246** Photovoltaic intermediate applications. K. L. Biringer (Sandia Laboratories, Albuquerque, N. Mex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1121-1125. 18 refs. Research supported by the U.S. Department of Energy.

The paper discusses intermediate applications of on-site photovoltaic systems which cover grid connected applications between residential and central power stations, ranging in size from 20 kW to several megawatts. Characteristics of the load profiles and economic parameters for different users are examined along with energy

## 02 SOLAR ENERGY

consumption data for various applications, including commercial, industrial, agricultural, multifamily residential, and municipal. It is pointed out that with the achievement of the DOE 1986 price goal of 70 cents/watt (1980 dollars) for photovoltaic modules, many significant intermediate application subsectors will be economically viable markets for photovoltaics. V.L.

**A81-27247 \*** **Flat-plate photovoltaic array design optimization.** R. G. Ross, Jr. (California Institute of Technology, Jet Propulsion Laboratory, Energy Technology Engineering Section, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1126-1132. 7 refs.

An analysis is presented which integrates the results of specific studies in the areas of photovoltaic structural design optimization, optimization of array series/parallel circuit design, thermal design optimization, and optimization of environmental protection features. The analysis is based on minimizing the total photovoltaic system life-cycle energy cost including repair and replacement of failed cells and modules. This approach is shown to be a useful technique for array optimization, particularly when time-dependent parameters such as array degradation and maintenance are involved. V.L.

**A81-27248** **Low cost structures for photovoltaic arrays.** H. N. Post (Sandia Laboratories, Albuquerque, N. Mex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1133-1138. 6 refs. Research supported by the U.S. Department of Energy.

The design and analysis of low cost, ground-mounted flat plate non-tracking array structures for use in large intermediate and central power station applications are described. Design requirements for the array structure, especially wind loading criteria, are discussed and problem areas associated with the integration of the module panel and support structure are identified. Support system costs which include site preparation, foundation and support structure, and installation costs are summarized. Wind effects data derived from comprehensive wind tunnel tests of flat plate array field models are presented and compared with wind loading estimates based on existing design standards. (Author)

**A81-27249** **Photovoltaic system sizing analysis.** G. J. Jones (Sandia Laboratories, Albuquerque, N. Mex.) and E. M. Mehalick (General Electric Co., Philadelphia, Pa.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1139-1143. Research supported by the U.S. Department of Energy.

A primary concern in designing any photovoltaic system is the determination of its 'optimum' size. In grid-connected applications this is normally considered to be one which delivers energy to the owner's load at the minimum lifecycle cost, including the cost of backup utility energy. A great deal can be learned about system design by making use of simple analytical relationships to study the effect of various design parameters on sizing. The purpose of this paper is to show one such model and apply it to study the effect of load and the fixed and variable costs on photovoltaic system sizing. (Author)

**A81-27250** **Design and qualification of BSR-solar cells for future solar arrays.** H. Bebermeier (Telefunken AG, Wedel, West Germany). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1144-1147.

The development of back-side-reflection (BSR) solar cells is discussed with reference to their design, performance, effect of the cover glass on the in-orbit performance, and qualification testing. The optical IR-reflectivity of the cells varies between 60 and 70%; solar absorptance of a covered cell is 0.76. It is shown that cerium

doped microsheet glass is a good solution for covering BSR cells due to excellent optical characteristics. V.L.

**A81-27251** **Advanced module technique with thin solar cells.** J. Koch and W. Snakker (Telefunken AG, Fachbereich Neue Technologien, Wedel, West Germany). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1148-1153. 12 refs. Research supported by the Bundesministerium für Forschung und Technologie.

Test modules of solar cells 80-100 microns thick have been manufactured by a process currently used for all solar arrays in order to find out whether the thin cells would have a higher fracture rate than the thick cells. An analysis of cell performance during manufacturing is given for the following steps: n-side welding, cover glass bonding, electrical performance measurement, p-side welding, bonding to substrates, and handling. The necessary process modifications are discussed. Results of extended environmental tests indicate that the behavior of thin cell modules is not different from that of modules over 200 microns thick. V.L.

**A81-27254 \* #** **Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions.** K. S. Jefferies (NASA, Lewis Research Center, Space Propulsion and Power Div., Cleveland, Ohio). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1164-1168. 6 refs.

Solar array systems have been studied and compared for earth orbital and orbit transfer missions with the principal objective of quantifying the cost tradeoffs between gallium arsenide and silicon array for specific classes of missions and system characteristics. For the missions considered, it is found that the purchase cost advantage of Si arrays is not overcome by the greater radiation resistance of GaAs arrays. The use of reflectors for concentration may significantly reduce the power system cost. However, GaAs arrays benefit considerably more from solar concentration than Si arrays in terms of mission cost because of their higher allowable temperature. In the case of orbit transfer missions, a cover glass thickness of at least 0.05 cm is recommended to reduce total mission cost. V.L.

**A81-27255** **SnO<sub>2</sub>/polycrystalline silicon solar cells.** A. K. Ghosh, T. Feng, and H. P. Maruska (Exxon Research and Engineering Co., Linden, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1169-1172. 6 refs. Contract No. DE-AC03-79ET-23047.

High efficiency solar cells (area greater than 1 sq cm) have been fabricated by spraying SnCl<sub>4</sub> onto heated polycrystalline silicon substrates at a temperature lower than 400 °C for an interval of a minute or less. For poly-Si with grains of approximately 1 mm, the efficiency is approximately 10 percent. After a small initial decrease in efficiency, the SnO<sub>2</sub>/Si devices become more stable. A theory has been developed which allows the calculation of device parameters for polycrystalline silicon solar cells, and experimental results for SnO<sub>2</sub>/Si cells are in good agreement with it. The theory of SnO<sub>2</sub>/Si solar cells developed for single crystal devices cannot be totally extended to poly-Si because of grain boundary recombination problems. Results are presented describing grain size effects on device parameters. (Author)

**A81-27257** **Degradation of ITO/p-Si solar cells.** S. M. Goodnick, C. W. Wilmsen, and J. F. Wager (Colorado State University, Fort Collins, Colo.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1175-1180. 9 refs.

The stability of ITO (indium tin oxide) on p-silicon solar cells has been investigated through accelerated life testing. It is found that

ITO/Si solar cells degrade at temperatures above 255 C due to the growth of interfacial oxide. Extrapolation of experimental data to room temperature shows that this process should occur very slowly and should not be a significant problem in actual cell operation. Light and load tests at room temperature and at 82 C are consistent with this conclusion. V.L.

**A81-27259** Low-cost high-efficiency SnO<sub>2</sub>/n<sup>+</sup>/p Si heteroface solar cell fabricated by paint-on-diffusant method. H. Takakura, Y. Hamakawa (Osaka University, Toyonaka, Japan), and M. S. Choe (Osaka University, Toyonaka, Japan; Jeonbug National University, Jeonju, South Korea). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1186-1191. 11 refs.

A new SnO<sub>2</sub>/n<sup>+</sup>/p Si heteroface solar cell has been developed in which the SnO<sub>2</sub> window acts both as a highly conductive surface layer and as an antireflective coating. The cell junction is fabricated by the paint-on-diffusant method, and the SnO<sub>2</sub> film is formed by chemical vapor deposition. An efficiency of 14.0% has been obtained for a 1 x 1 sq cm cell under 72 mW/sq cm sunlight. V.L.

**A81-27260** Physical and chemical characterization of R.A.D. silicon films. A. Rocher, C. Fontaine (CNRS, Paris; CNRS, Laboratoire d'Optique Electronique, Toulouse, France), M. Oberlin, J. Goma (CNRS, Paris, Orléans, Université, Orléans, France), C. Burggraf, J. P. Deville (CNRS, Paris, Strasbourg I, Université, Strasbourg, France), M. Aucouturier, and A. Chari (CNRS, Paris, Paris XI, Université, Orsay, Essonne, France). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1192-1197. 14 refs. Research supported by the Centre National de la Recherche Scientifique and Commissariat à l'Energie Solaire.

**A81-27261 \*** Grain size dependence of silicon solar cell parameters. K. M. Koliwad and T. Daud (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1204-1208. 8 refs. Research sponsored by the U.S. Department of Energy and NASA.

Measurements of the non-uniform diffusion length of the minority carriers near grain boundaries in polycrystalline silicon have been used to develop an analytical model for the calculation of solar cell output as a function of grain size. Experimental results are presented which verify the theoretical analysis. Variation of open circuit voltage and fill factor with grain size is discussed. V.L.

**A81-27262** Development of amorphous silicon cells. J. J. Hanak, S. Faughnan, V. Korsun, and J. P. Pellicane (RCA Laboratories, Princeton, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1209-1213. 8 refs. Research sponsored by RCA; Contract No. XJ-9-8254.

**A81-27263** Photovoltaic behavior of amorphous silicon-based alloys. W. Czubytyj, K. Ng, A. Madan (Energy Conversion Devices, Inc., Troy, Mich.), and M. Shur (Minnesota, University, Minneapolis, Minn.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1214-1217. 12 refs.

Experimental results are presented on photovoltaic devices using amorphous Si-H-F alloys as the active layer. Thin films of a-Si-F-H are fabricated from SiF<sub>4</sub> and H<sub>2</sub> gas mixtures using a capacitive radio frequency glow discharge. The inclusion of H and F leads to a low level of localized states; because of the low mobilities of electrons and holes, the diffusion lengths are low and the light generated

current is mainly due to drift. A model is proposed which shows how the short circuit current densities and the light current-voltage characteristics depend on the depletion width. V.L.

**A81-27264** CO-sputtered doped amorphous silicon as a photovoltaic material. M. G. Thompson and D. K. Reinhard (Michigan State University, East Lansing, Mich.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1218-1220. 8 refs. NSF Grant No. ENG-79-10896.

**A81-27265** Optical absorption by gap states in amorphous silicon. R. S. Crandall (RCA Laboratories, Princeton, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1221-1223. 12 refs.

Measurements of the steady state primary photocurrent for photon energies between 0.58 and 2.0 eV have been made on a-Si:H solar cell structures by means of blocking contacts. From these, the absorption coefficient for weakly absorbing gap states has been determined. In addition, transient secondary photocurrents have been measured to determine the drift mobility of the majority carriers. It is shown that photon absorption by gap states produces electrons in the same state as absorption by band states. This result leads to the conclusion that holes are mobile in gap states above the valence band. V.L.

**A81-27266** Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics. G. A. Swartz and R. Williams (RCA David Sarnoff Research Center, Princeton, N.J.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1224-1228.

Barrier properties, such as barrier height and depletion distances in the p<sup>+</sup> and n layers of amorphous silicon solar cells have been determined from measurements of the differential current-voltage characteristics. The barrier heights determined from these measurements approach the open circuit potential. The depletion distances in the n layer, which are calculated from the measured capacitance of test diodes alongside the test solar cells, are in agreement with the depletion distances from the differential of the I-V curves. V.L.

**A81-27267** Review of in-orbit performance of ESA's spacecraft solar arrays. E. G. Suppa and R. L. Crabb (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1229-1233.

The predicted performances of solar arrays on ESA spacecraft are compared with the actual orbital data. An analysis of the flight data has made it possible to identify some aspects of solar array design relevant for the optimization of future arrays. These aspects include: the adequacy of the design margin used for sizing solar arrays, the accuracy of the electrical performance test methods and of the solar cell standards used during preflight testing, and the uncertainty in the models of radiation environment. V.L.

**A81-27268 #** NTS-2 solar cell experiment after two years in orbit. R. L. Statler and D. H. Walker (U.S. Navy, Naval Research Laboratory, Washington, D.C.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1234-1239. 11 refs. Navy-USAF-supported research.

In-orbit test data are presented for silicon and gallium arsenide solar cells involved in the solar cell experiment aboard the NTS-2

## 02 SOLAR ENERGY

satellite. Some of the conclusions, after 811 days of orbital performance, are (1) the effect of the trapped electron environment at 11,000 nm, 63 deg inclination orbit on silicon solar cells can be adequately predicted by multiplying the equivalent 1-MeV fluence obtained from the AEI-7 model by two, (2) the total loss in maximum power for production type silicon cells varies from 31.6 to 20.6%, and (3) the (AlGa)As-GaAs cells with 1 micron junction depths retained good maximum power output at a value of 46.2 mW.

V.L.

**A81-27269** Integral glass covering of spacecraft solar cells by electrostatic bonding. P. R. Younger, G. A. Landis, and R. G. Tobin (Spire Corp., Bedford, Mass.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1240-1245. 6 refs. Contract No. F33615-77-C-3120.

The development of electrostatic bonding as a covering technique for spacecraft solar cells is reviewed with reference to the effects on bonding of cell parameters such as base material resistivity, contact metallization, junction depth, cell and metallization thickness, back surface fields, and wraparound contacts. The main cell type investigated is the MLAR coated cell, results of bonding 2 mil thick cells to 3 mil thick covers are reported. Yields of over 90% have been demonstrated within single lots of substantial size.

V.L.

**A81-27270** High efficiency solar panel - Phase II. J. Fodor and R. Opjorden (Spectrolab, Inc., Sylmar, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1246-1251. Contract No. F33615-77-C-3108.

The paper reviews the results of the HESP (high efficiency solar panel) project, phase II, whose major objective has been the development of a production ready high-efficiency space qualified device. Process advances incorporated into the HESP device have resulted in maximum power performance improvements of 17.6% BOL and 9.4% after electron irradiation over 1976 production devices. The program has also yielded a process which, if applied to 50 micron devices, promises even greater performance and weight advantages.

V.L.

**A81-27271\*** Concentrator designs for space photovoltaic arrays. D. E. Rockey (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.) and I. Baker (Hughes Aircraft Co., El Segundo, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1252-1257. 8 refs. Contract No. NAS7-100.

The unique set of operating constraints determining key concentrating solar array design characteristics for low earth orbital, geosynchronous and interplanetary missions are considered. Minimum cost is crucial at low earth orbits, performance and design life are needed in geosynchronous orbit, and structural pointing accuracy and radiation resistance are essential in interplanetary designs. The impact of such emerging technologies as ultrathin cells, gallium arsenide cells and cold mirrors is discussed. Power-to-mass ratios as high as 200 W per kilogram at a distance of 1 astronomical unit from the sun are possible, using concentrators in conjunction with gallium arsenide arrays.

O.C.

**A81-27272** SOLCEL II - An improved photovoltaic system analysis computer program. E. R. Hoover (Sandia Laboratories, Albuquerque, N. Mex.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1258-1261.

The characteristics and performance of a photovoltaic system analysis program, SOLCEL II, are reported. Possessing greater detail of individual components and flexibility than its precursor, the

program simulates the annual performance of specific solar arrays and optimizes design parameters or performs sensitivity studies in a single computer run. It contains 12 orientation and tracking schemes, three types of collectors, different dc/ac inverter models, four economic analysis options and tradeoffs between execution speed and details of each component model.

O.C.

**A81-27273** Optimisation of total annual energy output from constant/adjustable tilt solar PV arrays. R. Lahri, Y. A. Gnanadner, and S. K. Sangal (Central Electronics, Ltd., Sahibabad, India). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1262-1266. Research supported by the Ministry of Industrial Development.

A detailed experimental study of constant-tilt photovoltaic arrays with a view toward electrical storage requirement minimization and annual electrical output maximization is presented. It was found that while seasonal adjustments of the array tilt angle does not appreciably alter the annual electrical output, the distribution of the output is significantly changed. This variation could be matched with the load requirement pattern to reduce size and electrical storage requirements. It is concluded that where manual labor is cheap, manually-adjustable arrays are more cost effective than optimized constant-angle systems.

O.C.

**A81-27274** Solar input and solar data computation for the engineering of solar systems - Transients' simulation. G. Russo. In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1267-1271. 9 refs.

The construction of an analytical model of the atmosphere, for computing solar energy data with low computation time, is considered. The selective interaction between the electromagnetic radiation and the atmosphere is studied. Graphs giving a comparison of experimental and computed values of the global energy flux are presented. It is concluded that this model is a very good approximation on a monthly basis, and is slightly affected by a lack of frequency of the input data on those days when the global flux equals the diffusion component of the radiation. The model is operational and has been compared with experimental values.

K.S.

**A81-27275** PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements. T. J. Lambarski, R. M. Turfler, K. E. Bardwell (BDM Corp., Albuquerque, N. Mex.), and C. B. Rogers (Sandia Laboratories, Albuquerque, N. Mex.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1272-1276. 8 refs.

The Photovoltaic Transient Analysis Program (PV-TAP) computer code is described. PV-TAP is able to handle a variety of photovoltaic analyses on systems ranging from single PV cells to megawatt arrays. Trade-off studies can be performed for device fabrication, module, panel, and array design, heat transfer and cooling optimization, and cell burnout protection. Analyses can be conducted for power conditioning equipment design, and collector/concentrator selection and design. The effects of illumination and load transients, and of fixed and propagating shadows can also be studied. The input structure is user oriented. The program features include a large selection of network elements, and the ability to accept user-defined models.

L.S.

**A81-27276** A comparison of theory and experiment for photovoltaic/thermal collector performance. S. D. Hendrie and P. Raghuraman (MIT, Lexington, Mass.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1277-1283. 6 refs. Research sponsored by the U.S. Department of Energy.



The performance of air and liquid combined photovoltaic-thermal (PV-T) collectors is examined. Thermal efficiencies with concurrent electric energy collection and electrical efficiencies are compared with analytical results for each collector. The air PV-T collector demonstrated a low cell-to-fluid conductivity, and the liquid PV-T collector, low cell-to-absorber and cell-to-tube wall conductivities. For both collectors, the computed thermal loss coefficient and transmission absorption product indicate performance improvement areas. The loss coefficients could be lowered by a higher cell-packing factor and a higher cell-to-fluid conductivity. The transmission absorption products could also be improved with a higher cell-packing factor as well as by higher glass cell-encapsulant transmissivity. L.S.

**A81-27277** Performance and reliability of photovoltaic modules at various MIT LL test sites. S. E. Forman and M. P. Themelis (MIT, Lexington, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1284-1289. 8 refs. Research sponsored by the U.S. Department of Energy.

**A81-27278 \*** Qualification test results for DOE solar photovoltaic flat panel procurement - PRDA 38. J. S. Griffith (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1290-1295. Research sponsored by the U.S. Department of Energy and NASA.

Twelve types of prototypes modules for the DOE Photovoltaic Flat Panel Procurement (PRDA 38) were subjected to qualification tests at the Jet Propulsion Laboratory according to a new specification. Environmental exposures were carried out separately and included temperature cycling, humidity, wind simulation, and hail. The most serious problems discovered were reduced insulation resistance to ground and ground continuity of the metal frames, electrical degradation, erratic power readings, and delamination. The electrical and physical characteristics of the newly received modules are also given. (Author)

**A81-27279 \*** Influence of module requirements on flat plate module design evolution. J. C. Arnett and R. G. Ross, Jr. (California Institute of Technology, Jet Propulsion Laboratory, Energy Technology Engineering Section, Pasadena, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1296-1298. Research sponsored by the U.S. Department of Energy and NASA.

Photovoltaic module design features and performance characteristics have undergone significant evolutionary changes between pre-1975 First Generation configurations and current Third Generation design technology. A major contributor to this evolution was an iterative process of continuing design guideline and specification development for major module procurements. Module manufacturers have actively responded to these evolving requirements through progressively improving designs. This iterative/feedback process is described. Interim design guidelines and preliminary design options reflecting the LSA 1982 Module Technical Readiness Specification (November 1979) are described with respect to previous design and performance requirements. (Author)

**A81-27280** Qualification testing of photovoltaic concentrator modules for system application experiments. J. F. McDowell, D. A. Pritchard, and A. E. Verardo (Sandia Laboratories, Albuquerque, N. Mex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1299-1305. Research supported by the U.S. Department of Energy.

**A81-27281** Improved polycrystalline thin film gallium arsenide MOS solar cells. S. S. Chu, T. L. Chu, Y. T. Lee, C. L. Jiang, and A. B. Kuper (Southern Methodist University, Dallas, Tex.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1306-1310. 7 refs. Contract No. EG-77-C-01-4042.

Polycrystalline gallium arsenide thin films were deposited on tungsten-coated graphite substrates by the reaction of gallium, hydrogen chloride, and arsine in a hydrogen flow system. The deposited films were used for the fabrication of MOS type solar cells. The current-voltage characteristics of the solar cells can be improved by using a thin gallium arsenide phosphide layer on the surface of, or a brief zinc diffusion into, the gallium arsenide film. Large area (9 sq cm) solar cells with AM1 efficiencies of higher than 5% (without antireflection coating) have been prepared. With proper AR coating, the AM1 efficiency would be higher than 7.5%. (Author)

**A81-27282 #** Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells. L. L. Kazmerski, P. J. Ireland, and P. Sheldon (Solar Energy Research Institute, Golden, Colo.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1311-1315. 13 refs.

The performance of thin-film, polycrystalline, Schottky-barrier GaAs solar cells are evaluated in terms of the chemistry and electrical activity of grain and grain boundary regions. Surface analysis techniques (Auger electron spectroscopy, secondary ion mass spectroscopy, and X-ray photoelectron spectroscopy) are used to determine compositional properties which are correlated with electron-beam induced current measurements of selected areas and with photovoltaic device performance. Passivation by grain boundary oxidation is investigated, and the phase and composition of these oxides are evaluated. The quality of the intragrain material is assessed to be as important as the activity of the intergrain regions in determining the performance of these photovoltaic devices. (Author)

**A81-27283** The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells. L. M. Fraas (Chevron Research Co., Richmond, Calif.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1316-1323. 19 refs.

**A81-27284** Grain boundary edge passivated solar cells on thin film GaAs. K. P. Pande, D. H. Reep, S. K. Shastri, A. S. Weiner, J. M. Borrego, and S. K. Ghandhi (Rensselaer Polytechnic Institute, Troy, N.Y.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1324-1329. 6 refs. Contract No. X1-9-8000-1.

A technique for the fabrication of thin film polycrystalline GaAs solar cells with grain boundary edge passivation is described. The Schottky barrier cells are prepared on molybdenum substrates by the metal-organic process. Selective anodization techniques are used for passivation of the grain boundary edge, resulting in solar cells with a conversion efficiency of 5.7% AM1 with no anti-reflective coating. The cells have a collection efficiency close to the theoretical value for single crystal cells with no anti-reflective coating (23 mA/sq cm). The relationship of the fabrication process to electrical performance is discussed. L.S.

**A81-27285** Efficient large-grained GaAs homojunction solar cells. G. W. Turner, J. C. C. Fan, R. P. Gale, and O. Hurtado (MIT, Lexington, Mass.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1330-1334. 10 refs.

## 02 SOLAR ENERGY

Engineers, Inc., 1980, p. 1330-1332. 9 refs. USAF-supported research.

Conversion efficiencies exceeding 13% at (AM1) have been obtained for antireflection-coated GaAs homojunction solar cells grown by chemical vapor deposition on large-grained substrates. A new passivation method, involving the surface electroplating of tin and subsequent heat treatment, has been found to significantly improve the open-circuit voltage. Open-circuit voltages approaching 0.9 V have been obtained for the first time in polycrystalline GaAs solar cells. (Author)

**A81-27287\*** Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques. Y. C. M. Yeh, K. L. Wang, B. K. Shin, and R. J. Stirn (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1338-1342. 6 refs.

GaAs epitaxial films were grown by chemical vapor deposition using organo-metallic sources (OM-CVD) on single crystal and polycrystalline bulk GaAs, as well as on bulk polycrystalline and recrystallized thin-film Ge substrates. Details of Antireflecting Metal-Oxide-Semiconductor (AMOS) solar cells fabricated on GaAs films grown on bulk polycrystalline Ge and recrystallized Ge thin-film substrates will be discussed, as well as preliminary photovoltaic results obtained for n(+)/p homojunction structures. (Author)

**A81-27288** Chemistry and preparation of III-V heterojunction solar cells. K. J. Bachmann, F. A. Thiel, H. Schreiber, Jr., W. R. Sinclair (Bell Telephone Laboratories, Inc., Murray Hill, N.J.), and T. Bitner (Western Electric Co., Reading, Pa.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1343, 1344. 10 refs.

Solar energy conversion efficiencies of indium tin oxide (ITO) heterojunction solar cells with III-V group alloys are reported. The heterojunctions were obtained by the RF sputtering of ITO on single crystals of p-type InAs and InP and ternary Ga(x)In(1-x)P and InP(y)As(1-y) alloys. In contrast to expectations based on the variation of conversion efficiency with semiconductor bandgap, the efficiencies of the ITO/Ga(x)In(1-x)P junctions are found to decrease monotonically with increasing x, while those of the ITO/InP(y)As(1-y) are found to reach a highest efficiency at y = 0.95. The applicabilities of the ideal heterojunction model, the buried homojunction model and the SIS model of III-V heterojunctions to ITO/InP, InAs and GaP devices are then considered on the basis of Auger and ion microprobe analyses. A.L.W.

**A81-27290** High efficiency MIS/inversion layer silicon solar cells. R. E. Thomas, C. E. Norman, and R. B. North (Carleton University, Ottawa, Canada). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1350-1353. 11 refs.

The use of tantalum oxides to create an inversion layer in silicon which can be contacted by an MIS grid to form an MIS/inversion layer solar cell is examined. Ta<sub>2</sub>O<sub>5</sub> layers were formed by the electron beam evaporation of tantalum films on p- and n-type silicon with subsequent oxidation at 530 C, the swept electron-beam evaporation of Ta<sub>2</sub>O<sub>5</sub> pressed powder and by spin-on processes resulting in the deposition of a Ta<sub>2</sub>O<sub>5</sub> coating containing 20% SiO<sub>2</sub>. Charge measurements obtained from the aluminum capacitors defined on the Ta<sub>2</sub>O<sub>5</sub> surface reveal charge densities of  $-3 \times 10$  to the 11th,  $5 \times 10$  to the 11th and  $1.3 \times 10$  to the 12th/sq cm for the thermal, evaporated and spin-on tantalum oxide coatings, respectively, while all three oxides showed sufficient reflectance to act as antireflection coatings. For solar cells fabricated by the growth of MIS oxide at 450 C, total area AM1 efficiencies up to 16% were measured for the spin-on coatings on single and polycrystalline

substrates, with short circuit currents up to 40 mA/sq cm, open circuit voltages up to 0.57 and fill factors of up to 0.80. A.L.W.

**A81-27293** MIS silicon grating solar cells on BSF substrates. R. Girisch, F. D'Hoore, P. Van Halen, R. Mertens, K. Petit, P. De Pauw, and R. Van Overstraeten (Leuven, Katholieke Universiteit, Heverlee, Belgium). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record.

New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1366-1369. 5 refs. Research supported by the Nationaal Fonds voor Wetenschappelijk Onderzoek, European Economic Community Contract No. 439-78-1-ESB.

This paper deals with MIS grating type solar cells on single crystalline silicon substrates. Experiments are reported that confirm theoretical predictions showing that a minority carrier blocking backside contact is necessary to obtain good collection efficiencies, at least in MIS grating cells where collection only occurs through a two-dimensional diffusion mechanism. On the other hand, in grating cells where an inversion layer is induced in the spacing between the grid pattern, as is the case for SiO<sub>2</sub> covered cells, the collection efficiency and the short circuit current depend only weakly on the nature of the backside contact. (Author)

**A81-27294** A 14 percent efficiency SnO<sub>x</sub>/SiO<sub>2</sub>/n-Si solar cell. E. Saucedo and J. Mimila-Arroyo (Instituto Politécnico Nacional, Mexico City, Mexico). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1370-1375. 26 refs. Research supported by the Instituto Politécnico Nacional.

SIS solar cells were fabricated by chemical-spray deposition of a thin SnO(x) film on n-type Si. An analysis of transport properties as a function of temperature showed that two conduction mechanisms exist: a tunnel effect at low forward bias and a mechanism for which an ideality factor of the diode curve of about 1 and an activation energy of 0.87 were found. Under 100 mW/sq cm sunlight, the cells showed the following performance: short-circuit current of 36 mA/sq cm, open-circuit voltage of 525 mV, fill factor of 0.74, and efficiency of 14 percent. B.J.

**A81-27295** Semiconductor-insulator-semiconductor (SIS) solar cells - Indium-tin-oxide on silicon. D. Burk, J. Shewchun (Brown University, Providence, R.I.), McMaster University, Hamilton, Ontario, Canada), M. Spitzer, J. J. Loferski (Brown University, Providence, R.I.), R. Singh, J. Hadrevi (McMaster University, Hamilton, Ontario, Canada), and J. Kukulka (McMaster University, Hamilton; Solar Cells, Ltd., Burlington, Ontario, Canada). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1376-1383. 12 refs. Research supported by Brown University and National Research Council of Canada, Contract No. XS-9-8233-1.

Experimental results for indium-tin oxide, single crystal silicon solar cells fabricated by ion beam sputtering as well as other methods have plateaued at 12%. The theory predicts a maximum efficiency of 20%. A systematic study of the process parameters was undertaken along with an examination of loss mechanisms to improve the efficiency above this 12% range. An efficiency of 15% was achieved for indium-tin oxide-pSi cell on single crystal material and a 9.5% efficiency on polycrystalline silicon. B.J.

**A81-27296** The ecliptic-align v-grooved hyperjunction cell. R. R. Lucero (Technical Advent Circle, Honolulu, Hawaii). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1386, 1387.

A new generation of thin-film solar cell, the ecliptic-align v-grooved hyperjunction cell, is reported. The cell, in which the active layers are deposited on a substrate with a v-grooved surface, have three main advantages. (1) four successive light incidences result

in significant reduction of reflectivity, at all sun angles, even with highly reflective surfaces, (2) approximately 2 and 1/2 times the junction area per cell area results in a reduction of relative current density and thus reduces series resistance; and (3) a reflective backing can be added for up to four passes through the active layers. The first two advantages are especially significant for MIS and SIS cells. B.J.

**A81-27297**      **Stacked multiple-bandgap solar cells prepared by CVD techniques.** R. D. Dupuis, P. D. Dapkus, R. P. Ruth, J. J. Coleman, W. I. Simpson (Rockwell International Electronics Research Center, Anaheim, Calif.), H.-T. Yang, and S. W. Zehr (Rockwell International Electronics Research Center, Anaheim and Thousand Oaks, Calif.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1388, 1389. Contract No. F33615-78-C-2036.

Thin-film stacked multiple-bandgap solar cell (SMBSC) structures, consisting of two cells electrically and optically in series, have been fabricated entirely by chemical vapor deposition techniques. SMBSCs involving a window-type GaAlAs cell grown on a heteroface GaAs cell, with a thin GaAs n(+)/p(+) tunnel junction interconnection, have been grown by metalorganic CVD and have open-circuit voltage values of greater than 2.0 V under AM0 illumination. Other SMBSC structures investigated included a GaAs cell grown by metalorganic CVD on a Ge cell grown by GeH<sub>4</sub> pyrolysis, with a GaAs connecting tunnel junction. B.J.

**A81-27299**      **Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses.** J. A. Bragagnolo, R. W. Birkmire, and J. E. Phillips (Delaware University, Newark, Del.). In: Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1400, 1401.

A CdS texturing process and a Cu<sub>2</sub>S formation procedure have been combined to give CdS/Cu<sub>2</sub>S cells with low reflectance losses but with high open circuit voltages in excess of 0.54 V. As a consequence conversion efficiencies of 10% are anticipated. (Author)

**A81-27310**      **The aerodynamics of heliostats for solar power plant applications.** J. Xerikos, H. H. Tang (McDonnell Douglas Corp., Huntington Beach, Calif.), J. E. Cermak, and J. A. Peterka (Colorado State University, Fort Collins, Colo.). In: Wind engineering. Proceedings of the Fifth International Conference, Fort Collins, Colo., July 8-14, 1979. Volume 2. Oxford, Pergamon Press, Ltd., 1980, p. 1173-1184. 7 refs.

The heliostat field-array test, conducted under the sponsorship of DOE in the meteorological wind tunnel of Colorado State University, investigated the characteristics of the steady-state wind loads produced by airflow patterns in and around several configurations of heliostat clusters with and without a wind fence. The characteristics of natural boundary-layer winds at the actual site were simulated in the tunnel. A key conclusion of the study was that wind loads can be reduced to a minimum level through the use of properly designed and located fences used in combination with an efficiently distributed field array. (Author)

**A81-27552** #      **Construction and startup performance of the Miamisburg salt-gradient solar pond.** L. J. Wittenberg and M. J. Harris (Monsanto Research Corp., Miamisburg, Ohio). *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 11-16. 13 refs. Contract No. DE-AC04-76DP-00053.

An account is given of the construction and 1.5 years of operation of the Miamisburg, Ohio salt-gradient solar pond which, with 2020 sq m, is the largest solar collector in the U.S. The 18% sodium chloride solution pond has reached storage temperatures of 64 C in July and 28 C in February. Under steady-state conditions, conservative heat-yield estimates on the order of 962 million Btu have been made. The heat is used to warm-up a summer outdoor

swimming pool and in winter a recreational building. Installation costs were only \$35/sq m, and heat costs based on a 15-year depreciation of installation costs is below that of fuel oil heating, at \$9.45 per million Btu. Further study is recommended for maintenance of water clarity, metallic component corrosion and assurance of pond water containment. O.C.

**A81-27554** #      **Second law analysis and synthesis of solar collector systems.** A. Bejan (Colorado, University, Boulder, Colo.), D. W. Kearney, and F. Kreith (Solar Energy Research Institute, Golden, Colo.). *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 23-28. 19 refs. Research supported by the U.S. Department of Energy.

The second law of thermodynamics is used to analyze the potential for energy conservation in solar collector systems. It is shown that the amount of useful energy (exergy) delivered by solar collector systems is affected by heat transfer irreversibilities occurring between the sun and the collector, between the collector and the ambient air, and inside the collector. Using as working examples an isothermal collector, a nonisothermal collector, and the design of the collector-user heat exchanger, the optimum operating conditions for minimum heat transfer irreversibility (maximum exergy delivery) are derived. (Author)

**A81-27555** #      **An algorithm for calculating monthly-average radiation on inclined surfaces.** S. A. Klein and J. C. Theilacker (Wisconsin, University, Madison, Wis.). *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 29-33. 14 refs. Contract No. EY-76-S-02-2588-A003.

**A81-27556** #      **Experimental comparison of control strategies for solar energy systems incorporating dual storage tanks.** R. L. T. Wolfson and H. S. Harvey (Middlebury College, Middlebury, Vt.). *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 47-51. 5 refs. Contract No. EM-78-S-4719.

Two identical solar collector systems were operated side by side for a 67 day period. Data acquisition and control of both systems were accomplished by a minicomputer. One system's control strategy kept its two storage tanks at the same temperature, simulating a single tank. The other system employed a dual temperature strategy designed to allow greater flexibility in adjusting to varying isolation. The dual temperature strategy showed a modest 4 percent gain in energy delivered to a load. (Author)

**A81-27557** #      **High-flux solar absorber concept for central receiver power plants.** B. D. Pomeroy (General Electric Co., Schenectady, N.Y.), J. M. Roberts (General Electric Co., Sunnyvale, Calif.), and T. V. Narayanan (Foster Wheeler Development Corp., Livingston, N.J.). *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 52-55. 7 refs. Contract No. EM-78-C-03-1725.

For cylindrical receivers with a capacity of about 400 MW/t, an aim-at-the-belt focusing strategy can produce average fluxes the order of 0.5 MW/sq m with peaks as high as 2 MW/sq m. An absorber concept is described which uses liquid sodium coolant and a three-header configuration to efficiently capture this solar power. The mechanical design of this absorber is discussed and thermal performance estimates are presented showing the solar-capture efficiency over a range of solar intensities. The sodium-flow characteristics and some potential flow-control problems are also described. A thermal-stress analysis is presented which shows that a limiting factor on the flux capability may be tube-wall creep/fatigue failure and not the heat-transfer capability of sodium. (Author)

**A81-27558** #      **Design improvements in LiBr absorption chillers for solar applications.** G. Grossman, J. R. Bourne, J. Ben-Dror, Y. Kimchi, and I. Vardi (Tadiran Israel Electronics Industries, Ltd., Tel Aviv, Israel). *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 56-61.

The present article describes a theoretical evaluation of two

## 02 SOLAR ENERGY

design improvements made in a lithium bromide absorption chiller which contribute substantially to its performance in solar application. One is the addition of a solution preheater which allows for a considerable reduction in generator size and cost, and improves performance at part load. The other is the addition of an auxiliary generator which enables the chiller to operate at nominal capacity or higher at all times, while utilizing to a maximum the solar radiation available at the time, however small. This is an effective solution to the problem of backup required in all solar-powered systems. The evaluation has been performed by computer simulation and results are presented for the performance of the unit with different configurations of the above systems. The results indicate the limitations on the part of the load to be supplied by the preheater. They point toward the advantage of using an auxiliary generator in a separate shell from the solar-powered generator and with a separate condenser. Operating curves for the chiller with the design improvements are given. (Author)

**A81-25750** Salt gradient solar pond with reflective bottom - Application to the 'saturated' pond. C. F. Kooi (U.S. Department of State, Washington, D.C.). *Solar Energy*, vol. 26, no. 2, 1981, p. 113-120. 14 refs.

The 'saturated' salt gradient solar pond operates near the solubility limit. Consequently, temperature fluctuations may cause precipitation of the salt, which can increase the reflectivity of the bottom. It is shown that this can reduce the width of the nonconvective zone and seriously degrade the performance of the pond. The temperature distribution, efficiency and optimum operating conditions are calculated, taking account of diffusely reflected light from the bottom of the pond. The mechanism for narrowing the nonconvective zone is described. A semiquantitative analysis is made of a known case of simultaneous salt precipitation and nonconvective zone destruction. It is argued that the boundary between the nonconvective zone and the lower convective zone will move to its maximum temperature position if the solubility is a sufficiently strong increasing function of temperature. (Author)

**A81-25751** A non-linear flat-plate collector model. P. I. Cooper and R. V. Dunkle (Commonwealth Scientific and Industrial Research Organization, Div. of Mechanical Engineering, Highett, Victoria, Australia). *Solar Energy*, vol. 26, no. 2, 1981, p. 133-140. 7 refs.

An analytical study is made of the thermodynamic efficiency of a nonlinear flat-plate collector, in which the overall loss coefficient is assumed to be a linear function of the temperature difference between the environment and the collector fluid. Three dimensionless numbers (radiation, size and inlet temperature) are used to characterize the linear and nonlinear models of instantaneous collector performance, and three additional dimensionless numbers express the average daily performance for a constant fluid inlet temperature and an assumed parabolic insulation profile. It is demonstrated that if experimental inaccuracies are taken into account, consideration of anything other than a linear correlation of experimental data to analytical results will not be justified. O.C.

**A81-28216** # Dependence of efficiency of shallow junction silicon solar cells on substrate doping. E. S. Rittner, A. Meulenbergh, and J. F. Allison (COMSAT Laboratories, Clarksburg, Md.). *Journal of Energy*, vol. 5, Jan.-Feb. 1981, p. 9-14. 30 refs. Research sponsored by the Communications Satellite Corp.

Experimental evidence is provided to support a modification of solar cell theory to include the field-enhanced junction recombination dark current. This term is more important in limiting shallow junction solar cell efficiency as base resistivity is decreased. The anomalously high-diffusion dark current in the n-region is also significant in limiting open-circuit voltage, this excess dark current results from high-surface recombination at the metallic contacts on the front surface along with bandgap narrowing and high Auger volume recombination in the diffused n-region caused by high donor density. Methods are proposed for reducing the magnitude of both dark currents to improve overall cell performance. (Author)

**A81-28588** # Development and study of a lead telluride/germanium telluride solar thermoelectric generator (Razrabotka i isledovanie solnechnogo termoelektricheskogo generatora na osnove telluristogo svintsa i germaniya). V. A. Baum, Ch. Agabaev, and N. Ovezsakhmatov (Akademiya Nauk Turkmensoi SSR, Nauchno-Proizvodstvennoe Ob'edinenie Solntse, Turkmen SSR) *Akademiya Nauk Turkmensoi SSR, Izvestiya, Seriya Fiziko-Tekhnicheskikh, Khimicheskikh i Geologicheskikh Nauk*, no. 1, 1981, p. 41-47. In Russian.

The paper describes the design and operation of a planar solar thermoelectric generator based on n-type lead telluride and p-type germanium telluride. Experimental results are presented on the output power as a function of temperature drop on the junctions of the device, and on output power as a function of solar flux density. B.J.

**A81-28737** Digital holographic interferometry of convective heat transport. A. Choudry (Delft, Technische Hogeschool, Delft, Netherlands). *Applied Optics*, vol. 20, Apr. 1, 1981, p. 1240-1244. 17 refs. Research supported by the Stichting voor Fundamenteel Onderzoek der Materie.

The analysis and interpretation, using digital techniques, of real-time holographic interferogram data from the study of convective heat transport in a flat plate solar collector are discussed. Special attention is given those optical and physical aspects of the study that will aid in establishing an automated digital process for interference pattern analysis, including the structural systematics of fringe patterns, noise due to spurious optical effects, and the accuracy of digitized optical signals. The result of the study is a two-tiered system of digital analysis in which the interactive mode is first used to find a set of algorithms to calculate the temperature field, and then an automatic analysis is initialized. O.C.

**A81-28926** Theoretical analysis of simplified four wavelength division solar cell system. S. Sakai and M. Umeno (Nagoya Institute of Technology, Nagoya, Japan). *Japanese Journal of Applied Physics*, vol. 20, Jan. 1981, p. 125-127. 6 refs.

A simple method is proposed for dividing the solar spectrum into four parts, and the conversion efficiency of the method is calculated theoretically. The maximum conversion efficiency obtainable with the proposed arrangement is estimated at 31%. Arrangements for the division of spectrum into more than four parts are shown. V.L.

**A81-28936** Chlorophyll sensitized solar photovoltaic cell with cuprous iodide electrode. K. Tennekone and W. M. R. Divigalpitiya (Sri Jayawardanapura University, Nugegoda, Sri Lanka). *Japanese Journal of Applied Physics*, vol. 20, Jan. 1981, p. 299, 300. 11 refs.

It is noted that if electrolytic photovoltaic cells are to be of any practical importance in the use of solar energy, the semiconductor material in the electrolytic medium must be photostable and sensitive to light in the visible region. The cell discussed here consists of a photocathode of cuprous iodide coated with chlorophyll-a. It is noted that the dye sensitized photocurrent supposedly arises from electron transfer between the excited dye and the semiconductor. CuI is a mixed conductor, and the charge carriers are Cu(+) ions, electrons, or holes. At temperatures lower than 300 C, however, the ionic conduction is found to be insignificant. In the presence of traces of excess iodine, the conduction is due mainly to holes. The CuI layer described here behaves as a p-type semiconductor having a band gap of 0.31 eV. C.R.

**A81-28954** Review of conductor-insulator-semiconductor (CIS) solar cells. R. Singh (Energy Conversion Devices, Inc., Troy, Mich.), M. A. Green (New South Wales, University, Kensington, Australia), and K. Rajkanan (General Instrument Corp., Hicksville, N.Y.). *Solar Cells*, vol. 3, Mar. 1981, p. 95-148. 314 refs. Research supported by the Natural Sciences and Engineering Research Council of Canada, U.S. Department of Energy, Australian Research Grants

Committee, and National Energy Research Development and Demonstration Council of Australia.

The physics and technology of the conductor-insulator-semiconductor (CIS) solar cells are reviewed. The CIS photovoltaic devices may incorporate an ultrathin interfacial layer in a metal-semiconductor junction (Schottky diode), an oxide semiconductor-base semiconductor heterojunction diode, or an electrolyte-semiconductor diode. Attention is given to the effects of the interfacial layer thickness and the work function of the conductor on the performance of the cells. By ensuring inversion at the interface of the base semiconductor, devices can be fabricated with properties which do not depend strongly on the surface states nor on other nonidealities of the interfacial layer. Experimental data in tabular form are presented on single-crystal MIS and SIS solar cells, polycrystalline CIS solar cells, and amorphous silicon CIS solar cells. K.S.

**A81-28958** High efficiency 1.43 and 1.69 eV band gap Ga<sub>1-x</sub>Al<sub>x</sub>As-GaAs solar cells for multicolour applications. E. Fanetti, C. Flores, G. Guarini, F. Paletta, and D. Passoni (Centro Informazioni Studi ed Esperienze S.p.A., Milan, Italy). *Solar Cells*, vol. 3, Mar. 1981, p. 187-194. 9 refs.

The fabrication and the most significant characteristics of 1.43 and 1.69 eV band gap Ga<sub>1-x</sub>Al<sub>x</sub>As-GaAs solar cells, designed for high efficiency and high concentration systems, are described. The cells are characterized by a very low series resistance obtained by using beryllium as a p-type dopant and by using a simplified structure including a minimum number of layers grown by liquid phase epitaxy. Conversion efficiencies up to 21.1% and 19.2% were measured at 210 suns, air mass 1.5, for the low gap and high gap cells respectively, while 20% and 18% efficiencies were observed at 1000 suns. For the higher band gap cell a conversion efficiency of 14.2% was also measured at 2500 suns. The overall conversion efficiency of some multicolour systems utilizing the Ga<sub>1-x</sub>Al<sub>x</sub>As-GaAs cells combined with spectrum-splitting optical filters and with a lower band gap (1.1 eV) cell were also estimated under realistic assumptions. (Author)

**A81-29032** Optimization of fin and tube parameters in a flat-plate collector. H. P. Garg, U. Rani, and R. Chandra (Indian Institute of Technology, New Delhi, India). *Energy* (UK), vol. 6, Jan. 1981, p. 83-92. 16 refs.

A theoretical investigation for optimizing collector-cost effectiveness is carried out by considering various tube diameters, materials, tube spacing, fin materials, and thicknesses for black and other paints. The bond conductance is taken into account for various joining techniques. Various tube geometries are considered and the convective heat-transfer coefficients are calculated. The pressure drops are calculated with allowance for the friction factor due to the skin effect. Since the friction factor for bends and fittings is negligibly small in the laminar flow regime, the pressure drop is calculated for skin friction alone. Efficiency and costs are computed to determine an optimal system. (Author)

**A81-29196** The state of solar technology (Stand der Solartechnik). M. Kuczera (Dornier System GmbH, Friedrichshafen, West Germany). *Brennstoff-Wärme-Kraft*, vol. 33, Mar. 1981, p. 90-97. 7 refs. In German.

The difficulties and prospects of solar technology are discussed. The difficulties include the necessity of expensive and inefficient solar collectors and the low power density (a maximum 1 kW/sq m) which is an obstacle to achieving higher process temperatures and which necessitates the building of unusually extended installation. The prospects involve the generation of low temperature heat with flat-plate collectors, the generation of high temperature heat with concentrating collectors for the further transformation to mechanical or electrical energy, and the development of cheap solar cells for the direct generation of electrical energy from radiant energy. Measurements are shown for the amount of solar radiation received by various parts of the world, and the present solar technologies are

reviewed including solar cells, flat plate collectors, parabolic cylinders, paraboloids and heliostat towers. D.K.

**A81-29252** Simplified methods for analyzing the performance of parabolic dish systems. S. Dasgupta, A. F. Hildebrandt (Houston, University, Houston, Tex.), and C. E. Mauk (Texas Energy and Natural Resources Council, Austin, Tex.). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 1-5. 10 refs. Contract No. EG-77-C-04-3974.

Simple expressions are given for the determination of incident fluxes inside cavities of various shapes heated by paraboloidal mirrors. Approximate methods are also given to determine the energy loss from cavities due to reflection, reradiation and convection. Some of these results were verified against the results from more exact techniques. Some design considerations for achieving high efficiencies with parabolic dish systems are also discussed. (Author)

**A81-29253** Design and performance of a concentrating solar collector. I. H. Farag (New Hampshire, University, Durham, N.H.). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 6-14. 5 refs. Research supported by the University of New Hampshire.

Design considerations of a parabolic concentrating solar collector included collector orientation, construction materials, reflective surface shape, and the use of collector pipe internal fins. The collector's surface is approximately 1.4 sq m of high reflectivity mirrored glass, focussing on a 38.1 mm diameter blackened copper pipe, in which air is used as the heat transfer medium. Preliminary tests indicate a 43% efficiency based on daily insulation averages. O.C.

**A81-29254** Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums. L. M. Scheier (Trane Co., La Crosse, Wis.) and T. H. Kuehn (Iowa State University of Science and Technology, Ames, Iowa). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 15-20. 7 refs. Research supported by the Iowa State University of Science and Technology.

The thermal efficiency of a compound parabolic concentrator (CPC) solar collector can be enhanced by extracting the solar energy absorbed not only by the receiver but also by the reflectors and aperture cover. Much of the energy that would normally be lost from the front of the collector is used to heat air blown through the collector, which can then be utilized for space or process heating. The present analysis uses a thermal network analogy to predict the radiation, conduction, and convection heat transfer between the CPC collector components and between the collector and its surroundings. Results are presented for concentration ratios of 1.5 and for selection and nonselection absorbers and various air and liquid flow rates. (Author)

**A81-29255** A numerical approach for the prediction of the front losses of a flat-plate solar collector. G. Lauriat (Conservatoire National des Arts et Métiers, Paris, France). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 21-26. 14 refs.

The front losses of a flat-plate solar collector are estimated on the basis of a bidimensional heat conduction in the single cover of the collector. The sensitivity of the performances to the absorption of radiation in the cover is investigated. It is also shown that an optimal spacing between the absorber and the cover cannot be found with the correlations previously reported in the literature. Some results of calculations of the front losses when the temperature distribution of the absorber is non-uniform are given at the end. (Author)

## 02 SOLAR ENERGY

**A81-29256** Concentrating solar collectors for thermal and photovoltaic application. M. Simon. (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979.*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 27-33.

Description of the design and development of a 3 kW concentrating silicon cell module with four heliostatically mounted cylindrical parabolic concentrating troughs and a concentration factor of between 20 and 40. It was first determined through model calculations that a concentration factor of between 10 and 50 would be optimal for cylindrical parabolic reflectors, depending on specific solar cell and collector costs. A series of indoor tests were then run, using an electrical sun simulator, on a preprototype system with a water pump load simulator. The modular, four-trough prototype system, optimized for maximum daily energy output and low production and maintenance costs, was then tested outdoors. The special development of an integrated heat absorption system using a selective filter mirror to concentrate radiation not converted by the cells is proposed in conclusion. O.C.

**A81-29261** Dynamic behavior of a natural circulation loop for a solar collector. J. C. Friedly (Rochester, University, Rochester, N.Y.) and B. H. Davison (California Institute of Technology, Pasadena, Calif.). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979.*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 69-79 15 refs Contract No. N00014-76-C-0001.

The unsteady state of a natural convection loop for a solar energy collector has been studied theoretically. The nature of the response to small disturbances in a set of model equations has been solved for rigorously. It is shown that under a small, but significant set of operating conditions the nominal steady state can be unstable and oscillations in flow rate can be anticipated. The oscillations result from the interaction of temperature disturbances fed around the loop and the gravitational pressure drops. The oscillation period is determined by the total time required for fluid to circulate around the loop. Computations are presented on the effect of dynamic parameters such as residence times, thermal capacitances and thermal time constants, and some of their implications in the design of passive solar heating systems are discussed. Computations of the dominant root of the model characteristic equation are also presented. Under most operating conditions response times of the order of the fluid residence time in the collector can be expected and in some cases the response time can be significantly longer than that. Transients may in fact persist longer than the expected mean time between disturbances to the system. (Author)

**A81-29262** Central solar heating plants - Optimal ratio between solar collector area and heat storage volume. S.-E. Ramsmark (Lund Institute of Technology, Lund, Sweden). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979.*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 91-96

**A81-29265** Active cooling system alternatives for concentrating photovoltaic systems. L. D. Clements and M. J. O'Leary (Texas Tech University, Lubbock, Tex.). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979.*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 117-122. 5 refs

A design trade-off study was employed to choose an active cooling system for a large concentrating photovoltaic irrigation system. Wet cooling tower, air cooler-pond 'hybrid', and air cooler-evaporator designs were compared with respect to parasitic power requirements, initial cost, operating cost, reliability, maintenance requirements, load matching, and any corrosion, pollutants or residues resulting from operation. It is concluded that the evaporator-assisted air cooler is the most attractive alternative due to its lower initial cost and cheap and simple operation, despite relatively high parasitic energy requirements. O.C.

**A81-29268** Production of fuels from high temperature solar thermal systems - Economic analysis. S. Lakshmanan, F. K. Manasse, and V. K. Mathur (New Hampshire, University, Durham, N.H.). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979.*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 156-163. 20 refs. Contract No. DE-AC02-79ET-21067.

The employment of existing coal, lignite and peat gasification technology in conjunction with high temperature solar heating is considered. It is required that such hybrid systems be of the gas-recirculation type in order to operate around-the-clock. Cost estimates for conventional and hybrid systems using coal, lignite, peat and wood indicate that by 1990 the cost of gas from solar systems will be to 5 to 6% cheaper than that of conventional methods such as Lurgi and HyGas, with an additional saving of 10% of the fossil fuel consumed due to the diurnal availability of solar energy. It is concluded that the fossil fuel savings may reach 30% when high temperature thermal storage becomes available. O.C.

**A81-29269** On the safety to solar electric power generation. A. Z. Ullman, B. B. Sokolow, L. Libby, J. Daniels, J. Hill, R. Hudson, P. Hurt, A. Kashani, G. Meunier, and P. Parekh (California, University, Los Angeles, Calif.). (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov. 25-29, 1979.*) *AIChE Symposium Series*, vol. 76, no. 198, 1980, p. 164-172 24 refs.

A series of studies were undertaken to assess the safety hazards in proposed solar thermal power systems (STPS). Among the risks identified are distributed heliostat defocusing, interruption of working fluid flow, receiver meltdown, and leakage of hazardous fluids. It is concluded that unique hazards are presented by sensible heat, latent heat, and thermochemical energy storage systems, although specific sources of danger vary widely among the three types. A tentative preference is established for the salt phase change, latent heat storage type from the standpoint of worker safety. O.C.

**A81-29290 \*** Effect of zinc impurity on silicon solar-cell efficiency. C.-T. Sah, P. C. H. Chan, C.-K. Wang (Illinois, University, Urbana, Ill.), K. A. Yamakawa, R. Lutwack (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.), and R. L.-Y. Sah. *IEEE Transactions on Electron Devices*, vol. ED-28, Mar 1981, p. 304-313. 24 refs. Research supported by the US Department of Energy and NASA.

Zinc is a major residue impurity in the preparation of solar-grade silicon material by the zinc vapor reduction of silicon tetrachloride. This paper projects that in order to get a 17-percent AM1 cell efficiency for the Block IV module of the Low-Cost Solar Array Project, the concentration of the zinc recombination centers in the base region of silicon solar cells must be less than  $4 \times 10$  to the 11th Zn/cu cm in the p-base n+/p/p+ cell and  $7 \times 10$  to the 11th Zn/cu cm in the n-base p+/n/n+ cell for a base dopant impurity concentration of  $5 \times 10$  to the 14 atoms/cu cm. If the base dopant impurity concentration is increased by a factor of 10 to  $5 \times 10$  to the 15th atoms/cu cm, then the maximum allowable zinc concentration is increased by a factor of about two for a 17-percent AM1 efficiency. The thermal equilibrium electron and hole recombination and generation rates at the double-acceptor zinc centers are obtained from previous high-field measurements as well as new measurements at zero field described in this paper. These rates are used in the exact dc-circuit model to compute the projections. (Author)

**A81-29684** Solar selective surfaces. O. P. Agnihotri and B. K. Gupta (Indian Institute of Technology, New Delhi, India). New York, Wiley-Interscience, 1981. 232 p. 384 refs. \$35.

Principles of the design, production, evaluation and application of reflection-absorption and reflection-transmission type solar selective surfaces for flat plate or concentrating solar collectors are discussed. The preparation, properties and role of transparent conducting coatings as solar selective surfaces are considered, with attention given to metal films, wide bandgap semiconductors, and geometrical selective spectral surfaces, and aspects of the application

of selective surfaces to photothermal conversion are described. Transparent conductors used in photovoltaic energy conversion are examined, including ITO/Si, SnO<sub>2</sub>/Si, ITO/GaAs, ITO/InP and SnO<sub>2</sub>/GaAs heterojunction devices, and the various measurement techniques used for absorptance and emittance determinations are presented. Consideration is then given to the compositions, fabrication and preparation of black reflection-absorption coatings, which may be composed of absorber-reflector tandems, conversion coatings, pure semiconductors, powdered semiconductor-reflector combinations and composite material coatings. Recommendations with regard to the further development of transparent conducting coatings, plated coatings, paint coatings, high-temperature selective surfaces and magnetron sputtering fabrication techniques are presented.

A L W

**N81-16437\*** National Aeronautics and Space Administration Langley Research Center, Hampton, Va  
**SOLAR-PUMPED GAS LASER DEVELOPMENT**  
 John W Wilson Dec 1980 66 p refs  
 (NASA-TM-81894) Avail NTIS HC A04/MF A01 CSCL 20E

A survey of gas properties through detailed kinetic models led to the identification of critical gas parameters for use in choosing appropriate gas combinations for solar pumped lasers. Broadband photoabsorption in the visible or near UV range is required to excite large volumes of gas and to insure good solar absorption efficiency. The photoexcitation density is independent of the absorption bandwidth. The state excited must be a metastable state which is not quenched by the parent gas. The emission bandwidth must be less than 10 Å to insure lasing threshold over reasonable gain lengths. The system should show a high degree of chemical reversibility and an insensitivity to increasing temperature. Other properties such as good quantum efficiency and kinetic efficiency are also implied. Although photoexcitation of electronic vibrational transitions is considered as a possible system if the emission bands sufficiently narrow, it appears that photodissociation into atomic metastables is more likely to result in a successful solar pumped laser system. J M S

**N81-16558\*** Raytheon Co., Waltham, Mass New Products Center

# THE HISTORY OF THE DEVELOPMENT OF THE RECTENNA

William C Brown /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 271-280 refs

Avail NTIS HC A16/MF A01 CSCL 10A

The history of the development of the rectenna is reviewed through its early conceptual developmental phases. Some selective aspects of the current solar power satellite rectenna development are examined.

R C T

**N81-16559\*** Boeing Aerospace Co., Seattle, Wash  
**RECTENNA SYSTEM DESIGN**

G R Woodcock and R W Andryczyk (General Electric Co.) /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 281-290

Avail NTIS HC A16/MF A01 CSCL 10A

The fundamental processes involved in the operation of the rectenna system designed for the solar power satellite system are described. The basic design choices are presented based on the desired microwave rf field concentration prior to rectification and based on the ground clearance requirements for the rectenna structure. A nonconcentrating inclined planar panel with a 2 meter minimum clearance configuration is selected as a representative of the typical rectenna.

R C T

**N81-16572\*** General Electric Co., Cincinnati, Ohio Advanced Energy Programs Dept  
**STORAGE REQUIREMENT DEFINITION STUDY Final Report**  
 L E Stacy, G C Wesling, and W F Zimmerman 15 Dec

1980 120 p refs Sponsored by NASA and DOE Prepared for JPL

(Contract JPL-955388)

(NASA-CR-163882, AED-EO-57, JPL-9950-472) Avail NTIS HC A06/MF A01 CSCL 10C

A dish Stirling solar receiver (DSSR) and a heat pipe solar receiver with TES (HPSR) for a 25 kWe dish Stirling solar power system are described. The thermal performance and cost effectiveness of each are analyzed minute by minute over the equivalent of one year of solar insolation. Existing designs of these two systems were used as a basis for the study. TES concepts for the DSSR and alternative TES concepts for the HPSR are presented. Parametric performance and cost studies were performed to determine the operating and cost characteristics of these systems. Data are reported for systems (1) without TES and with varying amounts of TES, (2) with and without a fossil fuel combustor, (3) with varying solar to fossil power input, and (4) with different system control assumptions. The principal effects of TES duration, collector area, engine efficiency, and fuel cost sensitivity are indicated. Development needs for each of the systems are discussed and the need and nature of possible future TES solar modular experiments are presented and discussed.

Author

**N81-16574\*** Fairchild Stratos Corp., Manhattan Beach, Calif  
**DISH STIRLING SOLAR RECEIVER PROGRAM Final Report**

Richard A Haglund 15 Dec. 1980 174 p Prepared for JPL (Contracts NAS7-100, JPL-955400)  
 (NASA-CR-163889, JPL-9950-473, ER-79917-3) Avail NTIS HC A08/MF A01 CSCL 10A

A technology demonstration of a Dish Stirling solar thermal electric system can be accomplished earlier and at a much lower cost than previous planning had indicated by employing technical solutions that allow already existing hardware, with minimum modifications, to be integrated into a total system with a minimum of development. The DSSR operates with a modified United Stirling p-40 engine/alternator and the JPL Test Bed Concentrator as a completely integrated solar thermal electric system having a design output of 25 kWe. The system is augmented by fossil fuel combustion which ensures a continuous electrical output under all environmental conditions. Technical and economic studies by government and industry in the United States and abroad identify the Dish Stirling solar electric system as the most appropriate, efficient and economical method for conversion of solar energy to electricity in applications when the electrical demand is 10 MWe and less.

A R H

**N81-16575\*** Kinetic Coatings, Inc., Burlington, Mass  
**DEVELOPMENT OF SIMPLIFIED PROCESS FOR ENVIRONMENTALLY RESISTANT CELLS Final Report, 8 Jun. 1978 - 30 Nov. 1980**

William J King Dec 1980 166 p refs Sponsored in part by DOE Prepared for JPL (Contract JPL-955079)  
 (NASA-CR-163884, DOE/JPL-955079-80/1, JPL-9950-468) Avail NTIS HC A08/MF A01 CSCL 10A

This report describes a program to develop a simple, foolproof, all vacuum solar cell manufacturing process which can be completely automated and which results in medium efficiency cells which are inherently environmentally resistant. All components of the completed cells are integrated into a monolithic structure with no material interfaces. The exposed materials (Si, Al<sub>2</sub>O<sub>3</sub>, Al, Ni) are all resistant to atmospheric attack and the junction, per se, is passivated to prevent long term degradation. Such cells are intended to be incorporated into a simple module consisting basically of a press formed metallic superstructure with a separated glass cover for missile, etc., protection.

Author

**N81-16576\*** Solar Power Corp., Woburn, Mass  
**DESIGN, FABRICATION, TEST, QUALIFICATION AND PRICE ANALYSIS FOR THIRD GENERATION DESIGN SOLAR CELL MODULES Final Report**  
 15 Sep 1980 99 p refs Sponsored in part by NASA and DOE Prepared for JPL



## 02 SOLAR ENERGY

(Contract JPL-955403)

(NASA-CR-163917, DOE/JPL-955403-80/1, JPL-9950-464)  
Avail NTIS HC A05/MF A01 CSCL 10A

An updated program plan is presented showing the task descriptions depicting the work, progress, achievements, and the cause of any deviations from the original plan (SC-1), and how this impacted on the original schedule of the program. In addition there is an update documenting all design alterations made during the pre-production phase and a complete up to date set of engineering and manufacturing documentation (CM-1). The purpose of the work in the original plan was to explore, design, develop, test, and deliver 1000 watts of prototype flat plate, photovoltaic modules appropriate for use in applications in the 20 to 500 kilowatt range and which show potential for meeting the 1986 cost goals. E D K

**N81-16578\*** RCA Labs, Princeton, N J  
**AUTOMATED ARRAY ASSEMBLY, PHASE 2 Final Report, 1 Sep. 1977 - 31 Dec. 1979**  
R V DiAello Oct 1980 259 p refs Sponsored in part by DOE Prepared for JPL  
(Contracts NAS7-100, JPL-954868)  
(NASA-CR-163878, DOE/JPL-954868-80/9, JPL-9950-453)  
Avail NTIS HC A12/MF A01 CSCL 10A

A manufacturing sequence which is capable of mass producing silicon solar cells is described. The sequence was arrived at after the evaluation of many processes and three related manufacturing sequences which are discussed. L F M

**N81-16580\*** Jet Propulsion Lab., California Inst of Tech., Pasadena  
**PHOTOVOLTAIC MODULE SOILING STUDIES, MAY 1978 - OCTOBER 1980**  
A R Hoffman and C R Maag 1 Nov 1980 52 p refs  
(Contracts NAS7-100, EX-76-A-29-1012)  
(DOE/JPL-1012-49, JPL-Pub-80-87) Avail NTIS  
HC A04/MF A01 CSCL 10C

Comparative electrical and optical performance data from photovoltaic modules and materials subjected to outdoor exposure at field test sites throughout the United States were collected and examined. The results show significant time and site dependence. During periods when natural removal processes do not dominate the rate of particulate contamination accumulation appears to be largely material-independent. The effectiveness of natural removal processes, especially rain, is strongly material-dependent. Glass and acrylic top cover materials retain fewer particles than silicone rubber does. Side by side outdoor exposure testing for long duration is presently the most effective means of evaluating soiling differences between materials. Changes in spectral transmission as a function of time and location and limited scattering data are presented. Author

**N81-16581\*** Jet Propulsion Lab., California Inst of Tech., Pasadena  
**CRITERIA FOR EVALUATION OF REFLECTIVE SURFACE FOR PARABOLIC DISH CONCENTRATORS**  
F Bouquet 15 Jul 1980 67 p refs Sponsored in part by DOE  
(Contracts NAS7-100)  
(NASA-CR-163898, DOE/JPL-1060-39, JPL-Pub-80-81) Avail  
NTIS HC A04/MF A01 CSCL 10B

Commercial, second surface glass mirror are emphasized, but aluminum and metallized polymeric films are also included. Criteria for sealing solar mirrors in order to prevent environmental degradation and criteria for bonding sagged or bent mirrors to substrate materials are described. An overview of the technical areas involved in evaluating small mirror samples, sections, and entire large gores is presented. A basis for mirror criteria was established that eventually may become part of inspection and evaluation techniques for three dimensional parabolic reflective surfaces. T M

**N81-16592\*** Sandia Labs, Albuquerque N Mex Photovoltaics Div  
**DESIGN, FABRICATION, AND PERFORMANCE OF A**

## 20 PERCENT EFFICIENT SILICON SOLAR CELL

J L Rodriguez and F W Sexton Oct 1980 26 p refs  
(Contract DE-AC04-76DP-000789)  
(SAND-80-2225) Avail NTIS HC A03/MF A01

A single crystal concentrator p(+)/nn(+) silicon solar cell with maximum efficiency greater than 20% at 27 C is described. The intrinsic cell design was used with several metallization patterns targeted for different system designs in the ten to several hundred suns concentration range. The design and fabrication of the intrinsic cell is specified. Performance data for the best cells of three metal patterns with the intrinsic cell are presented and discussed. Author

**N81-16593\*** Sandia Labs, Albuquerque, N Mex Experimental Systems Operations Div  
**PERFORMANCE OF A SOLAR-HEATED ASSEMBLY BUILDING AT SANDIA NATIONAL LABORATORIES**  
Dale E Haskins Sep 1980 44 p refs  
(Contract DE-AC04-76DP-00789)  
(SAND-80-0599) Avail NTIS HC A03/MF A01

The passive solar heating system of the assembly building at Sandia National Laboratories' Photovoltaic Advanced Systems Test Facility is described and the thermal analysis of the building is given. Performance predictions are also given, and actual performances for December 1979 and January 1980 are shown. E D K

**N81-16594\*** Oak Ridge National Lab., Tenn  
**APPLICATIONS OF LASER ANNEALING AND LASER-INDUCED DIFFUSION TO PHOTOVOLTAIC CONVERSION**  
**Progress Report, 1 Mar. 1980 - 28 Feb. 1981**  
R T Young, D H Lowndes, and R F Wood 17 Nov 1980 18 p Presented at Topical Polycrystalline Silicon Subcontractors' Rev Meeting, Colorado Springs, Colo., 17 Nov 1980  
(Contract W-7405-eng-26)  
(CONF-801153-1) Avail NTIS HC A02/MF A01

Laser annealing and laser induced diffusion can be used to control grain boundary diffusion and segregation. With these techniques, the near surface region of a sample actually melts but stays molten for such a short time that significant dopant migration cannot occur. Furthermore, since the grain boundaries as such do not exist while the material is molten, rapid diffusion to them and along them does not occur. Laser techniques can also be used to promote growth and evidence from EBIC and TEM indicates that pulsed laser annealing changes the elementary structure of some types of grain boundaries. The role of lithium in polycrystalline Si was studied. It was found that when Li is added to polycrystalline Si, it not only provides an excess free carrier for each ionized Li, but also dramatically improves the carrier mobilities. A R H

**N81-16595\*** Research Triangle Inst., Research Triangle Park, N C Semiconductor Research Dept  
**RESEARCH ON HIGH EFFICIENCY CASCADE SOLAR CELLS Annual Report, Jul 1979 - Jun 1980**  
S M Bedair, M L Timmons, J R Hauser, J E Andrews, S B Phatak, and M Simons Aug 1980 103 p refs Prepared in cooperation with North Carolina State Univ., Raleigh  
(Contract EG-77-C-01-4042)  
(SERI/PR-8136-1-T1) Avail NTIS HC A06/MF A01

The technology needed to fabricate two junction cascade solar cells having conversion efficiencies of 30 percent or more under multisun illumination was researched using a number of different III-V semiconductor materials systems that are potential candidate for a cascade solar cell design. Work focused on the development of a compatible combination of materials required for the monolithic, multilayer structure using several different epitaxial growth techniques. Materials receiving principal attention during the past year have been GaAlAs, GaInP and GaAlAsSb for the high bandgap top cell and GaInAs, GaAsSb and GaAs for the low bandgap bottom cell. Liquid phase vapor phase and organometallic chemical vapor deposition growth techniques were explored. E D K



**N81-16606#** Ames Lab, Iowa  
**PHOTOELECTROCHEMICAL SOLAR CELLS BASED ON d-BAND ELECTROCHEMISTRY AT TRANSITION METAL DISLENIDES** Technical Progress Report, 1 Dec. 1979 - 29 Feb. 1980

Bruce A Parkinson and Thomas E Furtak May 1980 32 p refs

(Contract EG-77-C-01-4042)

(IS-4745) Avail NTIS HC A03/MF A01

Topographic photogenerated carrier collection analysis and sub bandgap photoexcitation studies have confirmed that edge states associated with lattice imperfections on WSe<sub>2</sub> are the principal detrimental factor contributing to poor power conversion efficiency in photoelectrochemical solar cells based on this material. Efficiency improvement was achieved by inactivating the edge states. Author

**N81-16607#** Sandia Labs, Albuquerque, N Mex  
**PHOTOVOLTAIC ADVANCED SYSTEMS TEST FACILITY: DESCRIPTION AND OPERATIONS PLAN**

Howard J Gerwin Oct 1980 46 p Sponsored by DOE

(SAND-80-1612) Avail NTIS HC A03/MF A01

The Photovoltaic Advanced Systems Test Facility is described. Photovoltaic modules and arrays are tested, along with power conditioning units and energy storage equipment related to photovoltaic systems. The test facility description, collector test plan, and user interface information are presented. S F.

**N81-16608#** Sandia Labs, Albuquerque, N. Mex Geo Energy Systems Analysis Div

**COMPARATIVE ANALYSIS OF COMBINED FLAT-PLATE PV/T COLLECTORS WITH SEPARATE PV/T COLLECTORS**

Eddie R Hoover Sep 1980 44 p refs Sponsored by DOE (SAND-80-1494) Avail NTIS HC A03/MF A01

The conditions under which a combined photovoltaic/thermal (PV/T) collector is more cost effective than separate flat plate photovoltaic and thermal collectors are determined. The annual performance of the separate PV/T system and four different combined PV/T systems are simulated in two geographical locations using a system analysis computer program. Based on equivalent electrical and thermal outputs and the 1986 DOE goal for PV modules (70 cents/Wp), the maximum allowable incremental cost to upgrade the conventional thermal collector to a combined PV/T collector is determined. For all of the cases considered, the separate PV/T collectors are more cost effective than the combined PV/T collectors. E D K

**N81-17266#** National Aeronautics and Space Administration Lewis Research Center, Cleveland, Ohio

**COMMERCIAL (TERRESTRIAL) AND MODIFIED SOLAR ARRAY DESIGN STUDIES FOR LOW COST, LOW POWER SPACE APPLICATIONS**

Joseph C Koleck and Thomas J Riley Dec 1980 21 p refs (NASA-TM-81622, E-632) Avail NTIS HC A02/MF A01 CSCL 10A

The suitability of commercial (terrestrial) solar arrays for use in low Earth orbit is examined. It is shown that commercial solar arrays degrade under thermal cycling because of material flexure, and that certain types of silicones used in the construction of these arrays outgas severely. Based on the results, modifications were made. The modified array retains the essential features of typical commercial arrays and can be easily built by commercial fabrication techniques at low cost. The modified array uses a metal tray for containment, but eliminates the high outgassing potting materials and glass cover sheets. Cells are individually mounted with an adhesive and individually covered with glass cover slips, or clear plastic tape. The modified array is found to withstand severe thermal cycling for long intervals of time. M G

**N81-17518#** National Aeronautics and Space Administration Pasadena Office, Calif

**SOLAR ENERGY RECEIVER FOR A STIRLING ENGINE** Patent

M. Kudret Selcuk, inventor (to NASA) (JPL) Issued 2 Dec 1980 5 p Filed 6 Apr 1979 Supersedes N79-20513 (17 -

11, p 1448) Sponsored by NASA

(NASA-Case-NPO-14619-1, US-Patent-4,236,383,

US-Patent-Appl-SN-027559, US-Patent-Class-80-841,

US-Patent-Class-80-524, US-Patent-Class-126-419) Avail US Patent and Trademark Office CSCL 10A

A solar energy receiver includes a separable endless wall formed of a ceramic material in which a cavity of substantially cylindrical configuration is defined for entrapping solar flux. An acceptance aperture is adapted to admit to the cavity a concentrated beam of solar energy. The wall is characterized by at least one pair of contiguously related segments separated by lines of cleavage intercepting the aperture. At least one of the segments is supported for pivotal displacement. A thermal-responsive actuator is adapted to respond to excessive temperatures within the cavity for initiating pivoted displacement of one segment, whereby thermal flux is permitted to escape from the cavity. Official Gazette of the US Patent and Trademark Office

**N81-17521#** Photowatt International, Inc., Tempe, Ariz  
**AUTOMATED ARRAY ASSEMBLY TASK DEVELOPMENT OF LOW-COST POLYSILICON SOLAR CELLS** Final Report

Gregory T Jones Nov 1980 86 p refs Sponsored by DOE Prepared for JPL

(Contract JPL-955265)

(NASA-CR-163939, DOE/JPL/955265-80/3) Avail NTIS HC A05/MF A01 CSCL 10A

Development of low cost, large area polysilicon solar cells was conducted in this program. Three types of polysilicon material were investigated. A theoretical and experimental comparison between single crystal silicon and polysilicon solar cell efficiency was performed. Significant electrical performance differences were observed between types of wafer material, i.e. fine grain and coarse grain polysilicon and single crystal silicon. Efficiency degradation due to grain boundaries in fine grain and coarse grain polysilicon was shown to be small. It was demonstrated that 10 percent efficient polysilicon solar cells can be produced with spray on n+ dopants. This result fulfills an important goal of this project, which is the production of batch quantity of 10 percent efficient polysilicon solar cells. Author

**N81-17522#** Solarex Corp., Rockville, Md  
**DEVELOPMENT OF A HIGH EFFICIENCY THIN SILICON SOLAR CELL** Final Report

G Storti, J Culik, and C Wngley Dec 1980 79 p refs Prepared for JPL

(Contracts NAS7-100, JPL-954883)

(NASA-CR-163931, SX/115/F)

Avail NTIS HC A05/MF A01 CSCL 10A

Significant improvements in open-circuit voltage and conversion efficiency, even on relatively high bulk resistivity silicon, were achieved by using a screen-printed aluminum paste back surface field. A 4 sq cm 50 micron m thick cell was fabricated from textured 10 ohm-cm silicon which had an open-circuit voltage of 595 mV and AMO conversion efficiency at 25 C of 14.3%. The best 4 sq cm 50 micron thick cell (2 ohm-cm silicon) produced had an open-circuit voltage of 607 mV and an AMO conversion efficiency of 15%. Processing modifications are described which resulted in better front contact integrity and reduced breakage. These modifications were utilized in the thin cell pilot line to fabricate 4 sq cm cells with an average AMO conversion efficiency at 25 C of better than 12.5% and with lot yields as great as 51% of starts, a production rate of 10,000 cells per month was demonstrated. A pilot line was operated which produced large area (25 cm) ultra-thin cells with an average AMO conversion efficiency at 25 deg of better than 11.5% and a lot yield as high as 17%. A R H

**N81-17523#** General Electric Co., Cincinnati, Ohio Advanced Energy Programs Dept

**A CONCEPTUAL DESIGN STUDY OF A HIGH TEMPERATURE SOLAR THERMAL RECEIVER (ADDED TASKS 6 AND 7) Final Report**

C S Robertson, L R McCreight, A Gatti, and H W Semon 7 Nov 1980 39 p refs Prepared for JPL

(Contract JPL-955455)

## 02 SOLAR ENERGY

(NASA-CR-163944, JPL-9950483, AED-EO-48) Avail NTIS HC A03/MF A01 CSCL 10A

The key component of this concept is a coiled tube of silicon nitride which acts as a heat exchanger appears to be ideal from the standpoint of utilizing structural ceramics at around 2500 F under severe thermal shock conditions. However the size and configuration of this coil are beyond the state of the art for fabricating such materials as silicon nitride and carbide. A two-task program to develop and demonstrate the feasibility of extruding and forming a section of thin walled silicon nitride tubing was undertaken as an addition to the original program. A promising polyvinyl butyral-based binder lubricant was identified. Fourteen full size extrusion experiments were conducted. Two trial firings of 1-1/4 turn helices were made. T M

**N81-17525\*** Westinghouse Electric Corp., Trafford, Pa. Power Circuit Breaker Div

### **LOW COST SOLAR ARRAY PROJECT SILICON MATERIALS TASK. DEVELOPMENT OF A PROCESS FOR HIGH CAPACITY ARC HEATER PRODUCTION OF SILICON FOR SOLAR ARRAYS. Final Technical Report**

Maurice G. Fay 1981 234 p refs. Prepared for JPL (Contract JPL-954589)

(NASA-CR-163943, JPL-9950491, DOE/JPL-954589-80/9) Avail NTIS HC A11/MF A01 CSCL 10A

The experimental verification system for the production of silicon via the arc heater-sodium reduction of SiCl<sub>4</sub> was designed, fabricated, installed, and operated. Each of the attendant subsystems was checked out and operated to insure performance requirements. These subsystems included the arc heaters/reactor, cooling water system, gas system, power system, Control & Instrumentation system, Na injection system, SiCl<sub>4</sub> injection system, effluent disposal system and gas burnoff system. Prior to introducing the reactants (Na and SiCl<sub>4</sub>) to the arc heater/reactor, a series of gas only-power tests was conducted to establish the operating parameters of the three arc heaters of the system. Following the successful completion of the gas only-power tests and the readiness tests of the sodium and SiCl<sub>4</sub> injection systems, a shakedown test of the complete experimental verification system was conducted. T M

**N81-17531\*** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio

### **SPACE PHOTOVOLTAIC RESEARCH AND TECHNOLOGY 1980. HIGH EFFICIENCY, RADIATION DAMAGE AND BLANKET TECHNOLOGY**

1980 395 p refs. Conf held in Cleveland, 15-17 Oct 1980 (NASA-CP-2169, E-469) Avail NTIS HC A17/MF A01 CSCL 10A

The application of silicon solar cells are discussed with respect to their importance in the exploration of space. Several aspects of the technology associated with the development of photovoltaic devices are reported.

**N81-17532\*** National Aeronautics and Space Administration, Washington, D. C.

### **NASA'S HIGH EFFICIENCY AND RADIATION DAMAGE SOLAR CELL PROGRAM**

Lynwood P. Randolph /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 1-3

Avail NTIS HC A17/MF A01 CSCL 10A

The conversion efficiency and the life expectancy of solar cells and arrays were evaluated for space applications. Efforts were made to improve the understanding of the conversion of electromagnetic radiation to useful forms of energy. A broad range of advanced concepts were evaluated. R C T

**N81-17533\*** Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio

### **SOLAR POWER R AND D FOR AIR FORCE SPACE REQUIREMENTS**

Joseph F. Wise /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 5-10

Avail NTIS HC A17/MF A01 CSCL 10A

The requirements for improved solar power system technology for DOD satellites are reported. It is shown that the technology is required in several areas including solar cells, array blanket technology, energy storage and power system operation, and regulation and control. It is further shown that as the missions become more critical to defense, military aspects such as survivability, hardening, and eventually defense must be addressed. R C T

**N81-17534\*** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio

### **RECENT PROGRESS IN HIGH-OUTPUT-VOLTAGE SILICON SOLAR CELLS**

A. Muelenberg (COMSAT Labs., Clarksburg, Md.), R. A. Arndt (COMSAT Labs., Clarksburg, Md.), J. F. Allison (COMSAT Labs., Clarksburg, Md.), and V. Weizer /in its Space Photovoltaic Res and Technol 1980 p 11-14 refs

(Contract NAS3-22217)

Avail NTIS HC A17/MF A01 CSCL 10A

The status of the technology associated with the development of high output voltage silicon solar cells is reported. The energy conversion efficiency of a double diffusion process is compared to that of a single diffusion process. The efficiency of a 0.1 ohm/cm solar cell is characterized both before and after covering. R C T

**N81-17537\*** Purdue Univ., Lafayette, Ind.

### **COMPUTER MODELING OF HIGH-EFFICIENCY SOLAR CELLS**

R. J. Schartz and M. S. Lundstrom /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 37-50 refs. Sponsored by DOE. Prepared for Sandia Labs., Albuquerque, N. Mex.

Avail NTIS HC A17/MF A01 CSCL 10A

Transport equations which describe the flow of holes and electrons in the heavily doped regions of a solar cell are presented in a form that is suitable for device modeling. Two experimentally determinable parameters, the effective bandgap shrinkage and the effective asymmetry factor are required to completely model the cell in these regions. Nevertheless, a knowledge of only the effective bandgap shrinkage is sufficient to model the terminal characteristics of the cell. The results of computer simulations of the effects of heavy doping are presented. The insensitivity of the terminal characteristics to the choice of effective asymmetry factor is shown along with the sensitivity of the electric field and quasielectric fields to this parameter. The dependence of the terminal characteristics on the effective bandgap shrinkage is also presented. Author

**N81-17541\*** Communications Satellite Corp., Clarksburg, Md.

### **SILICON RESEARCH AND TECHNOLOGY WORKSHOP REPORT**

A. Muelenberg, Jr. /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 71-72

Avail NTIS HC A17/MF A01 CSCL 10A

The materials, structures, processing, modeling and measurements of high efficiency silicon solar cells were surveyed. In the materials area, highlights included (1) the possibility of improving cell voltages by reducing minority carrier mobilities in critical regions of the solar cells, (2) the need for and possibility of lowering the surface recombination velocity for improvement of open circuit voltage in shallow junction cells, (3) the present need for improved lifetime in high resistivity cells, and (4) the potential for new materials such as polycrystalline or dendritic web material to perform well at end of life in a radiation environment. In the area of structures, distinction was made between those for terrestrial use and those that would survive radiation environments. Areas such as epitaxial growth and laser or electron beam annealing (and diffusion) were proposed as having certain advantages over more conventional techniques. R C T

**N81-17542\*** Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio

# THE GaAs SOLAR CELL RESEARCH AND DEVELOPMENT PROGRAMS OF THE AIR FORCE

Kenneth T Masloski /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 73-78 ref

Avail NTIS HC A17/MF A01 CSCL 10A

The compound GaAs is of interest for space application photovoltaics due to its inherent advantages over silicon. Higher efficiencies, superior radiation hardness, and a greater temperature resistance are the major advantages of GaAs over Si. Air Force programs look for ways of maximizing these advantages while minimizing disadvantages such as higher costs and weights. Four programs in GaAs photovoltaics are described and each program is discussed in terms of its objective, approach and status. TM

**N81-17543\*** Jet Propulsion Lab., California Inst of Tech., Pasadena

## HIGH EFFICIENCY EPITAXIAL GaAs/GaAs AND GaAs/Ge SOLAR CELL TECHNOLOGY USING OM/CVD

K L Wang, Y C M Yeh, R J Stirn, and S Swerdling /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 81-85 Sponsored in part by DOE and AF

(Contract NAS7-100)

Avail NTIS HC A17/MF A01 CSCL 10A

A technology for fabricating high efficiency, thin film GaAs solar cells on substrates appropriate for space and/or terrestrial applications was developed. The approach adopted utilizes organometallic chemical vapor deposition (OM-CVD) to form a GaAs layer epitaxially on a suitably prepared Ge epi-interlayer deposited on a substrate, especially a light weight silicon substrate which can lead to a 300 watt per kilogram array technology for space. The proposed cell structure is described. The GaAs epilayer growth on single crystal GaAs and Ge wafer substrates were investigated. TM

**N81-17544\*** National Aeronautics and Space Administration Langley Research Center, Hampton, Va

## STUDY OF PROCESS TECHNOLOGY FOR GaAlAs/GaAs HETEROFACE SOLAR CELLS

Edmund J Conway, Gilbert H Walker, Charles E Byvik, and David W Almgren /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 87-94

Avail NTIS HC A17/MF A01 CSCL 10A

Two processes were considered the infinite melt process and the finite melt process. The only technique that is developed to the point that 10,000 cells could be produced in one year is the infinite melt liquid phase epitaxy process. The lowest cost per cell was achieved with the advanced metal organic chemical vapor deposition process. Molecular beam epitaxy was limited by the slow growth rate. The lowest cost, an 18 percent efficient cell at air mass zero, was approximately \$70 per watt. TM

**N81-17545\*** Varian Associates, Palo Alto, Calif

## HIGH EFFICIENCY COMPOUND SEMICONDUCTOR CONCENTRATOR PHOTOVOLTAICS

Peter Borden, Paul Gregory, Ram Saxena, Richard Owen, and Ozzie Moore /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 95-112 refs

Avail NTIS HC A17/MF A01 CSCL 10A

Special emphasis was given to the high yield pilot production of packaged AlGaAs/GaAs concentrator solar cells, using organometallic VPE for materials growth, the demonstration of a concentrator module using 12 of these cells which achieved 16.4 percent conversion efficiency at 50 C coolant inlet temperature, and the demonstration of a spectral splitting converter module that achieved in excess of 20 percent efficiency. This converter employed ten silicon and ten AlGaAs cells with a dichroic filter functioning as the beam splitter. A monolithic array of AlGaAs/GaAs solar cells is described. TM

**N81-17546\*** Rockwell International Corp., Thousand Oaks, Calif Electronics Research Center

# STATUS OF ROCKWELL-ERC HIGH EFFICIENCY SOLAR CELL PROGRAMS

S W Zehr, J A Cape, D L Miller, and H T Yang /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 113-119

Avail NTIS HC A17/MF A01 CSCL 10A

Programs aimed at developing large area, high efficiency GaAs heteroface cells for low concentration space applications and high concentration terrestrial applications as well as other programs aimed at developing high efficiency multicolor devices for use in similar applications are described. An additional program aimed at achieving improved power to weight ratio by parting thin film solar cells from their growth substrates prior to their incorporation into an array assembly is also described. There is potential for multiple reuse of the substrates which could lead to reduced costs for such devices. Highlights of these programs and their interrelated contributions toward the goals of reducing specific weight, volume and cost of photovoltaic space power systems are discussed. Overall goals are summarized and current programs and their funding sources are listed. TM

**N81-17547\*** Hughes Research Labs., Malibu, Calif

## GaAs WORKSHOP REPORT

G S Kamath /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 121-124

Avail NTIS HC A17/MF A01 CSCL 10A

The advantages of GaAs over silicon are discussed. The substrate problem in solar cell fabrication was reviewed. Future trends in solar energy technology were predicted with special emphasis on cost of production. TM

**N81-17548\*** Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio

## RESULTS OF THE AIR FORCE HIGH EFFICIENCY CASCADED MULTIPLE BANDGAP SOLAR CELL PROGRAMS

W P Rahilly /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 125-129 refs

Avail NTIS HC A17/MF A01 CSCL 10A

The III-V semiconductor materials system that was selected for continued cascade cell development was the AlGaAs cell on GaAs cell structure. The tunnel junction used as transparent ohmic contact between the top cell and the bottom cell continued to be the central difficulty in achieving the program objective of 25 percent AMO efficiency at 25 C. During the tunnel junction and top cell developments it became apparent that the AlGaAs cell has potential for independent development as a single junction converter and is a logical extension of the present GaAs heteroface technology. TM

**N81-17549\*** Midwest Research Inst., Golden, Colo Solar Energy Research Inst

## INCORPORATION OF SUPERLATTICE CRYSTAL LAYERS IN MULTIJUNCTION SOLAR CELLS

A E Blackslee and K W Mitchell /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 131-136 refs

Avail NTIS HC A17/MF A01 CSCL 10A

Superlattice layers are effective in decreasing the density of dislocations in lattice mismatched heterostructures at least four orders of magnitude. Hence it was proposed to utilize this feature of superlattices to alleviate the problems due to misfit dislocations generated in the regions between two or more photovoltaic collecting junctions. A further advantage is that the possibility is presented for using silicon as a low cost substrate as well as for the low band gap junction. In the test case, a silicon low gap cell was connected to a GaAs 7P3 high gap cell through a connecting region containing a GaAs/GaP superlattice. TM

**N81-17550\*** Research Triangle Inst., Research Triangle Park, N C

## AlGaAs-GaAs CASCADE SOLAR CELL

M F Lamorte and D H Abbott /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 137-156

## 02 SOLAR ENERGY

refs

(Contract F33615-78-C-2077)

Avail NTIS HC A17/MF A01 CSCL 10A

Computer modeling studies are reported for a monolithic, two junction, cascade solar cell using the AlGaAs/GaAs materials combination. An optimum design was obtained through a serial optimization procedure by which conversion efficiency is maximized for operation at 300 K, AM 0, and unity solar concentration. Under these conditions the upper limit on efficiency was shown to be in excess of 29 percent, provided surface recombination velocity did not exceed 10,000 cm/sec. TM

**N81-17551\*#** Research Triangle Inst., Research Triangle Park, N C

### **FABRICATION OF AlGaAs/GaAs CASCADE SOLAR CELL BY LPE**

S M Bedair /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 157-164

Avail NTIS HC A17/MF A01 CSCL 10A

Stacking two or more photovoltaic junctions in electrical and optical series results in higher conversion efficiency since each junction can be tailored to respond more efficiently to a smaller range of photon energies. An efficiency of about 30 percent was predicted for a two junction cascade cell having the optimum bandgap values. A number of III-V materials systems were considered for use in fabricating cascade solar cells. The Al-Ga-As system is attractive from a developmental standpoint since it employs a proven materials system that is closely lattice matched throughout its compositional range. This system employs a GaAs low bandgap cell and 1.9 eV AlGaAs high bandgap cell connected by an AlGaAs tunnel junction. Although this cell does not possess the optimum bandgap values, an efficiency of 25 percent was predicted at 300 K under AM0, 1 sun illumination. TM

**N81-17552\*#** Varian Associates, Palo Alto, Calif

### **OM-VPE GROWN MATERIALS FOR HIGH EFFICIENCY SOLAR CELLS**

Ram Saxena, B Cooper, III, M Ludowise, P Borden, and P Gregory /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 165-173 refs

Avail NTIS HC A17/MF A01 CSCL 10A

Organometallic sources are available for all the III-V elements and a variety of dopants, thus it is possible to use the technique to grow a wide variety of semiconductor compounds. AlGaAsSb and AlGaInAs alloys for multijunction monolithic solar cells were grown by OM-VPE. While the effort concentrated on terrestrial applications, the success of OM-VPE grown GaAs/AlGaAs concentrator solar cells (23% at 400 suns) demonstrates that OM-VPE is suitable for growing high efficiency solar cells in large quantities for space applications. In addition, OM-VPE offers the potential for substantial cost reduction of photovoltaic devices with scale up and automation and due to high process yield from reproducible, uniform epitaxial growths with excellent surface morphology. TM

**N81-17553\*#** Research Triangle Inst., Research Triangle Park, N C

### **CASCADE SOLAR CELL WORKSHOP REPORT**

J A Hutchby /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 175-180

Avail NTIS HC A17/MF A01 CSCL 10A

Issues related to the feasibility, research and development, and demonstration of a 30% AMO cascade solar cell discussed include the material selection, growth and fabrication techniques, and device development strategy for a monolithic (two terminal) cascade cell, a hybrid (four terminal) cascade cell, and a spectral splitting device (three cells). Workshop recommendations include (1) initiate a long range research program to develop a three junction, monolithic, cascade cell using either AlGaAsSb-GaAsSb or AlGaInAs-GaInAs material system, (2) emphasize OM-CVD

epitaxial growth technique, perhaps combined with other technologies in the near term to obtain tunnel junctions, (3) develop a two junction device first, (4) initiate a cascade solar cell modeling program to study and compare performance of two and four terminal cascade devices exposed to electron and proton irradiation, and (5) encourage and be open to new ideas for developing four terminal, hybrid, cascade cells exploiting novel component cell interconnect technologies. A R H

**N81-17559\*#** Naval Research Lab., Washington, D C

### **THREE YEAR PERFORMANCE OF THE NTS-2 SOLAR CELL EXPERIMENT**

R L Statler and D H Walker /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 219-228 refs Sponsored in part by AF

Avail NTIS HC A17/MF A01 CSCL 10A

Twelve different solar cell modules from the NTS 2 experiment are functioning after more than three years in a severe trapped radiation orbit of 20,367 km (10,990 nm) circular, 63 deg inclination. The rate of maximum power degradation may be fit to a predicted rate which is based on twice the value of 1 MeV electron equivalent damage fluence calculated from the space electron model AEI 7. The photovoltaic parameters of the cells are compared to their original values to demonstrate rank order of performance. Author

**N81-17572\*#** Jet Propulsion Lab., California Inst of Tech., Pasadena

### **PROSPECTS FOR ENHANCING SEP ARRAY PERFORMANCE**

John A Scott-Monck /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 351-361 refs

(Contract NAS7-100)

Avail NTIS HC A17/MF A01 CSCL 10A

Three advanced blanket design models, all employing the OAST thin cell, were developed for potential incorporation into the SEP array. The beginning of life (BOL) specific power of the these blankets ranges from 180 to 660 W/kg. Coupling these blanket designs to the baseline SEP array structure yields array specific powers of from 90 to 200 W/kg. It is shown that certain modifications to the SEP array structure, coupled with the advanced blanket designs, could allow the BOL specific power to reach approximately 250 W/kg. J M S

**N81-17573\*#** Astro Research Corp., Carpinteria, Calif

### **EFFICIENT STRUCTURES FOR GEOSYNCHRONOUS SPACECRAFT SOLAR ARRAYS**

John M Hedgepeth /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 363-377 refs

(Contract NAS7-100)

Avail NTIS HC A17/MF A01 CSCL 10A

Structural concepts for deploying and supporting lightweight solar array blankets for geosynchronous electrical power are evaluated. First, the requirements for more mass efficient solar arrays is established by describing future needs. Then analytical results are set forth which show that not only must lighter weight blankets be developed but also the supporting structure must be improved proportionately. The SEPS configuration is taken to be the state of the art point of departure for improved structural concepts. Several directions for improvement are indicated. J M S

**N81-17574\*#** Spectrolab, Inc., Sylmar, Calif

### **THE HEWAC PILOT LINE EXPERIENCE**

M Gillanders and R Opjorden /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 379-386

(Contract NAS3-21270)

Avail NTIS HC A17/MF A01 CSCL 10A

Advanced silicon solar cells with both electrical contacts on the back side of the cell are described. These high efficiency wrap around contact solar cells (HEWACS) utilize a screen printed

dielectric insulation layer to isolate the 'n' and 'p' contacts from each other. Development of a device exhibiting high AMO conversion efficiencies is addressed along with the processing of such cells to a point where cell fabrication can be carried out by production personnel under operating production line conditions JMS

**N81-17575\*** TRW Defense and Space Systems Group, Redondo Beach, Calif

**DESIGN REQUIREMENTS FOR HIGH-EFFICIENCY HIGH CONCENTRATION RATIO SPACE SOLAR CELLS**

H Rauschenbach and R Patterson /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 387-400 ref

(Contract NAS8-32988)

Avail: NTIS HC A17/MF A01 CSCL 10A

A miniaturized Cassegrainian concentrator system concept was developed for low cost, multikilowatt space solar arrays. The system imposes some requirements on solar cells which are new and different from those imposed for conventional applications. The solar cells require a circular active area of approximately 4 mm in diameter. High reliability contacts are required on both front and back surfaces. The back area must be metallurgically bonded to a heat sink. The cell should be designed to achieve the highest practical efficiency at 100 AMO suns and at 80 C. The cell design must minimize losses due to nonuniform illumination intensity and nonnormal light incidence. The primary radiation concern is the omnidirectional proton environment JMS

**N81-17576\*** Jet Propulsion Lab., California Inst of Tech., Pasadena

**BLANKET TECHNOLOGY WORKSHOP REPORT**

John A Scott-Monck /in NASA Lewis Research Center Space Photovoltaic Res and Technol 1980 p 401-403

Avail: NTIS HC A17/MF A01 CSCL 10A

The solar array blanket, defined as a substrate covered with interconnected and glassed solar cells, but excluding the necessary support structure, deployment, and orientation devices, is considered. The interactions between the blanket and the structure that is used to package, deploy, support and, if necessary, restow it, are addressed along with systems constraints such as spacecraft configuration, size, and payload requirements. The influence on blanket design is emphasized. The three main mission classes considered are low Earth orbital (LEO), intermediate, or LEO to GEO transfer, and geosynchronous (GEO). Although interplanetary missions could be considered to be a separate class, their requirements, primarily power per unit mass, are generally close enough to geosynchronous missions to allow this mission class to be included within the third type. Examination of the critical elements of each class coupled with considerations of the shuttle capabilities is used to define the type of blanket technology most likely required to support missions that will be flown starting in 1990 JMS

**N81-17579\*** Solarex Corp., Rockville, Md

**SILICON SOLAR CELL OPTIMIZATION Interim Report, Aug. 1978 - Feb. 1980**

John H Wohlgemuth and A L Scheinine Wright-Patterson AFB, Ohio AFWAL Jun 1980 78 p refs

(Contract F33615-78-C-2039)

(AD-A092908, AFWAL-TR-80-2059)

Avail: NTIS

HC A05/MF A01 CSCL 10/2

This research program has resulted in improvements in vertical junction solar cell techniques leading to higher efficiencies and improved handleability. Vertical junction solar cells have now been fabricated with AMO conversion efficiency greater than 15% (25 C). A variety of cells have been fabricated including different groove depths, substrate thicknesses and bulk resistivities. Cell performance has been measured both before and after irradiation. Theoretical analysis has been performed to generate computer models of I-V curves for various cell geometries. These models have been compared with actual cell performance to aid in the understanding of the mechanisms responsible for cell performance. GRA

**N81-17588\*** OAO Corp., Washington, D C  
**FUELS AND CHEMICALS MADE FROM SOLAR ENERGY: OPTIONS FOR THE 1990'S AND BEYOND**

Aug 1980 13 p

(Contract DE-AC01-79ET-21051)

(DOE/CS-21051/01) Avail: NTIS HC A02/MF A01

The concept and feasibility of using solar thermal systems to produce gaseous and liquid fuels and feedstocks from non-renewable resources such as coal, lignite, and peat and from renewable resources such as water and waste organic materials are discussed. Some of the commercially important reactions considered as candidates for solar thermal technology are mentioned including synthesis gas production, shale oil processing, decomposition of water, ammonia production, styrene manufacture, and inorganic chemicals processes. DOE research programs in this area are briefly discussed. DOE

**N81-17587\*** Biphase Energy Systems, Inc., Santa Monica, Calif  
**EVALUATION OF A TWO-PHASE TURBINE FOR SOLAR ELECTRIC POWER GENERATION Final Report**

William E. Amend 17 Nov 1980 129 p refs

(Contracts DE-AC03-78ET-20431, EY-78-C-03-1255)

(DOE/ET-20431/T1) Avail: NTIS HC A07/MF A01

The Biphase turbine has the potential to produce shaft power at a higher efficiency than conventional Rankine type cycles operating between the same temperature limits. Also, the two phase system has the potential to effectively operate at higher heat source temperatures than the Rankine system without having to employ extremely high pressures. In addition, capital costs of the Biphase system are projected to be some 30 percent below those for an equivalent Rankine vapor system. Since the Biphase turbine is inherently a low speed, high torque device, conventional mechanical elements can be employed to build a highly reliable, low maintenance system. Thus the cost of electrical power produced from a field of solar collector by a Biphase system is projected to be significantly below that from a Rankine system. The design, fabrication, analysis, and preliminary testing of a 58.7 hp Biphase system designed to produce electrical power from a field of solar collectors delivering energy at 540 F and 500 psia are described. DOE

**N81-17589\*** Nuovo Pignone S.p.A., Florence (Italy)

**CONSTRUCTION OF A COMPLETE ALL SEASON CONDITIONING WITH SOLAR ENERGY OF AN OFFICE BUILDING OF 260 m2 AND ITS OPERATION Final Report**

Ferrari G P Aggradi 1980 86 p refs

(EUR-6702-EN) Avail: NTIS HC A05/MF A01

The building and the solar plant are described including the control system, and the main ways of operation. The results of the first year tests are reported for every day. A description of the data acquisition system is given, including the type of data, and the measurement frequency required in each case. The main troubles occurred during the test, and the methods used to solve them are described as well. The performance of the collector and the absorption refrigerant units are analyzed. DOE

**N81-17592\*** Unibilt Industries, Vandalia, Ohio

**PASSIVE AND HYBRID SOLAR MANUFACTURED HOUSING AND BUILDINGS Final Report**

Doug Scholz, Curt Bowling, Steven Winter, Emanuel Levy, Rita Marks, and Al Zgolinski 1981 163 p. Prepared in cooperation with Winter (Steven) Associates, Inc., New York. Prepared for Midwest Research Inst., Golden, Colo.

(Contract DE-FC02-80CS-30384)

(DOE/CS-30384/1) Avail: NTIS HC A08/MF A01

After reviewing alternative insulation, glazing, and water wall schemes, five options were identified for detailed energy use and life cycle cost analysis. Using the PASCALC/SLR analysis procedure, the performance of the base case home and each of the energy conservation options was calculated. DOE

**N81-17593\*** Commission of the European Communities, Brussels (Belgium) Directorate General for Research, Science and Education

**ENERGY: SOLAR ENERGY PROGRAMME OF THE**

## 02 SOLAR ENERGY

### COMMISSION OF THE EUROPEAN COMMUNITIES

1980 181 p  
(EUR-6959-EN) Avail NTIS (US Sales Only) HC A09/MF A01;  
DOE Depository Libraries

Abstracts are presented of the final reports of projects in the fields of solar energy applications for dwellings, a 1 MWe solar thermal power plant, photovoltaic power generation, and energy from biomass DOE

### N81-17695# Stanford Univ., Calif Dept of Materials Science and Engineering PHOTOELECTRONIC PROPERTIES OF ZINC PHOSPHIDE CRYSTALS, FILMS AND HETEROJUNCTIONS Quarterly Progress Report, 1 Jul. - 30 Sep. 1980

Richard H. Bube 1980 17 p refs Sponsored by DOE Prepared for Midwest Research Inst., Golden, Colo.

(SERI/PR-8031-1-T2, QPR-6) Avail NTIS HC A02/MF A01  
The role of crystalline defects and impurities in Zn3P2, the nature of the electronic charge transport in single crystal and thin film material, and the properties of photovoltaic heterojunctions involving Zn3P2 were studied. The scope of the program extends from basic investigations of materials properties on single crystals to the preparation and characterization of all thin film heterojunction devices. One of the principal motivations behind this research program is the realization that Zn3P2 is a relatively uninvestigated yet ideal component for photovoltaic heterojunction use in solar energy conversion. The program concentrates on the basic materials problems involved with Zn3P2, providing the kind of information needed for other more developmental program directed toward actual practical cells. Results are reported DOE

### N81-17696# Mueller Associates, Inc., Baltimore, Md. PROGRAM PLAN FOR RELIABILITY AND MAINTAINABILITY IN ACTIVE SOLAR HEATING AND COOLING SYSTEMS

Oct 1980 62 p refs  
(Contract DE-AC01-80CS-36010)  
(DOE/CS-36010/01) Avail NTIS HC A04/MF A01

Specific objectives are as follows: provide all groups that have solar R & M concerns with the information that is available to the program and that can assist in alleviating those concerns; assist the solar energy industry in improving levels of R & M performance in state of the art solar energy systems, components, and materials; assist in the early development of a viable infrastructure for the design, manufacture, installation, and maintenance of reliable, maintainable, and durable solar energy systems; assist in the development of appropriate standards, code provisions, and certification programs relating to the R & M performance of solar energy systems, components, and materials; and develop the information required to support the other activities within the R & M program. These objectives correspond to five areas of action: regulations, research and development, technology transfer, solar industry infrastructure development, and data collection and analysis. TM

### N81-17600# Midwest Research Inst., Golden, Colo Solar Energy Research Inst.

**APPROPRIATE SIZING OF SOLAR HEATING SYSTEMS**  
P Bendt Sep 1980 33 p refs  
(Contracts DE-AC02-77CH-00178, EG-77-C-01-4042)  
(SERI/TR-333-320) Avail NTIS HC A03/MF A01

It is demonstrated that the uncertainty in future economic trends makes the results of system sizing by minimizing its life cycle cost questionable. The design conditions for minimum cost are extremely broad and all practical systems have a solar fraction within the limited range of 30 percent to 90 percent. Thus, by choosing only three collector areas that give systems within this range, one is assured of selecting a nearly optimal system for any realistic economic scenario. Selecting one of these three systems is essentially equivalent to economic optimization, but simpler. Procedures are derived for determining the sizes of the three systems. The conclusion is that the collector areas should be about 1/8, 1/6, and 1/3 of the building floor area. This rule of thumb eliminates the need to design solar systems individually, allowing the possibility of mass produced homes with standardized solar heating systems. DOE

**N81-17604# Lincoln Lab., Mass Inst of Tech., Lexington  
RESIDENTIAL USE OF PHOTOVOLTAICS**  
E C. Kern, Jr. 1980 7 p refs Presented at 1980 Photovoltaic Solar Energy Conf., Cannes, France, 27-31 Oct. 1980  
(Contract DE-AC02-76ET-20279)  
(DOE/ET-20279/109, CONF-801087-2) Avail NTIS  
HC A02/MF A01

Residential electricity demand data and forecasts for France, Japan and the United States are presented as background information pertinent to the market for solar photovoltaic power systems. Current residential photovoltaic system development activities in the United States were reviewed. Issues related to the eventual adoption of such systems are discussed. DOE

**N81-17605# Ontario Research Foundation, Mississauga.  
SOLAR ENERGY PROGRAM: PROTECTIVE SOLAR COLLECTOR SYSTEMS FROM CORROSION**  
[1981] 35 p refs Sponsored by National Research Council, Ottawa, Ontario  
(NP-25154) Avail NTIS (US Sales Only) HC A02/MF A01;  
DOE Depository Libraries

Corrosion by galvanic means is described and methods of fabrication which minimize this type of corrosion are discussed. Minimizing corrosion at the design and operating stages of a solar heating system by properly choosing materials, coatings, and heat transfer fluids is considered. DOE

### N81-17606# Battelle Inst., Frankfurt am Main (West Germany) DEVELOPMENT OF A CADMIUM SELENIDE THIN FILM SOLAR CELL Final Report

Dieter Bonnet Bonn Bundesministerium fuer Forschung und Technologie Dec 1979 86 p refs In GERMAN, ENGLISH summary Sponsored by Bundesministerium fuer Forschung und Technologie  
(BMFT-FB-T-79-72, ISSN-0340-7608) Avail NTIS  
HC A05/MF A01; Fachinformationszentrum, Karlsruhe, West Germany DM 18,50

A CdSe MIS thin film solar cell was developed. Fourteen materials were studied with regard to their suitability as I-layers. Two of these compounds, i.e., ZnSe and Sb2Se3, give cells with relatively high photovoltage and high photocurrent. The preparation procedure for the 2 micron thick active CdSe film was optimized with respect to all essential parameters. Commercial, nominally very pure CdSe material from six manufacturers was found either to be unsuited or to lead to properties greatly varying from batch to batch. The best results were reproducibly obtained with a material directly synthesized from the elements which are commercially available in highly pure form. Experimental cells achieve efficiencies of 4.5%. Short circuit current densities of more than 25 mA/sq cm for incident solar radiation of 100 mW/sq cm and open circuit voltages around 600 mV are obtained. Further enhancement of the photovoltage up to 700 to 800 mV seems possible by suitable doping of the CdSe layer and compensation of the doping near the surface. This as well as an enhancement of the fill factor from 55 to 70% can lead to cells of 9 to 10% efficiency. Author (ESA)

### N81-17609# Kernforschungsanlage, Juelich (West Germany) Gesellschaft mit beschraenkter Haftung TEST STATIONS FOR FLAT PLATE COLLECTORS IN IRAN, BRAZIL AND INDIA Final Report

K Scharmer and U Kleinhaus Bonn Bundesministerium fuer Forschung und Technologie Dec 1979 15 p ref In GERMAN, ENGLISH summary Sponsored by Bundesministerium fuer Forschung und Technologie  
(BMFT-FB-T-79-94, ISSN-0340-7608) Avail NTIS  
HC A02/MF A01, Fachinformationszentrum, Karlsruhe, West Germany DM 3,40

A solar collector test facility was developed to evaluate the characteristics of flat plate collectors. The collectors are described. Three collector setups were sent to research institutes in Iran, Brazil and India. These test facilities will determine the extent of collector development in those countries and test collectors under the climatic conditions of the three countries. Author (ESA)

**N81-17617\*** Acurex Corp., Mountain View, Calif. Environmental Div  
**SURVEY OF EPA FACILITIES FOR SOLAR THERMAL ENERGY APPLICATIONS** Final Report, 1 Nov. 1977 - 30 Jun. 1978

E V Nelson, P T Overly, and D M Bell Oct 1980 155 p refs  
 (Contract EPA-88-03-2567)  
 (NASA-CR-182469, EPA-600/7-80-176, PB81-109316, ACUREX-80-40/EE) Avail NTIS HC A08/MF A01 CSCL 13A

A study was done to assess the feasibility of applying solar thermal energy systems to EPA facilities. A survey was conducted to determine those EPA facilities where solar energy could best be used. These systems were optimized for each specific application and the system/facility combinations were ranked on the basis of greatest cost effectiveness. GRA

**N81-17681\*** Department of Energy, Washington, D. C. Office of Energy Research  
**INTRODUCTION TO METEOROLOGICAL MEASUREMENTS AND DATA HANDLING FOR SOLAR ENERGY APPLICATIONS**

Oct. 1980 219 p refs  
 (DOE/ER-0084) Avail: NTIS HC A10/MF A01

Five project areas, called tasks, were identified for cooperative activities within the IEA Program to Develop and Test Solar Heating and Cooling Systems. The objective of one task was to obtain improved basic resource information for the design and operation of solar heating and cooling systems through a better understanding of the required insolation (solar radiation) and related weather data, and through improved techniques for measurement and evaluation of such data. At the February 1978 initial experts meeting in Norrköping, Sweden, the participants developed the objective statement into two subtasks. (1) an insolation handbook, and (2) a portable meteorological instrument package. The handbook provides a basis for a dialogue between solar scientists and meteorologists. DOE

**N81-18114** Purdue Univ., Lafayette, Ind.  
**FLASH PHOTOLYSIS STUDIES OF THE SEMICONDUCTOR/ELECTROLYTE INTERFACE** Ph.D. Thesis

Jeffrey Rosenthal 1980 196 p  
 Avail Univ Microfilms Order No 8102700

The semiconductor/electrolyte interface, as applicable to solar energy conversion, was studied using the technique of flash photolysis with electrochemical monitoring. Two important observations came out of these studies. First, the intermediates or products of a light induced reaction at a semiconductor/electrolyte interface are electrochemically detectable at the semiconductor. This was demonstrated by the detection of a photo-oxidation product shown to exist under continuous irradiation by cyclic voltammetry. Also detected were the light induced decomposition products of n-type and p-type semiconductors, at conditions consistent with the literature observations. Second, charge transfer between a semiconductor electrode and a species in solution can be so slow that detection on the time scale of a flash photolysis experiment is not possible.

Dissert Abstr

**N81-18225\*** California Univ., Livermore  
**SOLAR COAL GASIFICATION: PLANT DESIGN AND ECONOMICS**

William R Aiman, Charles B Thorsness, and David W Gregg  
 12 Nov 1980 50 p refs Presented at the 73rd Ann Meeting of the AICE, Chicago, 16-20 Nov 1980  
 (Contract W-7405-eng-48)  
 (UCRL-84610, CONF-801104-6) Avail NTIS HC A03/MF A01

A plant was laid out and analyzed with the aid of a code that calculates process flows and plant economics. This plant is the simplest, most straightforward plant and thus the most appropriate for initial analysis. Solar energy is focused directly on the reacting coal. The process analysis shows that 40% more product can be produced from a given amount of coal and that the fraction of the solar energy that can be converted into usable

energy is greater than that for any other method with the exception of conversion to simple thermal energy. The economic analysis shows that for a gasification plant that produces a given amount of product per year, the capital costs are much higher but the operating costs are much lower. These cost differences reflect the 8 hr per day operation and the lower coal consumption for the SCG plant. Product costs were derived as a function of coal cost. DOE

**N81-18488** California Univ., Los Angeles  
**EFFECT OF WALL SUCTION ON LAMINAR ENTRANCE FLOW WITH APPLICATION TO SOLAR AIR HEATERS** Ph.D. Thesis

Seung Joon Rhee 1980 340 p  
 Avail: Univ Microfilms Order No 8104035

Numerical solutions are obtained for hydrodynamically and thermally developing steady-state laminar flow in a long rectangular cavity with uniform suction on one wall and uniform temperature or heat flux independently prescribed at each wall. Collection efficiencies for several solar air heaters are predicted by performing a system analysis. A two dimensional thermal system model is considered, where temperature variation along the direction of flow is allowed in each system element. Five selective black metal plate experimental solar air heaters with and without transpiration were designed, fabricated, and tested to compare their technical merits and to prove how well the theoretical results and system analysis predict performance of actual solar collectors. Discussion of the design of a full-scale selective black metal plate solar air heater with transpiration through slots is presented. Discussed are (1) The number of teflon films for cover glazing assembly, (2) the spacing between glazing elements, (3) the spacing between the absorber plate and the inner glazing, and (4) the design of inlet and outlet manifolds. Dissert Abstr

**N81-18492\*** United Stirling A B Malmö (Sweden)  
**DESIGN STUDY OF A KINEMATIC STIRLING ENGINE FOR DISPERSED SOLAR ELECTRIC POWER SYSTEMS** Final Report, 1979 - 1980

1980 124 p refs  
 (Contract DEN3-56, EX-76-A-29-1060)

(NASA-CR-159588, DOE/NASA/0056-79/2) Avail NTIS HC A08/MF A01 CSCL 10B

The concept evaluation shows that the four cylinder double acting U type Stirling engine with annular regenerators is the most suitable engine type for the 15 kW solar application with respect to design, performance and cost. Results show that near term performance for a metallic Stirling engine is 42% efficiency. Further improved components show an impact on efficiency of the future metallic engine to 45%. Increase of heater temperature, through the introduction of ceramic components, contribute the greatest amount to achieve high efficiency goals. Future ceramic Stirling engines for solar applications show an efficiency of around 50%. TM

**N81-18493\*** National Aeronautics and Space Administration  
 Lyndon B Johnson Space Center, Houston, Tex  
**SOLAR POWER SATELLITE SYSTEM SIZING TRADEOFFS**  
 G D Arndt and L G Monford Feb 1981 44 p ref  
 (NASA-TP-1804, S-505) Avail NTIS HC A03/MF A01 CSCL 10A

Technical and economic tradeoffs of smaller solar power satellite systems configured with larger antennas, reduced output power, and smaller rectennas, are considered. The differential costs in electricity for seven antenna/rectenna configurations operating at 2.45 GHz and five satellite systems operating at 5.8 GHz are calculated. Two 2.45 GHz configurations dependent upon the ionospheric power density limit are chosen as examples. If the ionospheric limit could be increased to 54 mW sq/cm from the present 23 mW sq/cm level, a 1.53 km antenna satellite operating at 2.45 GHz would provide 5.05 GW of output power from a 6.8 km diameter rectenna. This system gives a 54 percent reduction in rectenna area relative to the reference solar power satellite system at a modest 17 percent increase in electricity costs. At 5.8 GHz, an 0.75 km antenna providing

## 02 SOLAR ENERGY

2 72 GW of power from a 5 8 km diameter rectenna is selected for analysis This configuration would have a 67 percent reduction in rectenna area at a 36 percent increase in electricity costs Ionospheric, atmospheric, and thermal limitations are discussed Antenna patterns for three configurations to show the relative main beam and sidelobe characteristics are included A R H

**N81-18495\*** Solarex Corp, Rockville, Md  
**COPLANAR BACK CONTACTS FOR THIN SILICON SOLAR CELLS** Final Report, 24 Jul. 1978 - 15 Jul. 1980  
G Storti, A Scheinine, D Whitehouse, J Wohlgemuth, C Wngley, and M Giuliano Jan 1981 38 p refs  
(Contract NAS3-21250)  
(NASA-CR-185272) Avail NTIS HC A03/MF A01 CSCI 10A

The type of coplanar back contact solar cell described was constructed with interdigitated n(+) and p(+) type regions on the back of the cell, such that both contacts are made on the back with no metallization grid on the front This cell construction has several potential advantages over conventional cells for space use namely, convenience of interconnects, lower operating temperatures and higher efficiency due to the elimination of grid shadowing However, the processing is more complex, and the cell is inherently more radiation sensitive The latter problem can be reduced substantially by making the cells very thin (approximately 50 micrometers) Two types of interdigitated back contact cells are possible, the types being dependent on the character of the front surface The front surface field cell has a front surface region that is of the same conductivity type as the bulk but is more heavily doped This creates an electric field at the surface which repels the minority carriers The tandem junction cell has a front surface region of a conductivity type that is opposite to that of the bulk The junction thus created floats to open circuit voltage on illumination and injects carriers into the bulk which then can be collected at the rear junction For space use, the front surface field cell is potentially more radiation resistant than the tandem junction cell because the flow of minority carriers (electrons) into the bulk will be less sensitive to the production of recombination centers, particularly in the space charge region at the front surface T M

**N81-18499#** Von Karman Inst for Fluid Dynamics, Rhode-Saint-Genese (Belgium) Environmental and Applied Fluid Dynamics Dept  
**HEAT EXCHANGE AND SOLAR ENERGY, VOLUME 1**  
1980 223 p refs Partly in ENGLISH and FRENCH Proceedings of 1980 Lecture Ser, Rhode-Saint-Genese, Belgium, 28 Jan - 1 Feb 1980 2 Vol  
(VKI-LS-1980-2-Vol-1) Avail NTIS HC A01/MF A01

Lectures were presented surveying the heat transfer problems arising in connection with the collection, storage and utilization of solar energy Special emphasis is given to the modeling of complete solar systems, including computer simulation of their transient response

**N81-18500#** Mons Univ (Belgium)  
**GENERAL INTRODUCTION TO THERMAL CONVERSION OF SOLAR ENERGY**  
J Bougard In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy, Vol 1 1980 35 p refs

Avail NTIS HC A10/MF A01

The daily distribution and monthly repartition of direct and diffuse solar energy is shown for Belgium The thermodynamic limitations of thermal conversion are reviewed relative to solar heating and cooling systems Optical systems, absorbers, and the global energy balance are discussed for thermal solar collectors Energy flow charts shown are for several configurations of solar heating systems Author (ESA)

**N81-18501#** Institut Royal Meteorologique de Belgique, Brussels Radiometry Section  
**METEOROLOGICAL DATA: MEASUREMENT TECHNIQUES AND SOLAR COMPONENTS**

R Dogniaux In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy, Vol 1 1980 28 p refs

Avail NTIS HC A10/MF A01

The users of solar radiation data are identified and their respective accuracy requirements are given Quantities and units are defined for direct, diffuse and global solar radiation measurements, and for long wave radiation flux Techniques for estimating solar radiation data from sunshine hourly data are mentioned, and for deriving mean radiation components from parameters associated with the astronomical coordinates of the Sun, the geographical coordinates of the station, and atmospheric turbidity Author (ESA)

**N81-18502#** Mons Univ (Belgium)  
**METEOROLOGICAL DATA: TREATMENT OF RADIATION DATA, TEST REFERENCE YEAR**  
Andre Pilatte and Philippe Nicolas In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy, Vol 1 1980 29 p Sponsored by EEC and Belgium Ministry of Scientific Policy  
Avail NTIS HC A10/MF A01

A test reference year (TRY) is defined as a set of real measured hourly values for dry temperature, for global, diffuse and direct normal solar radiation, and for wind velocity The data are in true sequence within each month The months are selected from a multiple year data set of observations for a given location such that the resulting TRY is typical for the location Three methods for selecting a TRY are outlined One is purely statistical, the second depends on manual evaluation of data by a meteorologist, and the third depends on the effects of input data on a given system, (a building or a domestic hot water system) Each method is used to select a TRY and a climatological evaluation is performed with a solar heating system simulation program SYS4 The methods generate usable TRYs, with the statistical method costing the least Author (ESA)

**N81-18503#** Joint Research Centre of the European Communities, Ispra (Italy)  
**THERMAL PROCESSES IN FLAT PLATE SOLAR COLLECTORS**  
E Aranovitch In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy, Vol 1 1980 49 p

Avail NTIS HC A10/MF A01

Heat losses from radiation, natural convection and from conduction in nonfocusing flat plate collectors are described and evaluated The fin and bond effect is discussed and a method is shown for deriving the temperature profile in an aluminum fin The principles of radiation transmission through transparent covers are reviewed, including Fresnel reflections at interfaces, and absorption coefficients within material Methods for calculating heat losses and efficiency of a collector are shown Methods for improving transmittance of covers are mentioned, including use of double glass, selective surfaces, and honeycomb structures between the cover and the absorber plate Author (ESA)

**N81-18504#** Joint Research Centre of the European Communities, Ispra (Italy)  
**DESCRIPTION AND THERMAL PERFORMANCE OF CORRUGATED SOLAR COLLECTORS [DESCRIPTION ET PERFORMANCES THERMIQUES DE COLLECTEURS SOLAIRES A CORRUGATIONS]**  
P Colaiemma (ALUMETAL), X Micheletti (ALUMETAL), E Aranovitch, F Farfaletti, M Ledet, and C Roumengous In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy Vol 1 1980 21 p In FRENCH

(Contract ISPRA-145-75-PIPGI)

Avail NTIS HC A10/MF A01

Full scale tests were conducted of a flat plate solar collector fabricated from modular aluminum extrusions The anodized extruded backplates contained integral fluid tubes and triangular corrugations Plates painted black, brown and green were evaluated at entry temperatures between 40 C and 90 C, and were found to be of nearly equal efficiency Anodized plates



were 40% more efficient. Curves are shown for monochromatic reflectance as a function of length of anodizing treatment. The extrusion profile tested presented a nonnegligible thermal resistance. Author (ESA)

**N81-18505#** Calabria Univ., Cosenza (Italy)  
**ADVANCED SOLAR COLLECTORS (CONCENTRATING TROUGHS)**

Orazio A Barra, L Franceschi, and E Pugliese Carratelli. In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy, Vol 1 1980 31 p refs

Avail NTIS HC A10/MF A01

The optical characteristics of short focus and long focus parabolic troughs are listed. A statistical analysis of the photothermal conversion and thermal losses of a cylindrical pipe and a cavity receiver is made. A steady state heat transfer equation is used to perform a dynamic analysis of the temperature profiles of the fluid flowing inside the receivers. Finite difference methods are employed to solve the equation with boundary conditions supplied by statistical analysis and with experimental data to estimate the equation parameters. Solutions for several physical and geometrical variants are discussed. Parabolic trough solar plant designs are given. Author (ESA)

**N81-18506#** Calabria Univ., Cosenza (Italy)  
**A NATURAL CONVECTION SOLAR HOUSE SYSTEM**

O A Barra, E Pugliese Carratelli, and G Salzano (Rome Univ). In Von Karman Inst for Fluid Dyn Heat Exchange and Solar Energy, Vol 1 1980 16 p refs

(Contract CNR-78-02438 07)

Avail NTIS HC A10/MF A01

An instrumented house heated by air circulated past a south facing wall was constructed and a computer model prepared to simulate the operation of the system. The wall was thermally decoupled from the collector, and a thin metal absorber plate introduced between the transparent cover and the wall. The absorber radiated from both sides in the naturally circulating air flow. The model supplied a synthetic series of hourly values of direct and diffused solar radiation and external ambient temperature, assuming a statistical distribution of historical data of the site. Some graphical model results are given. Author (ESA)

**N81-18515#** First Manufactured Homes, Inc., Lubbock, Tex  
**PASSIVE AND HYBRID SOLAR MANUFACTURED HOUSING AND BUILDINGS**

15 Sep 1980 217 p  
(Contract DE-EC02-80CS-30371)

(DOE/CS-30371/1) Avail. NTIS HC A10/MF A01

The eleven Conceptual Options, three Preliminary Designs for the Technical Review and three types of thermal storage hat could be used with any of the three plans are included. Also, the appropriate thermal calculations, life cycle cost, cost estimates and market analysis are included. GRA

**N81-18520#** Midwest Research Inst., Golden, Colo Solar Thermal, Ocean, and Wind Div  
**OMNIUM-G PARABOLIC DISH OPTICAL EFFICIENCY: A COMPARISON OF TWO INDEPENDENT MEASUREMENT TECHNIQUES**

M Bohn and H Gaul Oct 1980 16 p refs

(Contract DE-AC02-77CH-00178)

(SERI/TR-631-544) Avail NTIS HC A02/MF A01

Measurements made at SERI of the optical efficiency of the Omniium-G parabolic dish concentrator are described. Two independent techniques are emphasized: the cold water calorimeter method, and the heat of fusion method. Results from both techniques indicate that the optical efficiency for a 10 cm receiver aperture is 25 percent. An optical alignment procedure is described that resulted in the increase in optical efficiency from 21 percent to the current value of 25 percent. DOE

**N81-18521#** Institute of Gas Technology, Chicago, Ill  
**ELECTROCHEMICAL PHOTOVOLTAIC CELLS** Quarterly

**Technical Progress Report, 1 Aug. - 31 Oct. 1980**

Peter G P Ang and A F Sammells Dec 1980 22 p refs  
(Contract DE-AC02-77CH-00178)

(SERI/PR-9175-1-T2) Avail NTIS HC A02/MF A01

Experimental approaches for electrochemical photovoltaic cells that not only show promise of high power conversion efficiencies but also have the potential to achieve long life and the capacity for energy storage were identified. The work is organized as follows: selection of high efficiency semiconductor photoelectrode/electrolyte systems, development of long life electrochemical photovoltaic cells, development of an all solid state electrochemical photovoltaic cell with in situ storage and demonstration of laboratory size photoelectrochemical cell with redox storage. This program is directed toward identifying a suitable match between the proposed semiconductor and the redox species present in aqueous, nonaqueous, and solid electrolytes for achieving the necessary performance and semiconductor stability requirements. Emphasis is on aqueous electrolyte based systems where fast kinetics are favored. The proposed systems will be compatible with convenient storage of the electroactive species generated and their later electrochemical discharge in a redox cell. DOE

**N81-18522#** Battelle Pacific Northwest Labs, Richland Wash  
**BARSTOW HELIOSTAT MIRROR GLASS CHARACTERIZATION**

M A Lind and C Q Buckwalter Sep 1980 40 p refs

(Contract DE-AC06-76RL-01830)

(PNL-3576) Avail NTIS HC A03/MF A01

The technical analysis performed on the special run of low iron float glass for a ten megawatt solar thermal/electric pilot power plant is discussed. The topics that are addressed include the optical properties and the relative durability of the glass. Two optical parameters, solar transmittance and optical flatness, were measured as referenced in the specification and found to be better than the stated tolerances. The average solar transmittance exceeded 0.890 transmittance units. The glass also exhibited optical angular flatness deviations less than + or - 1.0 mrad as required. Both qualitative and quantitative accelerated weathering tests were performed on the glass in order to compare its durability to other soda lime float glass and alternate composition glasses of interest to the solar community. In both the quantitative leaching experiments and the more qualitative room temperature and elevated temperature water vapor exposure experiments the heliostat glass exhibited the same characteristics as the other soda lime silicate float glasses. DOE

**N81-18523#** Midwest Research Inst., Golden, Colo  
**SOLAR CENTRAL RECEIVER SYSTEMS COMPARATIVE ECONOMICS**

P J Eicker Apr 1980 9 p refs. Presented at Solar Central Receiver Semiann Rev Meeting, Williamsburg, Va., 11 Sep 1979

(Contract DE-AC02-77CH-00178)

(SERI/SP-633-637, CONF-7909189-1) Avail NTIS HC A02/MF A01

Several major conceptual design studies of solar central receiver systems and components were completed in the last year. The results of these studies were used to compare the projected cost of electric power generation using central receiver systems with that of more conventional power generation. The cost estimate for a molten salt central receiver system is given. Levelized busbar energy cost is shown as a function of annual capacity factor indicating the fraction of the cost due to each of the subsystems. The estimated levelized busbar energy cost for a central receiver (70 to 90 mills per kilowatt hour) is compared with the levelized busbar energy cost for a new coal fired Rankine cycle plant. Sensitivities to the initial cost of coal and the delta fuel escalation are shown. DOE

**N81-18530#** Rockwell International Science Center, Thousand Oaks, Calif Electronics Research Center  
**GALLIUM ARSENIDE PHOTOVOLTAIC DENSE ARRAY FOR CONCENTRATOR APPLICATIONS** Final Report

J A Cape Dec 1980 108 p refs

(Contract DE-AC04-78DP-00789)

## 02 SOLAR ENERGY

(SAND-78-7056) Avail NTIS HC A06/MF A01

The feasibility of operating a photovoltaic subsystem on a solar central receiver was explored with emphasis on the possible application of the photovoltaic device as part of a compound receiver for cogeneration of heat and electricity, a so-called total energy system. Progress is reported in the design, performance, and testing of a dense array of GaAs concentrator cells. Specific requirements for the array design were (1) achieve 16% array efficiency (including area losses) at 1000 SUNs, (2) yield a working output voltage between 220 to 300 volts, (3) have integral heat sinking optimized for efficient total energy utilization, (4) meet the test conditions of 25(0) to 180(0)C and 50 to 1500 SUNs, (5) have a modular structure so that larger units could be built up, (6) be compatible with CRTF test system (coolant loop, and optical acceptance angle, etc), and (7) be protected against shorts, shadowing, individual cell open circuit failure and load fluctuations. Progress is reported including design, performance, and testing details. DOE

**N81-18532#** Foster-Miller Associates, Inc., Waltham, Mass  
**DEVELOPMENT OF AN AUTOMATIC HELIOSTAT CLEANING SYSTEM** Final Technical Report

Paul Tremblay and Elizabeth Poulin Dec 1980 120 p refs (Contract DE-AC04-79DP-00789)

(SAND-79-8184, SAN-7908) Avail NTIS HC A06/MF A01

An automatic washing system was designed consisting of a water treatment system, a pressurized underground water distribution system, an automatic spray washing module for each heliostat, a water collection system, and appropriate controls to operate this equipment. In order to determine the required values for the various washing parameters, a series of washing tests was undertaken in which mirrors were soiled and then cleaned by a high pressure water spray. Reflectivity was measured for the clean, soiled and washed conditions to determine the effectiveness of the cleaning. A heliostat spray module was constructed and operated mainly to obtain information on the mechanical operation of one concept. This testing showed that this system was generally satisfactory, but did show some areas for improvement. Water distribution and waste water systems were designed and evaluated with the main conclusion that conventional waste water collection is complex and the most expensive part of the system. DOE

**N81-18533#** Hughes Research Labs., Malibu, Calif  
**INDIUM PHOSPHIDE/CADMIUM SULFIDE THIN-FILM SOLAR CELLS** Final Report, May 1979 - Jul. 1980

K Zanio Sep 1980 71 p refs

(Contract DE-AC02-77CH-00178)

(SERI/TR-8170-1-T2) Avail NTIS HC A04/MF A01

Thin-film InP/RXCdS/ITO/GLASS devices were prepared by depositing ITO on low-cost glass substrate, depositing CdS on the ITO by thermal evaporation, increasing the CdS lateral grain size by recrystallization, and depositing p-type InP by planar reactive deposition (PRD) on the recrystallized CdS (RXCdS). Yields of the RXCdS/ITO/GLASS substrates were increased to 90% with lateral dimensions of the RXCdS grains as large as 0.3 mm. P-type InP layers were obtained with Be doping. S-doping via vapor transport from the CdS was eliminated by capping the entire RXCdS substrate with InP. For InP deposited on RXCdS at 380 C, devices showed blocking action with a barrier height of about 0.5 V but no light response, possibly due to an intermediate approx 3 micrometers thick n-InP layer from diffusion of S from the RXCdS. These results were achieved despite poor InP epitaxy due to an approx 0.5 micrometer-thick In-Cd-S transition layer between the InP and the RXCdS. InP films were subsequently deposited on RXCdS at the reduced substrate temperature of 280 C to reduce S-diffusion and improve the quality of the epitaxy. DOE

**N81-18537#** New Mexico Inst of Mining and Technology, Socorro Dept of Metallurgical and Materials Engineering  
**MICROSTRUCTURAL AND MECHANICAL PROPERTY EVALUATION OF BLACK CHROME AND ZINC OXIDE COATED SOLAR COLLECTORS** Annual Report, Jun. 1979 - Mar. 1980

O T Inal, L E Murr, and A E Torma 1980 85 p refs (Contract DE-AS04-78AL-04266)

(DOE/AL-04266/T1, AR-2) Avail NTIS HC A05/MF A01

Plating parameters for black chrome system were optimized with respect to selectivity utilizing simplex evolutionary operation procedures in sixteen sets of experiments. Overgrowths produced with the optimized parameters were evaluated for optical, structural, thermal stability and mechanical properties. It is observed that the coatings produced possess consistently high selectivity values, are durable against exposure to high temperature, are well attached to their structure, and are ductile. Black zinc oxide surfaces created on leaf zinc, electroplated zinc on steel, and hot-dip zinc coated steel substrates show selectivity values that vary between 6-9, are seen to maintain their physical integrity as well as optical properties. The plating parameters utilized in deposition of the coatings are seen to alter quantity and distribution of the elemental component and affect optical properties of these surfaces. DOE

**N81-18538#** Harvard Univ., Cambridge, Mass Energy and Environmental Policy Center  
**BOSTON SOLAR RETROFITS: STUDIES OF SOLAR ACCESS AND ECONOMICS**

Michael Shapiro and Shauna Doyle Nov 1980 101 p refs (Contract DE-AT01-79CS-10047)

(DOE/CS-10047/T5) Avail NTIS HC A06/MF A01

Studies of solar access and solar retrofit economics are described for residential applications in the City of Boston. The study of solar access was based upon a random sample of 94 buildings, the sample was stratified to ensure a broad geographic representation from the city's various sections. Using available data on the heights and orientations of the sampled structures and surrounding buildings, each building's hourly access to sunlight was computed separately for the roof and south facing walls. The second study was a comparative analysis of the economics of several solar heating and hot water systems. Next, a number of alternative approaches for solar space and water heating were identified from interviews with individuals and groups involved in solar retrofit projects in the Boston area. DOE

**N81-18540#** Argonne National Lab., Ill Components Technology Div

**SOME BASIC CONSIDERATIONS AND POSSIBLE IMPROVEMENTS ON THE SOLAR POND**

W T Sha, Y S Cha, K V Liu, and S L Soo Jun 1980 49 p refs

(Contract W-31-109-eng-38)

(ANL-CT-80-23) Avail NTIS HC A03/MF A01

Experimental results were compared to theoretical stability criteria of a salt gradient solar pond. Cellular motion in the nonconvective layer is expected. Innovative concepts on friction stabilization using stabilizing barriers and longitudinal stratification to improve pond heat extraction efficiency are presented. DOE

**N81-18542#** Battelle Pacific Northwest Labs., Richland, Wash  
**ASSESSMENT OF SOLAR OPTIONS FOR LARGE POWER APPLICATIONS**

Walter J Apley Oct 1980 12 p refs Presented at the Solar Central Receiver Semi-Annual Meeting, San Francisco, 15 Oct. 1980

(Contract DE-AC06-76RL-01830)

(PNL-SA-8968, CONF-8010129-1)

Avail NTIS

HC A02/MF A01

Comparative analyses of solar thermal conversion concepts were performed with the purpose of characterizing, evaluating, and ranking the principal solar thermal power concepts under consideration in the DOE-Solar Thermal Power Program, on the basis of an engineering and economic analysis of alternative power plant configurations. Conceptual designs developed for the selected systems were based on common assumptions of available technology in the 1990 to 2000 time frame. Designs best suited for a comparative evaluation of the concepts were formulated. Costs were estimated on the basis of identical assumptions, ground rules, methodologies, and unit costs of materials and labor applied uniformly to all of the concepts.

Seven generic types of collectors, together with associated subsystems for electric power generation, were considered in the study. The collectors can be classified into three categories: two-axis tracking (with compound-curvature reflecting surfaces), one-axis tracking (with single-curvature reflecting surfaces), and nontracking (with low-concentration reflecting surfaces) DOE

**N81-18545#** Brookhaven National Lab., Upton, N Y Dept of Energy and Environment  
**THIN-FILM FLAT-PLATE SOLAR COLLECTORS FOR LOW COST MANUFACTURE AND INSTALLATION**  
 John W Andrews and William G Wilhelm Mar 1980 37 p refs  
 (BNL-51124) Avail NTIS HC A03/MF A01

A solar energy collector design using thin film plastics in both the absorber and glazing is described. The design approach proceeded in two steps. First, cost constraints on solar collectors were determined using reasonable economic projections. Second, engineering was applied only to those ideas which had hope of falling within those cost boundaries. The use of thin film plastics appeared most attractive according to these criteria. The nature of the marketing and distribution network can be expected to have a strong impact on the final installed cost of the collector; the proposed design has characteristics which could make possible a reduced price markup DOE

**N81-18551#** Sandia Labs., Albuquerque, N Mex Experimental Systems Operations Div  
**MIDTEMPERATURE SOLAR SYSTEMS TEST FACILITY PROGRAM FOR PREDICTING THERMAL PERFORMANCE OF LINE-FOCUSING, CONCENTRATING SOLAR COLLECTORS**

Thomas D Harrison Nov 1980 29 p refs  
 (Contract DE-AC04-76DP-00789)  
 (SAND-80-1964) Avail NTIS HC A03/MF A01

The qualifications of the laboratories selected to do the testing and the procedure for selecting commercial collectors for testing are given. The testing program is outlined. The computer program for performance predictions is described. An error estimate for the predictions and a sample of outputs from the program are included DOE

**N81-18552#** State Univ of New York Buffalo Dept of Electrical Engineering  
**FABRICATION AND TESTING OF MIS SOLAR CELLS ON a-Si:H Final Report, 15 Sep 1979 - 15 Sep, 1980**  
 M K Han and Wayne A Anderson 3 Nov 1980 56 p refs  
 Sponsored in part by Midwest Research Inst Golden, Colo  
 (Contract DE-AC02-77CH-00178)  
 (SERI/TR-8041-9-T1) Avail NTIS HC A04/MF A01

Fabrication techniques and improved a-Si:H film processing were achieved to produce a short circuit current density of 7.5 mA/sq/cm and open circuit voltage of 740 mV on large area a-Si cells by the deposition of an inexpensive semitransparent metal (Cr) as a top electrode on a N-I-P structure. This corresponds to a 2% efficiency using AM1 illumination. A V(sub oc) of 830 mV and fill factor of 0.54 were also separately obtained. A relatively simple and inexpensive deposition technique using a one pumpdown vacuum system, Al grid, and thin metal film structure were applied to reduce the cost of a-Si:H cell fabrication. A SEM study of a-Si film quality shows the substrate texture to greatly influence the film morphology. This in turn serves to influence the uniformity of photovoltaic response on completed solar cells. The studies of optical transmittance of various thin metal films promote the utilization of Cr and Cu as a top electrode. Dark and illuminated I-V characteristics show that current conduction mechanisms and recombination phenomena are not the same under dark and illuminated conditions DOE

**N81-18555#** Monosolar, Inc., Santa Monica, Calif  
**EMERGING MATERIALS FOR SOLAR CELL APPLICATIONS. ELECTRODEPOSITED CdTe Quarterly Report, 16 May - 16 Aug, 1980**  
 Robert L Rod, Bulent Basol and Oscar Stafstudd 10 Sep 1980 15 p  
 (Contract DE-AC02-77CH-00178)

(SERI/PR-9152-1-T1, QR-2) HC A02/MF A01

Work was centered about improving electroplating processes and cell fabrication techniques, with emphasis being given to three differing n-CdTe/Au Schottky configurations. The highest values of efficiency related parameters achieved with a simulated solar irradiation of 100 mW/sq cm were 0.57V for open circuit voltage, 0.6 for fill factor, and 6 mA/sq cm for short circuit current. Four important parameters are known to control the quality of the Monosolar electrodeposition process and resultant solar cells. They are electrolyte temperature, Te concentration in the solution at a specific pH, deposition or quasi-rest potential and flow pattern of the electrolyte (stirring). The first three considerations are believed to be fully understood and optimized. Work is underway to further understand the effects of stirring on the diffusion of ionic components and the effects on CdTe film performance. Work was accelerated during the quarter to increase the short circuit current. Parallel programs using laser irradiation of finished CdTe films, heat treatment, and changes in the electrodeposition process itself to recrystallize films were started DOE

**N81-18557#** Poly Solar, Inc., Garland, Tex  
**THIN FILM POLYCRYSTALLINE SILICON SOLAR CELLS Technical Progress Report, 16 Jul - 15 Oct, 1980**  
 Oct 1980 32 p  
 (Contract DE-AC02-77CH-00178)

(SERI/PR-9192-1-T2, TPR-2) Avail NTIS HC A03/MF A01  
 The objectives of this contract are to fabricate large area thin film silicon solar cells with AM1 efficiency of 10% or greater with good reproducibility and good yield and to assess the feasibility of implementing this process for manufacturing solar cells at a cost of \$300/kWe. Efforts were directed to the purification of metallurgical silicon, the preparation and characterization of substrates and epitaxial silicon layers, and the fabrication and characterization of solar cells. The partial purification of metallurgical silicon by extraction with aqua regia was further investigated in detail, and the resulting silicon was analyzed by the atomic absorption technique. The unidirectional solidification of aqua regia extracted metallurgical silicon on graphite was used for the preparation of substrates, and the impurity distribution in the substrate was determined and compared with the impurity content in metallurgical silicon. The effects of heat treatment on the impurity distribution in the substrate and in the epitaxial layer were also investigated DOE

**N81-18559#** Westinghouse Research and Development Center, Pittsburgh, Pa  
**DEVELOPMENT OF COPPER SULFIDE/CADMIUM SULFIDE THIN FILM SOLAR CELLS Technical Progress Report, 13 Jan - 12 Apr 1980**

J R Szedon, F A Shirland, J A Stoll, H C Dickey, and W J Biter 23 Jul 1980 39 p refs  
 (Contract DE-AC02-77CH-00178)

(SERI/PR-8143-1-T2 TPR-3) Avail NTIS HC A03/MF A01  
 During the course of this quarter, peak cell performance was improved from 0.455V to 0.510V, from 11.8 to 20.2 mA/sq/cm, and from 3.3% to 6.5% as regards open circuit voltage, short circuit current density, and conversion efficiency, respectively. Information exchanges and critical reviews of process details were made with the cooperation of the group at the Institute of Energy Conversion, University of Delaware. As a result of these, two areas were identified which lead to higher cell performance. Substrate temperature control and monitoring during deposition were improved by the use of a thermocouple welded to the foil substrate. Fast thorough rinsing of the CdS films in the interval between the etch for surface texturing and the immersion in cuprous chloride for barrier formation current and open circuit voltage performance DOE

**N81-18560#** Texas A&M Univ., College Station Dept of Chemistry  
**PHOTOCHEMICAL SOLAR ENERGY CONVERSION IN SURFACTANT VEHICLES Annual Progress Report, 1 Mar. - 30 Nov, 1980**  
 J H Fendler 1980 8 p refs

## 02 SOLAR ENERGY

(Contract DE-AS05-80ER-10601)

(DOE/ER-10601/1) Avail NTIS HC A02/MF A01

This report lists the personnel, journal publications, oral presentations, and summarizes the scientific activities the neodymium-yag laser system was installed, based on this laser, a nanosecond flash photolysis system was constructed, water soluble 5,10,15,20-tetra-p-n-methyl-pyridinochloride zinc-porphyrin were synthesized purified and characterized, and photosensitized electron transfer, charge separation a hydrogen production were demonstrated in surfactant DOE

**N81-18561#** Virginia Polytechnic Inst and State Univ Blacksburg  
**THE CdSiAs<sub>2</sub> THIN FILMS FOR SOLAR CELL APPLICATIONS** Final Report, 9 Apr. 1979 - 8 Mar 1980

L C Burton and L H Slack Jun 1980 71 p refs

(Contract DE-AC04-79ET-23007)

(DOE/ET-23007/4) Avail NTIS HC A04/MF A01

Compounds of Cd-Si-As required for sputtering targets and evaporation charges were synthesized by direct fusion. These include CdSiAs<sub>2</sub>, Cd<sub>3</sub>As<sub>2</sub>, CdAs<sub>2</sub> and SiAs. Polycrystalline ingots of CdSiAs<sub>2</sub> were found to be porous, with the chalcopyrite structure, and with minor amounts of other phases such as CdAs<sub>2</sub>, SiAs, As and Cd<sub>3</sub>As<sub>2</sub>. Sputtered films were formed in a single target RF system. A homogeneous CdSiAs<sub>2</sub> target was initially used, followed by composite targets consisting of CdAs<sub>2</sub> + Si. Films from the latter targets were superior to the others and were more extensively studied. As deposited films were amorphous off stoichiometry, with resistivities over 10 to the 8th power cm and band gaps of approx 1.4 eV. Subsequent reactive heat treatments in the 515 to 615 C range resulted in crystalline films, resistivities of 1 to 10 cm, CdSiAs<sub>2</sub> compositions within 15 of stoichiometry, energy gap of approx 1.55 eV, absorption coefficient of 0.002/cm at 0.6 micrometers, but with poor mechanical properties (mainly cracking). A Ta/SiO<sub>2</sub> substrate proved to be the best for these films. DOE

**N81-18564** Stanford Univ, Calif  
**SILICON SOLAR CELL DESIGN FOR MEDIUM CONCENTRATION APPLICATIONS** Ph.D. Thesis  
Frederick Chien-Ming Wu 1980 127 p  
Avail Univ Microfilms Order No 8103577

Two solar cell processes were developed leading to solar cells that are fabricated directly on an existing commercial integrated circuits processing line. The computer model developed used a simple but realistic equivalent circuit approach. Through simulation of variations arising from carrier lifetime, resistance and surface effects, the program shows that for typical values obtained from a commercial line, a surface junction structure, where a p-n junction is formed over the entire top surface of the cell, gives maximum energy conversion efficiencies for 1 to 200 times solar concentrations. Two different surface junction solar cells were designed to maximize current collection. Laser annealing cannot be substituted as an ion-implantation damage annealing step. The remaining point defects are enough to cause a degradation of cell performance, and a subsequent thermal anneal is necessary to restore the expected efficiency.

Dissert Abstr

**N81-18566** Connecticut Univ, Storrs  
**THERMAL PERFORMANCE PREDICTIONS OF FLAT-PLATE SOLAR COLLECTOR AIR HEATERS** Ph.D. Thesis  
Thomas Charles O'Neill 1980 250 p  
Avail Univ Microfilms Order No 8103219

A computer program was written that models heat exchanges occurring within flat plate solar air collectors and which computes the incoming solar flux and heat losses to the environment. Internal collector temperatures and thermal efficiencies are predicted for either steady state or transient cases from finite difference solutions to a set of energy balance equations. These relations are written for thermal modes that are generated and linked together by the internal deck logic. The program was utilized in a study of three types of air collectors. The first two configurations employed crossflow impingement along the backside of their absorbers to augment heat transfer coefficients developed at those surfaces, while the third used a rock matrix

absorber to expand its surface area for heat transfer. In addition the first collector replaced the conventional stationary plate absorber of the second design by a traveling belt. Dissert Abstr

**N81-18572#** Bolt, Beranek and Newman, Inc Canoga Park Calif

**EVALUATION OF THE NOISE IMPACT OF SATELLITE POWER SYSTEM VEHICLES ON THE COMMUNITY AND ECOLOGY AT THE LAUNCH SITE**

Karl S Pearson, Pritchard H White, and John F Wilby Dec 1980 109 p refs

(Contract W-7405-eng-48)

(LBL-11978, BBN-4210) Avail NTIS HC A06/MF A01

Placement of the Satellite Power System (SPS) satellites into orbit will require the launch of many heavy space vehicles over a 30 year period. These vehicles will generate rocket noise at launch and sonic booms at launch and on return to the landing site. In this study, rocket noise levels and sonic boom pressures are predicted for the region around a typical launch/landing site. The response of humans and animals to broadband and impulsive noise is reviewed briefly and the appropriate information is applied to the specific noise levels and sonic boom pressures predicted for the region around the launch/landing site. It is estimated that noise levels will be high enough that hearing protection will be required for personnel at the launch site and that there will be significant annoyance (more than 5% highly annoyed) to the population within 9 km from the launch site. Infrasound (sub-audio frequencies) will probably cause significant annoyance over a larger region. With launches over the ocean, the very high sonic boom pressures during ascent will occur over unpopulated areas. However, booms generated during descent of the orbiters will occur over populated areas and it is predicted that there will be significant annoyance at distances up to 45 km from the launch/landing site. DOE

**N81-19177#** Rockwell International Corp, Seal Beach, Calif  
**Satellite Systems Div**

**SUMMARY OF LBST SYSTEMS ANALYSIS AND INTEGRATION TASK FOR SPS FLIGHT TEST ARTICLES**

H S Greenberg In NASA Langley Research Center Large Space Systems Technol, 1980, Vol 1 Feb 1981 p 167-182 refs

Avail NTIS HC A19/MF A01 CSCL 22B

The structural and equipment requirements for two solar power satellite (SPS) test articles are defined. The first SPS concept uses a hexagonal frame structure to stabilize the array of primary tension cables configured to support a Mills Cross antenna containing 17,925 subarrays composed of dipole radiating elements and solid state power amplifier modules. The second test article consists of a microwave antenna and its power source, a 20 by 200 m array of solar cell blankets, both of which are supported by the solar blanket array support structure. The test article structure, a ladder, is comprised of two longitudinal beams (215 m long) spaced 10 m apart and interconnected by six lateral beams. The system control module structure and bridge fitting provide bending and torsional stiffness, and supplement the in plane Vierendeel structure behavior. Mission descriptions, construction, and structure interfaces are addressed. MG

**N81-19558\*** National Aeronautics and Space Administration  
Pasadena Office Calif

**COPPER DOPED POLYCRYSTALLINE SILICON SOLAR CELL Patent**

Krishna M Koliwad (JPL California Inst of Tech Pasadena) and Taher Daud, inventors (to NASA) (JPL California Inst of Tech, Pasadena) Issued 10 Feb 1981 4 p Filed 30 May 1979 Supersedes N79-25512 (17 - 18, p 2147) (NASA-Case-NPO-14670-1, US-Patent 4 249 957 US-Patent-Appl-SN-043941, US-Patent-Class 136-258, US-Patent-Class-357-30 US-Patent-Class-357-59, US-Patent-Class-357-63 US-Patent-Class-252-62 3E) Avail US Patent and Trademark Office CSCL 10A

Fabrication of improved performance photovoltaic cells is described. They are fabricated from polycrystalline silicon containing copper segregated at the grain boundaries. TM

**N81-19562\*#** Rockwell International Corp., Downey, Calif  
Space Operations and Satellite Systems Div  
**SATELLITE POWER STUDY (SPS) CONCEPT DEFINITION STUDY (EXHIBIT D). VOLUME 1 EXECUTIVE SUMMARY** Final Report

G M Hanley Washington NASA Mar 1981 50 p refs  
(Contract NAS8-32475)  
(NASA-CR-3392, SSD-80-0108-1) Avail NTIS  
HC A03/MF A01 CSCL 10A

Efforts concentrated on updating of the Rockwell reference concept, definition of new system options, studies of special emphasis topics, further definition of the transportation system, and further program definition. The Rockwell reference satellite concept has a gallium arsenide (GaAs) solar cell array having flat concentrators with an effective concentration ratio of 1.83 at end of life. Alternatives to this concept includes solid state power amplifiers or magnetrons for dc/RF conversion and multibandgap solar cells for solar to dc energy conversion. Two solid state concepts were studied. It was determined that the magnetron approach was the lowest mass and cost system. TM

**N81-19564\*#** Rockwell International Corp., Downey, Calif  
**SATELLITE POWER SYSTEMS (SPS). LBST SYSTEMS AND INTEGRATION TASK FOR SPS FLIGHT TEST ARTICLE** Final Report

H S Greenberg Washington NASA Feb 1981 142 p refs  
(Contract NAS8-32475)  
(NASA-CR-3376, SSD-80-0102) Avail. NTIS  
HC A07/MF A01 CSCL 10A

This research activity emphasizes the systems definition and resulting structural requirements for the primary structure of two potential SPS large space structure test articles. These test articles represent potential steps in the SPS research and technology development. Author

**N81-19565\*#** Rockwell International Corp., Downey, Calif  
**SATELLITE POWER SYSTEMS (SPS) CONCEPT DEFINITION STUDY (EXHIBIT D). VOLUME 3: TRANSPORTATION ANALYSIS** Final Report

G M Hanley Washington NASA Mar 1981 85 p refs  
(NAS8-32475)  
(NASA-CR-3394, SSD-80-0108-3) Avail NTIS  
HC A05/MF A01 CSCL 10A

Additional analyses and investigations were conducted to further define transportation system concepts that will be needed for the developmental and operational phases of an SPS program. To accomplish these objectives, transportation systems such as the Shuttle and its derivatives were identified, new heavy lift launch vehicle (HLLV) concepts, cargo and personnel orbital transfer vehicles (EOTV and POTV), and intraorbit transfer vehicle (IOTV) concepts were evaluated, and, to a limited degree, the program implications of their operations and costs were assessed. The results of these analyses were integrated into other elements of the overall SPS concept definition studies. TM

**N81-19567\*#** Hughes Aircraft Co., El Segundo, Calif  
**CONCEPTUAL DESIGN STUDY OF CONCENTRATOR ENHANCED SOLAR ARRAYS FOR SPACE APPLICATIONS. PERFORMANCE EVALUATION OF 5 KW AND 20 KW SYSTEMS IN Si AND GaAs AT 1 AU EMPLOYING A FLAT PLATE TROUGH CONCENTRATOR** Final Report

20 Oct 1980 72 p refs  
(Contracts NAS7-100, JPL-955194)  
(NASA-CR-184038, JPL-9950-483, Hughes-Ref-E3256) Avail  
NTIS HC A04/MF A01 CSCL 10A

A simple, efficient and very lightweight preliminary design for a 5 KW and 20 KW BOL output concentrated array evolved and is described by drawings. The relative effectiveness of this design, as compared to an unconcentrated planar array of equal power output, was measured by comparing power to mass performance of and the solar cell area required by each. Improvements in power to mass performance as high as 42% together with array area size reduction of 57% are possible in GaAs systems. By contrast, when the same concentrator design is applied to silicon systems, no improvement in power to mass

can be obtained although array area reductions as high as 35% are obtainable. LFM

**N81-19568\*#** Clemson Univ., SC Dept of Electrical and Computer Engineering  
**INVESTIGATION OF RELIABILITY ATTRIBUTES AND ACCELERATED STRESS FACTORS ON TERRESTRIAL SOLAR CELLS** Annual Report

J W Lathrop, R A Hartman, and C R Saylor Jan 1981 255 p refs Sponsored in part by DOE Prepared for JPL  
(Contract NAS7-100)  
(NASA-CR-184012, JPL-9950-481, AR-3, DOE/JPL-954929-81/8) Avail NTIS HC A12/MF A01 CSCL 10A

Major effort during this reporting period was devoted to two tasks: improvement of the electrical measurement instrumentation through the design and construction of a microcomputer controlled short interval tester, and better understanding of second quadrant behavior by developing a mathematical model relating cell temperature to electrical characteristics. In addition, some preliminary work is reported on an investigation into color changes observed after stressing. TM

**N81-19569\*#** RCA Corp., Princeton, N J Solid State Div  
**DEVELOPMENT OF MEGASONIC CLEANING FOR SILICON WAFERS** Final Report

A Mayer Sep 1980 96 p refs Sponsored in part by DOE Prepared for JPL  
(Contracts NAS7-100; JPL-955342)  
(NASA-CR-104011, DOE/JPL-955342-79/2, JPL-9950-498) Avail NTIS HC A05/MF A01 CSCL 10A

A cleaning and drying system for processing at least 2500 three in diameter wafers per hour was developed with a reduction in process cost. The system consists of an ammonia hydrogen peroxide bath in which both surfaces of 3/32 in spaced, ion implanted wafers are cleaned in quartz carriers moved on a belt past two pairs of megasonic transducers. The wafers are dried in the novel room temperature, high velocity air dryer in the same carriers used for annealing. A new laser scanner was used effectively to monitor the cleaning ability on a sampling basis. TM

**N81-19570\*#** Lamar Univ., Beaumont, Tex  
**PROCESS FEASIBILITY STUDY IN SUPPORT OF SILICON MATERIAL TASK 1** Final Report, 1 Oct. 1975 - 6 Feb. 1981

Carl L Yaws, Ku-Yen Li, Jack R Hopper, C S Fang, and Kerth C Hansen 6 Feb 1981 481 p refs Prepared for JPL  
(Contracts NAS7-100, JPL-954343)  
(NASA-CR-184009) Avail. NTIS HC A20/MF A01 CSCL 10A

Results for process system properties, chemical engineering and economic analyses of the new technologies and processes being developed for the production of lower cost silicon for solar cells are presented. Analyses of process system properties are important for chemical materials involved in the several processes under consideration for semiconductor and solar cell grade silicon production. Major physical, thermodynamic and transport property data are reported for silicon source and processing chemical materials. TM

**N81-19571\*#** Acurex Corp., Mountain View, Calif Alternate Energy Div

**ADVANCED SOLAR CONCENTRATOR MASS PRODUCTION, OPERATION, AND MAINTENANCE COST ASSESSMENT** Final Report

W A Niemeyer, R J Bedard, and D M Bell Jan 1981 101 p refs  
(Contracts NAS7-100, JPL-955477)  
(NASA-CR-184039, ACUREX-FR-80-14/AE, DRL-015, DRO-SE003) Avail NTIS HC A05/MF A01 CSCL 10A

The object of this assessment was to estimate the costs of the preliminary design at production rates of 100 to 1,000,000 concentrators per year, concentrators per aperture diameters of 5, 10, 11, and 15 meters; and various receiver/power conversion package weights. The design of the cellular

## 02 SOLAR ENERGY

glass substrate Advanced Solar Concentrator is presented The concentrator is an 11 meter diameter, two axis tracking, parabolic dish solar concentrator. The reflective surface of this design consists of inner and outer groups of mirror glass/cellular glass goes. T.M.

**N81-19572\*** Photowatt International, Inc., Tempe, Ariz.  
**ARRAY AUTOMATED ASSEMBLY TASK LOW COST SILICON SOLAR ARRAY PROJECT, PHASE 2 Final Report**

Clayton Olson Dec. 1980 321 p refs Sponsored in part by DOE Prepared for JPL Prepared in cooperation with Sensor Technology, Inc., Chatsworth, Calif  
(Contract JPL-954865)  
(NASA-CR-184037, DOE/JPL-954865-80/9, JPL-9950-509)  
Avail NTIS HC A14/MF A01 CSCL 10A

Analyses of solar cell and module process steps for throughput rate, cost effectiveness, and reproductibility are reported In addition to the concentration on cell and module processing sequences, an investigation was made into the capability of using microwave energy in the diffusion, sintering, and thick film firing steps of cell processing Although the entire process sequence was integrated, the steps are treated individually with test and experimental data, conclusions, and recommendations T M

**N81-19574** Ecole Polytechnique Federale de Lausanne (Switzerland) Inst de Thermique Appliquees

**TECHNICAL EVALUATION OF GASEOUS SUSPENSIONS OF GRAPHITE FOR THE ABSORPTION OF CONCENTRATED SOLAR RADIATION**

Mohamed A M Abdelrahman 1979 174 p refs Sponsored in cooperation with Federal Institute of Technology, Luusanne, and Sudan National Council for Research  
(EPFL-ITA-6, ISBN-3-2600-4592-9) Avail Issuing Activity

The direct absorption of concentrated solar radiation by a gaseous suspension of graphite was investigated The problem of agglomeration and deposition as well as the particle size distribution as a function of time were studied theoretically and experimentally Suspended particles of about the incident radiation wavelength size were shown to absorb adequately in a technically reasonable suspension thickness and have, in addition, selective properties (low emittance in the infrared) Agglomeration and deposition properties were shown to change if the particles are coated with a silicone base layer Author (ESA)

**N81-19578\*** Martin Marietta Aerospace, Denver, Colo  
**TERRESTRIAL PHOTOVOLTAIC SYSTEM ANALYSIS Final Report, Feb. - Nov. 1979**

Matthew S Imamura, Roger Giellis, and Robert L Moser Wright-Patterson AFB, Ohio AFWAL Jul 1980 117 p refs (Contract F33815-79-C-2001, AF Proj 3145)  
(AD-A094827, MCR-80-683, AFWAL-TR-80-2074) Avail NTIS HC A06/MF A01 CSCL 10/1

The purpose of this program was to evaluate the use of an actively cooled photovoltaic power system at Tinker Air Force Base, Oklahoma, which required both electrical and thermal energy The thrust of the study was to identify a preliminary design of an actively cooled photovoltaic concentrator configuration including the necessary details of integrating it into the facility, and compare the cost of this system and that of the present energy sources. A conventional utility-connected arrangement was selected for the Tinker AFB electroplating facility mainly because of simplicity in its implementation and availability of the inverter, which is the key component in the system The system uses a direct energy transfer arrangement with a peak array power tracking inverter, no electrochemical storage batteries are used The thermal energy distribution system interfaces directly with the plating tanks in the facility The estimated initial installed cost of the combined photovoltaic/thermal system is \$28 per watt The use of thermal energy for the plating tanks is costly (\$3 per watt) because of an extensive distribution system and use of exotic heat exchangers GRA

**N81-19582\*** Institute of Gas Technology, Chicago, Ill  
**ELECTROCHEMICAL PHOTOVOLTAIC CELLS Final**

**Technical Progress Report, 15 Apr. 1979 - 17 Apr. 1980**  
Peter G P Ang and Anthony F Sammells Sep 1980 103 p refs Prepared for Midwest Research Inst, Golden, Colo  
(Contract EC-77-C-01-4042)  
(SERI/TR-8002-5-T1) Avail NTIS HC A06/MF A01

Increasing solar energy conversion efficiencies and identifying potentially long-life systems were emphasized Semiconductor/redox couple systems were selected on the basis of the apparent positions of their conduction and valence band energy levels at the interface, together with the semiconductor decomposition potential Selected redox couples should possess equilibrium potentials that lie negative of the semiconductor decomposition potential and positive of the semiconductor conduction band Liquid-junction solar cells were characterized using n-MoSe<sub>2</sub>, N-MoS<sub>2</sub>, n-WSe<sub>2</sub>, n-CdSe, and n-GaAs as photo-anodes T M

**N81-19587\*** Colorado State Univ, Fort Collins Solar Energy Applications Lab

**CSU SOLAR HOUSE 3 SOLAR HEATING AND COOLING SYSTEM PERFORMANCE Annual Technical Summary Report, 1 Oct. 1978 - 30 1979**

D S Ward, John C Ward, and H S Beroi Oct 1980 85 p refs  
(Contract DE-AC02-79CS-30122)  
(DOE/CS-30122/T1) Avail NTIS HC A05/MF A01

The practicality of an integrated flat plate state-of-the-art liquid-heating solar collector and absorption cooling system is studied This was accomplished by designing and installing a complete solar heating and cooling system (including appropriate data acquisition equipment and instrumentation), performing a detailed analysis and evaluation of all aspects of the solar system, and comparing the seasonal performance of the system with two other solar heating and cooling systems installed in adjacent buildings with virtually identical thermal characteristics DOE

**N81-19595\*** General Electric Co, Philadelphia, Pa Space Systems Operations

**DEVELOPMENT OF A COMBINED PHOTOVOLTAIC/THERMAL LINEAR RECEIVER FOR A PARABOLIC TROUGH CONCENTRATOR Final Report**

Dec. 1980 61 p  
(Contract DE-AC04-78DP-00789)  
(SAND-80-7138) Avail NTIS HC A04/MF A01

The development of a receiver design for a linear focus concentrator is discussed The design concept described employs a pair of nested glass tubes A specially configured inner borosilicate glass tube functions as the mounting surface for the solar cell circuit in this dual focus receiver geometry This inner tube, which is capped at each end to provide an interior dead air space, is inserted within a 2 inch ID glass pipe which is part of Corning Pyrex beaded pressure process piping system The selected receiver coolant, which is designated as Synfluid (2 centistokes kinematic viscosity), is circulated through the outer glass pipe in direct contact with the solar cell circuit active area The concentrated irradiance from the parabolic trough impinges on the outer glass pipe and is optically transmitted through the clear synthetic mineral oil to the solar cell circuit Two prototype receivers of this design were fabricated and assembled DOE

**N81-19605\*** California Univ, Livermore Lawrence Livermore Lab

**SOLAR GASIFICATION OF CARBONACEOUS MATERIALS**  
R W Taylor, R Berjoan (CNRS, Odeillo, France), and J P Coutures (CNRS, Odeillo, France) Apr 1980 39 p refs  
(Contract W-7405-eng-48)

(UCRL-53063) Avail NTIS HC A03/MF A01

Charcoal, wood, and paper were gasified in a packed bed reactor using steam and solar energy The steam was generated by spraying water directly onto the surface of the fuel and, at the same time, heating the fuel at the focus of a solar furnace The steam was generated by solar energy Half of the steam reacted with carbon, and 30% of the incident solar energy was stored as chemical energy The performance of a fluidized bed reactor was compared to that of a packed bed reactor using charcoal and CO<sub>2</sub> The fraction of the incident solar energy

utilized to produce CO (stored) was 10% in the case of the fluidized bed reactor and 40% for the packed bed reactor DOE

**N81-19607#** Midwest Research Inst., Golden, Colo Solar Energy Research Inst  
**PASSIVE SOLAR ENERGY INFORMATION USER STUDY**  
 W W Below, B L Wood, T L Marie, and C L Reinhardt  
 Nov 1980 278 p refs  
 (Contract DE-AC02-77CH-00178)  
 (SERI/TR-751-746) Avail NTIS HC A13/MF A01

The results of a series of telephone interviews with groups of users of information on passive solar heating and cooling are described. These results, part of a larger study on many different solar technologies, identify types of information each group needed and the best ways to get information to each group. The overall study provides baseline data about information needs in the solar community DOE

**N81-19609#** Brookhaven National Lab., Upton, N Y Dept of Energy and Environment  
**SOLAR/PERFORMANCE GOALS FOR SOLAR AND GROUND-COUPLED HEAT PUMP SYSTEMS**  
 John W Andrews Sep 1980 31 p refs  
 (Contract DE-AC02-76CH-00018)  
 (BNL-51259) Avail NTIS HC A03/MF A01

Cost goals for combined solar/heat pump systems are developed. Three methods of analysis are used: simple payback, positive cash flow, and life cycle costing. The goals are parameterized on system energy efficiency, with the air-to-air heat pump as the conventional system which is used as a basis for comparison. Cost goals for nine systems are determined in three generic climates DOE

**N81-19610\*#** Battelle Columbus Labs., Ohio  
**SATELLITE POWER SYSTEMS (SPS) SPACE TRANSPORTATION COST ANALYSIS AND EVALUATION**  
 Nov 1980 141 p refs Sponsored by NASA  
 (Contract W-31-109-eng-38)  
 (NASA-CR-184020, DOE/ER-0086) Avail NTIS  
 HC A07/MF A01 CSCL 22B

A picture of Space Power Systems space transportation costs at the present time is given with respect to accuracy as stated, reasonableness of the methods used, assumptions made, and uncertainty associated with the estimates. The approach used consists of examining space transportation costs from several perspectives to perform a variety of sensitivity analyses or reviews and examine the findings in terms of internal consistency and external comparison with analogous systems. These approaches are summarized as a theoretical and historical review including a review of stated and unstated assumptions used to derive the costs, and a performance or technical review. These reviews cover the overall transportation program as well as the individual vehicles proposed. The review of overall cost assumptions is the principal means used for estimating the cost uncertainty derived. The cost estimates used as the best current estimate are included DOE

**N81-19612#** Sandia Labs., Livermore, Calif  
**FATIGUE-CREEP LIFETIME ANALYSIS OF FOUR ADVANCED CENTRAL RECEIVER CONCEPTS**  
 J Jones Jan 1981 20 p refs  
 (Contract DE-AC04-76DP-00789)  
 (SAND-80-8047) Avail NTIS HC A02/MF A01

Four advanced central receiver concepts were analyzed for their fatigue-creep design lifetimes. Using the flux profiles provided by the designers, the thermal hydraulic performance of an individual tube in a receiver panel was ascertained by computer analysis. A linear model of the tube crown strain for the tube on given thermal and structural finite element analyses were performed. The computed stresses and strains were used in evaluation of the creep and fatigue design lifetimes by N-47 and compared to the desired lifetime of 30 years. Three of the four designs met or exceeded the desired lifetime and the fourth met the desired lifetime when the factor of safety incorporated in N-47 was reduced. All four designs were judged adequate for the current level of design effort DOE

**N81-19613#** Sandia Labs., Albuquerque, N Mex Component and Subsystem Development Div  
**DEVELOPMENT OF SHEET MOLDING COMPOUND SOLAR COLLECTORS WITH MOLDED-IN SILVERED GLASS REFLECTIVE SURFACES**  
 Roscoe L Champion and Ronald E Allred Dec 1980 41 p refs  
 (Contract DE-AC04-76DP-00789)  
 (SAND-80-0702) Avail NTIS HC A03/MF A01

Parabolic test moldings were fabricated from a general purpose sheet molding compound with flat chemically strengthened glass, flat annealed glass, and thermally formed glass. Attempts to mold with annealed sheet glass (1 mm thick) and thermally formed glass (1.25 mm thick) were unsuccessful, only the chemically strengthened glass (1.25 mm thick) was strong enough to survive molding pressures. Because of the mismatch in thermal expansion between glass and sheet molding compound, the as-molded panels contained a sizeable residual stress. The results are given of dimensional changes taking place in the panels under accelerated thermal cycling and outdoor aging conditions; these results are compared to an analytical model of the laminate. In addition, the sheet molding compound is examined for thermomechanical properties and flow behavior in the rib sections. Results indicated that lowering the thermal expansion coefficient of the sheet molding compound through material modifications would produce a more stable structure DOE

**N81-19614#** Sandia Labs., Albuquerque, N Mex Experimental Systems Operations Div  
**PUMP HEAT LOSS TEST REPORT**  
 M A Quintana and L E Torkelson Jan 1981 23 p  
 (Contract DE-AC04-76DP-00789)  
 (SAND-80-2526) Avail NTIS HC A02/MF A01

A test is described which measures the heat loss from a centrifugal pump under both insulated and uninsulated conditions. Results showed a 27% reduction in loss by insulating the pump and seal not requiring liquid cooling DOE

**N81-19615#** Sandia Labs., Livermore, Calif Thermal Subsystems Div  
**COST-PERFORMANCE COMPARISON OF WATER-STEAM RECEIVERS FOR SOLAR CENTRAL ELECTRIC POWER PLANTS**  
 P D Laquil, C T Schafer, and S E Faas Dec 1980 39 p refs  
 (Contract DE-AC04-76DP-00789)  
 (SAND-80-8245) Avail NTIS HC A03/MF A01

An evaluation of the relative cost performance of large solar central receiver electric power plants utilizing water/steam receivers was performed. The investigation consisted of a systems integration of receiver conceptual designs from three major boiler manufacturers with advanced turbine conditions and thermal storage designs. The methodology and results of the evaluation are described. The results of the evaluation are described. The results indicate which combinations of receiver designs, storage types, and thermodynamic conditions hold promise for significant cost performance improvements when compared to first generation water/steam technology DOE

**N81-19618#** Midwest Research Inst., Golden, Colo Systems Development Branch  
**COMPARATIVE RANKING OF 0.1 TO 10 MW SUB E SOLAR THERMAL ELECTRIC POWER SYSTEMS. VOLUME 1: SUMMARY OF RESULTS Final Report**  
 John P Thornton, Kenneth C Brown, Joseph G Finegold, James B Gresham, F Ann Herlevich, John S Kowalik, and Thomas A Kriz Aug 1980 151 p refs  
 (Contracts DE-AC02-77CH-00178, EG-77-C-01-4042)  
 (SERI/TR-351-461-Vol-1) Avail NTIS HC A08/MF A01

The original objective of the study was to project the mid 1990 cost and performance of selected generic solar thermal electric power systems for utility applications and to rank these systems by considered plants with rated capacities of 1 to 10 MW sub e, operating over a range of capacity factors from the no storage case to 0.7 and above. The study was extended to

## 02 SOLAR ENERGY

include systems with capacities from 0.1 to 1 MW sub e, a range that is attractive to industrial and other non-utility applications DOE

**N81-19621#** Harvard Univ., Cambridge, Mass  
**OPTIMIZATION OF TRANSPARENT ELECTRODE FOR SOLAR CELLS** Technical Progress Report, 15 Sep. - 15 Dec. 1980

Roy G Gordon 1980 9 p  
(Contract DE-AC02-77CH-00178)  
(SERI/PR-9318-1-T1) Avail NTIS HC A02/MF A01

Films of fluorine-doped tin oxide were studied. The current research has as its goal further improvements in the properties of this transparent electrode material. The first phase of the work sought to find out what mechanisms limit the transparency and electrical conductivity of this material. It is suspected that certain chemical impurities, and also mechanical imperfections at boundaries between small grains in the films, may have deleterious effects. The second phase of the work attempted to minimize those deleterious factors which were identified in the first phase. Some samples of optimal films were made, under the best conditions obtained. Progress is summarized. DOE

**N81-19622#** California Univ., Los Angeles School of Engineering and Applied Science  
**TRANSPARENT GLASS HONEYCOMB STRUCTURES FOR ENERGY LOSS CONTROL** Final Summary Report, Jan. 1976 - Oct. 1979

Jun 1980 102 p refs  
(Contract DE-FG03-76CS-31084, Grant EY-76-G-03-1084)  
(UCLA-ENG-8039) Avail NTIS HC A06/MF A01

It was demonstrated that properly shaped glass honeycomb placed between a nonselective absorber and the coverglass of a flat plate solar collector gives collection efficiencies significantly higher than those of conventional flat plate units, even those with selective absorbers, collecting solar energy at temperatures required for heating and cooling buildings. Three basic glass honeycomb shapes were analyzed and tested: thin walled cylindrical glass tube honeycomb in square or hexagonal arrays, corrugated thin glass sheets stacked peak to trough to form double sinusoidal shaped cells, and flat thin glass sheets stacked to form long parallel slots. DOE

**N81-19624#** Southern California Gas Co., Los Angeles  
**PROJECT SAGE. SOLAR ASSISTED GAS ENERGY** Final Report

Mar 1980 219 p refs  
(Grant NSF PTP-75-03457)  
(DOE/TIC-11105, NSF/RA-790330/31) Avail NTIS HC A10/MF A01

Plans are formulated to improve solar assisted gas energy (SAGE) technical design and performance, reduce SAGE costs, refine SAGE market assessment, and identify policies to encourage the use of SAGE. Two SAGE water heating systems were installed and tested. One system was retrofit onto an existing apartment building, the other was installed in a new apartment building. Each installation required approximately 1000 square feet of collector area tilted to an angle of 37(0) from the horizontal, and each was designed to supply about 70 percent of the energy for heating water for approximately 32 to 40 units of a typical two-story apartment complex, in Southern California. Construction costs were compiled, and both installations were equipped with performance monitoring equipment. The operating and maintenance requirements of each installation was evaluated by gas company maintenance engineers. Market penetration was assessed by developing a computer simulation program using the technical and economic analysis from the installation experience. DOE

**N81-19625#** Centro Informazioni Studi Esperienze, Milan (Italy)  
**GaAs(GeAl)AS SOLAR CELLS TO BE USED UNDER CONCENTRATED SOLAR LIGHT CONDITION**

G. Fabi and G. Fiorito Commission of the European Communities 1980 37 p refs Sponsored by Commission of the European Communities  
(EUR-6934-EN) Avail NTIS HC A03/MF A01

A LPE facility for growing GaAs-GaAlAs epitaxial structures suitable for solar cells was designed and constructed. This facility allows growths on substrates up to 4 sq cm in area and the use of solutions for several growths. After an investigation of GaAlAs and dopant phase diagrams, based on thermodynamic considerations, the growth critical parameters were set-up. A simple model analysis on the cell behavior allowed to identify the fundamental characteristics of both GaAs-GaAlAs structures and single layers. The obtained results evidenced the possibility of growing GaAs and GaAlAs layers with composition, doping and electric characteristics fitting solar cells. DOE

**N81-19626#** Acurex Corp., Mountain View, Calif Alternate Energy Div.

**SOLAR PRODUCTION OF INDUSTRIAL PROCESS HOT WATER: OPERATION AND EVALUATION OF THE CAMPBELL SOUP HOT WATER SOLAR FACILITY** Final Report, 1 Sep. 1979 - 10 Dec. 1980

John I Kull, William N Neimeyer, and Stanley B Youngblood Dec 1980 162 p refs  
(Contract DE-AC03-76CS-31218)  
(SAN-1218-4) Avail NTIS HC A08/MF A01

The operation and evaluation of a solar hot water facility is summarized. The period of evaluation was for 12 months from October 1979 through September 1980. The objective of the work was to obtain additional, long term data on the operation and performance of the facility. Minor modifications to the facility were completed. The system was operated for 15 months, and 12 months of detailed data were evaluated. The facility was available for operation and of the time during the last 8 months of evaluation. A detailed description of the solar facility and of the operating experience is given, and a summary of system performance for the 12 month operation/evaluation period is presented. Recommendations for large scale solar facilities based on this project's experience are given and an environmental impact assessment is provided. DOE

**N81-19628#** Motorola, Inc., Phoenix, Ariz Solar Operations  
**NEAR-TERM IMPLEMENTATION OF PROJECTION COST REDUCTIONS FOR PHOTOVOLTAIC CONCENTRATOR ARRAY** Final Report, 18 Dec. 1978 - 7 Jan. 1980

L Grenon Dec 1980 43 p refs  
(Contract DE-AC04-76DP-00789)  
(SAND-80-7073) Avail NTIS HC A03/MF A01

A chronological review of the process sequence is presented as well as an explanation of each process step and its production readiness status. Topics covered include: (1) evaluation of use of thin silicon substrates (7 mil), (2) selection of a wax material capable of protecting selected surfaces of the solar cell from attack by various chemical etches during processing, (3) evaluation of ion implantation processes and annealing techniques, (4) development of a fine surface texturing process for improved absorption of incident illumination, (5) provision for subsequent development of fine line front surface metallization patterning, (6) optimization of the metallization processes, and (7) determination of those parameters that must be tested in order to determine the quality of a finished concentrator solar cell. Processes that have evolved that have direct application to satisfying a near-term cost effective process sequence include plasma etching, plasma patterning, and evaluation of a lower cost nickel-copper metallization process. DOE

**N81-19629#** Plasma Physics Corp., Locust Valley, N Y  
**PLASMA-ASSISTED CVD OF FLUORINATED, HYDROGENATED AMORPHOUS SILICON** Final Technical Report, 15 Sep. 1979 - 15 Sep 1980

John H Coleman, John P Hammes, and Harold J Wiesmann 1980 31 p refs Sponsored by Midwest Research Inst., Golden, Colo  
(Contract DE-AC02-77CH-00178)  
(SERI/TR-8041-2-T1) Avail NTIS HC A03/MF A01

Approximately 300 large-area PIN hydrogenated amorphous silicon (a-Si:H) solar cells were fabricated and tested. The a-Si:H PIN cells which were plasma deposited at 200 to 350 C were found to have high internal currents, whereas those which were deposited by CVD at 500 to 650 C had low internal currents.



When corrected for optical losses in the top electrode, the internal quantum efficiency vs wavelength for the PIN cells indicated a peak value above 80% at about 525nm, which decreased monotonically to zero at about 725 nm. When the published values of the RCA and EXXON were corrected similarly for optical loss, nearly identical values of internal quantum efficiencies were found. DOE

**N81-19630#** Pacific Sun, Inc., Palo Alto, Calif  
**SOLAR-HEATED HOT WATER INSTRUMENTATION PROJECT FOR EPRI HEADQUARTERS COMPLEX, PALO ALTO, CALIFORNIA** Final Report

H T Whitehouse and P Ortiz Jan 1981 172 p refs  
 (EPRI Proj 1191-1)  
 (EPRI-EM-1854) Avail NTIS HC A08/MF A01

A data acquisition and analysis effort charted the performance of a solar assisted, hot water preheat system supplying a portion of the service water needs. Detailed load and performance data for the system are presented, the merits of the data acquisition system employed are discussed, and recommendations for future monitoring efforts are provided. DOE

**N81-19631#** Radiation Monitoring Devices, Inc., Watertown, Mass

**LOW COST SPRAYED CdTe SOLAR CELL RESEARCH** Quarterly Report, 15 Nov. - 14 Feb. 1980

P Sienkiewicz, S Lis, M G Sarreze, and G Entine Mar 1980 16 p refs Prepared for Midwest Research Inst., Golden, Colo (Contract EG-77-C-01-4042)  
 (DSE-4042-T34) Avail NTIS HC A02/MF A01

Two approaches showed great promise. X-ray diffraction analysis showed that CdTe can be produced from solutions containing CdCl<sub>2</sub> and (NH<sub>4</sub>)<sub>2</sub>TeO<sub>4</sub> with either hydrazine dihydrochloride or oxalic acid as the reducing agent. Films produced from the oxalic acid experiments yielded reducing agent. Films produced from the oxalic acid experiments yielded encouraging infrared scans, and as a result this approach received the most effort. In addition, good quality, photoconductive, CdS films were produced via traditional methods and characterized using optical and electrical measurements. Overall film uniformity for both CdS and CdTe was improved by the installation of a stainless steel, gravity fed, spray nozzle and mechanical linkage. DOE

**N81-19634#** Rockwell International Corp., Anaheim, Calif  
 Electronic Devices Div

**CHEMICAL VAPOR DEPOSITION OF THIN-FILM POLY-CRYSTALLINE Si FOR LOW COST SOLAR CELLS** Quarterly Technical Progress Report, 2 Feb. - 2 May 1980

Ralph P Ruth, William I Simpson, Jane J Yang, Lavada A Moudy, and Richard E Johnson May 1980 102 p refs  
 (Contract DE-AC03-79ET-23045)  
 (SAN-3045-3, QTPR-3) Avail NTIS HC A06/MF A01

The program emphasized a study of the transport properties of p type polycrystalline Si films as functions of average grain size and impurity doping concentration. Preliminary investigations of nucleation and early stage growth phenomena in such films were carried out to provide improved understanding of the fundamental properties of the films that limit photovoltaic performance and thus to establish a good technical basis for subsequent attempts to achieve improved performance in solar cells using such films. Also, the study of transport properties was extended to n type polycrystalline Si films. DOE

**N81-19635#** PRC Energy Analysis Co., Los Angeles, Calif  
**SATELLITE POWER SYSTEM (SPS) PUBLIC OUTREACH EXPERIMENT**

S R McNeal Dec 1980 69 p refs Sponsored by NASA  
 (Contract DE-AC81-79ER-10041)  
 (NASA-CR-184022, DOE/ER-10041/T11) Avail NTIS HC A04/MF A01 CSCL 10A

An outreach experiment was conducted to improve the results of the satellite power system (SPS) concept development and evaluation program. The objectives of the outreach were to (1) determine the areas of major concern relative to the SPS concept and (2) gain experience with an outreach process for

use in future public involvement. The response to the outreach effort was positive, suggesting that the effort extended by the SPS project division to encourage an information exchange with the public was well received. The responses were analyzed and from them some questions and answers about the satellite power system are presented. ED K

**N81-19638#** AEG-Telefunken, Wedel (West Germany) Fachbereich Neue Technologien, Raumfahrt

**A 10 kW SMALL SOLAR POWER STATION AND OPERATIONS OPTIMIZATION** Final Report

Joachim Gloel Bonn Bundesministerium fuer Forschung und Technologie Dec 1980 123 p refs In GERMAN, ENGLISH summary Sponsored by Bundesministerium fuer Forschung und Technologie (BMFT-FB-T-79-139, ISSN-0340-7608) Avail NTIS HC A06/MF A01

Characteristics of the plant are unpressurized hot water (95 C) for transport and storage of thermal energy, screw expansion engine operating with freon R114 for thermomechanical energy conversion, and an ac three phase generator interconnected with a static converter to provide line voltages and frequencies. A solar collector simulator was used in testing. Selection, assembly, and function of the system and each subsystem are detailed. Component performance results are listed. Component by component operation optimization results show the importance of correctly regulating the thermal cycle temperature as well as the freon expansion pump circuit pressure. Author (ESA)

**N81-19640#** Swedish Council for Building Research, Stockholm  
**A SOLAR HEATING PLANT IN STUDEVIK: DESIGN AND FIRST YEAR OPERATIONAL PERFORMANCE**

Rutger Roseen and Bengt Persers 1980 98 p  
 (PB81-114480, ISBN-91-640-3265-2) Avail NTIS HC A05/MF A01 CSCL 13A

Group solar heating plants offer one of the most promising ways of economically utilizing solar energy for space heating purposes. A relatively advanced prototype installation was built at Studsvik on the Swedish east coast south of Stockholm. The installation is based on a cheap, excavated and insulated water store with a floating insulating cover. The solar collectors are mounted on the cover, which turns to track the Sun. This increases the efficiency of the concentrating collectors by between 30 and 50 percent. The heat is used as the sole heat source for an adjacent office building, designed for low temperature heating. GRA

**N81-19647#** Franklin Research Center, Philadelphia, Pa  
**HOT WATER FROM THE SUN: A CONSUMER GUIDE TO SOLAR WATER HEATING**

Beth McPherson May 1980 115 p refs Sponsored in part by DOE and HUD  
 (PB81-128597, HUD-0001752, HUD/PDR-548) Avail NTIS HC A06/MF A01 CSCL 13A

Consumer information and guidance are provided relating to solar heating of water for residential use. Information to help the homeowner decide whether to install a solar hot water system is provided. The components which make up a solar hot water system, the various kinds of systems available, and the benefits and limitations of each type are discussed. The physical orientation of the house, site vegetation, and ways to determine if the house has enough sunlight to make good use of the Sun are also analyzed. The elements of cost in a solar energy system are outlined, and a method is provided to help the reader estimate whether a solar unit is justified. GRA

**N81-19648#** American Planning Association, Chicago, Ill  
**RESIDENTIAL SOLAR DESIGN REVIEW. A MANUAL ON COMMUNITY ARCHITECTURAL CONTROLS AND SOLAR ENERGY USE**

Martin Jaffe and Duncan Erley Jul 1980 87 p refs Sponsored in part by DOE, Washington, D C  
 (Contract HUD-H-2573)  
 (PB81-128605, HUD-0001753, HUD/PDR-579) Avail NTIS HC A05/MF A01 CSCL 13A

## 02 SOLAR ENERGY

Intended primarily for members of private architectural review committees working for homeowners associations, this guidebook examined some of the design review committees to solar installations and buildings in relation to existing aesthetic goals in their communities. The guide describes typical solar energy systems and explains why they look the way they do. Design alternatives for highlighting, concealing, and integrating solar equipment into buildings were examined. GRA

**N81-19665#** Automation Industries, Inc., Silver Spring, Md  
Vitro Lab Div  
**ENVIRONMENTAL DATA FOR SITES IN THE NATIONAL SOLAR DATA NETWORK**  
Dec 1980 245 p  
(Contract DE-AC01-79CS-30027)  
(SOLAR/0010-80/12) Avail NTIS HC A11/MF A01

The solar sites are grouped into 12 zones, each of which consists of several adjacent states. The solar energy sites are in alphabetical sequence within each zone. The tables provide available meteorological data for reporting sites in the NSDN as follows. Insolation - the insolation table presents the total, diffuse direct, maximum, and extra-terrestrial radiation for the solar site. It also shows the ratio of total extra-terrestrial radiation, as a percent. Temperature - the temperature table gives the average daytime, nighttime, maximum, minimum and inlet water temperatures for the solar site. Additional tables are presented for some of these NSDN sites, supplying either wind or relative humidity data, or both. DOE

**N81-20173\*#** National Aeronautics and Space Administration  
Lewis Research Center, Cleveland, Ohio  
**ANALYSIS OF COSTS OF GALLIUM ARSENIDE AND SILICON SOLAR ARRAYS FOR SPACE POWER APPLICATIONS**  
Kent S Jefferies Mar 1981 16 p refs  
(NASA-TP-1811, E-536) Avail NTIS HC A02/MF A01 CSCL 10A

A parametric analysis was performed to compare the costs of silicon and gallium arsenide arrays for Earth orbital missions. The missions included electric power in low Earth orbit (LEO), electric power in geosynchronous Earth orbit (GEO), and power for electric propulsion of a LEO to GEO orbit transfer mission. Inputs to the analysis for all missions included launch and purchase costs of the array. For the orbit transfer mission, the launch and purchase costs of the electric propulsion system were added. Radiation flux as a function of altitude and radiation tolerance as a function of cell type were used to determine power degradation for each mission. Curves were generated that show the sensitivity of launch-array cost and total mission cost to a variety of input parameters for each mission. These parameters included mission duration, cover glass thickness, array specific cost, array specific mass, and solar cell efficiency. Solar concentration was considered and the sensitivities of cost to concentration ratio, concentrator costs, and concentrator mass were also evaluated. Results indicate that solar cell development should give a high priority to reducing array costs and that the development of low cost, lightweight, solar concentrators should be pursued. Author

**N81-20536** Michigan State Univ., East Lansing  
**CONSIDERATIONS IN THE DESIGN OF SOLAR ENGINES**  
Ph.D. Thesis  
L D Ryan 1980 215 p  
Avail Univ Microfilms Order No 8106436

The basic problem is to develop simple engines to convert solar radiation into useful work. Chapters are included on solar insolation and solar collectors, both flat plate and concentrators. The initial research centered on the Stirling engine. It became obvious that the displacement piston was an expensive means to add the reject heat. The displacement piston was eliminated by rotating the entire engine through the heat source for 180 degrees of rotation and cooling over the remaining 180 degrees. This modification resulted in the development of a new engine. Limited studies were conducted on the gas inside the heat ring. Pressure versus time was measured for air and Freon 12 when subjected to radiation. Freon 12 responded

significantly better. Since friction is a deterrent to solar engine development, methods to minimize friction are discussed.

Dissert Abstr

**N81-20537\*#** Rockwell International Corp., Downey, Calif  
Space Operations and Satellite Systems Div  
**SATELLITE POWER SYSTEMS (SPS) CONCEPT DEFINITION STUDY (EXHIBIT D). VOLUME 6, PART 1. COST AND PROGRAMMATICS Final Report**  
G M Hanley Washington NASA Mar 1981 84 p refs  
(Contract NAS8-32475)  
(NASA-CR-3397, SSD-80-0108-6-1) Avail NTIS  
HC A05/MF A01 CSCL 10A

A summary of the cost data reviewed as well as conclusions and recommendations are presented. Cost and programmatic aspects of Rockwell's SPS CR-2 reference configuration were based on the results of several contracts with NASA and independent company-sponsored activities by the Space Operations and Satellite Systems Division of Rockwell International. TM

**N81-20544\*#** Jet Propulsion Lab., California Inst of Tech., Pasadena  
**LSA FIELD TEST Annual Report, Aug. 1979 - Aug. 1980**  
Peter Jaffe 30 Dec 1980 44 p refs  
(Contract NAS7-100, DE-A101-76ET-20356)  
(NASA-CR-164083, JPL-PUB-81-12, DOE/JPL-1012-52) Avail  
NTIS HC A03/MF A01 CSCL 10A

After almost four years of endurance testing of photovoltaic modules, no fundamental life-limiting mechanisms were identified that could prevent the twenty-year life goal from being met. The endurance data show a continual decline in the failure rate with each new large-scale procurement. Cracked cells and broken interconnects continue to be the principal causes of failure. Although the modules are more adversely affected physically by hot, humid environments than by cool or dry environments there are insufficient data to correlate failure with environment. There is little connection between the outward physical condition of a module and changes in its electrical performance. TM

**N81-20545\*#** Jet Propulsion Lab., California Inst of Tech., Pasadena  
**PROCEEDINGS OF THE 16TH PROJECT INTEGRATION MEETING Progress Report, Apr. - Sep. 1980**  
R R McDonald Sep 1980 492 p refs  
(Contract NAS7-100, DE-A101-76ET-20356)  
(NASA-CR-164073, JPL-PUB-80-100, DOE/JPL-1012-51, PR-16) Avail NTIS HC A21/MF A01 CSCL 10A

The principal achievement of the Low Cost Solar Array Project in 1980 was the attainment of \$280/Wp Technical Readiness, and that processes and equipment now commercially available can make possible a deliverable product in 1982. A prototype array for intermediate load applications was demonstrated using frameless modules. It was proof tested to 40 lb/sq ft loading, and priced at \$24/sq m, including array fabrication, module installation, shipping to the site and site installation for quantities of 20 MW. LFM

**N81-20546\*#** Jet Propulsion Lab., California Inst of Tech., Pasadena  
**THE CORRECTION FOR SPECTRAL MISMATCH EFFECTS ON THE CALIBRATION OF A SOLAR CELL WHEN USING A SOLAR SIMULATOR**  
Clay H Seaman 15 Jan 1981 10 p refs  
(Contracts NAS7-100, DE-A101-76ET-20356)  
(NASA-CR-164074, JPL-PUB-81-1, DOE/JPL-1012-50) Avail  
NTIS HC A02/MF A01 CSCL 10A

A general expression was derived to enable calculation of the calibration error. The information required includes the relative spectral response of the reference cell, the relative spectral response of the cell under test, and the relative spectral irradiance of the simulator (over the spectral range defined by cell response). The spectral irradiance of the solar AMX is assumed to be known. TM

**N81-20648\*** Jet Propulsion Lab., California Inst of Tech., Pasadena

**RESULTS OF THE 1980 NASA/JPL BALLOON FLIGHT SOLAR CELL CALIBRATION PROGRAM**

C H Seaman and R S Weiss 15 Mar 1981 15 p refs (Contract NAS7-100)

(NASA-CR-164078 JPL-Pub-81-18) Avail NTIS HC A02/MF A01 CSCL 10A

Thirty-eight modules were carried to an altitude of about 36 kilometers. In addition to the cell calibration program, an experiment to evaluate the calibration error versus altitude was performed. The calibrated cells can be used as reference standards in simulator testing of cells and arrays. TM

**N81-20649\*** Von Karman Inst for Fluid Dynamics, Rhode-Saint-Genese (Belgium)

**HEAT EXCHANGE AND SOLAR ENERGY, VOLUME 2**

1980 337 p refs Proc of 1980 Lecture Ser., Rhode Saint Genese Belgium 28 Jan - 1 Feb 1980 2 Vol (VKI-Lec-Ser-1980-2-Vol-2) Avail NTIS HC A15/MF A01

The heat transfer problems arising in connection the collection, storage, and utilization of solar energy are examined. The treatment of solar and meteorological data, the instrumentation and measurement technique used to obtain them as well as mathematical models and operational characteristics of various solar heating systems and their individual components are covered. Special emphasis is given to the modeling of complete solar systems, including computer simulation of their transient response. Advantages and disadvantages of energy storage based on sensible heat, phase change, and chemical reaction, along with thermomechanical solar power generation and calculation of the thermal load requirement of buildings are discussed. An analysis of economic aspects and future prospects for solar energy utilization is made.

**N81-20650\*** Mons Univ (Belgium)

**LATENT AND CHEMICAL STORAGE**

Roger Jadot /In Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy, Vol 2 1980 53 p refs

Avail NTIS HC A15/MF A01

The thermodynamics of solar heat storage through the use of hydrates and chemical reactions are discussed. The properties of salt hydrates, and the use of encapsulation to facilitate heat flow are reviewed in the context of home systems. Glauber's salt and calcium chloride hexahydrate are cited as examples. The use of organic compounds in latent heat storage is mentioned, and a list of over 200 compounds selected from the literature is given. Reactions of NH<sub>3</sub> with inorganic salts and other reactions are mentioned for use in a chemical heat pump. Author (ESA)

**N81-20651\*** Technische Physische Dienst TNO-TH, Delft (Netherlands)

**THE BENEFITS OF ADVANCED HEAT STORAGE SYSTEMS**

C denOuden /In Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy, Vol 2 1980 11 p refs

Avail NTIS HC A15/MF A01

A prototype installation using sodium hydrates encapsulated in a polymer matrix with a nucleating agent was constructed. Performance tests using a version of ASHREA standard 94-77 were carried out over 300 aging cycles. Results show a 10% decrease in latent heat of fusion. Rock bed heat storage and adsorbent material heat storage are also compared. For a temperature range of 20 to 80 C, Sorbead R has a seven to ten times higher stored energy density than a rock bed.

Author (ESA)

**N81-20652\*** Technische Physische Dienst TNO-TH, Delft (Netherlands)

**A METHOD TO TUNE THE VARIOUS COMPONENTS OF A SOLAR HEATING SYSTEM**

C denOuden /In Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy, Vol 2 1980 20 p

Avail NTIS HC A15/MF A01

The cost effectiveness of solar space and hot water heating was modeled using as a reference system an instrumented solar house. The reference system has 35 sq m of collectors and a two cu m heat storage tank. The mean annual energy yield was calculated for the climate of the Netherlands. For given component and installation costs, optimal collector area and storage tank volumes are computed. Author (ESA)

**N81-20653\*** Katholieke Universiteit te Leuven (Belgium) Lab voor Warmteoverdracht en Reaktorkunde

**PERFORMANCE OF AIR COLLECTOR HOUSE HEATING SYSTEMS WITH ROCK BED STORAGE**

W L Dutre /In Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy Vol 2 1980 31 p Sponsored by Belgium Govt

Avail NTIS HC A15/MF A01

A solar air heating system and its control system are described and a computer model describing the dynamic behavior of the system is presented. The model is validated against short term measurements on an experimental facility. An acceptable agreement was shown between the model and the measured temperature of the storage system. The system differential equations are solved with a half-hour time step, using half-hourly averaged meteorological data. Model runs indicate that the system performance can be improved mainly by additional storage insulation, improved heat transfer in the air collectors, and through the use of highly selective absorbers. The combination with a heat pump eliminates the need for a thermal auxiliary heating system only in the case of large storage capacities, or permits the same system efficiency with a considerably smaller storage as in the case without a heat pump. Author (ESA)

**N81-20654\*** Mons Univ (Belgium)

**WATER SYSTEMS MODELING**

J Lagneau and C Boussemaere /In Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy, Vol 2 1980 30 p Sponsored by Natl Belgium Program of Energy

Avail NTIS HC A15/MF A01

Mathematical models of two simple solar collectors and three complete solar heating systems are described and compared. Flat plate, double cover, liquid medium collectors were simulated. Hourly values of ambient temperature and global insolation on the collectors are used in the simulations of the behavior of heating systems. A finite difference scheme is used in one model and the modified Euler's method in another. Results from the former compare favorably with those from the Los Alamos Study Center model. A simplified program is described which calculates for each day the storage tank temperature resulting from the heating load, heat loss, and energy output of the collector. Author (ESA)

**N81-20655\*** Von Karman Inst for Fluid Dynamics, Rhode-Saint-Genese (Belgium)

**SYSTEM MODELING USING TRNSYS COMPUTER SIMULATION**

N Connor /In Heat Exchange and Solar Energy, Vol 2 1980 23 p refs

Avail NTIS HC A15/MF A01

Use of the program TRNSYS for design and system optimization is illustrated by transient simulation of a water heating system comparing two different types of collector, and for a swimming pool heating system. The data required for the simulations, the program modules used, and the information flow through the program are shown. Curves are presented for one year of operation, showing energy requirements, optimum collector area, and minimum annual cost all for various collector options. Performance curves are given for the pool heater. Author (ESA)

**N81-20656\*** Joint Research Centre of the European Communities, Ispra (Italy)

**THERMOMECHANICAL SOLAR POWER/ELECTRICITY GENERATION. TECHNICO-ECONOMIC PROBLEMS AND PROSPECTIVES OF DEVELOPMENT AND APPLICATION**

Joachim Greiz /In Von Karman Inst for Fluid Dynamics Heat

## 02 SOLAR ENERGY

Exchange and Solar Energy. Vol 2 1980 38 p refs

Avail NTIS HC A15/MF A01

The thermodynamics of high temperature solar energy conversion are presented and the one MW Helioelectric Power Plant EURELIOS of the European Communities is described. Some particularities of hydrogen, its production with solar energy and transportation of solar energy by means of hydrogen and/or hydrogenated fuels are discussed. The solar power plant represents 80% of the overall costs and is the most cost-intensive component in the system. Solar energy conversion into mechanical power, electrolysis, and transportation of chemicals over long distances (several 1000 km) over land and sea to the user's site are surveyed. Liquid and gaseous hydrogen, methanol, and ammonia are considered. Industrial solar hydrogen production is discussed, emphasizing electrolysis. Some qualitative considerations on the influence of large scale solar energy conversion on climate indicate that there should be atmospheric heating above a plant and only a slight cooling of the ground underneath the mirrors.

Author (ESA)

### **N81-20558# Michigan Univ., Ann Arbor Heat Transfer Lab THE A PRIORI DECISION IN SOLAR ENERGY AND CONSERVATION ECONOMICS**

John A. Clark / In: Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy. Vol 2 1980 57 p refs. Repr from Solar Energy and Conservation Systems, 1980

Avail NTIS HC A15/MF A01

The initial decision concerning the economic viability of a solar energy heating system or an energy conservation system is shown to involve technical, physical, meteorological, geographic, design and cost factors as well as the source of funding and type of arrangements made to finance the system. Four basic economic/technical models, which include the influence of increasing fuel costs, are presented and compared with other possible kinds of investments to determine the economic viability of the system. It is found that different economic conclusions are both possible and justifiable for investment situations having different constraints.

Author (ESA)

### **N81-20559# Michigan Univ., Ann Arbor A LIFE-CYCLE MODEL FOR SOLAR HEATING SYSTEM DESIGN AND ECONOMIC EVALUATION MICHIGAN ECONOMIC MODEL FOR SOLAR HEATING (MESH)**

John A. Clark / In: Von Karman Inst for Fluid Dynamics Heat Exchange and Solar Energy. Vol 2 1980 37 p refs. Presented at Solar Energy and Conservation Symp, Miami, 11-13 Dec 1978

Avail NTIS HC A15/MF A01

A model is presented which allows for both design selection and economic optimization of a solar heating system within the U.S. This model relates the life-cycle total cost of a solar heating system to the escalating cost of fuel, installed system costs per unit area of collector, the cost of capital (capital recovery factor under a mortgage contract), taxes, collector type, building load factor, degree-day heating factor, conversion efficiency of the back-up system, solar load fraction, and solar input-collector performance factors derived from the Los Alamos solar heating model. The influence of cost escalation in fuel is included by an inflation function determined by the analysis. The circumstances corresponding to an arbitrary and/or optimum (minimum total life-cycle cost) design condition are identified and explicitly determined. The influence of the principal governing parameters on solar heating design and economics in the U.S. is shown in a simple but complete form.

Author (ESA)

### **N81-20587# Technical Planning, Inc., Beltsville, Md COORDINATION AND MANAGEMENT TASKS FOR THE IEA SOLAR HEATING AND COOLING PROGRAM AND CCMS SOLAR ENERGY PILOT STUDY Final Report**

Sheila B. Blum and William J. Kennish Oct 1980 35 p refs (Contract DE-AC02-79CS-30108)

(DOE/CS-30108/T3. TPI/IEA-F-7)

Avail NTIS

HC A03/MF A01

Both the management assistance and technical involvement

are discussed for a solar system performance validation effort. An overview of the program accomplishments is presented as well as conclusions for future work. RCT

### **N81-20568# American Heliothermal Corp., Denver, Colo EVALUATION OF SOLAR COLLECTORS FOR HEAT PUMP APPLICATIONS Final Report**

Gary Skartvedt, Donald Pedreya, Robert McMordie, James Kidd, Jerome Anderson, and Richard Jones Aug 1980 154 p refs (Contracts DE-AC04-78CS-35351, EM-78-C-04-5351) (DOE/CS-35351/T1) Avail NTIS HC A08/MF A01

The potential utility of very low cost (possibly unglazed and uninsulated) solar collectors to serve as both heat collection and rejection devices for a liquid source heat pump was evaluated. The approach consisted of exercising a detailed analytical simulation of the complete heat pump/solar collector/storage system against heating and cooling loads derived for typical single family residences in eight US cities. The performance of each system was measured against that of a conventional air to air heat pump operating against the same loads. In addition to evaluation of solar collector options, water tanks and buried pipe grids to provide thermal storage was considered. A determination of night sky temperature and convective heat transfer coefficients for surfaces with dimensions typical of solar collectors was included. The experiments were conducted in situ by placing the test apparatus on the roofs of houses in the Denver, Colorado, area.

DOE

### **N81-20570# Midwest Research Inst., Golden, Colo Information Outreach and Dissemination Branch,**

#### **PHOTOVOLTAICS INFORMATION USER STUDY**

W. W. Belaw, B. L. Wood, T. L. Marie, and C. L. Reinhardt Oct 1980 220 p refs

(Contracts DE-AC02-77CH-00178, EG-77-C-01-0442)

(SERI/TR-751-852) Avail NTIS HC A10/MF A01

The results of a series of telephone interviews with groups of users of information on photovoltaics are described. These results, part of a larger study on many different solar technologies, identify types of information each group needed and the best ways to get information to each group. Baseline data about information needs in the solar community is given. The following technological areas are emphasized: photovoltaics, passive solar heating and cooling, active solar heating and cooling, biomass energy, solar thermal electric power, solar industrial and agricultural process heat, wind energy, ocean energy and advanced energy storage.

DOE

### **N81-20572# Varian Associates, Palo Alto, Calif FURTHER DEVELOPMENT OF A NOVEL SOLAR CELL CONCENTRATOR PHOTOVOLTAIC CONVERTER SYSTEM Final Report**

H. A. VanderPlas and P. E. Gregory Oct 1980 45 p refs

(Contract DE-AC04-76DP-00789)

(SAND-80-7072) Avail NTIS HC A03/MF A01

A photovoltaic converter using an optical filter to split the solar spectrum and focus the light onto two cells was built and tested. Conversion efficiencies for the test module ranged from 27.0 percent at 113 suns to 28.0 percent at 489 suns. The construction of this module was guided by a theoretical analysis of the efficiencies to be expected from a variety of bandgap combinations. Elements of the splitting approach were investigated with emphasis on the extension of the spectral splitting principle to a three gap converter. This includes the extension of the theoretical analysis to include the properties of the optical filter. The theoretical analysis is given, and the feedback provided by this analysis to the rest of the program is emphasized. Research on germanium, silicon, and AlGaAs/Al(sub x)/Ga(sub 1-x)/As solar cells is described.

DOE

### **N81-20574# New Mexico Univ., Albuquerque Bureau of Engineering Research**

#### **OPTIMIZATION OF STORAGE IN PASSIVE SOLAR HEATING SYSTEMS Final Report**

Raymond J. Bahm May 1980 228 p refs

(Contract DE-AS04-78CS-35405, EM-78-S-04-5405)

(DOE/CS-35405/T1, TR-BER-4(80)DOE-720-1) Avail NTIS HC A11/MF A01

The search for a simple method of estimating the optimum amount of storage for passive solar space heating system designs and the results of that search are described. The project goals, and why the project is important are described. The major project results are presented in the order of their importance with respect to meeting the project goal. A narrative description of the project is given. The various approaches attempted are described, giving the reasons for failure in those areas that were not successful. Most of the data is presented in graphical form. DOE

**N81-20582#** Higgins, Auld and Associates. Albuquerque, N Mex **SOLAR COLLECTOR FOUNDATION DESIGNS**  
Harry E Auld and Jeffrey B West Sep 1980 35 p refs  
(Contract DE-AC04-76DP-00789)  
(SAND-80-7070) Avail NTIS HC A03/MF A01

Foundation designs for a solar collector facility proposed for construction at Sandia Laboratories are presented. A suggested method for placement and construction is included. A cost estimate is provided in Appendix A and the complete design calculations are presented in Appendix B. DOE

**N81-20583#** Sandia Labs., Albuquerque, N Mex Component and Subsystem Development Div **HANDBOOK FOR CALCULATING SOLAR-INFLUENCED BUILDING HEAT LOSSES**  
Raymond W Harggan, Herbert E Anderson, and Irving J Hall Oct 1980 180 p refs  
(Contract DE-AC04-76DP-00789)  
(SAND-79-2173) Avail NTIS HC A09/MF A01

Monthly heat losses and gains are presented for single-pane windows having different orientations. In addition, computational techniques in both analytical and graphical form are presented to extend this information to the computation of heat losses and gains from other building elements and the evaluation of wind speed on building heat loss. Heat loss data is presented for 26 SOLMET sites. An example problem illustrates the computations involved. DOE

**N81-20585#** Radiation Monitoring Devices, Inc., Watertown, Mass **LOW COST, SPRAYED CdTe SOLAR CELL RESEARCH**  
**Annual Progress Report, 15 Aug. 1979 - 14 Aug. 1980**  
H B Serreze, M Squillante, S Lis, R Turcotte, M Talbot, and G Entine Sep 1980 35 p refs  
(Contract DE-AC02-77CH-00178)  
(SERI/PR-8104-3-T2, AR-1) Avail NTIS HC A03/MF A01

Techniques to produce sprayed CdTe solar cells by utilizing experimental methods similar to those previously developed to produce device quality CdS and CdSe thin films were examined. The existing technology is extended by making use of inorganic tellurium salts and by appropriately modifying the process parameters. Using this approach films of CdTe were spray deposited. Furthermore, the spray solution is very stable and the process is reproducible. Preliminary Schottky barrier solar cell devices showed very encouraging AM1 photovoltaic behavior. DOE

**N81-20587#** Los Alamos Scientific Lab., N Mex **SOLAR COAL GASIFICATION Quarterly Progress Report, 1 Oct. - 31 Dec. 1980**  
J A Sullivan and R J Jensen 1980 21 p refs  
(Contract W-7405-eng-36)  
(DOE/TIC-11384) Avail NTIS HC A02/MF A01

The concept of solar coal gasification is investigated in the laboratory using the beam from a CO<sub>2</sub> laser to simulate the radiation from a solar furnace. The parameters influencing the pyrolysis of stationary samples of Western sub-bituminous coal and the reaction of the char product with CO<sub>2</sub> to form CO were investigated, and many of the experimental conditions required for maximizing gas yields were determined. Tests of solar coal gasification were conducted using small furnaces. DOE

**N81-20588#** Automation Industries, Inc., Silver Spring, Md Vitro Labs

## OCTOBER 1980 ENVIRONMENTAL DATA FOR SITES IN THE NATIONAL SOLAR DATA NETWORK

Oct 1980 248 p refs  
(Contract DE-AC01-79CS-30027)  
(SOLAR/0010-80/10) Avail NTIS HC A11/MF A01

Tables of available meteorological data for reporting sites in the National Solar Data Network are presented for the following: insolation, temperature, wind, and humidity. A technical discussion of the instruments and measurements used to obtain these data tables is included. A map illustrating the climate zones is provided. DOE

**N81-20595#** Microwave Associates Inc., Burlington, Mass **HIGH CONCENTRATION SILICON PHOTOVOLTAIC CELL DEVELOPMENT Interim Report, Nov 1978 - Feb 1980**  
G Allendorf, R Frank, J Goodrich, and W Matthei Jun 1980 113 p refs  
(Contract DE-AC04-76DP-00789)  
(SAND-80-7068) Avail NTIS HC A06/MF A01

The objective of this study is to develop practical semiconductor photocells for use in high concentration system (at least 25 suns at air mass one), having 18 percent or more efficiency, using state of the art silicon material and device technology, and amenable to low cost photovoltaic production of electrical energy from solar radiation. Work accomplished at Microwave Associates from the initiation of the contract on 27 November 1978 to 29 February 1980, is described. DOE

**N81-20596#** PRC Energy Analysis Co., Los Angeles, Calif **SATELLITE POWER SYSTEM (SPS) UTILITY INTEGRATION: INSTITUTIONAL PLANNING AND OPERATIONAL ISSUES**  
Meredith Crist, John Hill, Allan D Kotin, and James A Rabe Oct 1980 205 p refs  
(Contract DE-AC01-79ER-10041)  
(EAC-R-4015) Avail NTIS HC A10/MF A01

Management and organizational arrangements are needed to incorporate 300 GW of Satellite Power System (SPS) electrically into the US utility grid. Locating a sufficient number of suitable rectenna sites in the eastern United States to serve projected load centers on a proportional basis appears to be difficult. Transmission distances from rectennas to load centers could be a problem in the western United States. Long transmission distances are undesirable from a technical point of view but can be managed. More significant is the fact that long transmission lines associated with SPS would consistently cross state (and other regulatory) boundaries. However, siting exercises suggest that 60 rectennas could be located in eligible areas within the continental United States to serve projected load centers without violating the current state of the art of electricity transmission and load management. DOE

**N81-20599#** Martin Marietta Aerospace, Denver, Colo **THE 10-KILOWATT PHOTOVOLTAIC CONCENTRATOR ARRAY FABRICATION**  
J A Sanders, R L Donovan and S Broadbent Dec 1980 292 p refs  
(Contract DE-AC04-76DP-00789)  
(SAND-80-7062) Avail NTIS HC A13/MF A01

The PCA is based on the use of an acrylic Fresnel lens to concentrate sunlight on high intensity solar cells. The array with modified heat sinks was fabricated to determine the impact on electrical performance due to lower weight heat sinks and reduced thermal dissipation surfaces. The cost optimization study identified a new lower weight heat sink design that would reduce the heat sink weight by 50% and the array cost by approximately 31% for a loss of only 7% in annualized electrical power generation. The production cost estimate provides an indicator that an overall 87% learning curve can be achieved and the cost of the 5000th unit could be \$5.30 per watt in 1979 dollars. DOE

**N81-20600#** AEG-Telefunken, Wedel (West Germany) Fachbereich Neue Technologien, Raumfahrt **EXPERIMENTAL STUDY TO DEFINE DEVELOPMENTS FOR TERRESTRIAL SOLAR CELL GENERATORS Final Report**  
Hans Gochermann, Willi Pschunder, and G Wahl Bonn

## 02 SOLAR ENERGY

Bundesministerium fuer Forschung und Technologie Dec 1979  
144 p refs In GERMAN, ENGLISH summary Sponsored by  
Bundesministerium fuer Forschung und Technologie  
(BMFT-FB-T-79-143, ISSN-0340-7608) Avail NTIS  
HC A07/MF A01

Materials, industrial processes, and design configurations were analyzed in order to define an economically attractive photovoltaic solar generator. System analyses and tests were performed, interconnection and encapsulation techniques for solar cells were developed, and a 1kW solar generator was built for performance measurements. Special solar cells were developed and fabricated, using single crystalline silicon and unconventional polycrystalline silicon. Cost reductions through the use of large area wafers and from the modification of process steps for solar cell fabrication are demonstrated. Further cost reduction are shown possible by using cheaper materials for contacts, interconnectors, encapsulation, etc. Using the fabricated prototype cells, two types of solar cell modules, i.e., glass and plastic encapsulations were developed, favoring the modular design of solar generators. Accelerated life test results for solar cell aging characteristics along with generator operational electrical data are given.

Author (ESA)

**N81-20602#** Laboratoires d'Electronique et de Physique Appliquees, Limeil-Brevannes (France)

**FABRICATION OF AMORPHOUS SILICON SOLAR CELLS, USING AN INDUSTRIAL PROCESS. Final Report [REALISATION DE CELLULES SOLAIRES A BASE DE SILICIUM AMORPHE PAR UN PROCEDE INDUSTRIEL]**

E Fabre and S Laou Aug 1980 18 p refs In FRENCH, ENGLISH summary

(Contract DGRST-78 7 0050)

(LEP-80 638 SME-689-A) Avail NTIS HC A02/MF A01

An industrial way of depositing amorphous silicon was investigated using a commercially available plasma reactor with a large throughput (AMP 300, APPLIED MATERIALS). A conversion efficiency of 1% was obtained for a metal insulator semiconductor structure with platinum and a 1 cu cm area. An important field effect was observed upon the collection efficiency. The homogeneity of the layers is very good. RCT

**N81-20605#** Swedish Council for Building Research, Stockholm  
**FLAT PLATE THERMAL SOLAR COLLECTORS. A PHYSICAL BACKGROUND**

Per Isakson 1980 105 p refs

(PB81-135741, ISBN-91-540-3329-2 D35-1980) Avail NTIS HC A06/MF A01 CSCL 10A

A physical background to the energy balance of flat plate solar collectors is provided. This background gives an idea of the wide range of literature available on the subject. GRA

**N81-20612** Arizona Univ., Tucson

**THE RETARDATION OF CRYSTALLIZATION OF CVD AMORPHOUS SILICON AND THE STUDY OF ITS STRUCTURAL AND OPTICAL PROPERTIES. Ph.D. Thesis**

Donald Clarke Booth 1980 271 p

Avail Univ Microfilms Order No 8102243

Amorphous silicon alloys containing boron, carbon, germanium, and nitrogen were prepared using chemical vapor deposition (CVD) and the effects of composition on their optical and structural properties for use as high temperature stable absorbers in photothermal solar energy conversion were determined. It was found that the ratio of silicon to alloy element in the film was not in general the same as in the gas mixture. The structure of all as-deposited alloy films was amorphous. The profiles of the absorption coefficients of the as-deposited amorphous silicon alloys resemble closely those of the nonalloyed material, even for large amounts of the alloying element present in the film, except for the existence of a large absorption tail at low photon energies. The refractive index, on the other hand, varies strongly with the alloy concentration, decreasing significantly for large concentrations of the alloy element. High temperature anneal experiments were conducted to determine the structural stability with anneal of these alloyed amorphous silicon films. It was found that silicon-carbon alloys were structurally stable to

temperatures of 900 C to 1000 C, depending on the carbon concentration. Dissert Abstr

**N81-20936#** Los Alamos Scientific Lab., N Mex  
**STUDY OF THE EFFECTIVENESS OF SELECTIVE ABSORBER COATINGS AND PHASE CHANGE MATERIALS IN PASSIVE SOLAR SPACE HEATING**

W O Wray, I C Hyde, and L E Bourdeau (Lab CRNR-PIRDES d'Energie Solaire, Nice, France) 1980 5 p refs Presented at the 1980 Passive and Hybrid Solar Energy Program Update Meeting, Washington, D.C., 21-24 Sep 1980

(Contract W-7405-eng-36)

(LA-UR-80-2930, CONF-800972-6)

HC A02/MF A01

Avail NTIS

The performance of selective absorber coatings in passive solar heating systems is assessed. The relative performance of thermal storage wall buildings when equipped either with a selective absorber coating or movable night insulation is studied. The advantages a phase change thermal storage wall might have over a conventional system that employs either masonry or water as the thermal storage medium are determined. Phase change material walls were tested with and without a diatomaceous Earth thickening agent that suppresses convection and in both vented and unvented configurations. Results are presented and discussed. DOE

**N81-21489** International Institute for Applied Systems Analysis, Laxenburg (Austria)

**SOLAR OPTIONS IN CENTRAL EUROPE. A SYNTHESIS OF SOLAR TECHNOLOGY ASSESSMENT AND CONTEMPORARY CRITERIA IN 1978-1979**

Charles R Bell Dec 1979 32 p refs Transl into ENGLISH of Revue de l'Energie (Paris), Mar 1979

(IIASA-RR-79-14) Avail Issuing Activity

Solar energy as a potential substitute for fossil fuels is evaluated, and the time phase in which solar technology can become a significant part of the energy supply mix is discussed. Constraints, such as the characteristic uncertainties of solar energy inputs, the developmental status of solar technology, and the evolution of other energy supply alternatives, are also described. The options that are at present most viable for solar energy exploitation in central Europe as well as the economic and technical parameters of these options are identified. A correlation with prototype data is made whenever possible to maximize the usefulness of the results. Author (ESA)

**N81-21491\*#** Rockwell International Corp., Downey Calif  
Space Operations and Satellite Systems Div

**SATELLITE POWER SYSTEM (SPS) CONCEPT DEFINITION STUDY (EXHIBIT D) VOLUME 2. SYSTEMS/SUBSYSTEMS ANALYSES. Final Report**

G M Hanley Washington NASA Mar 1981 338 p refs (Contract NAS8-32475)

(NASA-CR-3393, SSD-80-0108-2)

HC A15/MF A01 CSCL 10A

Avail NTIS

Modifications to the reference concept were studied and the best approaches defined. The impact of the high efficiency multibandgap solar array on the reference concept design is considered. System trade studies for several solid state concepts including the sandwich concept and a separate antenna/solar concept, are described. Two solid state concepts were selected and a design definition is presented for each. Magnetrons as an alternative to the reference klystrons for dc/RF conversion are evaluated. System definitions are presented for the preferred klystron and solid state concepts. Supporting systems are analyzed, with major analysis in the microwave, structures, and power distribution areas. Results of studies for thermal control, attitude control, stationkeeping, and details of a multibandgap solar cell study are included. Advanced laser concepts and the meteorological effects of a laser beam power transmission concept are considered. JDH

**N81-21492\*#** Rockwell International Corp., Downey, Calif  
**SATELLITE POWER SYSTEMS (SPS) CONCEPT DEFINITION STUDY (EXHIBIT D). VOLUME 4, PART 2. COST AND PROGRAMMATICS APPENDIX. Final Report**

G M Hanley Washington NASA Mar 1981 401 p 7 Vol  
(Contract NAS8-32475)  
(NASA-CR-3398, SSD-80-0108-6-2) Avail NTIS  
HC A18/MF A01 CSCL 10A

Cost and programmatic aspects of a recommended satellite power system are documented. Computer generated summaries are presented, and the detailed computer runs structured in a Work Breakdown Structure are given. The six configurations developed during the study period are summarized. J D H

**N81-21623\*** National Aeronautics and Space Administration  
Goddard Space Flight Center, Greenbelt, Md  
**SOLAR MAXIMUM MISSION (8MM) IN-FLIGHT PERFORMANCE**

Richard J Broderick *In Its The 1980 Goddard Space Flight Center Battery Workshop* Mar 1981 p 349-359

Avail NTIS HC A19/MF A01 CSCL 10C

The modular power system is discussed. Typical and analytical orbit data are compared with life test data for the batteries. E D K.

**N81-21635\*** La Quinta Motor Inns, Inc., San Antonio, Tex  
**SOLAR HOT WATER SYSTEM INSTALLED AT LAS VEGAS, NEVADA** Final Report

Jan 1981 40 p refs Sponsored by NASA

(Grant EG-77-G-01-1854)

(NASA-CR-161642) Avail NTIS HC A03/MF A01 CSCL 10A

A solar energy hot water system installed in a motor inn at Las Vegas, Nevada is described. The inn is a three story building with a flat roof for installation of the solar panels. The system consists of 1,200 square feet of liquid flat plate collectors, a 2,500 gallon insulated vertical steel storage tank, two heat exchangers, and pumps and controls. The system was designed to supply approximately 74 percent of the total hot water load. M G

**N81-21641\*** Spectrolab, Inc., Sylmar, Calif  
**SILICON SOLAR CELL PROCESS DEVELOPMENT, FABRICATION AND ANALYSIS** Final Report

Joseph A Minahan 9 Mar 1981 75 p refs Sponsored by NASA and DOE Prepared for JPL

(Contract JPL-955055)

(NASA-CR-164164, DOE/JPL-955055-81/6, JPL-9950-523) Avail NTIS HC A04/MF A01 CSCL 10A

The fabrication of solar cells from several unconventional silicon materials is described and cell performance measured and analyzed. Unconventional materials evaluated are edge defined film fed grown (EFG), heat exchanger method (HEM), dendritic web grown and continuous CZ silicon. Resistivity, current voltage, and spectral sensitivity of the cells were measured. Current voltage was measured under AM0 and AM1 conditions. Maximum conversion efficiencies of cells fabricated from these and other unconventional silicon materials were compared and test results analyzed. The HEM and continuous CZ silicon were found to be superior to silicon materials considered previously. J D H

**N81-21646\*** Honeywell Corporate Material Sciences Center  
Bloomington, Minn

**SILICON-ON-CERAMIC PROCESS: SILICON SHEET GROWTH AND DEVICE DEVELOPMENT FOR THE LARGE-AREA SILICON SHEET TASK OF THE LOW-COST SOLAR ARRAY PROJECT** Annual Report, 29 Sep 1979 - 30 Sep 1980

A B Whitehead, J D Zook, B L Grung, J D Heaps, F Schmitt, S B Schultdt, and P W Chapman 5 Jan 1981 79 p refs Sponsored by NASA and DOE Prepared for JPL

(Contract JPL-954356)

(NASA-CR-164134, DOE/JPL-954356-80/14, JPL-9950-495 AR-5) Avail NTIS HC A05/MF A01 CSCL 10A

The technical feasibility of producing solar cell quality sheet silicon to meet the DOE 1986 cost goal of 70 cents/watt was investigated. The silicon on ceramic approach is to coat a low cost ceramic substrate with large grain polycrystalline silicon by

unidirectional solidification of molten silicon. Results and accomplishments are summarized. T M

**N81-21553#** Automation Industries, Inc., Silver Spring, Md  
Vitro Labs Div

**HULLCO CONSTRUCTION, PRESCOTT, ARIZONA: SOLAR ENERGY SYSTEM PERFORMANCE EVALUATION OCTOBER 1979 - MAY 1980**

Paul C Miller and Edward Pollock 1980 88 p refs

(Contract DE-AC01-79CS-30027)

(SOLAR/1043-80/14) Avail NTIS HC A05/MF A01

A single-family passive solar residence located in Prescott, Arizona was designed to supply 97 percent of the heating load. Included in the system is an attached greenhouse, a Trombe wall, rock bin, direct gain floor slab, and secondary storage in the building mass. The actual solar contribution was 91 percent in this colder than average season. DOE

**N81-21554#** Automation Industries, Inc., Silver Spring, Md  
Vitro Labs Div

**SOLAR ENERGY SYSTEM PERFORMANCE EVALUATION, KALWALL CORPORATION, MANCHESTER, NEW HAMPSHIRE** Progress Report, Oct. 1979 - May 1980

J W Spears 1980 81 p refs

(Contract DE-AC01-79CS-30027)

(SOLAR/2015-80/14) Avail NTIS HC A05/MF A01

The direct-gain passive solar energy system was designed to supply approximately 50% of the annual space heating demand. The addition of roof insulation has resulted in system performance which exceeds these design projections. The structure is equipped with 1750 sq ft of vertical south-facing glazing and 850 sq ft of vertical east-facing glazing. The storage system consists of 817,000 pounds of dark-colored concrete in the eight inch floor slab. Additional storage is in the materials stored in the warehouse. Auxiliary space heating is provided by two liquid-to-air heat exchangers supplied by the building boiler. DOE

**N81-21555#** Automation Industries, Inc., Silver Spring, Md  
Vitro Labs Div

**TROY-MIAMI LIBRARY, TROY, OHIO: SOLAR ENERGY SYSTEM PERFORMANCE EVALUATION** Progress Report, Nov 1979 - Apr. 1980

Stephen Dudzik 1980 77 p refs

(Contract DE-AC01-79CS-30027)

(SOLAR/2029-80/14) Avail NTIS HC A05/MF A01

The solar system utilizes 3264 sq ft of Owens-Illinois Sunpak Shaped Reflector evacuated tube collectors and a 5000 gallon underground steel-lined fiberglass water storage tank to heat the 23,000 sq ft building. The solar system performance can be briefly summarized: solar fraction, 31%, solar savings ratio, 0.20, conventional fuel savings, 11,421 kWh, system performance factor, 0.29, solar system COP, 2.96. DOE

**N81-21556#** Automation Industries, Inc., Silver Spring, Md  
Vitro Labs Div

**PERFORMANCE OF ACTIVE SOLAR DOMESTIC HOT WATER HEATING SYSTEMS** Progress Report, 1979 - 1980

M A Cramer, P W Kendall, J M Rosenbusch, and R A Weinstein 1980 249 p refs

(Contract DE-AC01-79CS-30027)

(SOLAR/0024-80/41) Avail NTIS HC A11/MF A01

The most recent composite results of analysis performed by Vitro Laboratories of solar hot water heating data for selected hot water sites in the National Solar Data Network (NSDN) are presented. Results presented were developed on the basis of analysis of instrumented sites monitored through 1979-1980. A total of 45 sites in the National Solar Data Network (NSDN) were examined for this study. Eighteen of these were selected for in-depth treatment because of the availability of valid long term data. System descriptions, schematic diagrams and energy flow diagrams for these 18 sites are presented. T M

**N81-21557#** Automation Industries, Inc., Silver Spring, Md  
Vitro Labs Div

**SOLAR ENERGY SYSTEM PERFORMANCE EVALUATION:**

## 02 SOLAR ENERGY

### HEI WAI WONG, HONOLULU, HAWAII, NOVEMBER AND DECEMBER 1979 AND APRIL THROUGH AUGUST 1980

M A Cramer 1980 76 p refs

(Contract DE-AC01-79CS-30027)

(SOLAR/1014-80/14) Avail NTIS HC A05/MF A01

The instrumented system consists of an array of flat-plate collectors with an area of 807.4 square feet. The collector and storage subsystem consists of a 1230-gallon storage tank mounted on the roof with the bottom of the tank slightly higher than the top of the collector panels. When the Sun heats the water in the collectors above the tank water temperature, a thermosiphon current is induced. When the temperature in storage exceeds the temperature of the water in the collectors, the thermosiphon flow ceases. The solar energy system at Hei Wai Wong supplied 98% of the energy required for hot water for the six apartments and the laundry. DOE

**N81-21564#** California Univ., Livermore Lawrence Livermore Lab

### WORLD ACTIVITY IN SOLAR PONDS

David W Dorn 20 Jan 1980 7 p refs

(Contract W-7405-eng-48)

(UCID-18900) Avail NTIS HC A02/MF A01

The United States and Israel appear to be the only two countries actively developing solar salt gradient pond technology, which uses the pond water both as a direct absorber of solar energy and as a storage medium for the thermal energy collected. Current US pond projects and past present, and future Israeli pond projects are presented. Israel, which is clearly leading in the development, has brought its research to a point considered near commercial and is beginning to market the technology in other countries. DOE

**N81-21566#** Colorado State Univ., Fort Collins Solar Energy Applications Lab

### HANDBOOK OF EXPERIENCES IN THE DESIGN AND INSTALLATION OF SOLAR HEATING AND COOLING SYSTEMS

Dan S Ward and Harjinder S Oberoi Jul 1980 231 p refs

(Contract DE-AC01-76CS-32224)

(DOE/CS-32224/T1) Avail NTIS HC A11/MF A01

A large array of problems encountered are detailed, including design errors, installation mistakes, cases of inadequate durability of materials and unacceptable reliability of components, and wide variations in the performance and operation of different solar systems. Durability, reliability, and design problems are reviewed for solar collector subsystems, heat transfer fluids, thermal storage, passive solar components, piping/ducting, and reliability/operational problems. Performance topics covered include criteria for design and performance analysis, domestic hot water systems, passive space heating systems, active space heating systems, space cooling systems, analysis of systems performance, and performance evaluations. DOE

### **N81-21568#** Sandia Labs., Albuquerque, N Mex MIDTEMPERATURE SOLAR SYSTEMS TEST FACILITY PREDICTIONS FOR THERMAL PERFORMANCE OF THE ACUREX SOLAR COLLECTOR WITH FEK 244 REFLECTOR SURFACE

Thomas D Harnson Jan 1981 22 p ref

(Contract DE-AC04-76DP-00789)

(SAND-80-1964/3) Avail NTIS HC A02/MF A01

A detailed account of the methods used to make the predictions is given. The performance predictions are part of a program to measure the characteristics of commercially available solar collectors that have the potential for use in industrial process heat and enhanced oil recovery applications. TM

### **N81-21571#** Sandia Labs., Albuquerque, N Mex PHOTOVOLTAIC CONCENTRATOR TECHNOLOGY DEVELOPMENT PROJECT

Oct 1980 308 p Presented at the 6th Project Integration Meeting, Albuquerque, N Mex., 5-6 Nov 1980

(Contract DE-AC04-76DP-00789)

(SAND-80-2373, CONF-801151) Avail NTIS

### HC A14/MF A01

Thirty-three abstracts and short papers describe the current status of research, development, and demonstration of concentrator solar cell technology. Solar concentrations discussed include the parabolic trough, linear focus Fresnel lens, point focus Fresnel lens, and the parabolic dish. Solar cells studied include silicon, GaAs, and AlGaAs. Research on multiple junction cells, combined photovoltaic/thermal collectors, back contact solar cells, and beam splitter modules is described. Concentrator solar cell demonstration programs are reported. DOE

**N81-21574#** General Electric Co., Philadelphia Pa Valley Forge Space Center

### PHOTOVOLTAIC CONCENTRATOR ARRAY PRODUCTION PROCESS STUDY, VOLUME 2: STUDY RESULTS Final Report, 25 Jan 1979 - 24 Jan 1980

R C Hodge Jan 1981 198 p refs

(Contract DE-AC04-76DP-00789)

(SAND-79-7055/2) Avail NTIS HC A09/MF A01

Photovoltaic concentrator array designs were evaluated in terms of their low production and life cycle cost analysis. Salient program design guidelines were defined which established the basic performance assumptions, environmental issues and design trade-off variables. Available design detail was then compiled. Preliminary manufacturing costs were estimated for each of the array concepts. Using energy costs, and assessments as to each array's technology readiness and improvement potential, the various arrays were ranked. The most promising arrays selected for the more detailed design optimization and cost studies were the point focus Fresnels, linear Fresnels, and one-axis troughs. DOE

**N81-21575#** General Electric Co., Philadelphia, Pa Space Div

### DESIGN OF A SIDE-BY-SIDE PHOTOVOLTAIC THERMAL SYSTEM FOR A NORTHEAST ALL-ELECTRIC RESIDENCE

E M Mehalick, G OBrien, G F Tully, J Johnson, J Parker, N Truncellito, and R Felice Nov 1980 204 p refs

(Contract DE-AC04-76DP-00789)

(SAND-80-7148) Avail NTIS HC A10/MF A01

There are three major system elements: the photovoltaic array, the electric power conversion subsystem, and the thermal subsystem. A key to the sizing of the PV and thermal array is the relative cost of each system. Therefore, the ratio of the costs associated with each system was varied parametrically to define ultimate sizing of the PV and thermal array. In general, the results indicate larger PV array area and minimal thermal array area for the set of cost assumptions described. DOE

**N81-21577#** Midwest Research Inst., Golden, Colo Solar Energy Research Inst

### INTERIM PERFORMANCE CRITERIA FOR PHOTOVOLTAIC ENERGY SYSTEMS

Richard DeBlasio, Steven Forman (MIT/Lincoln Lab), Steve Hogan, Gary Nuss, Hal Post (Sandia National Labs), Ronald Ross (JPL), and Harry Schafft (NBS) Dec 1980 230 p refs

(Contracts DE-AC02-77CH-00178, EG-77-C-01-4042)

(SERI/TR-742-654) Avail NTIS HC A11/MF A01

The performance criteria address characteristics of present-day photovoltaic systems that are of interest to manufacturers, government agencies, purchasers, and all others interested in various aspects of photovoltaic system performance and safety. The performance criteria apply to the system as a whole and to its possible subsystems: array, power conditioning, monitor and control, storage, cabling, and power distribution. They are further categorized according to the following performance attributes: electrical, thermal, mechanical/structural, safety, durability, reliability, installation/operation/maintenance, and building/site. DOE

### **N81-21579#** Midwest Research Inst., Golden, Colo YEARLY AVERAGE PERFORMANCE OF THE PRINCIPAL SOLAR COLLECTOR TAPES

Ar Rabi Jan 1981 56 p refs

(Contracts DE-AC02-77CH-00178, EG-77-C-01-4042)



(SERI/TR-631-716) Avail NTIS HC A04/MF A01

The results of hour by hour simulations for 26 meteorological stations were used to derive universal correlations for the yearly total energy that can be delivered by the principal solar collector types, flat plate, evacuated tubes, CPC, single and dual axis tracking collectors, and central receiver. The correlations are first and second order polynomials in yearly average insolation, latitude, and threshold (= heat loss/optical efficiency). With these correlations, the yearly collectible energy can be found by multiplying the coordinates of a single graph by the collector parameters, which reproduces the results of hour by hour simulations with an accuracy (rms error) of 2% for flat plates and 2% to 4% for concentrators DOE

**N81-21583#** Ames Lab., Iowa  
**PHOTOELECTROCHEMICAL SOLAR CELLS BASED ON d-BAND ELECTROCHEMISTRY AT TRANSITION METAL DISLENIDES** Final Technical Progress Report  
Bruce A Parkinson Oct 1980 35 p refs  
(Contracts W-7405-eng-82, EG-77-C-91-4042)  
(IS-4759) Avail NTIS HC A03/MF A01

The work with tungsten diselenide and molybdenum diselenide can be divided into two major directions. The first direction is the growth of high quality single crystals of the materials to establish the practical maximum solar energy conversion efficiency of layered compounds. The second effort utilizes less perfect single crystals with edge sites exposed as models of a polycrystalline device with the goal of understanding the mechanism by which recombination limits the efficiency of these materials and to devise methods for reducing the recombination. Progress is reported DOE

**N81-21591#** RCA Labs., Princeton, N J  
**AMORPHOUS THIN FILMS FOR SOLAR-CELL APPLICATIONS** Final Report, 11 Sep. 1979 - 10 Sep. 1980  
D E Carlson, R S Crandall, J Dresner, B Goldstein, J J Hanak, A R Moore, H E Schade, D L Staebler, and H A Weakliem Oct 1980 92 p refs  
(Contract DE-AC02-77CH-00178)  
(SERI/PR-O-8254-F) Avail NTIS HC A05/MF A01

The drift mobility was measured in doped amorphous silicon by measuring the current transient in a Schottky-barrier device during a reverse bias voltage pulse. Mass spectroscopy studies indicate that the film growth cannot be a simple ion surface recombination process but is probably due to either thermal decomposition of higher silanes or free radical surface reaction. The photoelectromagnetic effect was used to measure the hole diffusion length in undoped a-Si:H DOE

**N81-21598#** SRI International Corp., Menlo Park, Calif  
**LINE-FOCUS SOLAR CENTRAL POWER SYSTEM, PHASE 1. VOLUME 1: EXECUTIVE SUMMARY** Final Report, 29 Sep. 1978 - 30 Apr. 1980  
Arthur J Slemmons Apr 1980 51 p ref 3 Vol  
(Contracts DE-AT03-76ET-20550, EY-76-C-03-0115)  
(DOE/ET-20550/2-Vol-1) Avail NTIS HC A04/MF A01

The SRI International industrial team completed a subsystem and system parametric analysis, a 100 MW sub e commercial plant conceptual design, and a cost and performance analysis. A commercial assessment was made of the system DOE

**N81-21599#** SRI International Corp., Menlo Park, Calif  
**LINE-FOCUS SOLAR CENTRAL POWER SYSTEM, PHASE 1. VOLUME 2: TEXT** Final Report, 29 Sep. 1978 - 30 Apr. 1980  
Arthur J Slemmons Apr 1980 414 p refs 3 Vol  
(Contracts DE-AT03-76ET-20550, EY-76-C-03-0115)  
(DOE/ET-20550/2-Vol-2) Avail NTIS HC A18/MF A01

The conceptual design, parametric analysis, cost and performance analysis, and a commercial assessment of a 100 MWe high temperature line focus central power system are presented. Parametric analyses and conceptual design of the heliostat subsystem, receiver subsystem, heat transport subsystem, energy storage subsystem, electrical power generating subsystem, and master control subsystem are included. A market analysis and development plan are given DOE

**N81-21600#** SRI International Corp., Menlo Park, Calif  
**LINE-FOCUS SOLAR CENTRAL POWER SYSTEM, PHASE 1. VOLUME 3: APPENDICES** Final Report, 29 Sep. 1978 - 30 Apr. 1980

Arthur J Slemmons Apr 1980 75 p refs 3 Vol  
(Contracts DE-AT03-76ET-20550, EY-76-C-03-0115)  
(DOE/ET-20550/2-Vol-3) Avail NTIS HC A04/MF A01

Methods of determination of molten salt heat-transfer coefficients and tube-wall temperatures are discussed. Inputs for STEAEC programs, description of system analysis computer program, receiver analysis program, and heliostat production plan and design methodology are described DOE

**N81-21601#** Spectrolab, Inc., Sylmar, Calif  
**THE 10 KILOWATT PHOTOVOLTAIC CONCENTRATOR SYSTEM AS INSTALLED AT SANDIA LABORATORIES, 1979** Final Technical Progress Report  
K Ronney Dec. 1980 87 p  
(Contract DE-AC04-78DP-00789)  
(SAND-80-7063) Avail NTIS HC A05/MF A01

The photovoltaic concentrator system is described. Included are system description, problems encountered and resolved during fabrication, and system performance analysis DOE

**N81-21603#** Stanford Univ., Calif  
**SOLAR SPACE AND WATER HEATING SYSTEM AT STANFORD UNIVERSITY, CENTRAL FOOD SERVICES BUILDING** Final Report  
May 1980 143 p  
(Contract DE-AB03-77CS-31522)  
(DOE/CS-31522/T1) Avail NTIS HC A07/MF A01

This active hydronic domestic hot water and space heating system was 840 sq ft of single-glazed, liquid, flat plate collectors and 1550 gal heat storage tanks. The following are discussed: energy conservation, design philosophy, operation, acceptance testing, performance data, collector selection, bidding, costs, economics, problems, and recommendations. An operation and maintenance manual and as-built drawings are included in appendices DOE

**N81-21605#** Battelle Pacific Northwest Labs., Richland, Wash  
**ASSESSMENT OF GENERIC SOLAR THERMAL SYSTEMS FOR LARGE POWER APPLICATIONS: ANALYSIS OF ELECTRIC POWER GENERATING COSTS FOR SYSTEMS LARGER THAN 10 MWe, VOLUME 1**  
W J Apley, S P Bird, D R Brown, M K Drost, J A Fort, B A Garrett-Pnce, W P Patton, and T A Williams Nov 1980 200 p refs  
(Contract DE-AC06-76RL-01830)  
(PNL-3533-Vol-1) Avail NTIS HC A09/MF A01

Seven generic types of collectors, together with associated subsystems for electric power generation, were considered. The collectors can be classified into three categories: two-axis tracking (with compound-curvature reflecting surfaces), one-axis tracking (with single-curvature reflecting surfaces), and nontracking (with low-concentration reflecting surfaces). All seven collectors were analyzed in conceptual system configurations with Rankine-cycle engines. In addition, two of the collectors were analyzed with Brayton-cycle engines, and one was analyzed with a Stirling-cycle engine. With these engine options, and the consideration of both thermal and electrical storage for the Brayton-cycle central receiver, 11 systems were formulated for analysis DOE

**N81-21607#** Lincoln Lab., Mass Inst of Tech., Lexington  
**CONSTRUCTION OF A PHOTOVOLTAIC POWER SYSTEM AT NATURAL BRIDGES NATIONAL MONUMENT**  
A E Benoit Dec 1980 25 p  
(Contract DE-AC02-76ET-20279)  
(DOE/ET-20279/94) Avail NTIS HC A02/MF A01

A 100 kW peak photovoltaic (PV) power system at Natural Bridges National Monument in Utah is described. This system is the largest of its kind in the world. The construction phases of the program are described, and a chronological history of the events and problems encountered when such a large and complex task is undertaken in a remote area with very limited fabrication

## 02 SOLAR ENERGY

facilities is given. This experiment demonstrates the application of solar energy to the variety of loads found in a small and remote community. This solar energy system was designed to meet all electrical requirements when there is no utility grid, with only occasional back-up from an existing diesel generator.

DOE

**N81-21608#** Massachusetts Inst of Tech, Cambridge  
**CHALCOGENIDE-GLASS SOLAR CELLS** Final Technical Progress Report, 6 Apr. 1979 - 31 Oct. 1980

D Adler and John S Haggerty 1980 66 p

(Contract DE-AC03-79ET-23043)

(DOE/ET-23043/T1) Avail NTIS HC A04/MF A01

A wide array of glasses in the Se-Te-As system were prepared by RF-sputtering in either Ar or Ar/H<sub>2</sub> atmospheres and characterized optically and electrically. Some films were co-sputtered with small concentrations of Li, Na, or K. Glasses with optical gaps of 1.2 to 1.5 eV were investigated in solar-cell configurations. The Se-Te glasses without As exhibited transient behavior, the time-varying effects persisting for the order of several minutes or more. These transients were explained by invoking the unique properties of the valence alternation pairs (VAPs) which must exist in such glasses in large densities. Small concentrations (1 to 5%) of As effectively suppressed the transient effects.

DOE

**N81-21609#** Lincoln Lab, Mass Inst of Tech, Lexington  
**MEASURING DIRT ON PHOTOVOLTAIC MODULES, PART 2**

E B Murphy Nov 1980 20 p refs

(Contract DE-AC02-76ET-20279)

(COO-4094-86-Pt-2) Avail NTIS HC A02/MF A01

Two techniques for measuring and quantifying surface dirt and its effects on module output are described. One technique, using a standard portable glossmeter, measures the scattering of specular light by surface-dirt particles. This measured value can then be correlated with the peak power performance before and after cleaning. A second technique is also described which enables an investigator, in the field, to take dirt samples or replicas of the accumulated surface dirt from the PV module. Photomicrographs of urban, suburban, and rural dirt particles are shown. Measurements of module peak power before and after cleaning indicate that dirt particles in urban environments are more degrading to PV performance than dirt particles found in rural areas.

DOE

**N81-21617#** Sandia Labs, Livermore, Calif Energy Systems Studies Div

**METHODOLOGY FOR ESTIMATING FUTURE MARKET VALUES OF SOLAR THERMAL TECHNOLOGIES**

Larry D Brandt Dec 1980 24 p refs Sponsored by DOE (SAND-80-8248) Avail NTIS HC A02/MF A01

Projections of the future market value of solar systems are needed to derive cost goals for the emerging solar thermal technologies. The research documented has developed a methodology for projecting market values based on economic parity with the estimated future costs of conventional (fossil-fueled) technologies. Representative solar system values are presented for exemplary sets of economic assumptions including those under consideration by the Solar Thermal Cost Goals Committee. The effects on market value of variations in the rates of return required by potential users and the costs of alternative fuels are illustrated.

DOE

**N81-21619#** Commerce Dept, Washington, D C  
**PHOTOVOLTAICS INDUSTRY PROFILE**

Oct 1980 34 p

(Contract DE-AC06-76RL-01830)

(DOE/RL-01830/T3) Avail NTIS HC A03/MF A01

A description of the status of the U S photovoltaics industry is given. Principal end user industries are identified, domestic and foreign market trends are discussed, and industry organized and U S government organized trade promotion events are listed. Trade associations and trade journals are listed, and a photovoltaic product manufacturers list is included.

DOE

**N81-21621#** Sandia Labs, Albuquerque, N Mex Nondestructive Testing Technology Div

**AN ACOUSTIC MEASUREMENT OF BOILING INSTABILITIES IN A SOLAR RECEIVER**

Alan G Beattie 1 Oct 1980 56 p

(SAND-80-2409) Avail NTIS HC A04/MF A01

An acoustic technique was developed and used to search for boiling instabilities in the prototype receiver for the Barstow 10 MW Solar Thermal Pilot Plant. Instabilities consisting of movements of the transition zone between regions of nucleate and film boiling, were observed. The periods of these fluctuations ranged between three and fifteen seconds with no indications of preferred frequencies. The peak to peak amplitudes of the fluctuations averaged 0.4 meters under steady state conditions at absorbed power levels between 2.0 and 3.2 MW. Transient fluctuations with amplitudes up to 2.0 meters were also seen. These transients usually lasted between 30 and 300 seconds. It was not possible to pinpoint the causes of these transients.

Author

**N81-21625#** Technische Univ, Berlin (West Germany) Inst fuer Luft- und Raumfahrt

**ANALYSIS OF THE UTILIZATION OF LUNAR RESOURCES FOR SPACE POWER SYSTEMS, PART 1: SYSTEM DEFINITION AND MODEL STRUCTURE**

H H Koelle and B Jochenning 1980 44 p refs

(ILR-Mitt-73/1980-Pt-1) Avail NTIS HC A03/MF A01

The possible utilization of lunar resources for manufacturing and assembling solar power satellites in a geostationary orbit is examined. The system consists of three complexes (Earth, Moon and geostationary orbit) having 10 subsystems and 49 elements. Based on functional considerations, preliminary specifications for these elements are given. Some qualitative statements are made concerning energy and manpower requirements. Emphasis is on the investments needed for the lunar complex (mass, energy, manpower) to deliver a given amount of raw and construction materials to orbit for the assembly of solar power satellite systems to produce electrical energy for consumption on the Earth's surface.

Author (ESA)

**N81-21668#** New Mexico Univ, Albuquerque Bureau of Engineering Research

**PREPARATION OF MONTHLY MAPS OF SOLAR AVAILABILITY FOR NEW MEXICO BASED ON SATELLITE PHOTOGRAPHY** Technical Completion Report, 1 Feb. 1979 - 30 Sep. 1979

R J Bahm Jan 1981 29 p refs Sponsored by New Mexico Energy and Minerals Dept and New Mexico Energy Inst

(EMD-78-2131) Avail NTIS HC A03/MF A01

A set of 12 maps, one for each month, of solar radiation availability over the state of New Mexico is presented. The results indicate that long term solar radiation availability actually varies little over the state and that long term values for Albuquerque may be used over the entire state for most solar space heating design purposes.

T M

**N81-21710#** Automation Industries, Inc, Silver Spring, Md Vitro Labs Div

**ENVIRONMENTAL DATA FOR SITES IN THE NATIONAL SOLAR DATA NETWORK, JANUARY 1981**

Jan 1981 241 p

(Contract DE-AC01-79CS-30027)

(SOLAR/0010-81/01) Avail NTIS HC A11/MF A01

Insolation, temperature, wind, and humidity data recorded during the month of January 1981, at the National Solar Data Network for residential and commercial building solar demonstration sites throughout the United States are presented. The insolation tables present the total, diffuse, direct, maximum, and extraterrestrial radiation. The temperature tables give the average, daytime, nighttime, maximum, minimum and inlet-water temperatures for the solar sites. Additional tables are presented for some of the sites, supplying either wind or relative humidity data, or both. These data are used to determine the thermal performance of the solar systems.

DOE

## 03 HYDROGEN

Includes hydrogen production, storage, and distribution

**A81-21504**      **Perspectives for metal hydride technology.** H Buchner (Daimler-Benz AG, Stuttgart, West Germany) *Progress in Energy and Combustion Science*, vol 6, no 4, 1980, p 331-346 37 refs.

Hydrogen storage in the form of metal hydrides offers a series of interesting technical applications. The dual function of heat and fuel storage in hydrides is described for application in cars as well as for stationary use. It is shown that hydrides can act as electrochemically reversible storage electrodes in alkaline accumulators and as a means for isotope separation. Heat storage and waste heat recovery with the aid of hydrides and domestic possibilities for hydrogen production are discussed. (Author)

**A81-21955**      **Hydrogen and oxygen from water V - The ROC system** J E Noring, R B Diver, and E A Fletcher (Minnesota, University, Minneapolis, Minn.) *Energy* (UK), vol 6, Feb 1981, p 109-121 28 refs. Contracts No ER-78-02-4737, No DE-AC02-79ER-10450

A thermodynamic analysis of a two-membrane reactor-separator system is presented. The system can be made to operate at a reduced oxygen concentration (ROC) in the reactor-separator, thus greatly increasing the number and kinds of materials that may be considered candidates for separation membranes. The range of operation, thermal efficiencies and operating characteristics of an idealized model are presented. Candidate materials for hydrogen passing membranes are discussed. The unique characteristics of the ROC system make materials which might ordinarily be considered unsuitable in a reactor-separator environment worthy of experimental investigation. (Author)

**A81-23014**      **H<sub>2</sub> as an energy vector - Hydrogen production by the ELOFLUX electrolytic cell (H<sub>2</sub> comme vecteur de l'énergie - Production d'hydrogène par l'électrolyseur ELOFLUX)** P Brennecke, H Ewe, and E Just (Braunschweig, Technische Universität, Braunschweig, West Germany) *Coopération Méditerranéenne pour l'Energie Solaire, Revue Internationale d'Héliotechnique*, 2nd Semester, 1980, p 50-54 11 refs. In French

The ELOFLUX electrolytic cell is presented as an efficient means for the production of hydrogen to be used as a multipurpose energy carrier. The fabrication and operating properties of porous nickel electrodes, on which the ELOFLUX cell is based, are reviewed, and it is pointed out that the greater surface area afforded by porous electrodes allows the reduction of local current densities and thus the overvoltages related to interfacial charge transitions, resulting in reduced energy consumption. The design and operation of the continuous flow filter-press water electrolysis cell are discussed, and the necessity of using a protective surface coating of NiO to prevent anode oxidation is pointed out. Testing results demonstrating a degradation in cell efficiency from 72 to 68.4 percent over the course of 1200 hours of operation at full charge are presented, and it is concluded that the ELOFLUX cell represents a favorable means of hydrogen production. A L W

**A81-23531**      **Design and efficiency estimation of a thermochemical system of hydrogen production (Auslegung und Abschätzung des Wirkungsgrades einer Anlage zur thermochemischen Wasserstoffzeugung)** W Frie and B Grave (Siemens AG, Forschungslaboratorien, Erlangen, West Germany) *Siemens Forschungs- und Entwicklungsberichte*, vol 10, no 1, 1981, p. 1-8 16 refs. In German

An iron-chlorine thermochemical cycle for the production of hydrogen from water was investigated. The energy required in H<sub>2</sub>O-HCl separation is of special importance. Starting from a state of thermodynamic equilibrium, it was possible to estimate the energy

expended. The efficiency thus determined was about 18%. Improved separating processes could raise this to about 27%, hence, the efficiency is below that obtained by present-day electrolytic processes. B J

**A81-24012**      **Hydrogen Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979** Symposium sponsored by the American Chemical Society. Edited by W N Smith (General Electric Co., Philadelphia, Pa.) and J G Santangelo (Air Products and Chemicals, Inc., Allentown, Pa.) Washington, D C, American Chemical Society (ACS Symposium Series, No 116), 1980 437 p \$36 50

The studies included in this volume provide an overview of hydrogen research and development and examine the problems of industrial technology and economics of hydrogen production, commercial distribution and safety, the potential of advanced hydrogen technologies, and applications. Papers are presented on the hydrogen production from partial oxidation of residual fuel oil, coal gasification for hydrogen manufacture, production and application of electrolytic hydrogen, and hydrogen from fuel desulfurization. V L

**A81-24013**      **The economics of hydrogen production.** D P Gregory, C L Tsaros, J L Arora, and P Nevrekar (Institute of Gas Technology, Chicago, Ill.) In *Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979* Washington, D C, American Chemical Society, 1980, p 3-26 5 refs.

A range of hydrogen costs is estimated on a parametric basis for various hydrogen production processes including steam reforming, partial oxidation of residual oil, Koppers-Totzek gasification of coal, steam-iron process, water electrolysis, and thermochemical hydrogen production. Consideration is given to the effect of major variables such as feedstock price and by-product credits. V L

**A81-24014**      **Hydrogen technology - An overview** F J Salzano, A Mezzina, M Beller, G Strickland, and S Srinivasan (Brookhaven National Laboratory, Upton, N Y). In *Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979* Washington, D C, American Chemical Society, 1980, p 33-44. Research sponsored by the U S Department of Energy.

The state-of-the-art of hydrogen technology is reviewed with reference to hydrogen shipment, storage, hydrogen energy systems and fuel cells, applications, and economics. Attention is also given to international cooperation on hydrogen programs and research and development incentives and requirements. V L

**A81-24015**      **Hydrogen production from partial oxidation of residual fuel oil** C L Reed and C J Kuhre (Shell Oil Co., Process Engineering-Refining Dept., Houston, Tex.) In *Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979* Washington, D C, American Chemical Society, 1980, p 95-121

The heat and material balance are presented along with the associated costs for a Shell gasification process hydrogen plant sized to produce 100 million scf of hydrogen per stream day. The estimated manufacturing cost for hydrogen is \$2.22/100 scf H<sub>2</sub> based on the use of a heavy high-sulfur fuel oil valued at \$15.17/bbl, the plant cost is estimated at 85 million dollars (mid-1979, U S Gulf Coast), including an arbitrary allowance of 35% of onsite capital cost for offsites and 10% for contingencies. V L

**A81-24017**      **Technical and economic advances in steam reforming of hydrocarbons** R. G. Minet (KTI Corp., Pasadena, Calif.) and O Olesen (United Technologies Corp., South Windsor, Conn.) In *Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979* Washington, D C, American Chemical Society, 1980, p 147-175 13 refs.

## 03 HYDROGEN

Advances in the technology of high-temperature steam reforming of hydrocarbons are reviewed with emphasis on improvements in efficiency, feedstock range, and operating parameters. It is shown that proper integration of advanced reformer design with adsorption purification systems can reduce overall feed and fuel requirements below 400 Btu per standard cubic foot of hydrogen. V.L.

**A81-24018** Coal gasification for hydrogen manufacturing. W. G. Schlinger (Texaco Research Center, Montebello, Calif.), J. Falbe (Ruhrchemie AG, Oberhausen, West Germany), and R. Specks (Ruhrkohle AG, Essen, West Germany). In: Hydrogen. Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979. Washington, D.C., American Chemical Society, 1980, p. 177-190. 8 refs.

Two processes for converting heavy residual fuels into synthesis gas, a 50-50 mixture of hydrogen and carbon monoxide, are presented. These processes are (1) the Texaco synthesis gas generation process for gasification of fluids pumpable at temperatures as high as 600 F, and (2) the Texaco coal gasification process for gasification of solid carbonaceous materials fed as a slurry in water or other carrier fluid. Both processes are shown to be commercially viable and environmentally acceptable. V.L.

**A81-24019** Production and application of electrolytic hydrogen - Present and future. L. J. Nuttall (General Electric Co., Wilmington, Mass.). In: Hydrogen Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979. Washington, D.C., American Chemical Society, 1980, p. 191-212.

Developments in the large scale production of hydrogen by water electrolysis are reviewed with particular reference to an advanced electrolysis technology based on the use of a solid polymer electrolyte cell originally developed for aerospace fuel-cell and electrolysis applications. It is shown that the advanced solid polymer electrolyte technology has the potential to reduce the cost of electrolytic hydrogen from \$15-20 to \$9-13 per MBTU. V.L.

**A81-24021** Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling. G. D. Sandrock (Inco Research and Development Center, Suffern, N.Y.) and E. Snape (MPD Technology Corp., Ergenics Div., Waldwick, N.J.). In: Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979. Washington, D.C., American Chemical Society, 1980, p. 293-322. 30 refs.

The science of rechargeable metal hydrides is reviewed with reference to their basic chemistry, thermodynamics, and engineering properties. The main families of commercially available rechargeable hydrides are examined and potential applications of hydrides within the existing hydrogen industry are summarized. V.L.

**A81-24022** Closing the loop for the sulfur-iodine cycle. G. Caprioglio, K. McCorkle, and R. Sharp (General Atomic Co., San Diego, Calif.). In: Hydrogen Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979.

Washington, D.C., American Chemical Society, 1980, p. 323-332. 7 refs. Research sponsored by the Gas Research Institute and General Atomic Co., Contract No. EY-76-C-03-0167-PA-63.

The current status of a program to develop the sulfur-iodine thermochemical water-splitting cycle for hydrogen production is reviewed, with emphasis on the operation of the closed loop cycle demonstrator. The advantages of the proposed process include (1) well characterized chemical reactions involving only fluids, (2) heat utilization within a temperature range accessible to heat sources utilizing existing materials technology (specifically, a high-temperature gas-cooled reactor), and (3) thermal efficiency of about 50%. V.L.

**A81-24023** Hydrogen from fuel desulfurization. M. E. D. Raymont (Sulphur Development Institute of Canada, Calgary, Alberta, Canada). In: Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979.

Washington, D.C., American Chemical Society, 1980, p. 333-348. 19 refs.

Several types of thermal decomposition techniques which make it possible to recover both sulfur and hydrogen from hydrogen sulfide are examined, including upset equilibrium systems, closed cycle loops, open cycle loops, and electrochemical methods. Commercial and economic aspects of the proposed processes are compared with those of the Claus plants now commonly used for the processing of hydrogen sulfide. V.L.

**A81-24024** The sulfur-cycle hydrogen production process. G. H. Farbman and G. H. Parker (Westinghouse Electric Corp., Advanced Energy Systems Div., Pittsburgh, Pa.). In: Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979. Washington, D.C., American Chemical Society, 1980, p. 359-389.

The paper reviews the current development status of the sulfur-cycle hydrogen production process, a closed-cycle hybrid electrochemical/thermochemical water splitting technique. The process is capable of operating with high-temperature nuclear or solar heat sources and is expected to be able to produce hydrogen at an overall thermal efficiency of 45%, including the inefficiencies associated with the generation of the required electric power. V.L.

**A81-24556** Hydrogen/metal interactions with special reference to electrochemical approaches. H. J. Flitt (South Australia, Flinders University, Adelaide, Australia) and J. O. Bockris (Texas A & M University, College Station, Tex.). *International Journal of Hydrogen Energy*, vol. 6, no. 2, 1981, p. 119-138. 142 refs.

A comprehensive review of hydrogen interactions in metals has been made with special emphasis on the electrochemical viewpoint. The object of this article is to provide the reader with a general knowledge of the physico-chemical aspects of hydrogen embrittlement of metals. (Author)

**A81-24557** High temperature solar reactors for hydrogen production. E. Bilgen and J. Galindo (Ecole Polytechnique, Montreal, Canada). *International Journal of Hydrogen Energy*, vol. 6, no. 2, 1981, p. 139-152. 21 refs. National Research Council of Canada Contract No. 115Q31025-7-1509-5.

It has been shown recently that one-step, direct decomposition of water and two-step thermochemical cycles are feasible processes to produce hydrogen by using concentrated solar energy. The temperature level required for direct decomposition is above 2500 K in order to have a reasonable hydrogen yield. The temperature level for two- or three-step cycles may be about 1800 K. These temperatures can easily be obtained in industrial solar furnaces. Although the equilibrium temperatures at the receiver can be estimated, the precise information regarding the receiver efficiency at high temperatures is not readily available in the literature. In this paper, the receiver efficiency is analyzed and the theoretical results are compared to experimental findings. (Author)

**A81-24559** Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams. M. Hammerli, J. P. Butler, A. S. Denovan (Atomic Energy of Canada, Ltd., Chalk River Nuclear Laboratories, Chalk River, Ontario, Canada), and R. L. LeRoy (Electrolyser, Inc., Etobicoke, Ontario, Canada). *International Journal of Hydrogen Energy*, vol. 6, no. 2, 1981, p. 167-179. 21 refs.

A method is described for heavy water recovery as a valuable by-product from combined electrolytic and non-electrolytic hydrogen streams. The process is based on an important modification of the combined electrolysis and catalytic exchange-heavy water process (CECE-HWP). The CECE-HWP is now in the small pilot plant stage of development. A highly dispersed platinum-carbon-Teflon catalyst on a ceramic carrier achieves efficient deuterium exchange between hydrogen gas and liquid water. The range of acceptable ratios of electrolytic to non-electrolytic hydrogen which may be chosen in the Modified CECE-HWP is discussed. Bench-scale results are presented which clearly demonstrate recovery of heavy water from both the

electrolytic and non-electrolytic hydrogen streams. The potential application of the process to ammonia production is discussed and other possible applications are mentioned briefly. Advantages of adopting the process are outlined, including the important benefit of conserving fossil resources (Author)

**A81-24560** Hydrogen storage in aluminium-substituted TiFe compounds. G. Bruzzone, G. Costa, M. Ferretti, and G. L. Olcese (Genova, Università, Genoa, Italy) *International Journal of Hydrogen Energy*, vol 6, no 2, 1981, p 181-184 5 refs

**A81-25017** Engineering development of a HYCSOS chemical heat pump. J. S. Horowitz, P. A. Nelson, and C. A. Blomquist (Argonne National Laboratory, Argonne, Ill.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 2. Washington, D.C., Hemisphere Publishing Corp., 1981, p 629-639. 10 refs.

The paper focuses on the engineering development of a HYCSOS (hydride conversion and storage system) heat pump which uses a tubular hydride bed capable of being rapidly cycled. The design features a large number (about 200) of individual tubes, each containing a high-temperature hydride at one end, and a low-temperature hydride at the other end. The central portion of the tube is designed to allow hydrogen to flow freely between the ends but retard the flow of heat between the ends V.L.

**A81-25137** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 8 - Hydrogen energy. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.) Washington, D.C., Hemisphere Publishing Corp., 1981 428 p. Price of nine volumes, \$595

The book discusses the topics of electrolytic hydrogen production, thermochemical hydrogen production, solar hydrogen production, metal hydrides, and hydrogen utilization. Several papers are presented on the development status of the steam-iron process for hydrogen production, the production of hydrogen from carbonaceous materials, biophotolysis systems for hydrogen production, and heat transfer enhancement in metal hydride systems. Fixed site hydrogen storage is examined with a view to the applications impact, and a comparison of technologies and economics L.S.

**A81-25139** Fusion reactors for hydrogen production via electrolysis. J. A. Fillo, J. R. Powell, and M. Steinberg (Brookhaven National Laboratory, Upton, N.Y.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3259-3265 5 refs. Research sponsored by the U.S. Department of Energy

The decreasing availability of fossil fuels emphasizes the need to develop systems which will produce synthetic fuel to substitute for and supplement the natural supply. An important first step in the synthesis of liquid and gaseous fuels is the production of hydrogen. Thermonuclear fusion offers an inexhaustible source of energy for the production of hydrogen from water. Depending on design, electric generation efficiencies of 40 to 60% and hydrogen production efficiencies by high temperature electrolysis of 50 to 70% are projected for fusion reactors using high temperature blankets (Author)

**A81-25140** An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical. J. E. Funk and W. Eiserich (Lexington, University, Lexington, Ky.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3285-3320 15 refs.

This paper presents the results of a combined first and second law analysis, along with capital and operating costs, for hydrogen production from water by means of electrolytic, hybrid, and thermochemical processes. The processes are SPE and Lurgi electrolysis with light water reactor power generation and sulfur cycle hybrid, thermochemical and SPE electrolysis with a very high temperature reactor primary energy source. Energy and Exergy (2nd law) flow diagrams for the process are shown along with the location and magnitude of the process irreversibilities. The overall process thermal (1st law) efficiencies vary from 25 to 51% and the exergetic (2nd law) efficiencies, referred to the fuel for the primary energy source, vary from 22 to 45%. Capital and operating costs, escalated to 1979 dollars, are shown for each process for both the primary energy source and the hydrogen production plant. All costs were taken from information available in the open literature and are for a plant capacity of 100 x 10 to the 6th SCF/day. Production costs vary from 10 to 18 \$/GJ, based on the higher heating value of hydrogen, and are based on a 90% plant operating factor with a 21% annual charge on total capital costs (Author)

**A81-25141** Status of the development of the general atomic thermochemical water-splitting cycle. G. Besenbruch, G. Caprioglio, K. McCorkle, J. Norman, D. O'Keefe (General Atomic Co., San Diego, Calif.), and M. Yoshimoto (Idemitsu Kosan Co., Ltd., Tokyo, Japan). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3323-3334. Research sponsored by the Gas Research Institute and General Atomic Co., Contract No. DE-AT03-76SF-90351

**A81-25142** Development status of the Steam-Iron Process for hydrogen production. R. Biljetina and P. B. Tarman (Institute of Gas Technology, Chicago, Ill.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3335-3347

A description of the Steam-Iron Process for hydrogen production and operating results from a large-scale pilot facility are presented. Significant achievements of the pilot plant program are discussed. Commercial applications and economic advantages of the process are presented (Author)

**A81-25143** Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates. P. R. Robinson and C. E. Bamberger (Oak Ridge National Laboratory, Oak Ridge, Tenn.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3349-3353. Contract No. W-7405-eng-26

Cerium(IV) oxide, CeO<sub>2</sub>, reacts with derivatives of phosphoric acid, metaphosphate salts, and pyrophosphate salts at 600-1000 C to produce oxygen and cerium(III) phosphates. The cerium(III) phosphates are oxidized to CeO<sub>2</sub> by steam at 700-1200 C in the presence of alkaline earth oxides, carbonates, or halides. These two sets of reactions form the basis for a family of thermochemical cycles based upon the redox couple Ce(IV)/(III) (Author)

**A81-25144** Non-corrosive, two-reaction, low temperature T/C cycles. W. H. Dorrance (Organization Control Systems, Inc., Ann Arbor, Mich.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3355-3388 16 refs. Research supported by the Consolidated Natural Gas Research Co.

A reaction model is presented for redox reactions taking place within electrolytic solid state solutions. The model is applied to closed, two-reaction, thermochemical cycles for producing hydrogen and oxygen from water. The solid state solution employed is metal cation exchanged large-pore mordenite. The entropies and enthalpies

## 03 HYDROGEN

of reaction are advantageously determined by properly adjusting the concentration parameter  $S_i/A_i$  ratio within the mordenite solution. Fourteen metal cations are found to be suitable for use with such cycles. Cycle efficiencies between 35 and 50 are possible at maximum reaction equilibrium temperatures not exceeding 827 C. No corrosive materials are employed. A continuous flow system design concept is described. Both hydrogen and oxygen are produced at 68 atmospheres (1000 psia) with the cycle efficiencies and reaction equilibrium temperatures as cited above. (Author)

**A81-25145 Thermoelectrochemical hydrogen production using sodium chloride.** A.-M. A. El-Bassouni, J. W. Sheffield, and T. N. Veziroglu (Miami, University, Coral Gables, Fla.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3383-3403. 11 refs

Three closed-cycle processes for the thermoelectrochemical production of hydrogen from water using sodium chloride are under investigation. The maximum required temperature of 700 C can be achieved by solar energy using various concentration techniques. By means of photovoltaic cells or a solar power station, the required electric power can be obtained. The cycles are based on electrolysis of sodium chloride, production of hydrogen chloride gas, reaction between hydrogen chloride and metal or metal oxide, reaction between the metal chloride and water, and regeneration of the original raw materials. In these hybrid cycles hydrogen is produced in two steps of the five-step water splitting process. The characteristics of these cycles are being evaluated and their efficiencies will be compared with each other and with other hybrid cycles. (Author)

**A81-25146 Production of hydrogen from carbonaceous materials.** A. J. Darnell (Rockwell International Corp., Energy Systems Group, Canoga Park, Calif.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3405-3415. 9 refs

A method is presented for producing hydrogen from carbonaceous materials such as coal and biomass. The process, referred to as the bromination process, consists of a two-step cycle: (1) the carbonaceous material is reacted with bromine and water at 250-300 C to form an aqueous solution of hydrobromic acid and  $CO_2$ , (2) the aqueous hydrobromic acid is electrolyzed to form hydrogen at a voltage less than that required for the electrolysis of water, the bromine formed in the electrolysis is returned to the first step of the process. The theoretical thermal energy conversion efficiency of the process is 70%. The process is particularly suited to feedstocks with a water content up to 45%. V L

**A81-25147 Automotive dual-mode hydrogen generation system.** D. A. Kelly (Technidyne Associates, Maspeth, N.Y.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3417-3427

The automotive dual mode hydrogen generation system is advocated as a supplementary hydrogen fuel means along with the current metallic hydride hydrogen storage method for vehicles. This system consists of utilizing conventional electrolysis cells with the low voltage dc electrical power supplied by two electrical generating sources within the vehicle. Since the automobile engine exhaust manifold(s) are presently an untapped useful source of thermal energy, they can be employed as the heat source for a simple heat engine/generator arrangement. The second, and minor electrical generating means consists of multiple, miniature air disk generators which are mounted directly under the vehicle's hood and at other convenient locations within the engine compartment. The air disk generators are revolved at a speed which is proportionate to the vehicles forward speed and do not impose a drag on the vehicles motion. (Author)

**A81-25148 Overall efficiencies for conversion of solar energy to a chemical fuel.** J. D. Fish (Sandia Laboratories, Livermore, Calif.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3431-3452. 41 refs. Contract No. DE-AC04-76DP-00789

A complete and consistent scheme for determining the overall efficiency of a generalized process for the conversion of solar energy into a chemical fuel (e.g. hydrogen) is developed and applied to seven conversion processes: thermal, thermochemical, photovoltaic, photogalvanic, photoelectrolysis, photosynthesis and photochemical conversion. It is demonstrated that the overall efficiency of each of these processes is determined by ten common factors: maximum theoretical efficiency, inherent absorption losses, inherent internal losses, rate limiting effects, reflection losses, transmission losses, coverage losses, system construction requirements, parasitic losses and harvesting and conversion losses. Both state-of-the-art and optimistic values are assigned to each factor for each of the seven conversion processes. State-of-the-art overall efficiencies ranged from 5% for thermal conversion down to essentially zero for thermochemical. Optimistic values in the range of about 10 to 15% are calculated for several of the processes. D K.

**A81-25149 Feasibility study on the Porsche - Optimum design of solar collection on a fluctuating base.** T. Ohta and A. Shimamura (Yokohama National University, Yokohama, Japan) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3453-3460

The solar collection methods and structural dynamics of the Plan of Ocean Raft System for Hydrogen Economy (Porsche) platform, full scale models of which are intended to supply not only electrolytic hydrogen production and storage, but ocean floor mining and ammonia and heavy water production as byproducts, are presented. Particular attention is given to the sensing and control of wind and wave-induced fluctuations of the structure. O C

**A81-25151 Hydrogen generation from the chlorophyll water splitting reaction - Photochemical conversion and solar energy storage.** F. K. Fong (Purdue University, West Lafayette, Ind.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3477-3482. 29 refs

In this paper we describe the developments leading to the production of hydrogen and organic fuels from water and carbon dioxide using sunlight and the chlorophyll extracted from green plants. Product analyses were made by a variety of physical measurements. The conversion of light into electrochemical potential is depicted in terms of the photoactivation overpotential derived from the photooxidation of hydrated chlorophyll aggregates. The chlorophyll functions as the photocatalyst, reducing and oxidizing the water to yield hydrogen and oxygen through a one-electron cyclic pathway that is readily observed by electron spin resonance measurements. The significance of the in vitro solar energy storage experiments relative to the long-term solution of the energy crisis is discussed. (Author)

**A81-25152 Photosynthetic bacteria as alternative energy sources - Overview on hydrogen production research.** A. Mitsui, Y. Ohta, J. Frank, S. Kumazawa, C. Hill, D. Rosner, S. Barciella, J. Greenbaum, L. Haynes, and L. Oliva (Miami, University, Miami, Fla.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3483-3510. 154 refs. NSF Grants No. AER-75-11171; No. AER-76-17159; No. AER-77-11545; Contract No. RR-98036

**A81-25153** **Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite.** R W Williams, B W. Toye, and S. M. Martin (National Research Council, Ottawa, Canada). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D C., Hemisphere Publishing Corp., 1981, p 3511-3522. 8 refs

**A81-25154** **Bulk hydrogen storage using metal hydrides.** G Strickland and M. J. Rosso, Jr (Brookhaven National Laboratory, Upton, N.Y.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. (A81-25137 09-44) Washington, D C., Hemisphere Publishing Corp., 1981, p. 3525-3532. 13 refs. Research sponsored by the U S Department of Energy

The considerations involved in design and use of a process unit, or reservoir, for storing bulk quantities of hydrogen via solid particles of titanium-iron-manganese are described along with several applications. Also included are one type of reservoir having improved design features, and the service system in which it was installed for testing. The reservoir has a nominal storage capacity of 50 lb (23 kg) of hydrogen and is rated for hydrogen charging and discharging times in the 5 to 10-hour range. (Author)

**A81-25155** **Hydrogen in thin film hydriding alloys** J W Larsen, M L. Fuller, and B. R. Livesay (Georgia Institute of Technology, Atlanta, Ga.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 3533-3538. 11 refs. Contract No E(40-1)-5246.

Thin films of hydrogen storage alloys provide a well defined gas-metal interface for the study of the surface properties of these metal storage alloys. Sufficiently thin films remain intact during hydride cycling, whereas bulk alloys are reduced to powders. Thin films show other differences from the bulk, specifically in the pressure composition characteristics and the kinetics. Magnetization, sheet resistance and film stresses were measured in situ in specialized apparatus. These measurements indicate a much more sloped pressure composition curve with higher transition pressures and not the flat plateau exhibited by bulk specimens. They further suggest that substrate induced stresses are probably responsible for this deviation from bulk behavior. (Author)

**A81-25156** **Heat transfer enhancement in metal hydride systems.** M J Rosso, Jr and G. Strickland (Brookhaven National Laboratory, Upton, N.Y.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D C., Hemisphere Publishing Corp., 1981, p 3539-3545. 11 refs. Research sponsored by the U S Department of Energy.

An attempt has been made to enhance the heat transfer of hydrogen storage metal hydride systems by the addition of small fraction of high conductivity materials in various configurations. Results indicate that the form of the enhancement material rather than its composition is the more critical factor. The addition of over 6% aluminum foam enhances the effective thermal conductivity of a hydride bed by a factor of 2.6. V.L.

**A81-25157** **Efficiency of hydrogen compression by means of hydrides.** R W Meyerhoff (Inco Research and Development Center, Suffern, N.Y.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p 3555-3567.

Several devices, such as water pumps, heat pumps and compressors, have been proposed which all share a common feature, namely, the use of heat in conjunction with a reversible hydride to compress hydrogen. Several factors will determine the technical and economic

viability of these devices. One of these factors is the thermal efficiency of hydride compressors. This paper discusses the maximum efficiencies obtainable for hydride compressors as a function of the temperature of the heat source, T2, the temperature of the heat sink, T1, and X which is the ratio  $C_p/\Delta H$  where  $C_p$  is the system heat capacity (hydride plus container) per mole of hydrogen capacity and  $\Delta H$  is the heat of absorption per mole of hydrogen. (Author)

**A81-25158** **Development of solar-hydrogen systems using metal hydrides.** E. Snape (Ergenics, Wyckoff, N.J.), E. L. Huston, and G. D. Sandrock (Inco Research and Development Center, Suffern, N.Y.). In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D C., Hemisphere Publishing Corp., 1981, p 3569-3586. 12 refs

An investigation is made of ways in which metal hydride hydrogen storage systems may be integrated with hydrogen utilization systems and with photosynthetic, photocatalytic, photochemical, electrolytic, thermochemical, and pyrolytic systems of solar hydrogen production. It is concluded that hydride storage systems are the safest, cheapest and most practical methods for widespread, dispersed hydrogen fuel utilization in industry and transportation. O C

**A81-25159** **Fixed site hydrogen storage. I - Applications impact.** J J Iannucci and S L Robinson (Sandia Laboratories, Livermore, Calif.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D.C., Hemisphere Publishing Corp., 1981, p 3595-3605. 13 refs. Contract No DE-AC04-76DP-00789

The potential applications and requirements for fixed site storage in a scenario of wide spread hydrogen use are examined and quantified. An envisioned hydrogen production/distribution/end-use cycle is scrutinized to identify the storage needs for both continuous and intermittent sources including solar. The most pressing need for storage is found to be at the distribution point, in concurrence with current natural gas practice. Caverns and similar underground storage techniques are shown to be the most promising modes due to their low cost relative to all other options examined. Since a large volume of natural gas storage is presently in service, a pressing need to develop fixed site hydrogen storage technology (beyond the conversion of this underground storage to hydrogen) has not been identified. (Author)

**A81-25160** **Fixed site hydrogen storage. II - Comparison of technologies and economics.** S L Robinson and J J Iannucci (Sandia Laboratories, Livermore, Calif.) In: *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 8. Washington, D C., Hemisphere Publishing Corp., 1981, p. 3607-3625. 57 refs. Contract No DE-AC04-76DP-00789

Presently available and future fixed site hydrogen storage technologies are examined, to identify the minimum cost storage technique for various combinations of quantity, cycling frequency and parasitic energy costs. The forms studied are, pressurized gas, cryogenic liquid, hydride, and microballoon storage. For each form, installed capital cost, filling and emptying equipment costs and parasitic energy costs are developed and parameterized by electric rates. The energy intensive systems are economical for long-term cycling (seasonal storage) but unfavorable for short term (daily cycling). Low-pressure gas storage is favored for short term and intermediate term storage. Development of microballoon storage is recommended as a possible low-cost long-term storage option. (Author)

**A81-25493 #** **Hydrogen absorption and hydriding of Ti-based intermetallic compounds.** M Someno, M Arita (Tokyo Institute of Technology, Tokyo, Japan), R Kinaka (Kawasaki Steel Corp., Chiba Works, Chiba, Japan), and Y Ichinose (Nagaoka,

### 03 HYDROGEN

Technological University, Nagaoka, Japan) In Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 325-328

The effects of partially replacing Fe in TiFe by Co, Mn, and Cr and varying the Mn composition in TiMn(2-y) on the hydriding pressure were studied. Decomposition of TiCu and TiNi to TiH<sub>2</sub> and lower compounds was also studied. It is found that the partial replacement of Fe in TiFe lowers the hydriding pressure. The same effect is found for decreasing the Mn content in TiMn(2-y). A thermal activation process for decomposition of TiNi is discussed. Diffusivity of hydrogen in TiMn(2-y) was determined from absorption rate measurements (Author)

**A81-25494 # Hydrogen storage properties of FeTi/1+x/ M** Amano and Y Sasaki (National Research Institute for Metals, Tokyo, Japan) In Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 329-332. 6 refs

**A81-25496 # Hydrogen in LaNi5 intermetallic compound.** S Tanaka (Hokkaido University, Sapporo, Japan) and T B Flanagan (Vermont, University, Burlington, Vt). In Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 337-340. 6 refs

The data of hydrogen absorption in LaNi5 follow Sieverts' law only at the very low hydrogen contents, and positive deviations from Sieverts' law are observed at the higher hydrogen contents. The partial enthalpy and entropy of solution of hydrogen were determined at various values of hydrogen content. The exothermicity of absorption declines with hydrogen content. The apparent H/H interaction energy is positive and decreases with temperature (Author)

**A81-25497 # Investigations of intermetallic alloy film hydriding mechanisms.** B R Livesay and J W Larsen (Georgia Institute of Technology, Atlanta, Ga) In Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 345-348. Contract No E(40-1)-5246

Hydriding mechanisms have been investigated in AB5 alloys using specimens prepared in the form of both thin films and bulk powders. Property investigations using only bulk storage alloys lack full definition because several hydrogen sorption-desorption cycles reduce the specimens to powders. Films of the same alloys prepared with thickness less than about one micron remain coherent even with repeated hydrogenation cycles. The kinetics for hydrogen absorption and desorption processes fitted the relationship  $(F(t) = 1 - e^{-(t/\tau)^n})$  exp n/ for both powder and film specimens. The measured exponent n has a value 2 for SmCo5 powders and films with thicknesses greater than 1400 Å. A 500 Å SmCo5 film yielded a value of n = 1/2 which is identified with initial rates of hydrogen absorption. The measured time constants show that initiation of the beta-phase is slowed but not prevented in thicker films (Author)

**A81-25498 # Surface segregation effects in Mg2Cu, Mg2Ni and Mg-Mg2Ni hydrogen storage compounds.** L Schlapbach, T von Waldkirch, and A Seiler (Zurich, Eidgenossische Technische Hochschule, Zurich, Switzerland) In Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 349-352. 7 refs

**A81-25499 # Kinetics of the reaction between Mg2Ni and H2.** K Nomura, E Akiba, S Ono (National Chemical Laboratory for Industry, Yatabe, Ibaraki, Japan), and S Suda (Kogakuin University, Tokyo, Japan) In Hydrogen in metals, Proceedings of the Second

International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 353-356. 7 refs

**A81-25500 # Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys.** S Ono, Y Ishido (National Chemical Laboratory for Industry, Tsukuba, Japan), and J Kitagawa (Chiba Institute of Technology, Narashino, Japan) In Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979 Sendai, Japan, Japan Institute of Metals, 1980, p 357-360

A newly developed high pressure thermal analysis installation was used for the investigation of the hydrogen-sorbing characteristics of the Mg-Ni alloy. This apparatus made possible to measure DTA and TG curves simultaneously under hydrogen pressures up to 50 kgf/sq cm. Effects of exposing powdered hydrides in various gas atmospheres such as air, N<sub>2</sub>, CO<sub>2</sub>, CO, and CH<sub>4</sub> were investigated by the isobaric thermal cycling experiments and the shift of the initiation temperature for desorption was observed corresponding to the 'deactivation' by the gas molecules adsorbed on surface. The degree of shift was largest in the case of CO<sub>2</sub> and CO (Author)

**A81-26584 Hydrides of ternary TiFe/xM/1-x//M = Cr, Mn, Co, Ni/ intermetallics.** M H Mintz, S Vaknin (Negev, University, Atomic Energy Commission, Negev Nuclear Research Centre, Beersheba, Israel), S Biderman, and Z Hadari (Negev, University, Beersheba, Israel) *Journal of Applied Physics*, vol 52, Jan 1981, p 463-467. 17 refs. Research supported by the Ministry of Energy, Infrastructure and Communication

The effect of partial substitutions of iron in TiFe by different 3-d transition metals on the hydrogenation of the corresponding ternary compounds was studied. These substitutions produce the stabilization of the monohydride beta phases and reduce hysteresis in the absorption-desorption isotherms. A model which assumed local interactions of H with the nearest-neighbor metal atoms showed a linear dependence of the enthalpies of monohydride formation on the Fe concentration. A T

**A81-26872 Natural convection heat leak in supercritical hydrogen tanks.** A J Barrett (Beech Aircraft Corp., Boulder, Colo) In Advances in cryogenic engineering Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979 New York, Plenum Press, 1980, p 483-488

Consideration is given to the occurrence of natural convection in small-diameter tubes that are filled with supercritical hydrogen, the warm end of the tube is at ambient temperature and is located below the cold reservoir. The study was initiated to develop a method of predicting natural convection for variations in system geometry, fluid properties, and temperature gradients. The natural convection heat leak was determined from test data, and an empirical correlation was obtained for the prediction of natural convection. The equation which is obtained may be used during the design phase of supercritical fill and vent lines to select the proper tube diameter to reduce the natural convection heat leak. P T H

**A81-26880 Liquid hydrogen as an automotive fuel.** W F Stewart (California, University, Los Alamos, N. Mex.) In Advances in cryogenic engineering Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979 New York, Plenum Press, 1980, p 822-830. 19 refs

Research sponsored by the U.S. Department of Energy. The paper describes six hydrogen fuel projects (involving seven container designs and six vehicles) that have involved liquid hydrogen storage. Perris Smogless Automobile Association, Billings Energy Research Corporation, Los Alamos Scientific Laboratory, UCLA, Musashi Institute of Technology, and DFVLR. Some of these projects used existing laboratory-type containers, some used adapted liquefied natural gas containers, others used containers designed



especially for the project. A completely automatic liquid-hydrogen refueling station proposed by Stewart and Edeskuty (1974) is described in detail. P.T.H.

**N81-16323#** Institute of Gas Technology, Chicago, Ill  
**STUDY OF THE BEHAVIOR OF GAS DISTRIBUTION EQUIPMENTS IN HYDROGEN SERVICE, PHASE 2**

Walter J Jasinowski and H Ding Huang 1980 7 p refs  
 Presented at DOE Advan Conserv Technol and Chem Storage Branch Contract Rev Meeting, McLean, Va, 13-16, Oct 1980  
 Sponsored by DOE

(CONF-801055-5) Avail NTIS HC A02/MF A01

The characteristics of gas distribution pipe in hydrogen service were studied in experiments with three types of commercially available polyethylene natural gas piping. Hydrogen permeation was found to be 4 to 6 times greater than methane permeation. Ring tensile tests showed no significant difference in apparent strength of exposed and as received pipe samples, although the exposed specimens show greater elongation after testing to failure. Leakage experiments with methane hydrogen blends showed no selective leakage of hydrogen via Poiseuille, turbulent or orifice flow through leaks. Leak rates increased with increasing pressure and decreasing specific gravity. RCT

**N81-16483#** Los Alamos Scientific Lab., N Mex  
**A LIQUID-HYDROGEN-FUELED BUICK**

Walter F Stewart Nov 1980 15 p  
 (LA-8605-MS) Avail NTIS HC A02/MF A01

A 1979 Buick Century sedan with a displacement turbocharged V-6 engine and automatic transmission was converted to operation on hydrogen supplied to the engine from a liquid hydrogen tank installed in the trunk of the car. The liquid hydrogen tank is refilled using a semiautomatic refueling station designed to be operated by personnel with minimal training. The Buick has a fuel economy corresponding to 8.9 km/l (21 miles/gal) of gasoline and a range of 274 km (170 miles) in the high altitude area of Los Alamos, New Mexico. Author

**N81-19339#** Technische Hochschule, Aachen (West Germany)  
 Lehrstuhl fuer Technische Thermodynamik  
**DEVELOPMENT OF MULTISTEP PROCESSES FOR THERMO-CHEMICAL HYDROGEN PRODUCTION USING NUCLEAR HEAT. A SUMMARY** Final Report

Helmut Wolfgang Cremer, Peter Schuster, Gerhard Steinborn, G Wozny, and G Wuester. Bonn: Bundesministerium fuer Forschung und Technologie, Dec 1979. 62 p refs. In GERMAN, ENGLISH summary. Sponsored by Bundesministerium fuer Forschung und Technologie.  
 (BMFT-FB-T-79-121, ISSN-0340-7608) Avail NTIS HC A04/MF A01 Fachinformationszentrum, Karlsruhe, West Germany DM 12.85

A thermochemical water splitting technique, using heat at temperatures lower than 1000 C, is described. Several chemical reactions based on multistep processes of the iron/chlorine family are involved. The additional chemical components are recycled, the necessary energy is supplied by a high temperature nuclear reactor. Many thermochemical cycles are considered among which the more favorable are selected by means of thermodynamic, chemical and engineering criteria. Experimental studies of the individual chemical reactions and of sequences of reactions, and by means of balance and optimization calculations underlying process flow schemes. The selected Fe/Cl system is discussed comprehensively emphasizing the self regenerating nature of each reaction subsystem and the overall integration of the separation processes. Author (ESA)

**N81-19971#** Escher Technology Associates, St Johns, Mich  
**LIQUID-HYDROGEN AUTOMOTIVE ONBOARD STORAGE AND SERVICING SYSTEM PROJECT** Progress Report

Walter Finley Stewart and William Julius Daniel Escher 1981 8 p. Presented at the Soc of Automotive Engr Intern Eng Congr and Exposition, Detroit, 23-27 Feb 1981.  
 (Contract W-7405-eng-36)  
 (LA-UR-80-3491; CONF-810206-4) Avail NTIS HC A02/MF A01

An intermediate sized automobile adapted to liquid hydrogen fuel was road tested. A semiautomatic fueling station is used to service (refuel) the experimental vehicle. A 150-l (39.6-gal) cryogenic liquid hydrogen storage tank mounted in the trunk compartment and the dashboard fuel gauging system are described. The V-8 turbocharged engine was converted to hydrogen operation. DOE

**N81-20287** Virginia Univ., Charlottesville  
**IMPROVEMENTS IN THE ELECTROLYTIC GENERATION OF HYDROGEN** Ph.D. Thesis

Patrick Joseph Moran 1980 142 p  
 Avail Univ Microfilms Order No 8101054

The hydrogen economy is a scheme proposed to alleviate many of the problems of energy transition by the utilization of hydrogen as a synthetic fuel. An attractive method for the production of hydrogen is electrolysis of aqueous potassium hydroxide liberating both hydrogen and oxygen gases. The future utilization of hydrogen producing electrolyzers depends on two main factors. The first of these involves capital investment, particularly when small gas volumes are required. A new electrolyzer was designed and fabricated and is discussed in detail. The second factor influencing the future of electrolytic generation is energy efficiency, especially when considering large scale production. Two areas were researched in connection with efficiency. The first of these involves the investigation of polycrystalline nickel whisker electrodes. Mechanical stability was proven and electrochemical performance on a geometric surface area basis demonstrated encouraging results. The final area concerned with efficiency involves time dependent increases in cell voltage which represent continual decreases in efficiency. It was demonstrated that hydrogen absorption at nickel cathodes is one mechanism responsible for the voltage-time variation. Dissert Abstr

**N81-20300#** Brookhaven National Lab., Upton, N Y

**REVIEW OF FUSION SYNFUELS**

J A Fillo 1980 14 p refs. Presented at the 4th ANS Topical Meeting on the Technol of Controlled Nucl Fusion, King of Prussia, Pa, 14-17 Oct 1980.  
 (Contract DE-AC02-76CH-00016)  
 (BNL-28627, CONF-801011-74) Avail NTIS HC A02/MF A01

Thermonuclear fusion offers an inexhaustible source of energy for the production of hydrogen from water. Depending on design, electric generation efficiencies of about 40 to 60% and hydrogen production efficiencies by high temperature electrolysis of about 50 to 65% are projected for fusion reactors using high temperature blankets. Fusion/coal symbiotic systems appear economically promising for the first generation of commercial fusion synfuels plants. Coal production requirements and the environmental effects of large scale coal usage would be greatly reduced by a fusion/coal system. In the long term, there could be a gradual transition to an inexhaustible energy system based solely on fusion. DOE

**N81-21210#** Battelle Memorial Inst., Geneva (Switzerland)  
**DIRECT THERMAL WATER SPLITTING BY CONCENTRATED SOLAR RADIATION FOR HYDROGEN PRODUCTION. PHASE 0: PROOF OF CONCEPT EXPERIMENT** Final Report

P Genequand Jun 1980 59 p refs. Sponsored in part by DOE.  
 (Contracts NAS7-100, JPL-955277)  
 (NASA-CR-164137, JPL-9950-512) Avail NTIS HC A04/MF A01 CSCL 21D

The direct production of hydrogen from water and solar energy concentrated into a high temperature aperture is described. A solar powered reactor able to dissociate water vapor and to separate the reaction product at high temperature was developed, and direct water splitting has been achieved in a laboratory reactor. Water vapor and radiative heating from a carbon dioxide laser are fed into the reactor, and water vapor enriched in hydrogen and water vapor enriched in oxygen are produced. The enriched water vapors are separated through a separation membrane, a small disc of zirconium dioxide heated to a range of 1800 k to 2800 k. To avoid water vapor condensation within the reactor,

## 03 HYDROGEN

the total pressure within the reactor was limited to 0.15 torr. A few modifications would enable the reactor to be operated at an increased pressure of a few torrs. More substantial modifications would allow for a reaction pressure of 0.1 atmosphere.

J D H

**N81-21627#** Dornier-Werke G m b H., Friedrichshafen (West Germany) Bereich Neue Technologien

### **HIGH TEMPERATURE WATER VAPOR ELECTROLYSIS (HOT ELLY) Final Report**

Wolfgang Doenitz, Hajo Hermeking, Ingo Kitzmann, Alfred Koch, Reinhard Roettenbacher, Wolfgang Schaefer, Rainer Schmidberger, Juergen Schumacher, and Hartwig vonZuelow Bonn Bundesministerium fuer Forschung und Technologie Aug 1980 273 p refs In GERMAN, ENGLISH summary Sponsored by Bundesministerium fuer Forschung und Technologie (BMFT-FB-T-80-051, ISSN-0340-7608) Avail NTIS

HC A12/MF A01

The practicability of high temperature water vapor electrolysis was demonstrated on a laboratory scale. The component raw materials selection is described, and the manufacture of high temperature electrolysis cells is delineated. Electrolytic operation of single cells and of tubular batteries built of series connected cells, at ambient as well as at high pressure, is described. Results show that the specific electrical energy necessary for this method of hydrogen production is significantly lower than in conventional electrolysis processes.

Author (ESA)

## FUELS AND OTHER SOURCES OF ENERGY

Includes fossil fuels, nuclear fuels, geothermal and ocean thermal energy tidal energy, and wind energy

**A81-19847** Classification of bituminous coals - Application of the technique of optimal sections in coal classification. C. Peng (Peking Research Institute of Coal Chemistry, Peking, Communist China). *Energy* (UK), vol 6, Jan 1981, p 47-60. 9 refs.

The method of optimal sections was used for the classification of bituminous coals according to the degree of metamorphism and processing properties (e.g., the caking property). Coals are classified into low volatile, medium-low volatile, and high volatile depending on the amounts of volatiles with metamorphism section points of 20, 28, and 36% on a dry and ash-free basis. Based on the coke strength as the cross-reference, the coals are grouped into the noncaking, weakly caking, medium caking, and strongly caking types. Finally, the coals are subdivided into seven groups including noncaking and extra-strongly caking, thus, a natural classification is evolved and a numerical system set up for their classification. A T

**A81-20804 #** The Cycloentrifuge - An advanced gas/solids separator for coal conversion processes. J T McCabe and P R. Albrecht (Mechanical Technology, Inc., Latham, N.Y.). *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St Louis, Mo., Jan. 12-15, 1981, Paper 81-0395* 9 p

The Cycloentrifuge, a high-velocity particulate separator whose development is being underwritten by the U.S. Department of Energy, is discussed as a possible gas cleanup system. The separation principle here relies on centrifugal force generated by a bladed rotor located in a cyclone-shaped vessel. A laboratory model (inlet flow, 1000 actual cubic feet per minute) tested at one atmosphere and 100 F is described. Test results include velocity profiles and particulate separation efficiency measurements. The design of a high-temperature unit is also discussed, and plans to test this unit using 1000 F, 250-psi synthesis gas from a coal gasifier are presented. C R

**A81-20815 #** A preliminary investigation into the characteristics of a Rijke Tube pulsating combustor. A T Zimmerman. *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St Louis, Mo., Jan. 12-15, 1981, Paper 81-0411* 9 p 9 refs. Contract No. DE-AS05-79ER-10068

Recent work in the Soviet Union has indicated that the Rijke Tube might be a highly efficient, simple, and low cost coal combustor utilizing pulsating combustion. A low cost Rijke Tube experiment was designed. Tests were performed to investigate the claim of a higher burn rate for pulsating combustion over that for steady state. This experience was to be used later in the design of a more sophisticated Rijke Tube experiment. Pulsating combustion was demonstrated burning charcoal at the quarter-length position in the Tube. The burn rate for pulsating combustion was slightly but consistently faster than that for steady state. An hypothesis of faster burn rates for larger masses of fuel negating somewhat the advantage of pulsating combustion was advanced. Starting and damping mechanisms were also proposed. (Author)

**A81-22207 #** Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution (Die Bestimmung der Anomalien des vertikalen Temperaturgradienten aus horizontalen Temperaturverteilungen). R Rösler, H Lindner, and C Oelsner (Freiberg, Bergakademie, Freiberg, East Germany). *Gerlands Beiträge zur Geophysik*, vol 89, no 5, 1980, p 389-398. 10 refs. In German

This paper examines the determination of heat flow at the earth surface in relation to geothermal studies. Anomalies of the vertical temperature gradient can be calculated with the Hilbert transformation of surface temperature measured along a profile. The procedure is carried out with temperature values over the Supetau anticline at the Fergana basin. R C

**A81-22273** Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size. J M Lytle, R E Wood, and W H Wiser (Utah, University, Salt Lake City, Utah). *Fuel Processing Technology*, vol 4, Jan 1981, p 3-19. 23 refs

The effect of coal particle size, hydrogen pressure and temperature on the extent of coal conversion in an entrained flow reactor is presented. Coal hydrogenation is done by feeding dry coal with ZnCl<sub>2</sub> catalyst into a continuous stream of hydrogen. The hydrogen-coal stream enters a long, small internal-diameter reactor (coiled tube reactor) controlled at about 500 C and 12.4 MPa hydrogen. At these conditions the coal particles become plastic and sticky. The hydrogen provides the energy to force the sticky coal particles through the reactor. Conversion of 85% of the coal to liquids and gases is easily attained. A physical mechanism is presented based on the unreacted-core-shrinking model. This mechanism aids in the explanation of the effect of process variables on reaction rates. Projections beyond the range of the variables studied are presented. These projections indicate that the pressure of coal liquefaction processes may be reduced by (1) the use of dry coal particles and (2) the reduction of the particle size. Significant reaction rates may be attained at pressures as low as 0.6 MPa by proper adjustment of particle size and temperature. (Author)

**A81-22274** Effects of pore diameter and catalyst loading in hydrolquefaction of coal with CoO/MoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> catalysts. P N Ho (New York, State University, Amherst, N.Y.), Phillips Petroleum Co., Bartlesville, Okla.) and S W Weller (New York, State University, Amherst, N.Y.). *Fuel Processing Technology*, vol 4, Jan 1981, p 21-29. 10 refs. Contract No. EX-76-C-01-2013

**A81-22275** Motor fuels from coal - Technology and economics. K H Eisenlohr and H Gaensslen (Lurgi Kohle und Mineraloltechnik GmbH, Frankfurt am Main, West Germany). *Fuel Processing Technology*, vol 4, Jan 1981, p 43-61

Present technical methods for transforming coal into automotive fuels are discussed. The overall thermal efficiency is used as an important economic criterion in the evaluation of the different processes. Capital investment and production costs are determined and mutually compared. Finally, the influence of the selling price of gaseous products on the cost of automotive liquid fuels is analyzed. (Author)

**A81-22278** Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3. E A Queincy, M M Rahman (Wyoming, University, Laramie, Wyo.), J H Richmond (Ohio State University, Columbus, Ohio), and M L Rhoades (IBM Corp., Boulder, Colo.). *IEEE Transactions on Geoscience and Remote Sensing*, vol GE-19, Jan 1981, p 29-42. 23 refs. Contract No. E(49-18)-2414

The statistical model fitting of field measurements of the location, shape and size of the coal burned during underground coal gasification at a site near Hanna, Wyoming taken with a wideband loop-loop induction sounding system is discussed. Soundings were taken immediately after the burn and one year later by a system using audio frequency electromagnetic coupling between transmitter and receiver loops, and pseudo-noise pulse trains and cross correlation with averaging at the receiver to obtain minimum mean-square-error time domain signatures. Wire grid approximations of induction models were employed to compute model responses of simulated reaction zones consisting of buried metal boxes, cylinders and spheres in a conducting overburden. A dual-parameter Bayes minimum mean-square-error estimator was used to estimate model dimensions from magnitude responses extracted from field data at 1 kHz. Box model estimates of the volumes of coal gasified are shown.

## 04 FUELS AND OTHER SOURCES OF ENERGY

to compare favorably with those obtained by chemical estimation, however the location of the conducting anomaly was shifted laterally from the gasification wells and was observed to migrate upwards with site aging  
A L W

**A81-22350** • Liquefaction of biomass as a source of fuels or chemicals I J Miller and S K Fellows (Department of Scientific and Industrial Research, Chemistry Div., Petone, New Zealand) *Nature*, vol 289, Jan 29, 1981, p 398, 399 7 refs

Although biomass is one of the few renewable sources of liquid fuels and chemicals, relatively little work has been carried out on its direct liquefaction. It is reported that wood or cellulose can be almost totally converted to liquids or gases when heated under pressure of 350 C in the presence of phenol, water, an acid or base catalyst, and either hydrogen or nitrogen. The resultant liquids were separated into a neutral fraction, which was partly characterized by gas chromatography-mass spectrometry and found to contain mainly aromatic compounds with or without an oxygen-containing ring, and a phenolic fraction. The nature of these compounds was found to be dependent on the catalyst, but not appreciably on the physical conditions used  
(Author)

**A81-22511** Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory. H G. Ahlstrom and K R Manes (California, University, Livermore, Calif.) In *Electro-Optics/Laser '79 Conference and Exposition*, Anaheim, Calif., October 23-25, 1979, Proceedings Chicago, Industrial and Scientific Conference Management, Inc., 1979, p 487-501 16 refs Contract No W-7405-eng-48

The Shiva and Argus laser systems at Livermore have been developed to study the physics of inertial confinement fusion. Both laser system designs are predicated on the use of large aperture Nd-glass disk amplifiers and high power spatial filters. During the past year, DT filled microshell targets with and without polymer coatings have been irradiated. Recently new instruments have been developed to investigate implosion dynamics and to determine the maximum fuel density achieved by these imploded fusion pellets. A series of target irradiations with thin wall microshells at 15 to 20 TW, exploding pusher designs, resulted in a maximum neutron yield of  $3 \times 10^{10}$  to the 10th. Polymer coated microshells designed for high compression were subjected to 4 kJ for 0.2 nsec and reached fuel densities of 2.0 to 3.0 g/cc  
(Author)

**A81-22774** Suppression of stream condensate corrosion at Wairakei Geothermal Project. R James (Department of Scientific and Industrial Research, Wairakei, New Zealand) *Geothermal Energy*, vol 8, Mar 1980, p 11-21, 23, 24 9 refs

**A81-22849** Thermodynamic calculations for coal gasification processes (Thermodynamische Berechnungen zu Kohlevergasungsprozessen) K-K Neumann and F Keil (Uhde GmbH, Dortmund, West Germany) *Brennstoff-Wärme-Kraft*, vol 33, Jan 1981, p 22-25 13 refs In German

It is shown that gasification reactors for most coal gasification processes can be described by models that assume simultaneous chemical equilibrium between all parts of the reaction. A computer program incorporating such a simultaneous equilibrium model can be used to describe the processes of a gasification plant with regard to mutually connected mass and enthalpy balances  
B.J

**A81-23069** # The estimation of the parameters of the distribution of wind speed and direction. B McWilliams and D Sprevak (Belfast, Queen's University, Belfast, Northern Ireland) *Wind Engineering*, vol 4, no 4, 1980, p 227-238 7 refs

Statistical properties of the joint distribution of wind speed and direction are presented and used in an improved and simplified method of estimation of the parameters of the distribution. The proposed estimation procedure is tested against wind data from all available sites in Ireland. The agreement obtained between theory and observations gives further evidence to support the suitability of

the theoretical model and the estimation procedure for the distribution of wind speed and direction  
(Author)

**A81-23227** # The efficiency of conical pellets for laser fusion (Ob effektivnosti konicheskikh misheneri dlia lazernogo termoiadernogo sinteza) A V Borovskii and V V Korobkin (Akademiia Nauk SSSR, Fizicheskii Institut, Moscow, USSR) *Kvantovaya Elektronika* (Moscow), vol 8, Jan 1981, p 512 10 refs In Russian

The paper analyzes laser power reduction, laser pulse lengthening, and neutron yield increase for an ideal conical pellet with absolutely rigid and heat proof walls as compared to a spherical pellet of the same mass. A simple theory is proposed that makes it possible to take account of the influence of walls on the fusion process in the conical pellet with gaseous fuel and heavy shell. Energy losses due to wall deformation and heat conduction are estimated, and the influence of these factors on neutron yield is considered  
B J

**A81-23495** Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions L Petrakis and D W Grandy (Gulf Research and Development Co., Pittsburgh, Pa.) *Nature*, vol. 289, Feb 5, 1981, p 476, 477 11 refs Contract No DE-AC01-79ET-14940

**A81-23562** # Petroleum exploration with Landsat in Bay County, Michigan - An interim case study R K Vincent and D H Coupland (Geospectra Corp., Ann Arbor, Mich.) In *International Symposium on Remote Sensing of Environment*, 14th, San Jose, Costa Rica, April 23-30, 1980, Proceedings Volume 1

Ann Arbor, Mich., Environmental Research Institute of Michigan, 1980, p 379-387

Results are presented from a Landsat study of an area in Bay County, Michigan performed for the purposes of petroleum exploration. A lineation mapped from a contrast-stretched color composite was thought to be a fault trending NE-SW from the Southeastern corner of Saginaw Bay. Seismic data were used to confirm the existence of the fault and support an adjacent graben structure hypothesis. The second of two holes drilled on the northwestern margin found a significant show of gas and a minor oil show. Groundwater action along the fault trace may have been responsible for the appearance of the linear features in the computer-processed Landsat images  
L S

**A81-23587** # Remote sensing techniques for identification and evaluation of geothermal areas. L del Rio, P N Pascaud, S Camacho, and N Galvan (Universidad Nacional Autonoma de Mexico, Mexico City, Mexico) In *International Symposium on Remote Sensing of Environment*, 14th, San Jose, Costa Rica, April 23-30, 1980, Proceedings Volume 2 Ann Arbor, Mich., Environmental Research Institute of Michigan, 1980, p 731-742 25 refs

**A81-23590** # Application of aerial remote sensing to the study of geothermal resources in the desert north of Chile and environmental pollution in Santiago, Chile. A F Mauricio (Universidad de Chile, Santiago, Chile) In *International Symposium on Remote Sensing of Environment*, 14th, San Jose, Costa Rica, April 23-30, 1980, Proceedings Volume 2 Ann Arbor, Mich., Environmental Research Institute of Michigan, 1980, p. 761, 762

The technology and field methodology employed in the remote sensing of geothermal resources in desert regions of Chile are found to provide good information and to be suitable for use in other parts of the country. Over Santiago, it is found that the use of aerial multispectral photography (multiband camera) and images (thermal infrared line scanner) is very effective in detecting pollution sources. Air ventilation tubes, machines (vehicles and other motors), factories, and industries are readily distinguished on thermal infrared images. It is pointed out that these potential pollution sources can be

identified in the multiband photography, where the near infrared band has a potential to penetrate the smog. Water pollution is found to be dramatically illustrated, especially on thermal images C R

**A81-23630 # Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goiás - Brazil** P Veneziani and C Eustáquio dos Anjos (Instituto de Pesquisas Espaciais, São José dos Campos, São Paulo, Brazil) In International Symposium on Remote Sensing of Environment, 14th, San Jose, Costa Rica, April 23-30, 1980, Proceedings Volume 2

Ann Arbor, Mich, Environmental Research Institute of Michigan, 1980, p 1239-1242 10 refs

The objective of this research was to study thermally anomalous areas associated with hot waters in the County of Caldas Novas, State of Goiás, Brazil Data collection was conducted using a 50-cm soil thermometer and a precision radiation thermometer The temperature data, processed by a Trend Surface Analysis Program, indicated the presence of 4 principal anomaly areas, the town of Caldas Novas, Córrego Tucum, Pousada do Rio Quente, and Lagoa Pirapetinga These areas were verified in the field In the area of the town of Caldas Novas, of 14 deep wells drilled, 9 revealed water temperatures from 33 to 41 C, 2 contained hot mud, 1 contained sulfurous water measured at 29 C Two dry wells were also encountered (Author)

**A81-23690 Meteorological aspects of wind energy - Assessing the resource and selecting the sites.** W. T. Pennell, W. R. Barchet, D. L. Elliott, L. L. Wendell, and T. R. Hiester (Battelle Pacific Northwest Laboratories, Richland, Wash) *Journal of Industrial Aerodynamics*, vol 5, May 1980, p 223-246 15 refs Contract No. EY-76-C-06-1830.

A regional wind energy assessment of five Northwestern states is presented as a model for large-scale analysis of the wind energy potential and distribution of an area Frequency distributions of wind speed and direction, and duration curves for speed and power summarize the statistical distribution while the annual, monthly and diurnal curves show the temporal variation of the wind power resource on a station-by-station basis The various site selection techniques described include numerical and physical modeling and biological, geological, topographical and social and cultural indicators Site selection strategy is discussed in terms of mesoscale evaluation, candidate site screening, and candidate site evaluation It is concluded that experience with the initial wind turbine installations will be critical in evaluating current siting approaches. (Author)

**A81-23691 Wind energy resource survey methodology.** N. J. Cherry (Lincoln College, Canterbury, New Zealand) *Journal of Industrial Aerodynamics*, vol 5, May 1980, p 247-280 32 refs

National wind energy resource surveys from Vermont, France, Spain, Israel, India, the U K. and New Zealand are reviewed in light of a general discussion of methodologies and instrumentation It is noted that in the absence of detailed data, empirical relationships involving the site mean wind speed and the mean roughness length of the site can be used to estimate the parameters of the wind speed frequency distribution and can provide an estimate of the mean wind energy force with an uncertainty of about 15%, though erring on the conservative side A comprehensive resource assessment of a region can be carried out using robust cup anemometers with an electronic data-logger which records 1 to 5 minute mean wind speeds installed on existing towers on well-exposed elevated or coastal sites L S.

**A81-23692 An investigation of wind-energy prospects in the Otago region of New Zealand.** P. J. Edwards and K. R. Dawber (Otago, University, Dunedin, New Zealand) *Journal of Industrial Aerodynamics*, vol 5, May 1980, p 281-296 21 refs New Zealand Energy Research and Development Committee Contract No 3096

The investigation covers the Otago region of the south island of New Zealand east of 169 deg east longitude, an area of 2.5 x 10 to the 6th hectares centered near 45 deg latitude. Three years of data from an anemometer network installed as part of a national wind-energy resource survey have been analyzed to provide (1) an inventory of the wind energy available annually in the region, and (2)

a description of the characteristics of prospective aerogeneration sites The total resource is estimated to exceed 80 TW h per annum (9 GW average power) of which 10% might be utilized without either significant land use conflict or severe environmental impact Characterization of prospective sites in terms of wind-speed frequency, gust and lull distributions, wind-speed height profile, and longitudinal turbulence using data with high time resolution yields parameters similar to those found in other temperate maritime and continental climatic regimes (Author)

**A81-23693 Wind-tunnel simulation of the flow over hills and complex terrain.** R. N. Meroney (Colorado State University, Fort Collins, Colo) *Journal of Industrial Aerodynamics*, vol 5, May 1980, p. 297-321 20 refs Contracts No EG-77-S-06-1043, No. EY-76-S-06-2438.

A study has been completed to evaluate the accuracy of a wind tunnel investigation of flow over a complex terrain model Both terraced and contoured models of the Rakaia River Gorge region of New Zealand were prepared to an undistorted geometric scale of 1.5000 The contoured model was examined for three separate surface roughness conditions. On two spring days, selected for strong adiabatic down valley wind flow, three teams of investigators surveyed up to 27 sites on either side and within the river gorge Measurements consisted of wind speed and direction at a 10 m height The laboratory simulation results were compared with the available field data by means of statistical correlation and scatter diagrams The model and field results have been used to assess the value of laboratory experiments as part of a strategy to develop and demonstrate efficient and economical techniques for identifying favorable wind energy conversion sites (Author)

**A81-24016 Synthetic gas production for methanol - Current and future trends.** J. A. Camps and D. M. Turnbull (Davy Powergas, Inc., Lakeland, Fla) In Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979 Washington, D C, American Chemical Society, 1980, p 123-146

Synthesis gas (carbon monoxide/hydrogen mixture) generation from the various accepted feedstocks and methanol synthesis are discussed with reference to the efficiency, limitations, and economics of different processes Current and future markets for methanol are briefly reviewed V L

**A81-24020 Hydrogen requirements in shale oil and synthetic crude from coal.** J. L. Skinner (ARCO Oil and Gas Co., Dallas, Tex) In Hydrogen Production and marketing, Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979 Washington, D.C., American Chemical Society, 1980, p 279-291 6 refs

Analysis of the total hydrogen requirements for liquid fuels derived from oil shale and coal indicates that the amount of hydrogen is dependent on the feed raw material and the desired liquid product. For the production of a synthetic crude product from oil shale, about 2,000 scf of hydrogen per barrel (15.06 kmol/cu m) is required, while the production of synthetic crude from coal will require 7,000-8,000 scf per barrel (52.70-60.23 kmol/cu m). For fuel oil produced from coal, the hydrogen requirements will range between 5,000 and 6,500 scf per barrel (37.64-48.94 kmol/cu m) V L.

**A81-24265 Gasification combined cycle R&A assessment.** J. H. Witt and M. C. Neely (ARINC Research Corp., Annapolis, Md). In: Annual Reliability and Maintainability Symposium, Philadelphia, Pa., January 27-29, 1981, Proceedings New York, Institute of Electrical and Electronics Engineers, Inc., 1981, p 156-162 Research supported by the Electric Power Research Institute.

This paper describes the development and application of a methodology for assessing the reliability and availability of coal gasification combined cycle (GCC) power plant designs The methodology was developed for and applied to a design of an 1100-

## 04 FUELS AND OTHER SOURCES OF ENERGY

megawatt baseload GCC power plant. The specific objectives of the analysis were to obtain baseline reliability and availability values for the GCC plant design and to develop criticality rankings of the plant's components based on their impact on the system's reliability and availability measures. (Author)

**A81-24302** The mass discharge of a geofluid from a geothermal reservoir - Well system with flashing flow in the bore. D. J. Ryley (Liverpool, University, Liverpool, England) *Geothermics*, vol. 9, no. 3-4, 1980, p. 221-235 8 refs. Contract No. EY-76-5-02-4051-A001

**A81-24303** Thermal techniques for characterizing magma body geometries. H. C. Hardee and D. W. Larson (Sandia Laboratories, Albuquerque, N. Mex.). *Geothermics*, vol. 9, no. 3-4, 1980, p. 237-249. 14 refs. Contract No. AT(29-1)-789.

Surface heat flux distributions produced by magma bodies can be used in the characterization of the magma source. Closed-form analytical solutions for the conductive heat transfer from various idealized magma geometries, such as dikes, sills and spheres, were obtained using either the Schwarz-Christoffel transformation theorem or the 'method of images' with superposition. Comparison of these analytically determined heat flux distributions with field data from active geothermal areas at Yellowstone, Avachinsky volcano, Kilauea Iki, and the Coso geothermal area indicates that these fields may be conduction dominant, at least over certain depths. Results are in good agreement with several independent geophysical measurements. O.C.

**A81-24304** Construction of a probe for measuring temperature and pressure in deep wells. N. Adorni (Centro Informazioni Studi e Esperienze S.p.A., Milan, Italy), L. Ceppatelli, A. Grassi, A. Palama, and P. Rosselli (Ente Nazionale per l'Energia Elettrica, Centro Ricerca Geotermica, Pisa, Italy) *Geothermics*, vol. 9, no. 3-4, 1980, p. 251-259 European Economic Communities Contract No. 166-76-1-EG1

Measurement techniques for geothermal wells are discussed with emphasis on a particular temperature and pressure recording system. Details of the probe, the cable for mechanical and electrical connection to the surface instrumentation, and the surface equipment itself are presented. The system is shown to be operable down to 3000 m in depth, up to pressures of 250 bar, and temperatures of 240 C. D.K.

**A81-24306** Hydrothermal metamorphism in the Larderello geothermal field. G. Cavarretta (CNR, Centro di Studio per la Geologia dell'Italia Centrale, Rome, Italy), G. Gianelli, and M. Puxeddu (CNR, Istituto Internazionale per le Ricerche Geotermiche, Pisa, Italy) *Geothermics*, vol. 9, no. 3-4, 1980, p. 297-314. 61 refs. Research supported by the Consiglio Nazionale delle Ricerche.

The various tectonic units underlying the Larderello-Travale geothermal region have undergone hydrothermal metamorphism. The hydrothermal mineral assemblages are generally consistent with the temperatures now measured in the wells, leading to the hypothesis that solid phases deposited from a liquid medium during a hot-water stage that preceded the vapor-dominated one. (Author)

**A81-24427** Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion. J. D. Ferchak and E. K. Pye (Pennsylvania, University, Philadelphia, Pa.). *Solar Energy*, vol. 26, no. 1, 1981, p. 9-25 91 refs. Contract No. EY-76-S-02-4070

The paper assesses the biomass resource represented by starch derived from feed corn, surplus and distressed grain, and high-yield sugar crops planted on set-aside land in the U.S. It is determined that the quantity of ethanol produced may be sufficient to replace between 5 to 27% of present gasoline requirements. Utilization of novel cellulose conversion technology may in addition provide fermentable sugars from municipal, agricultural and forest wastes, and ultimately from highly productive silvicultural operations. The

potential additional yield of ethanol from lignocellulosic biomass appears to be well in excess of liquid fuel requirements of an enhanced-efficiency transport sector at present mileage demands. No conflict with food production would be entailed. A net-energy assessment is made for lignocellulosic biomass feedstocks' conversion to ethanol and an almost 10:1 energy yield/energy cost ratio determined. It is also found that novel cellulose pretreatment and enzymatic conversion methods still under development may significantly improve even that figure, and that both chemical-feedstocks and energy-yielding byproducts such as carbon dioxide, biogas and lignin make ethanol production potentially energy self-sufficient. A final high-efficiency production approach incorporates site-optimized, nonpolluting energy sources such as solar and geothermal O.C.

**A81-24749** Tapping the main stream of geothermal energy. *Geothermal Energy*, vol. 8, Aug.-Sept. 1980, p. 3-12

The development of geothermal energy resources in the United States is discussed. The distribution of underground water resources at temperatures above 90 C and depths up to 3 km in the continental U.S. is examined, and it is pointed out that whereas geothermal resources have been detected under 24 states, only 220 quadrillion Btu of energy recoverable as 24 GW of electricity for 30 years has been conclusively located, all of it in the western states. Direct-flash technology, which generates electricity from hydrothermal fluid at a temperature above 210 C with an efficiency of 15% is presented, and the binary cycle technology required to generate electricity from lower-temperature fluids such as those in the 180 C reservoir of low-salinity brine at Heber in southern California is examined in detail. Questions of minerals and heat control in a geothermal turbine system and the environmental emissions from geothermal plants are addressed. The geothermal resources of the United States are classified as petrothermal, geopressurized and hydrothermal, and methods for extracting heat from these dry rocks, pressurized water and natural gas deposits and systems of steam and hot water are indicated. It is concluded that as fossil fuel energy costs rise, the trend favors geothermal energy, particularly that which can be developed from known hydrothermal resources. S.C.S.

**A81-24750** China starts tapping rich geothermal resources. D. Guang *Geothermal Energy*, vol. 8, Aug.-Sept. 1980, p. 22, 23.

Attention is given to the electric and power installation running on geothermal energy at Yangbajain, Tibet. Other geothermal projects in Tibet, the Yunnan Province and the North China Plain are also outlined. Applications of geothermal energy are described, including the heating of homes and factories, spinning, weaving, paper-making and the making of wine. S.C.S.

**A81-24751** The Philippines geothermal success story. R. J. Birsic *Geothermal Energy*, vol. 8, Aug.-Sept. 1980, p. 35-44.

Geothermal electrical plants currently in operation in the Philippines are presented. Following a brief review of the geographical and energy situation of the nation, attention is given to the first 55,000-kW unit of the Tiwi Geothermal Electric Plant, which commenced operation in January 1979, the portable 3,000-kW Leyte Geothermal Pilot Plant, which commenced operation in July, 1977 as the first geothermal power plant in the country, the Makiling-Banahaw (Mak-Ban) Geothermal Power Plant, the first 55,000-kW unit of which began operation in May, 1979 and the second 55,000-kW unit of the Tiwi plant, which came into service in June, 1979, thus making the Philippines the fourth largest producer of geothermal electricity in the world. Factors favoring the use of geothermal plants in developing nations are pointed out, including low capital costs, no foreign exchange costs for fuel, small units, and little environmental impact, and the start-up of two more plants, the second 55,000-kW unit at Mak-Ban in September 1979 and the third Tiwi unit in January 1980, are noted. It is predicted that in 1981, when the Philippines is expected to become the largest user of geothermal energy from hot-water fields, it will have a total capacity of 552 MW from the Mak-Ban, Tiwi and Leyte sites. Further areas with geothermal potential are also pointed out. S.C.S.

**A81-24900** Gasoline from alcohols. C R Morgan, J P Warner, and S Yurchak (Mobil Research and Development Corp., Paulsboro, N.J.) (*American Chemical Society, National Meeting, 179th, Houston, Tex., Mar 24, 1980*) I & EC - Industrial and Engineering Chemistry, Product Research and Development, vol 20, Mar 1981, p 185-190 6 refs Contract No EX-76-C-01-2490

This paper discusses laboratory and vehicle performance test results obtained from gasoline produced by the Mobil methanol conversion process. Antiknock qualities, driveability performance, exhaust emission levels, plus other in-car and laboratory characterization tests show the gasoline to compare very favorably with conventional petroleum derived high-octane unleaded gasolines. The methanol conversion process, and its advantages relative to the blending of alcohol-containing fuels, also is discussed briefly.

(Author)

**A81-25066** Wood energy in West Virginia. C. L. Aton, L. P. Fisher, J. C. Wyvill, and J. L. Birchfield (Georgia Institute of Technology, Atlanta, Ga.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 4* Washington, D.C., Hemisphere Publishing Corp., 1981, p 1501-1516

The use of wood energy in West Virginia is examined. A five step determination process found 9,021,200 acres of commercial forest land available for the production of wood. Eighty percent of the state requires a manual element in the felling and retrieval process because of the hilly terrain. The methods and costs of hillside harvesting are outlined. The major technologies for the conversion of wood fuel to energy are described, and wood energy applications in supplementing natural gas for direct heat drying, steam production, and machine drive are delineated.

L.S.

**A81-25090** The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey. T. Esder and S. Simsek (Mineral Research and Exploration Institute of Turkey, Izmir, Turkey). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 5* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1919-1940 20 refs

**A81-25091** Hot Dry Rock Geothermal Energy Development Program. P. R. Franke (California, University, Los Alamos, N. Mex.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 5* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1993-2007.

The Hot Dry Rock (HDR) Geothermal Energy Development Program is reviewed. The principal operational tasks include the development and analysis of a 20 to 50 MW HDR reservoir at Fenton Hill with the potential construction of a pilot electric generating station, as well as the selection and evaluation of future target prospect areas. A small subterranean system at Fenton Hill comprised of two boreholes connected at a depth of 3 km by hydraulic fracturing was evaluated. A closed-loop surface system has been constructed and tests have yielded promising data on heat extraction, geofluid chemistry, flow impedance, and loss of water through the underground reservoir between the two holes. With positive program results, it will be possible to begin delivering commercial HDR-derived power-on-line in the final decade of this century.

L.S.

**A81-25093** Geothermal energy and biofuel production in agriculture. P. De Marchi Desenzani (Pavia, Università, Pavia, Italy). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 5* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2023-2031. 5 refs

While the usefulness of geothermal heat is limited by the temperature constraints, heat resources such as low-temperature geothermal water can be used profitably as aids to Italian agricultural production and in the processing of agricultural products. A

synergistic relationship between geoheat utilization and biofuel production is examined, and a reference system integrating solar, wind and geothermal energy is presented. The production of liquid or gaseous fuels from raw biomass and geothermal heat is reviewed. Liquid production offers better near-term opportunities than gas production, although methane is to be considered ultimately more useful than ethanol.

L.S.

**A81-25107** Synthetic fuel production in a particle-beam driven fusion reactor. J. W. Fisk and D. M. Woodall (New Mexico, University, Albuquerque, N. Mex.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 6* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2659-2669 16 refs.

An overview of the operation of an inertial confinement fusion reactor is presented explaining in particular the function of a buffer gas in the reaction chamber. The use of water vapor and carbon dioxide as a buffer gas are discussed with the intention of showing that they not only perform as buffer gases, but produce hydrogen and carbon monoxide as synthetic fuels as well when carbon dust is introduced with these feed gases. Equilibrium calculations for carbon dust and water vapor are performed for temperatures of 2000 and 4500 K and for carbon dust and carbon dioxide at 3500 K. The conversion times for 15-micron-diameter carbon particles were calculated using a shrinking core model. Tritium contamination of the products is also discussed.

(Author)

**A81-25108** Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources. J. H. Pendergrass, L. A. Booth, F. T. Finch, and T. G. Frank (California, University, Los Alamos, N. Mex.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 6* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2671-2710 67 refs.

A characterization of fusion reactors as radiation sources and a review of the fundamentals of radiolysis are presented. Substantial technological obstacles to development of efficient and economical radiolytic processes for synthetic fuel production are identified. Combined radiolytic/thermochemical cycles that have been proposed for synthetic fuels production are analyzed for potential for commercialization. Preliminary studies of radiolysis economics process are not encouraging. All grounds for optimism of which we are aware are summarized.

(Author)

**A81-25109** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7 - Hydrocarbon conversion. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.). Washington, D.C., Hemisphere Publishing Corp., 1981. 517 p. Price of nine volumes, \$595

Consideration is given to such topics as coal gasification and liquefaction, the combustion of alcohol fuels, hydrocarbon upgrading and combustion technology, novel engines using hydrocarbon fuel, and hydrocarbons economics and planning. Particular papers are presented on the role of high-Btu coal gasification technology, ethanol from municipal cellulosic wastes, the fluidized bed combustion of coal, the behavior of gas distribution equipment in hydrogen service, and the economics of advanced technologies for electricity generation from coal.

B.J.

**A81-25110** In situ and modified in situ recovery of fossil fuels. D. W. Stout (Energy Production Systems Corp., North Palm Beach, Fla.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979, Volume 7* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2713-2715

## 04 FUELS AND OTHER SOURCES OF ENERGY

An analysis is made of improvements in laser devices and digital signal processing whose application to in situ drilling of fossil fuel deposits may yield higher resource-recovery rates. Significant differences are seen in the operational characteristics of low- and high-power lasers, and in laser wavelength interactions with small and large particles. O.C.

**A81-25111** **Pricetown I - In-situ coal conversion field test for bituminous coals.** R. E. Zielinski, P. W. Seabaugh, A. K. Agarwal, R. J. Larson (Monsanto Research Corp., Miamisburg, Ohio), A. J. Liberatore, J. W. Martin, and J. D. McClung (U.S. Department of Energy, Morgantown Energy Technology Center, Morgantown, W. Va.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2717-2748. Contract No. DE-AC04-76DP-00053

The effectiveness of the in situ, underground Linked Vertical Well method of bituminous coal gasification was investigated by a field test in West Virginia. The test, involving air injection and reverse combustion linkage, was continuously monitored in real time by a minicomputer system. The high methane content of the evolved gas is attributed to the thermal- and hydro-cracking of tars and oils along with hydropyrolysis and hydrogasification of coal char. O.C.

**A81-25112** **The role of high-Btu coal gasification technology.** M. I. German (American Gas Association, Arlington, Va.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2749-2762

An analysis is given of the role and economic potential of Lurgi-technology gasification of coal to the year 2000, in relation to other gas-supply options, the further development of gasifier designs, and probable environmental impact. It is predicted that coal gasification may reach 10% of total gas supplies by the year 2000, with Eastern U.S. coal use reaching commercially significant use in the 1990's. It is concluded that coal gasification is the cleanest way of using coal, with minimal physical, chemical, biological and socioeconomic impacts. O.C.

**A81-25113** **Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project.** J. Kawabata, M. Yumiyama, Y. Tazaki, S. Honma, S. Takeda, K. Kitano, H. Yamaguchi (Government Industrial Development Laboratory, Sapporo, Japan), T. Chiba (Hokkaido University, Sapporo, Japan), and K. Yoshida (Tokyo University, Tokyo, Japan). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2763-2768

**A81-25114** **Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas.** Y. Yorulmaz (Middle East Technical University, Ankara, Turkey) and A. H. Weiss (Worcester Polytechnic Institute, Worcester, Mass.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2769-2778. 8 refs. Research supported by the Turkish Coal Corp.

**A81-25115** **Fluid bed hydrogenation of agglomerating bituminous coals.** B. Liss (City College, New York, N.Y.) and C. Welter (Union Carbide Corp., South Charleston, W. Va.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2779-2795. 7 refs.

A technique was developed and demonstrated at Union Carbide Corporation in 1977 for the processing of raw caking coals in a fluidized bed without preprocessing, and under severe conditions of

high hydrogen partial pressure and low injection-gas/coal ratio. Fluid bed operating limits were explored by sequential dynamic testing of the key operating variables, and it was determined that the energy required to sustain fluid bed operation is less than 1%. The process represents an economically viable and technically feasible approach to processing agglomerating coals such as Illinois No. 6 and Pittsburgh No. 8. O.C.

**A81-25116** **The conversion of peat - Recent developments in simultaneous dewatering and hydrogenolysis.** E. Chornet, R. Fonseca, and R. P. Brown (Sherbrooke University, Sherbrooke, Quebec, Canada). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2797-2807. 16 refs.

The paper presents the work done on laboratory level to convert peat into a bitumen-like material. It discusses the main aspects of the work accomplished including the study on the reactivity of the organic material in peat as related to hydrogenolysis, and a direct conversion of peat in its natural state using carbon monoxide and steam. The results of the experiments indicate that the conversion of peat into a bitumen-like material is possible in the presence of water. 350 C is the most convenient operating temperature. The significance of carbon dioxide consumption is also realized and various methods to reduce it are reviewed. (Author)

**A81-25117** **The development of biogas technology in India.** C. Chiranjivi, A. Raviprasad, and K. V. Rao (Andhra University, Visakhapatnam, India). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2809-2821. 9 refs.

Biogas from organic wastes is a potential renewable energy to meet the domestic energy needs in India. The fundamentals of bio-gasification by anaerobic digestion are presented. The production of biogas from cattle manure in small anaerobic digesters is discussed, illustrated by a popular digester model. The need for the development of community digesters for the needs of a village and its implications are mentioned. The research work on biogasification at Andhra University is summarized. A.T.

**A81-25118** **Gasification of biomass as a source of synfuels for developing countries.** J. R. Moreira and M. J. Antal, Jr. (Princeton University, Princeton, N.J.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2823-2833. 23 refs.

The economic viability of forest biomass gasification in furnishing feedstocks for synfuels production in Brazil is argued, on grounds of high net energy yield (due to minimal use of mechanization in the cultivation of timber such as Eucalyptus) and the high efficiency of acid hydrolysis and fast pyrolysis methods already being used. A thermochemical process still under development promises still higher efficiency and greater economy than coal gasification and coal-fired electrical generation. Assuming a feedback cost of \$1.00 per million Btu, a minimum gasoline precursor cost would be \$0.35 a gallon. O.C.

**A81-25120** **Production of liquid fuels with a high-temperature gas-cooled reactor.** R. N. Quade, D. L. Vrabie, and L. Green, Jr. (General Atomic Co., San Diego, Calif.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7.* Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2847-2858. 9 refs. Contract No. DE-AT03-76SF-71061.

An exploration is made of the technical, economic and environmental impact feasibility of integrating coal liquefaction methods directly and indirectly with a nuclear reactor source of process heat, with stress on the production of synthetic jet fuel.



## 04 FUELS AND OTHER SOURCES OF ENERGY

Production figures and operating costs are compared for indirect conventional and nuclear processes using Lurgi-Fischer-Tropsch technology with direct conventional and nuclear techniques employing the advanced SRC-II technology, and it is concluded that significant advantages in coal savings and environmental impact can be expected from nuclear reactor integration O.C.

**A81-25121** Future of alcohol fuels programs in Brasil. A. V. Carvalho, Jr., E. Rechtschaffen, and L. Goldstein, Jr. (Centro de Tecnologia Promon, Rio de Janeiro, Brazil). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2867-2877. 8 refs.

An updating is given of the Brazilian National Alcohol Program's production and utilization achievements to date in the substitution of ethanol and methanol for imported oil products. A series of Eucalyptus forestry and processing industry projections are made for fuel output and jobs creation that may be expected by the year 2000. With few exceptions, methanol produced from wood grown on poorer soils than can now be used for sugarcane substitute for oil products and result in jobs creation several orders of magnitude higher than petroleum fuels O.C.

**A81-25122** Alcohols as auxiliary fuels for diesel engines. B. H. Rao (Banaras Hindu University, Varanasi, India). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2879-2885.

**A81-25124** Ethanol from municipal cellulosic wastes. A. J. Parker, Jr., T. J. Timbario (Mueller Associates, Inc., Baltimore, Md.), and J. A. Mulloney, Jr. (American Solarhol Corp., Baltimore, Md.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979. Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2909-2922. 18 refs.

This paper addresses the use of municipal cellulosic wastes as a feedstock for producing ethanol fuels, and describes the application of enzymatic hydrolysis technology for their production. The concept incorporates recent process technology developments within the framework of an existing industry familiar with large-scale ethanol fermentation (the brewing industry). Preliminary indications are that the cost of producing ethanol via enzymatic hydrolysis in an existing plant with minimal facility modifications (low capital investment) can be significantly less than that of ethanol from grain fermentation (Author)

**A81-25125** An update in the 'development of alternate liquid fuels'. M. J. Rose (Brookhaven National Laboratory, Upton, N.Y.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2923-2928.

The Brookhaven National Laboratory has formulated a series of Alternate Liquid Fuels (ALF), compounded from combustible fluids such as alcohols, mineral oils and solvents, found in the waste streams of the cosmetic, petrochemical, electronics and other industries. These fuels are now being processed by a pilot plant with a productive capacity of 40,000 gallons in 8 hours, at direct costs ranging from \$0.26 to \$0.29 a gallon depending on selected feedstocks and blend ratios O.C.

**A81-25126** Coal conservation and stabilization during storage. M. O. Kestner and A. A. Kober (Apollo Technologies, Inc., Whippany, N.J.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2943-2948.

A survey is made of current coal-stockpiling methods intended to prevent atmospheric oxidation, spalling and fracturing, and acid runoff on exposure to rain. Data obtained from accelerated oxidative tests demonstrate that a novel method, the chemical pretreatment of coal (with a proprietary formulation) effectively prevents Btu losses, minimizes changes in free-swelling indices, and decreases acid runoff. Comparative photographic records of spalling and fracturing demonstrate the extent of morphological changes in treated and untreated coals. O.C.

**A81-25127** Advanced synfuels production/power systems utilizing laser particulate control. T. E. Botts, J. R. Powell, and J. A. Fillo (Brookhaven National Laboratory, Upton, N.Y.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2949-2953. 8 refs.

Consideration is given to the use of laser-induced fragmentation of entrained particulates, in the combustion-product stream of a direct coal-fired gas turbine's pressurized cyclone combustor, to sizes below 3 microns. This apparatus represents a combined-cycle system ideal for high-temperature water-electrolysis synfuels production, using heat extraction in the combustion chamber's radiant zone as well as electrical generation. O.C.

**A81-25128** Bed expansion and attrition studies in a coal-fired fluidized bed. G. Miller, V. Zakkay, A. Kolar, J. Franceschi, and W. Skelley (New York University, New York, N.Y.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2955-2968. 19 refs. Contract No. EF-76-C-01-2256.

**A81-25129** Combustion of coal suspension fuels using air atomizers. S. C. Kranc (South Florida University, Tampa, Fla.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2969-2982. 18 refs.

Experiments have been conducted to examine the use of air atomizers in conjunction with coal-liquid fuel mixtures. These fuels were formed by suspending pulverized coals in various liquid fuels such as Diesel and methanol. The fuels were burned in an atmospheric pressure water jacketed flame tube with a disk baffle flame stabilizer. A parametrical study of atomizer performance was made. Mass fractions as high as 40 percent have been tested. Thermal outputs obtained with coal in suspension are discussed in comparison with results for the pure liquid fuels (Author)

**A81-25130** Fluidized bed combustion of coal. J. Tatebayashi, Y. Okada, K. Yano, T. Takada, and K. Handa (Kawasaki Heavy Industries, Ltd., Osaka, Japan). In *Alternative energy sources II, Proceedings of the Second Miami International Conference*, Miami Beach, Fla., December 10-13, 1979 Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2983-2997. Research supported by the Ministry of International Trade and Industry.

The effect of various parameters on combustion efficiency, desulfurization efficiency and NO emission in fluidized bed combustion of coal were investigated by using two test combustors whose sectional areas were 200 mm and 500 mm square. It has been revealed that by employing two-stage combustion and setting the primary air ratio, secondary air injection height and other parameters to optimum levels, NO emission can be greatly reduced while barely impairing combustion efficiency or desulfurization efficiency. Also, NO emission of less than 50 ppm and desulfurization efficiency of as high as 93% were achieved. These results have ensured good prospects for the development of a coal combustion boiler system.

## 04 FUELS AND OTHER SOURCES OF ENERGY

which can satisfy the strictest environmental protection regulations, without installing special desulfurization and de-NO(X) facilities

(Author)

**A81-25133** Coal-oil mixtures - Their technical and commercial status M A Viola and G D Botsaris (Tufts University, Medford, Mass ) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979* Volume 7 Washington, D C , Hemisphere Publishing Corp , 1981, p 3071-3077 22 refs

The commercial and technical status of coal-oil mixtures (COM) are discussed. Although this technology is commercially available and economic incentives for its use exist, it is argued that optimization of fuel properties and the refinement of its production methods to prepare environmentally 'clean' COM will, along with the growing differential between coal and oil prices, increase its viability as an alternative fuel. Some industrial corporations have to date demonstrated preparation facilities and potential applications O C

**A81-25134** The economics of advanced technologies for electricity generation from coal. D F Hemming, R Johnston, and M Teper (International Energy Agency, London, England) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979* Volume 7 Washington, D C , Hemisphere Publishing Corp , 1981, p 3079-3097 18 refs

The International Energy Agency's Coal Research Program is presented, along with a review of advances made to date in the development of coal-fueled electrical generation processes such as fluidized bed combustion, gasifier effluent liquid and pyrolysis. The IEA is composed of countries such as the U S , the U K and West Germany, for which coal represents a major energy resource. An assessment of the economic climate for coal technology development in the member countries is also made, stressing methods used in capital costs assessment, financing, and regulatory and tax policies O C

**A81-25135** Economics and concepts of industrial coal fluidized bed combustion in Brazil M Saddy and J Szego (Centro de Tecnologia Promon, Rio de Janeiro, Brazil) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979* Volume 7 Washington, D C , Hemisphere Publishing Corp , 1981, p 3177-3189 10 refs

**A81-25136** Economic aspects of coal gasification and liquefaction in Belgium G Labeau and P Lermusieau (Mons, Faculté Polytechnique, Mons, Belgium) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979* Volume 7 Washington, D C , Hemisphere Publishing Corp , 1981, p 3191-3198

**A81-25162** Trash to energy. D J Damiano (Greeley and Hansen Consulting Engineers, Philadelphia, Pa). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979* Volume 9 Washington, D C , Hemisphere Publishing Corp., 1981, p 3629-3636

The recovery of urban solid waste for conversion to energy is discussed for the example of Philadelphia. The refuse-fired steam generating facility planned for the city is described, and the combination of a front-end separation plant with a semi-suspension fired boiler is surveyed. The environmental, social and economic aspects of the question are reviewed. L.S.

**A81-25163** The Bridgeport resource recovery system. J G. Lucchesi (Combustion Equipment Associates, Inc , New York, N Y ) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979.*

Volume 9 Washington, D C , Hemisphere Publishing Corp , 1981, p 3637-3643

A process used in Connecticut is described for converting municipal solid waste into a coal-like fuel. The fuel is a high-quality, low-sulphur fuel with a higher heating value of 7800-8000 Btus per pound. The fuel's low moisture content permits indefinite storage, and its high bulk density ensures economical storage, handling and market distribution. The fuel can be fired in conjunction with coal in existing coal burners without major modifications to the boilers, firing systems or pollution control systems L S

**A81-25225** Design and management for resource recovery. Volume 2 - High technology - A failure analysis. B Harrison and P A Vesilind (Duke University, Durham, NC ) Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980 107 p 100 refs \$29.95

The book examines five projects for reclaiming materials and energy, from solid waste with the aim of investigating their planning, design, and operation and of determining factors which result in failures or successful resource recovery. The facilities discussed are the Nashville Thermal Transfer Corporation plant, the St. Louis Union Electric solid waste utilization system proposal, the Baltimore pyrolysis system, the Lowell incinerator residue project, and the San Diego flash pyrolysis system. It was shown that the major factors affecting the operation of a recovery system include area markets, initial funding, technical viability, waste flow control, alternate disposal possibilities, and time pressure A.T.

**A81-25551** Design and management for resource recovery Volume 1 - Energy from waste Edited by T C Frankiewicz Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980 221 p \$29.95

The compilation covers municipal waste as a resource and a pollutant, the Chicago Southwest supplemental fuel processing facility, methane production from the Mountain View landfill, Wisconsin Electric Co., characterization of Americology refuse-derived fuel, and the Ames resource recovery facility. Powdered fuel from solid waste, the China lake trash-to-gasoline process, Albany biomass-to-oil project, and conversion of cellulosic wastes to liquid fuels are also discussed A T

**A81-25552** The Chicago Southwest Supplemental Fuel Processing Facility E F Nigro (Chicago, Dept of Streets and Sanitation, Chicago, Ill ) In *Design and management for resource recovery* Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 11-19

Empirical solutions were developed to improve refuse-derived fuel (RDF) throughput and quality at the Chicago Southwest Supplemental Fuel Processing Facility. The solutions included innovative process line balancing and modifications to unit processes. Implementations through May 1979 are discussed along with contemplated improvements. Also discussed are safety procedures and equipment such as explosion prevention practices and blast energy control. This chapter concludes with insights into methodologies to reduce maintenance and repair costs developed for the Chicago Southwest Supplemental Fuel Processing Facility which may be applicable to other RDF plants (Author)

**A81-25553** Methane production from the Mountain View landfill S C James and C W Rhyne (U S Environmental Protection Agency, Cincinnati, Ohio) In *Design and management for resource recovery* Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 21-31 5 refs

The paper reviews the current status of the Mountain View gas recovery project designed to produce 0.003 to 0.44 cu m of raw landfill gas (44% methane) per kg of solid waste. The heating value of raw landfill gas is approximately 16,800 kJ/cu m. The discussion covers the installation of production wells, treatment plant construction and operation, and the results of test runs V L

**A81-25554** The Pompano Beach RefCOM facility H R Geisser (L Robert Kimball and Associates, Ebsenburg, Pa ) In

Design and management for resource recovery Volume 1

Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 33-42

To date, the process concept of solid waste anaerobic digestion to produce methane gas has not received a fair test at the RefCOM facility in Pompano Beach, Fla This is largely due to operational difficulties in the feed processing and preparation system for the digesters These difficulties are reviewed along with the successful implementation of several problem solutions Additional process flow changes are also suggested to eliminate the remaining impediments to the continuous, design capacity operation of this facility

(Author)

**A81-25555 Wisconsin Electric's characterization of Ameri-cology's refuse-derived fuel** R S Alberg (Wisconsin Electric Power Co , Milwaukee, Wis ) In Design and management for resource recovery Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 43-52

The initial selections of important refuse-derived fuel (RDF) properties are reviewed A sampling method was developed to obtain a representative gross sample of RDF and the 'baling and coring' method for subsampling the gross sample is described Some specific studies have been performed to substantiate initial sampling assumptions In the absence of any standard analysis methods for this new fuel, analytical methods were developed Whenever possible these methods were adaptations of existing fuel analysis methods An evaluation of the present state-of the art of RDF characterization, as demonstrated by Wisconsin Electric's experience, highlights the successes of the program, but also notes the need for improved or additional characterization methods such as automatic sampling, 'effective' heating value, mass flow, density and slagging potential to evaluate better the proper use of RDF

(Author)

**A81-25556 Eco-Fuel and the Bridgeport facility.** F Hasselriis (Combustion Engineering Associates, Inc, New York, N Y ) In Design and management for resource recovery Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 53-63

The genesis of Eco-Fuel as an economical RDF alternative, and the planning and construction of the Bridgeport, CT, resource recovery facility is discussed The unit operations used to produce Eco Fuel are described Perspectives on the use of RDF for energy production are presented, and it is concluded that RDF will be a major source of fuel in the future

(Author)

**A81-25557 The Niagara Falls resource recovery system** R P Krueger (Hooker Chemical Co , Houston, Tex ) and C B Reale (Occidental Resource Recovery Systems, Inc, Irvine, Calif ) In Design and management for resource recovery Volume 1

Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 65-82 18 refs

The project development technique which the Occidental Petroleum Corporation learned from its construction of an energy-from-waste facility at Niagara Falls is discussed The technique is considered to illustrate the success that can be achieved when a company needs fuel to stay in business, opts for waste as fuel, makes a strong corporate commitment, takes the initiative, and works patiently through the political, social, and financial complexities of long-term contracts and massive capital investment It is noted that the project development technique may be as important as the technology employed at the facility This technique is described, and a comparison of the significant characteristics of bark and municipal wastes is made In discussing the project development technique, attention is given to refuse supply, tipping fees and product revenues, taxes and utility status, project financing, and permits and public acceptance

C R

**A81-25558 The Ames Resource Recovery facility.** A O Chantland (Ames, Dept of Public Works, Ames, Iowa) In Design

and management for resource recovery Volume 1

Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 87-93

The diminishing availability of natural gas, the use of high-sulfur coal and the need to dispose of waste material prompted the City of Ames, IA, to build a facility to produce refuse-derived fuel (RDF) and to recover other valuable resources from the city's solid waste Recovery is through mechanical processes The fuel is used to fire two types of boilers as a supplement to coal in an electric generating plant Ferrous metals and miscellaneous materials are also recovered and marketed

(Author)

**A81-25559 Technology for powdered fuel preparation from solid waste** N L Hecht, B L Fox, D S Duvall, and A A Ghazee (Dayton, University, Dayton, Ohio) In Design and management for resource recovery Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 97-112

Research supported by the U S Environmental Protection Agency

It is noted that while many of the systems developed by communities to recover valuable products, in particular, fuel, from municipal wastes have been relatively successful, the quality and consistency of the fuel obtained have not been completely satisfactory One technology considered to hold promise involves the production of powdered fuels from cellulose wastes A study of this technology undertaken by the University of Dayton is discussed Here, the powdered fuels are produced from cellulose by pyrolysis and embrittlement It is noted that the production of carbon char by low-temperature pyrolysis and the embrittlement of cellulose waste by chemical treatment is of particular interest The laboratory development of chemical treatments for powder fuel production forms the basis in the study for engineering and economic analysis for full-scale facilities

C R

**A81-25560 Commercialization potential of the China Lake trash-to-gasoline process** J Diebold and G Smith (U S Naval Weapons Center, China Lake, Calif ) In Design and management for resource recovery Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 113-139 39 refs

Research supported by the U S Environmental Protection Agency

The China Lake trash-to-gasoline process involves a series of noncatalytic petrochemical processes to convert organic wastes to a synthetic hydrocarbon crude oil containing about 90% high-octane gasoline and 10% fuel and lubricating oils By-product char and gases would be consumed for process energy Key features of the process, the relative confidence of commercial scale up and the projected economics based on an independent third-party evaluation are discussed

(Author)

**A81-25561 Municipal solid waste comminution by steam explosion.** J A Burke, Jr (Burke, Davoud and Associates, Richmond, Va ) In Design and management for resource recovery Volume 1 Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 141-147

Research sponsored by the U S Department of Energy

Results of a program with pilot sized equipment are described A 200-psi steam discharge reduces paper and other organic materials to very small sizes The extent of reduction of metal and glass containers depends on pressure The advantages of explosive decomposition are described Residual energy from the explosion is conserved and reused in downstream processes With steam, heat is retained for bioconversion With dry gases, momentum of discharging gas and refuse is used for separation of refuse-derived fuels (RDF) Discharges have low abrasion, hence, equipment is subject to low maintenance

(Author)

**A81-25562 Albany biomass-to-oil project** S Ergun, L Schaleger, and M Seth (California, University, Berkeley, Calif ) In Design and management for resource recovery Volume 1

Ann Arbor, Mich , Ann Arbor Science Publishers, Inc , 1980, p 149-158

## 04 FUELS AND OTHER SOURCES OF ENERGY

A process development unit constructed in Albany in 1976 is discussed, noting that this particular effort is being supplemented by research and engineering programs conducted elsewhere. It is pointed out that the chemical and stoichiometric base of cost estimates is replete with inconsistencies and invalid assumptions. After a careful evaluation of the results of recent research on wood liquefaction at Battelle Pacific Northwest Laboratories and Lawrence Berkeley Laboratory and a comparison of these results with those reported by the Bureau of Mines, the following chemical bases are presented: (1) liquefaction produces 46.4 ton oil/80 ton dry wood, a conversion efficiency of 58%, the necessary carbon monoxide and heat for treating 80 tons of dry wood will be obtained by gasifying 20 tons of dry wood, and the oil produced will have a heating value of about 31,300 J/g. The gross thermal efficiency from these bases is put at 78%, a figure that does not include electricity. Using Lawrence Berkeley Laboratory's chemical bases and process costs provided by Bechtel, the break-even cost of oil is shown to be about \$26/bbl.

C R

**A81-25563 Conversion of organic wastes to oil by reductive formylation** G R Youngquist, R Partch (Clarkson College of Technology, Potsdam, N Y), and L G Donaruma (New Mexico Institute of Mining and Technology, Socorro, N Mex.) In *Design and management for resource recovery* Volume 1.

Ann Arbor, Mich., Ann Arbor Science Publishers, Inc., 1980, p 159-180. 7 refs. Research supported by the Eastman Kodak Co.

Conversion of various solid organic wastes to oil by reduction using formic acid species has been studied using laboratory-scale batch and continuous reactors. Data on the effect of operating conditions on product yield and quality are presented for a variety of starting materials, including sewage and industrial waste treatment sludges. Reaction mechanisms, based on model compound experiments are discussed. Results for cracking of the product oils to lower-molecular weight hydrocarbons are also described. (Author)

**A81-25564 Conversion of cellulosic wastes to liquid fuels** J L Kuester (Arizona State University, Tempe, Ariz.) In *Design and management for resource recovery* Volume 1.

Ann Arbor, Mich., Ann Arbor Science Publishers, Inc., 1980, p 181-195. 5 refs. Research supported by the Arizona Solar Energy Research Commission, Contract No. EY-76-S-02-2982.

Liquid fuels such as diesel, kerosene, jet fuel, and high-octane fractions are processed from renewable biomass by direct liquefaction using thermal gasification and catalytic synthesis. The process can use urban, agricultural, forest, and industrial feedstocks producing 50-100 gallons of liquid fuel/ton of dry, ash free feedstock/day. It is proposed to evaluate alternative feedstocks and to optimize the gasification reaction, profitable operation of 270-900 metric ton/day will be developed using a 9 metric ton/day pilot plant. (Author)

**A81-26195 # Thermodynamic and thermophysical properties of combustion products** Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/ (Termodinamicheskie i teplofizicheskie svoystva produktov sgoraniya Volume 10 - Primeneniye, issledovaniye i vozmozhnyye topliva Part 2 - Mnogokomponentnyye toplivnye kompozitsii /Spravochnik/). V E Alekseyev, A F Dregalin, A P Tishin, V A Khudiakov, and V N Kostin. Moscow, Izdatel'stvo VINITI, 1980. 395 p. In Russian.

**A81-26474 # An investigation on Tehran municipal solid waste with the view of electricity generation** H Chokouhmand, Z Nejat, J Shayergan (Teheran, University, Teheran, Iran), M S Massoudi, and A Ostadhosseini (Arya Mehr University of Technology, Teheran, Iran). *Regional Journal of Energy, Heat and Mass Transfer*, vol. 2, Oct 1980, p 235-241. 6 refs.

An investigation of the physical and chemical composition of Tehran municipal waste is presented with consideration given to the incineration method of electrical conversion. Daily tonnages varied from 1600 to 3000 tons during 1977 with a composition consisting primarily of foodstuffs and paper. A total of 28,000 kWh could be

generated daily from 2400 tons of waste with a 59% moisture content and an average calorific value of 1100 kcal/kg. The lack of incinerator technology in Iran coupled with the high level of pollutants found in Teheran's air render the incineration method of electrical conversion impractical at present. L S

**A81-26477 Coal conversion /combustion and gasification/** J A Gray and F Starr (British Gas Corp., London, England). In *Behaviour of high temperature alloys in aggressive environments*. Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979. London, Metals Society, 1980, p 3-24. Discussion, p 25-27. 41 refs.

The paper deals with some of the high-temperature metallurgical aspects of coal conversion and utilization processes including those that burn coal and those that gasify coal by a variety of processes. The similarities and differences in process environment and in material requirements of several types of combustion and gasification systems are illustrated by thermochemical stability diagrams. It is shown that conditions in all the proposed conversion systems will be so aggressive that the conventional high-temperature alloys may prove inadequate and it may be desirable to change to alloys and coatings based on new compositions. V L

**A81-26491 Corrosion of alloys at high temperature in coal gasification environments** D M Lloyd and M J Cooke (Coal Research Establishment, Cheltenham, Glos., England). In *Behaviour of high temperature alloys in aggressive environments*. Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979. London, Metals Society, 1980, p 799-812. 8 refs.

In order to select alloys for coal gasification applications, specimens of 19 different superalloys were tested at 850 C for 250 hr in the freeboard of a 0.3 m diameter atmospheric pressure fluidized bed gasifier. The ferritic base alloys MA 956 E and FeCrAlloy offered the best resistance to corrosion. V L

**A81-26492 The performance of MCrAl alloys in complex coal conversion atmospheres** C M Packer and R A Perkins (Lockheed Research Laboratories, Palo Alto, Calif.). In *Behaviour of high temperature alloys in aggressive environments*. Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979. London, Metals Society, 1980, p 813-828. 22 refs.

The paper reviews the potential corrosion resistance of alumina-forming MCrAl alloys in complex coal gasification atmospheres. Specifically, the performance of these alloys during exposures to complex oxidizing/sulfidizing atmospheres is summarized. Attention is focused on a correlation of sulfidation resistance with composition and microstructure and how these factors affect the applicability of these materials for use in coal conversion systems. In particular, conclusions are discussed as to the influence of the M element and the aluminum content on the nature and effectiveness of the protective alumina scale that forms during service. In addition, the compositional and structural stability of the alloys at high temperatures is reviewed. The potential applications of these materials are described in terms of their use as protective claddings or coatings for structural materials. (Author)

**A81-26895 Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content** (Elementy geologicheskogo stroeniya zapadno-Sibirskoi plity po dannym deshifirovaniya melko masshtabnykh kosmicheskikh snimkov v svyazi s otsenoi neftegazonosnosti). V V Borovskii, A L Klopov, L L Podsova, and I D Peskovskii (Zapadno-Sibirskii Nauchno-Issledovatel'skii Geologorazvedochnyi Neftianoi Institut, Tyumen, USSR). *Issledovanie Zemli iz Kosmosa*, Nov-Dec 1980, p 80-86. 6 refs. In Russian.

Ring structures and fracture systems in the western Siberian plate were identified on small-scale space imagery. The complex interpretation of geological and geophysical data indicates that the

ring structures are related to the geological structure of deep parts of the crust and of the pre-Jurassic basement. Certain methodological problems associated with the use of magnetic and gravitational data in the present study are discussed. P T H

**A81-26928** Use of weighted brines in recovery of geothermal energy from hot, dry rock. L R Kern *Geothermal Energy*, vol 8, Feb. 1980, p. 12-24, 29-35. 14 refs

Two processes for recovering geothermal energy from hot dry rock of low permeability are studied. The processes are based on connecting two or three wells with a hydraulically created fracture and circulating a weighted brine solution through the connected system to recover heat from the rock to power an electric generating plant. Data obtained in field experiments in hot rock near Los Alamos, N.M., are used to perform economic assessments of the processes. The results indicate that a price of 6 to 8 cents per kWh is economical for the two-well process and a price of 2 to 3 cents is economical for the three-well process. F G M

**A81-27539 #** Solid-fuel combustion in fluidized beds (Szhiganiye tverdogo topliva v psevdoozhizhennom sloe) V A Borodulia and L M Vinogradov Minsk, Izdatel'stvo Nauka i Tekhnika, 1980 192 p 330 refs In Russian

Fluidized bed combustion technology is discussed as a way to control emissions from power plants. The experimental and theoretical literature on the combustion of solid fuels (particularly coal) in fluidized beds is reviewed, with emphasis on engineering and chemical aspects of fluidized bed technology. The removal of sulfur dioxide and the control of nitrogen oxide emissions during the low-temperature fluidized bed combustion of solid fuels are considered as an example. B J

**A81-27572** Alcohols as fuels - The global picture R F Ward (United Nations, New York, N Y) *Solar Energy*, vol 26, no 2, 1981, p. 169-173 25 refs

A number of countries have programs which encourage the production and use of ethanol and methanol to extend gasoline supplies. These programs are often based on food crops which are subject to wide variations in both cost and availability. Some of the programs are reviewed, and the costs of alcohols are compared to world market prices of gasoline. (Author)

**A81-28680** Wave-energy extraction by a submerged cylindrical resonant duct M J Simon (Cambridge University, Cambridge, England) *Journal of Fluid Mechanics*, vol 104, Mar 1981, p. 159-187 16 refs Research supported by the Science Research Council

A cylindrical duct absorbing energy from incident surface waves is considered. The asymptotic properties of the scattering and radiation potentials are determined, to yield the hydrodynamic quantities on which the energy absorption characteristics of the duct can be shown to depend. It is shown that it is possible to tune the resonant response of the duct to absorb the maximum theoretical energy at a given frequency. Curves are presented showing the variation of energy absorption and the amplitude of the duct response with frequency for various depths of submergence and various tuning frequencies. (Author)

**A81-28690** Head-sea diffraction by a slender raft with application to wave-power absorption. P Haren and C C Mei (MIT, Cambridge, Mass.) *Journal of Fluid Mechanics*, vol. 104, Mar 1981, p. 505-526 24 refs Contract No. DE-AC02-79ET-21062. NR Project 062-228

The parabolic approximation which has recently been found to be useful in other physical contexts, is extended to head-sea diffraction of short waves by a slender raft on deep water. In particular, it is a much more direct way of getting the inner approximation of the outer solution in a scheme of matched asymptotics than the original method of Faltinsen (1971). The present results are compared with a more involved integral equation method and are found to be remarkably accurate even when the raft

length is comparable to the wavelength. Finally, the asymptotic method is modified for a compliant raft which absorbs wave power by suitably controlled impedance. Optimum efficiency and other performance characteristics are predicted. (Author)

**A81-28992** Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings *Royal Society (London), Philosophical Transactions, Series A*, vol 300, no. 1453, Mar 20, 1981 221 p

A discussion of new coal chemistry is presented. The chemical and physical structure of coal is examined in the first section, including structural studies of coal extracts, metal and metal complexes in coal and coal microporosity. The second section presents new advances in applied coal technology. The development of liquid fuels and chemicals from coal is given especial emphasis, with papers on the Sasol Synthol process, the Shell-Koppers gasification process, liquefaction and gasification in Germany, the Solvent Refined Coal process, the Exxon Donor Solvent liquefaction process and the Mobil Methanol-to-Gasoline process. Finally, some developments that will be part of the future of coal chemistry in the year 2000 are examined in the third section, including coal-based chemical complexes and the use of coal as an alternative source to oil for chemical feedstocks. D.K.

**A81-28994** Motor fuels and chemicals from coal via the Sasol Synthol route. J C Hoogendoorn (Sasol, Ltd., Sasolburg, Republic of South Africa) (*Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980*) *Royal Society (London), Philosophical Transactions, Series A*, vol 300, no 1453, Mar 20, 1981, p. 99-108, Discussion, p. 108, 109

The production of synthetic motor fuels and chemicals from coal by the Sasol procedures is discussed. This process is based on the Fischer-Tropsch reaction by passing hydrogen and carbon monoxide in a specific ratio over iron catalysts at elevated temperatures and pressures. Two parallel reactor systems are discussed. The smaller system employs fixed-bed reactors, using a precipitated iron catalyst and produces predominantly heavy hydrocarbons of an aliphatic nature with carbon chains up to 100. These straight-chain hydrocarbons yield excellent waxes and high quality diesel oil. The larger system uses a powdered iron catalyst in a circulating fluid-bed reactor, a concept developed from American catalytic cracker technology. This system has the advantage of high production capacity and scale-up potential, and produces light olefins which can be used either as petrochemical feedstock or refined and added to the motor fuel pool, and ethylene which is augmented by ethane cracking. Analysis of product selectivities and values shows that co-production of chemicals and motor fuels from coal is profitable and efficient. D.K.

**A81-28995** Development of the Shell-Koppers coal gasification process E V Vogt and M J van der Burgt (Shell Internationale Petroleum Maatschappij, The Hague, Netherlands) (*Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980*) *Royal Society (London), Philosophical Transactions, Series A*, vol 300, no 1453, Mar 20, 1981, p. 111-120

The Shell-Koppers process for the gasification of coal under pressure is based on the principles of entrained-bed technology. It is characterized by practically complete gasification of virtually all solid fuels, production of a clean gas without by-products, high throughput, high thermal efficiency, efficient heat recovery, and environmental acceptability. The gas produced is 93 to 98 vol % hydrogen and carbon monoxide and is suitable for the manufacture of hydrogen or reducing gas, and, with further processing, substitute natural gas. It can also be used for the synthesis of ammonia, methanol, and liquid hydrocarbons. The process can be applied as an integral part of a combined-cycle power station featuring both gas and steam turbines, which will yield electricity generation at 42 to 45% efficiency for a wide range of feed coals. A 150 t/day gasifier has been put into operation successfully at Harburg, Germany,

## 04 FUELS AND OTHER SOURCES OF ENERGY

achieving a conversion of 99% for hard coal, and units of a capacity up to 2500 t/day are planned for the end of the 1980s D K

**A81-28996** Development of liquefaction and gasification in the Federal Republic of Germany G Kolling (Bergbau-Forschung GmbH, Essen, West Germany) (*Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980*) *Royal Society (London), Philosophical Transactions, Series A*, vol 300, no 1453, Mar. 20, 1981, p 121-128

In the past, a variety of processes for liquefaction and gasification of coal were used on a large industrial scale in Germany. Later, as these processes became uneconomic, the plants had to be closed. But now it is again necessary to look for new sources of oil and gas, especially coal. Therefore, the Federal Republic of Germany, with many other countries, is further developing known coal conversion technologies. Several experimental plants for liquefaction as well as for gasification of coal are in operation, and larger plants are under construction. The German federal government now intends to sponsor construction of large-scale commercial plants. The state of development of all these technologies is discussed (Author)

**A81-28997** The SRC-II process. B K Schmid and D M Jackson (Pittsburg and Midway Coal Mining Co., Englewood, Colo.) (*Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980*) *Royal Society (London), Philosophical Transactions, Series A*, vol. 300, no 1453, Mar 20, 1981, p. 129-138, Discussion, p 138, 139 6 refs

The Solvent Refined Coal (SRC-II) process which produces low-sulfur distillate fuel oil from coal is discussed. The process dissolves coal in a process-derived solvent at elevated temperature and pressure in the presence of hydrogen, separates the undissolved mineral residue, then recovers the original solvent by vacuum distillation. The distillate fuel oil produced is for use largely as a nonpolluting fuel for generating electrical power and steam and is expected to be competitive with petroleum fuels during the 1980s. During this period, the SRC-II fuel oil is expected to be attractive compared with combustion of coal with flue gas desulfurization in US East Coast oil-burning power plants, as well as in small and medium-sized industrial boilers. The substantial quantities of methane, light hydrocarbons and naphtha produced by the process have value as feedstocks for preparation of pipeline gas, ethylene and high-octane unleaded gasoline, and can replace petroleum fractions in many applications. The liquid and gas products from a future large-scale plant, such as the 6000 t/day plant planned for Morgantown, West Virginia, are expected to have an overall selling price of \$4.25 to \$4.75/GJ D K

**A81-28998** Exxon donor solvent liquefaction process. R C Neavel (Exxon Research and Engineering Co., Baytown, Tex.) (*Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980*) *Royal Society (London), Philosophical Transactions, Series A*, vol 300, no 1453, Mar 20, 1981, p 141-156, Discussion, p 156 11 refs. Research supported by the US Department of Energy, Electric Power Research Institute, Japan Coal Liquefaction Co., Phillips Petroleum Co., Atlantic Richfield Co., Ruhrkohle AG, and Exxon Corp.

The Exxon donor solvent (EDS) coal liquefaction system is a direct liquefaction procedure. Coal is chemically reacted and dissolved in a recycle solvent that is hydrogenated between passes to the liquefaction reactor. More than 2.6 barrels of a synthetic crude boiling below 1000 F are produced per ton of dry, high volatile coal feed. Other ranks of coal can be effectively liquefied. The process development has proceeded to a 250 ton/day pilot plant stage that went into operation in June 1980. The presentation addresses the chemical reactions and process conditions that result in ease of operability and flexibility of the EDS process (Author)

**A81-28999** A new route to liquid fuels from coal. S L Meisel (Mobil Research and Development Corp., New York, N.Y.) (*Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980*) *Royal Society (London), Philosophical*

*Transactions, Series A*, vol 300, no 1453, Mar 20, 1981, p 157-167, Discussion, p 167-169 25 refs

The Mobil Methanol-to Gasoline (MTG) process is discussed that efficiently converts crude methanol to high-quality gasoline by means of a new zeolite catalyst, ZSM-5. This conversion requires a gradual rearrangement of the carbon and hydrogen atoms and the addition of hydrogen to put together the desired molecules. The MTG process has been successfully demonstrated in a fixed-bed and a fluid-bed 4 barrels/day pilot unit operating under commercial conditions. A fixed-bed version that will produce 13,000 barrels of gasoline a day will be a key unit in a New Zealand complex, and a fluid-bed version will be tested in a 100 barrels per day German pilot plant. Modifications of the catalyst may enable it to construct basic chemical components such as light olefins, including ethylene, or BTX aromatics (benzene, toluene and xylenes) as the major product. Process and catalyst modifications can yield as much as 70% light olefin products from methanol D K

**A81-29267** Combined aquatic-terrestrial biomass systems. J R Benemann (Ecoenergetics, Inc., Vacaville, Calif.) (*American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov 25-29, 1979*) *AIChE Symposium Series*, vol 76, no 198, 1980, p 144-150 20 refs

A combined aquatic agriculture and terrestrial biomass system is described which combines wastewater treatment and fuel production functions and incorporates storage for good year-round performance. Considerable advantage is seen in the subsidization of the cost of fuel derived from the aquatic and terrestrial crops by the low cost of waste water treatment of such an integrated system. It is concluded that although the net energy output of such systems would be below 1% of US per capita energy consumption, they could make a significant contribution to local energy systems where yearly insolation and available land and water resources favor them O C

**A81-29682** Synfuels from coal. R A Passman (U.S. Department of Energy, Office of Coal Supply Assurance and Commercial Applications, Washington, D.C.). In Synfuels industry opportunities, Proceedings of the Seminar, Washington, D.C., November 6, 7, 1980. Seminar sponsored by the Government Institutes, Washington, D.C., Government Institutes, Inc., 1981, p 134-146.

Activities in the field of coal synthetics are reviewed with reference to the Federal feasibility and cooperative agreements and private sector response. Commercialization of synfuels from coal and projects based on technical processes that are considered ready for commercial introduction are discussed. Consideration is also given to economic, institutional, sociopolitical, and environmental issues V.L.

**A81-29692** Coal liquefaction. The chemistry and technology of thermal processes. D D Whitehurst, T O Mitchell, and M Farcasiu (Mobil Research and Development Corp., Central Research Div., Princeton, N.J.) New York, Academic Press, Inc., 1980 390 p 241 refs \$19.50

The book treats the conversion of coal into liquids in terms of the structural and functional differences between the coal and the desired products, with particular emphasis on thermal processes for coal liquefaction. The chemical and structural composition of coal and the liquids to be derived from coal are reviewed, and the significance of the physical properties and rank of coal relative to its conversion are discussed. Attention is then given to the catalytic effects of minerals, and the effects of process variables including time, temperature and hydrogen gas pressure, side reactions such as char formation, and solvent composition on liquefaction behavior. Finally, the intrinsic limitations of present-day processes are pointed out, and suggestions are presented for further improvements in coal liquefaction technology A L W

**A81-29994** # A UK view on future fuels. A B Wassell (Rolls Royce, Ltd., Derby, England) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston,*

Tex., Mar 9-12, 1981, Paper 81-GT-87 6 p 9 refs Members, \$2 00, nonmembers, \$4 00

Preliminary determinations concerning the impact of deteriorating gas turbine fuel specifications are reported, with stress on the replacing of kerosene by diesel fuel. Although trends agreeing with previously published data for gaseous and black smoke emissions have been established, rig data at pressures greater than 20 bars from a tubular combustor suggest that increases in combustor liner temperatures may not have as great an impact on service life as has been supposed. General consideration is also given the production of 'white smoke' at sub-idle conditions and the impact of reduced thermal stability O C

**A81-30110 # Methanol - The efficient conversion of valueless fuels into a versatile fuel and chemical feedstock.** D F Othmer (New York, Polytechnic Institute, Brooklyn, NY) *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex, Jan 18-22, 1981, Paper 81-PID-1.* 7 p Members, \$2 00; nonmembers, \$4.00

The production of fuel-grade methanol and methyl chemicals is discussed with attention to production costs. Natural gas and low grade solid fuels such as peat, lignite, and sub-bituminous coal combined with water or ash can be converted to methanol with a thermal efficiency of 50 to 65%. Methanol can be used as a fuel for transportation engines and in electric power generation. The advantages of methanol use, such as ease and safety of transportation, are considered. The projected cost is 17 to 34 cents per gallon, or \$2 50 to \$5.00 per million Btu L S

**A81-30116 # Engine fuels from biomass.** H W Parker (Engineering Societies Commission of Energy, Inc., Washington, D.C.) *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex, Jan 18-22, 1981, Paper 81-DGP-4* 12 p 36 refs Members, \$2 00, nonmembers, \$4 00

Sources of biomass fuels for engines are compared to other synfuels. Biomass can be converted to gaseous and liquid engine fuels by the same processes utilized for coal conversion such as gasification, direct liquefaction, and indirect liquefaction. Alternatively, biomass can be converted into liquid fuels by fermentation to methane or ethanol. The quantities of biomass derived engine fuels potentially available in the next decade are relatively small, and the anticipated costs are significantly greater than for liquid engine fuels made from coal or oil shale (Author)

**N81-16316# Oak Ridge National Lab., Tenn Environmental Sciences Div**

**ENVIRONMENTAL METRICS OF SYN-FUELS. II: A COMPUTER-BASED CODING SCHEME FOR COAL-CONVERSION RESEARCH DATA**

R H Strand, M P Farrell, T K Birchfield, C W Gudmundson, M E Vansuch, and H N Polovino 1980 15 p refs

(Contract W-7405-eng-26)

(CONF-8010106-3, Publ-1602)

Avail NTIS

HC A02/MF A01

The need to reduce the complexity of data encoding and error rates in studies using multiple data bases composed of hierarchical file structures is discussed. A coding scheme to represent long alphanumeric values is described. The efficiency of such a scheme is indicated and error-rate reduction is discussed. Several approaches are available that minimize coding errors. Numeric codes with embedded information allocated to positions within the value codes are widely used, but these are unacceptable for variables with many values or levels of classification. Such numeric smart codes require the full knowledge of the universe the variables describe, as well as the potential classification schemes for each variable. Codes without embedded information (nonsense codes) circumvent the problems associated with smart codes. With nonsense codes, alphanumeric variable values are assigned a sequential numeric code as new values are encountered in the data base, irrespective of their value in the alphanumeric sequence S F

**N81-16317# Argonne National Lab., Ill Chemical Engineering Div**

**SAMPLING AND INSTRUMENTATION FOR FLUIDIZED-BED COMBUSTION Annual Report, Oct. 1978 - Sep. 1979** Irving Johnson, W F Posolski, K M Myles, K E Griggs (Fluor Power Services, Chicago), A A Siczek, W W Managan, R W Doering, J J Eichholz, N M Fallon, and C L Herzenberg Sep 1980 109 p refs

(Contract W-31-109-eng-38)

(ANL/CEN/FE-80-2) Avail NTIS HC A06/MF A01

Background information is presented on process control, scientific investigation, and safety, in planned and operating fluidized bed combustion systems. Two prototype mass flow rate instruments installed on the solids feed lines of an existing ANL fluidized bed combustor are described. Each instrument consisted of a capacitive sensor spoolpiece and an associated preamplifier and signal conditioning. One channel of each instrument provides three outputs. One delivers a density signal while two others deliver two signals for measuring velocity by cross correlation. Operation was verified by using laboratory signal analyzers to process the signals. Analytical techniques suitable for monitoring the concentration of gaseous alkali compounds in the hot gas stream from a fluidized bed combustor are described T M

**N81-16318# Gulf Research and Development Co., Pittsburgh, Pa**

**INVESTIGATION OF MECHANISM OF HYDROGEN TRANSFER IN COAL HYDROGENATION Quarterly Progress Report, Jun. - Aug. 1980**

D C Cronauer, R G Ruberto, R I McNeil, and D C Young Sep 1980 25 p refs

(Contract DE-AC22-80PC-30080)

(DOE/PC-30080-T2) Avail NTIS HC A02/MF A01

Transfer experiments using bituminous coal and deuterium labeled tetralin and described. The rate of coal conversion, hydrogen transfer and site of hydrogen transfer were measured. Results showed that about 3.5 g of hydrogen is transferred per 1000 g MAF coal at reactor conditions of 450 C, 30 minute and 30% feed coal in tetralin. At these conditions, about 73% conversion of coal to toluene solubles was achieved. Results at lower times (0 and 10 minutes) and temperatures (300, 350, and 400 C) are also discussed. An evaluation of the techniques of measure hydrogen donor capacity indicated that the best instrumental approach available to us is that in which NMR is used to quantify the level of hydroaromatics. Both GC/MS and group type MS techniques do not appear to be adequate for this purpose T M

**N81-16322# Oak Ridge National Lab., Tenn Chemical Technology Div**

**RESOURCE RECOVERY FROM COAL RESIDUES**

G Jones, Jr 1980 12 p refs Presented at 73rd Ann Meeting of the Am Inst Chem Engr, Chicago, 16-20 Nov 1980

(Contract W-7405-eng-26)

(CONF-801104-8) Avail NTIS HC A02/MF A01

Several processes are being developed to recover metals from coal combustion and conversion residues. Methods to obtain substantial amounts of aluminum, iron, and titanium from these wastes are presented Author

**N81-16324# Dynecology, Inc., Hamson, N.Y**

**ENERGY FROM BIOMASS: THE SIMPLEX PROCESS FOR THE GASIFICATION OF COAL AND FOREST PULP Final Report, Jan. 1979 - Mar. 1980**

John C Arbo and David P Glaser Apr 1980 103 p Sponsored by New York State Energy Research and Development Authority

(PB81-110512, NYSERDA-80-2) Avail NTIS HC A06/MF A01 CSCL 21D

A series of tests were performed to investigate the adaptation of simplex process to the gasification of forest pulp or wood wastes. A coal and forest pulp briquette formulation, needed for the gasification process, was developed as part of the project. The sample briquettes were successfully turned into gas GRA

## 04 FUELS AND OTHER SOURCES OF ENERGY

**N81-16573\*** Mathtech, Inc., Princeton, N J  
**ADVANCED COGENERATION TECHNOLOGY ECONOMIC OPTIMIZATION STUDY (ACTEOS) Final Report**  
 Pat Nanda, Yaw Ansu, Ernest H Manuel, Jr., and William G Price, Jr 15 Dec 1980 211 p Sponsored in part by DOE Prepared for JPL  
 (Contract JPL-955559)  
 (NASA-CR-163887, Rept-2150, JPL-9950-471) Avail NTIS HC A10/MF A01 CSCL 10B

The advanced cogeneration technology economic optimization study (ACTEOS) was undertaken to extend the results of the cogeneration technology alternatives study (CTAS) Cost comparisons were made between designs involving advanced cogeneration technologies and designs involving either conventional cogeneration technologies or not involving cogeneration For the specific equipment cost and fuel price assumptions made, it was found that (1) coal based cogeneration systems offered appreciable cost savings over the no cogeneration case, while systems using coal derived liquids offered no costs savings, and (2) the advanced cogeneration systems provided somewhat larger cost savings than the conventional systems Among the issues considered in the study included (1) temporal variations in steam and electric demands, (2) requirements for reliability/standby capacity, (3) availability of discrete equipment sizes, (4) regional variations in fuel and electricity prices, (5) off design system performance, and (6) separate demand and energy charges for purchased electricity E D K

**N81-17261\*** National Aeronautics and Space Administration  
 Pasadena Office, Calif

**MOLTEN SALT PYROLYSIS OF LATEX Patent**  
 Albert J Bauman, inventor (to NASA) (JPL) Issued 20 Jan 1981 5 p Filed 27 Apr 1978 Supersedes N80-10361 (18 - 01, p0050) Sponsored by NASA  
 (NASA-Case-NPO-14315-1, US-Patent-4,246,001, US-Patent-Appl-SN-900659, US-Patent-Class-44-62, US-Patent-Class-44-50, US-Patent-Class-201-8, US-Patent-Class-201-10, US-Patent-Class-201-25)  
 Avail US Patent and Trademark Office CSCL 07C

Latex-rich plants such as Guayule or extracts thereof are pyrolyzed in an inert nitrogen atmosphere inorganic salt melts such as a LiCl/KCl eutectic at a temperature of about 500 C The yield is over 60% of a highly aromatic, combustible hydrocarbon oil suitable for use as a synthetic liquid fuel

Official Gazette of the U S Patent and Trademark Office

**N81-17287#** Foster Associates, Inc., Washington, D C  
**A STATISTICAL STUDY OF COAL SULFUR VARIABILITY AND RELATED FACTORS. DOCUMENTATION FOR THE COAL SULFUR VARIABILITY DATA BASE AND ANALYTICAL PROGRAM Final Report**

George R Warholc John E Morton, Yimin Ngan, James E Spearman and Yvonne Harris May 1980 254 p refs  
 (Contract EPA-68-02-2592)  
 (PB81-111593 EPA-450/5-80-008B) Avail NTIS HC A12/MF A01 CSCL 05B

The data structure and the analytical program developed for a statistical study of coal sulfur variability and related factors are described GRA

**N81-17290#** Katzen (Raphael) Associates, Cincinnati, Ohio  
**FARM AND COOPERATIVE ALCOHOL PLANT STUDY: TECHNICAL AND ECONOMIC ASSESSMENT AS A COMMERCIAL VENTURE**

Oct 1980 241 p  
 (Contract NAFC-T-16076549)  
 (PB81-112641, NAFC-80-08) Avail NTIS HC A11/MF A01 CSCL 21D

The production of motor fuel grade (MFG) ethanol in small plants was evaluated Several parameters were explored as follows six agricultural locations, three plant sizes of 90,000, 300,000, and 900,000 gallons per year, five feedstocks, ethanol proof levels of 190 and 199, and by-product distillers grains either as whole stillage or prepared by various degrees of drying Plants were assumed to operate only 6000 hours per year (sugar beets only 3600 hours) because of limitations of time (or beet feedstock) Locally, available boiler fuels were chosen Simplified

processing was identified so as to be realistically within the time and experience available to a farmer operator GRA

**N81-17291#** Institute of Gas Technology, Chicago, Ill  
**EVALUATION OF COAL CONVERSION CATALYSTS Annual Report**

Anthony L Lee Gas Research Inst Mar 1980 16 p refs  
 (Contract GRI-5014-322-0139)  
 (PB81-111387, GRI-79/0077) Avail NTIS HC A02/MF A01 CSCL 21D

Three sulfur-resistant methanation catalysts were evaluated with feed mixtures simulating raw gasifier effluents for extended periods These catalysts were evaluated at 200, 400, and 1000 psig, 500, 700, 800, 900, 1000, 1100, and 1200F, 2000, 3000, and 4800 Scf/hr-cu ft, using feeds containing sulfurs (H<sub>2</sub>S, COS, CH<sub>3</sub>SH, C<sub>2</sub>H<sub>5</sub>SH, and C<sub>4</sub>H<sub>4</sub>S) up to 3 mole percent GRA

**N81-17292#** Institute of Gas Technology, Chicago, Ill  
**HYDROGASIFICATION OF OIL SHALE Final Report, Jan. 1972 - Dec. 1979**

Harlan L Feldkurchner Gas Research Inst Oct 1980 495 p refs Sponsored by Gas Research Inst  
 (IGT Proj 30520, AGA Proj 1U-4-7)  
 (PB81-114092, GRI-79/0064) Avail NTIS HC A21/MF A01 CSCL 21D

The technical and economic feasibility of producing synthetic pipeline gas from oil shale using the HYTORT Process were investigated With Western shale, 95% or more of the organic carbon could be converted to useful products, and with Eastern shales organic carbon conversions up to 90% were achieved In addition to showing the overall technical and economic feasibility of the process, this study showed the technical and economic feasibility of a novel, patented method for feeding shale to and from high-pressure reactors Based on the results obtained, it now appears that the Eastern U S shale resource (largely neglected in the past because of the low yield by the conventional Fischer Assay method) is now economically recoverable GRA

**N81-17293#** Institute of Gas Technology, Chicago, Ill  
**RAPID-RATE BITUMINOUS COAL GASIFICATION Annual Report, 1 Jan. - 31 Dec. 1979**

D Q Tran and A R Mikkelsen Gas Research Inst Oct 1980 27 p refs  
 (Contract GRI-5011-322-0082)  
 (PB81-114290, GRI-79/0074) Avail NTIS HC A03/MF A01 CSCL 21D

Cold flow model studies were conducted in a 914 cm testing tube to elucidate phenomena that cause divergence of coal particle trajectories and to define the optimum coal injector configuration Results of these studies showed that it is essential to wet screen the crushed coal and that for particles in the range of 74 to 250 microns, the particle trajectories were laminar at nozzle Reynolds numbers of up to 30 For these Reynolds numbers, the results showed that coal particles in the size range 44 to 105 micrometer (-40+325 mesh) can achieve smooth streamline flow patterns over a free fall distance greater than 76.2 cm (30 in) Large particles, up to 250 micrometer (-60 mesh), achieve even greater laminar free fall distances exceeding 914 cm GRA

**N81-17294#** Georgia Inst of Tech, Atlanta Engineering Experiment Station

**PYROLYTIC OILS: CHARACTERIZATION AND DATA DEVELOPMENT FOR CONTINUOUS PROCESSING Progress Report, Jun. 1976 - Mar 1980**

J A Knight, L W Elston, D R Hurst, and R J Kovac Aug 1980 199 p refs  
 (Grants EPA-R-804418 EPA-R-806403)  
 (PB81-110959, EPA-600/2-80-122) Avail NTIS HC A09/MF A01 CSCL 21D

Pyrolytic oils produced by the pyrolysis of forestry residues in a vertical bed, countercurrent flow reactor were thoroughly characterized The pyrolytic oils were produced in a 500 lb per hour pilot plant and in a 50 ton per day field development facility The overall chemical and physical properties were



determined by standard analytical techniques. The oils are dark brown to black with a burnt, pungent odor and have a boiling range of about 100 C to approximately 200 C at which point thermal degradation begins to occur. Pyrolytic oils contained phenolics, polyhydroxy neutral compounds and volatile acidic compounds. GRA

**N81-17295#** Dayton Univ., Ohio. Research Inst.  
**OBTAINING IMPROVED PRODUCTS FROM THE ORGANIC FRACTION OF MUNICIPAL SOLID WASTE** Final Report  
N L Hecht, D S Duvall, A A Ghazee, and B L Fox Aug 1980 126 p refs  
(Grant EPA-R-804421)  
(PB81-110918, EPA-600/2-80-121) Avail NTIS  
HC A07/MF A01 CSCL 21D

Several processes for the conversion of the organic fraction of municipal solid waste to a powder were investigated. The first phase was devoted to identifying processes that offer a potential for enhanced product recovery, an evaluation of chemical treatment to improve carbon recovery from pyrolysis processes, an evaluation of laboratory processes for the production of gaseous and liquid fuels, and a laboratory investigation of embrittlement processes for cellulose wastes. The second phase was concerned with further laboratory studies of the embrittlement process, pilot studies of the embrittlement process with shredded newsprint and refuse derived fuel, and an engineering and economic assessment for a plant to process powered cellulose for use as fuel. GRA

**N81-17296#** Catalytic, Inc., Philadelphia, Pa.  
**DEVELOPMENT OF CATALYSTS FOR COAL CONVERSION** Annual Report, 1979

John Happel, M A Hnatow, and Bajars Lamonis Jan 1980 24 p  
(Contract GRI-5014-322-0145)  
(PB81-111395, GRI-79/0115) Avail NTIS  
HC A02/MF A01 CSCL 21D

A major breakthrough was accomplished in the development of a new family of catalysts. These formulations have such high activity in the presence of high concentrations of CO<sub>2</sub> that they can be used in a process cycle to produce syngas with only one acid gas removal step. Steam consumption was reduced from that required in conventional methanation processes. Eighty-six new catalyst formulations and one hundred seventy-three reduction and evaluation tests were conducted. A wide variety of potential catalytic material was tested. The best catalysts were further tested at high pressure and with gas feeds simulating raw syngas from several different types of processes. GRA

**N81-17297#** General Electric Co., Philadelphia, Pa.  
**MARINE BIOMASS PROGRAM** Annual Report for 1979  
Alan N Tompkins 17 Oct 1980 115 p refs  
(Contract GRI-5010-323-0014)  
(PB81-113185, GRI-79/0079) Avail NTIS  
HC A06/MF A01 CSCL 21D

Integrated processes for production and harvesting of seaweed in the ocean and conversion of that seaweed to methane at costs competitive on a commercial scale, with other alternate energy production system are discussed. Experimental data show that controlled cultivation of macroalgae is feasible, and that fuels can be derived from marine biomass feedstocks. Extensive work with *Macrocystis* indicated that it can be grown in the open ocean when fertilized by artificially upwelled deep ocean waters. Kelp thus derived was shown to be favorably suited to methane production by the process of anaerobic conversion. This report expands upon this data base with emphasis of the critical parameters associated with biomass yield and overall energy balance. GRA

**N81-17510#** Institute of Gas Technology, Chicago, Ill.  
**ASSESSMENT OF METHANE HYDRATES** Final Report, Dec. 1978 - Jun. 1980  
Maurice I Scott, Philip L Randolph, and Jon B Pangborn Oct. 1980 94 p refs  
(Contract GRI-5011-310-0097)

(PB81-113300, GRI-79/0070) Avail NTIS  
HC A05/MF A01 CSCL 08G

Prospective geological sites for gas hydrate existence, are identified to be the Arctic permafrost zones and under the ocean in deep sediments. Concentrating on the permafrost zone of Alaska, a computer search of 430 wells identifies those where data was logged that might indicate hydrate interest. Records of one particular well, Northwest Eileen State Number 2, strongly suggest the existence of a major natural gas hydrate deposit. An estimate of gas in place for the area around this well leads to a potential resource of 68 billion cubic feet per square mile. This is five times the amount of gas that would have been present if the depth interval were a conventional gas reservoir at hydrostatic pressure. Developed evidence strongly supports the existence of major quantities of natural gas trapped as hydrate (and possibly trapped below hydrate layers) in various regions of North America. GRA

**N81-17585#** California Univ., Berkeley. Lawrence Berkeley Lab.  
**CHARACTERIZATION OF SOLID WASTE CONVERSION AND COGENERATION SYSTEMS**

Washington DOE Sep 1980 227 p refs  
(Contract W-7405-eng-48)  
(DOE/EV-0105) Avail NTIS HC A11/MF A01

Three basic technologies for recovering energy from Municipal Solid Waste (MSW) were considered: direct combustion using a waterwall incinerator in which the heat from burning refuse is converted to steam by circulating water in steel tubes jacketing the interior of the incinerator; manufacture of a relatively uniform shredded, pulverized or pelleted refuse-derived fuel (RDF) for supplemental firing in a utility boiler; and pyrolysis or destructive distillation of MSW to extract a low-Btu fuel gas. While resource recovery and energy recovery systems can be installed independently, the processes described include both energy and resource recovery systems as well as necessary pollution control equipment for gaseous emissions. DOE

**N81-17601#** Midwest Research Inst., Golden, Colo. Solar Energy Research Inst.  
**COMBUSTION, PYROLYSIS, GASIFICATION, AND LIQUEFACTION OF BIOMASS**

T B Reed Sep 1980 15 p refs Presented at Energy from Biomass Conf., Brighton, England, 4-7 Nov 1980  
(Contracts DE-AC02-77CH-00178; EG-77-C-01-4042)  
(SERI/TP-622-893; CONF-801130) Avail NTIS  
HC A02/MF A01

The advantages of biomass as a feedstock are examined and biomass conversion techniques are described. Combustion is the simplest method of producing heat from biomass, using either the traditional fixed bed combustion on a grate or the fluidized bed and suspended combustion techniques now being developed. Pyrolysis of biomass is a particularly attractive process if all three products gas, wood tars, and charcoal can be used. Gasification of biomass with air is perhaps the most flexible and best developed process for conversion of biomass to fuel, yielding a low energy gas that can be burned in existing gas/oil boilers or in engines. Oxygen gasification yields a gas with higher energy content that can be used in pipelines or to fire turbines. In addition, this gas can be used for producing methanol, ammonia, or gasoline by indirect liquefaction. Fast pyrolysis of biomass produces a gas rich in ethylene that can be used to make alcohols or gasoline. Finally, treatment of biomass with high pressure hydrogen can yield liquid fuels through direct liquefaction. DOE

**N81-17603#** Brookhaven National Lab., Upton, N Y. Dept. of Energy and Environment

**CARBON MONOXIDE: RESOURCE OF THE FUTURE**  
R S Sapienza, W A R Siegrist, R I Goldberg, and B Easterling  
1980 9 p refs Presented at the 3rd Intern. Coal Util. Exhibition and Conf., Houston, Tex., 18-20 Nov. 1980  
(Contract DE-AC02-76CH-00016)  
(BNL-28576, CONF-801142-1) Avail NTIS  
HC A02/MF A01

Opinions and ideas under study by the Catalysis Group at Brookhaven National Laboratory (BNL) on the effective production

## 04 FUELS AND OTHER SOURCES OF ENERGY

and use of carbon monoxide and synthesis gas are described. The use of carbon monoxide is important for the successful introduction of coal for fuel production and for the petrochemical industry. The kinetics of fast producer reactions and slow producer reactions are described. DOE

**N81-17640#** Southern Research Inst., Birmingham, Ala  
**A MANUAL FOR THE USE OF ELECTROSTATIC PRECIPITATORS TO COLLECT FLY ASH PARTICLES** Final Report, Dec. 1978 - Feb. 1980  
Jack R. McDonald and Alan H. Dean, May 1980 785 p refs (Contract EPA-68-02-2114)  
(PB81-112757, SORI-EAS-80-066, Rept-3540-7, EPA-600/8-80-025) Avail NTIS HC A99/MF A01 CSCL 13B

The collection of fly ash particles (produced by the combustion of pulverized coal) by electrostatic precipitation (ESP) is considered. The manual covers fundamentals of ESP, mechanical and electrical components of ESP's, factors influencing ESP performance, measurement of important parameters, advantages and disadvantages of cold-side, hot-side, and flue-gas-conditioned ESPs, safety aspects, maintenance, troubleshooting, the use of a computer model for ESP, and features of a well-equipped ESP. Studies considered in this report include those, by various individuals and organizations, on comprehensive performance evaluations of full-scale ESPs, in situ and laboratory measurement of fly ash resistivity, rapping/reentrainment, evaluations of the effects of flue gas conditioning agents on ESP performance, fundamental operation of hot-side ESPs, basic laboratory experiments, and development of a mathematical model of ESP. GRA

**N81-17642#** Institute of Gas Technology, Chicago, Ill  
**HIGH-TEMPERATURE HIGH-PRESSURE PARTICULATE REMOVAL IN COAL GASIFICATION** Final Report, 1 Sep. 1978 - 1 Jan. 1980  
William F. Rush, Jr. and Michael Onischak, Gas Research Inst., Oct. 1980 50 p refs. Sponsored by Gas Research Inst. (PB81-113664; GRI-78/0046) Avail NTIS HC A03/MF A01 CSCL 13B

Sonic agglomeration and crossflow filtration were evaluated as techniques for removing fine particulates from high temperature, high pressure gas streams. Cold flow tests provided information about the feasibility of solid membrane crossflow filtration and sonic agglomeration to remove 1 to 10 micron particulates from dust-laden gas streams. Subsequent tests were conducted in high temperature high pressure equipment at operating conditions up to 265 C (509F), and 7000 kPa (1999 psia). Solid membrane crossflow filtration removed at least 98 percent of the particulates from the 95% fraction of entering gas. GRA

**N81-17684#** Water and Power Resources Service, Denver, Colo  
Engineering and Research Center  
**WIND RESOURCE OF THE AREA SURROUNDING MEDICINE BOW, WYOMING**  
Aug. 1980 39 p refs  
(PB81-109621) Avail NTIS HC A03/MF A01 CSCL 04B

Five high wind sites were instrumented to record wind resource data, with the ultimate goal of installing a large number of wind turbine generators, i.e., establishing a windfarm. Integration of windpower and hydroelectric power are accomplished by tying the windfarm output into an existing hydropower electrical grid. The data is presented in the form of plots of monthly mean windspeed, duration windspeed exceeded, windspeed frequency, and polar wind roses. GRA

**N81-18057#** Michigan Univ., Ann Arbor W. E. Lay Automotive Lab  
**LIGHT AIRCRAFT ENGINES, THE POTENTIAL AND PROBLEMS FOR USE OF AUTOMOTIVE FUELS. PHASE 1 LITERATURE SEARCH** Final Report, Oct. 1979 - Sep. 1980  
D. J. Patterson, K. Morrison, M. Remondino, and T. Slopsma, Dec. 1980 122 p refs  
(Contract DOT-FA79NA-6083)  
(AD-A094154, FAA-CT-81-150) Avail NTIS HC A06/MF A01 CSCL 21/4

A comprehensive data research and analysis for evaluating the use of automotive fuels as a substitute for aviation grade fuel by piston-type general aviation aircraft engines is presented. Historically known problems and potential problems with fuels were reviewed for possible impact relative to application to an aircraft operational environment. This report reviews areas such as fuel specification requirements, combustion knock, preignition, vapor lock, spark plug fouling, additives for fuel and oil, and storage stability. GRA

**N81-18104** Utah State Univ., Logan  
**AN EVALUATION OF POLYCYCLIC AROMATIC HYDROCARBONS FROM PROCESSED OIL SHALES** Ph.D. Thesis  
David Lawrence Maase, 1980 202 p  
Avail Univ. Microfilms Order No. 8104112

The characterization of organic residue associated with processed oil shale was studied in order to aid in the evaluation of the potential impact of oil shale development. A forecast of oil shale development in the White River Basin was projected and hydrological and geological parameters pertinent to estimations of polycyclic aromatic hydrocarbon (PAH) flux were presented. Organic residues from processed oil shales were characterized with specific attention to PAH. Processed oil shale samples were extracted by using organic solvents in a Soxhlet apparatus and by mixing shale samples with water. Reported organic chemistry isolation and identification regimes (applicable to gas, liquid and solid samples) are summarized in a tabular format. More than 100 organic compounds from processed oil shales were identified by gas chromatography coupled with mass spectrometry. Dissert. Abstr.

**N81-18117** Washington State Univ., Pullman  
**THE DETECTION OF TRACE ELEMENT SPECIES IN SOLVENT REFINED COAL** Ph.D. Thesis  
Carl Steven Weiss, 1980 132 p  
Avail Univ. Microfilms Order No. 8104155

The separation of solvent refined coals 1 and 2 were performed using a nine step solvent gradient separation on a silica support. The solvent refined coal 1 solid was subjected to solvent extraction with tetrahydrofuran before the separation. The solvent refined coal 2 was filtered prior to the separation. Each of the fractions generated was subjected to instrumental neutron activation analysis. In addition, two of the more functional fractions from the solvent refined coal 1 silica separation were fractionated based on molecular weight using gel permeation chromatography. These fractions were also analyzed by instrumental neutron activation analysis. Atomic absorption spectroscopy was used to determine Ca, Mg, Fe, and Be in some of the fractions generated, as an element selective detector for the effluent of a gel permeation chromatographic column. Dissert. Abstr.

**N81-18118** Utah Univ., Salt Lake City  
**CATALYTIC CRACKING OF HYDROTREATED COAL LIQUIDS AND RELATED POLYCYCLIC NAPHTHENES AND NAPHTHENOAROMATICS** Ph.D. Thesis  
Sunder Swaminathan, 1980 227 p  
Avail Univ. Microfilms Order No. 8103900

A systematic catalytic cracking investigation of hydrotreated coal derived liquids was conducted and related model compounds found in such liquids were developed. The studies were performed in a flow reactor, using REY type zeolite containing catalysts. The following types of starting feedstocks were employed: (1) polycyclic naphthenes viz. decalin and perhydrophenanthrene; (2) polycyclic naphthenoaromatics, viz. tetralin, 1,2,3,4,5,6,7,8-octahydroanthracene and 9,10-dihydrophenanthrene; and (3) hydrotreated SRC-2 liquids. Changes in product composition as a function of experimental variables (temperature, space velocity and catalyst type) were investigated and mechanistic aspects of the cracking reactions elucidated. Dissert. Abstr.

**N81-18149#** Michigan Univ., Ann Arbor Gas Dynamics Labs  
**INITIATION OF DETONATION IN UNCONFINED NATURAL GAS-AIR CLOUDS** Final Report  
J. A. Nicholls and M. Sichel, May 1980 42 p refs  
(GSRI Proj. 5014-363-0132)

(PB81-113292, UMICH-320639-F, GRI-79/0068) Avail NTIS HC A03/MF A01 CSCL 21D

The possibility that an unconfined combustible cloud arising from the release of liquefied natural gas could detonate is evaluated. A sector of a cylindrical cloud was modeled by a special shock tube. Blast waves of variable strength were transmitted into the combustible mixture. Since methane air couldn't be detonated, the critical initiation energy requirements for various stoichiometric methane oxygen nitrogen mixtures were determined and then extrapolated to determine the value for methane air. Extremely high values were indicated. The analysis allowed planar, cylindrical, and spherical geometries to be considered. GRA

**N81-18211** Stevens Inst of Tech, Hoboken, N J  
**KINETICS OF DONOR-SOLVENT LIQUEFACTION OF COAL IN NONISOTHERMAL EXPERIMENTS** Ph.D. Thesis

Govindan Mohan 1980 203 p

Avail Univ Microfilms Order No 8100856

Coal was liquefied in a batch reactor under nonisothermal conditions from 330 to 450 C using tetralin as a hydrogen donor solvent at total pressures up to 70 atm and reaction times from 5 to 60 minutes. A separation scheme was developed using liquid solid chromatography on alumina to separate the liquefied products into mixtures of classes of compounds referred to as aromatics, ethers, nitrogens, hydroxyls and multifunctionals. The chemical identities of these classes of compounds were determined by infrared and nuclear magnetic resonance spectroscopy. Using these classes of compounds several kinetic models were tested to fit experimental concentration time profiles using a nonisothermal, nonlinear parameter estimation technique. The multifunctional compounds were considered as reaction intermediates which then decomposed reversibly into aromatics, ethers, nitrogens and hydroxyls. It was found that this kinetic model predicts concentration time profiles satisfactorily. Dissert Abstr

**N81-18212\*** BDM Corp, Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS. VOLUME 1: EXECUTIVE SUMMARY** Final Report

31 Dec 1980 56 p 10 Vol

(Contract NAS8-33824)

(NASA-CR-161653, BDM/H-80-800-TR-Vol-1) Avail NTIS HC A04/MF A01 CSCL 21D

Feasibility analyses and systems engineering studies for a 20,000 tons per day medium Btu (MBG) coal gasification plant to be built by TVA in Northern Alabama were conducted. Major objectives were as follows: (1) provide design and cost data to support the selection of a gasifier technology and other major plant design parameters, (2) provide design and cost data to support alternate product evaluation, (3) prepare a technology development plan to address areas of high technical risk, and (4) develop schedules, PERT charts, and a work breakdown structure to aid in preliminary project planning. Volume one contains a summary of gasification system characterizations. Five gasification technologies were selected for evaluation: Koppers-Totzek, Texaco, Lurgi Dry Ash, Slagging Lurgi, and Babcock and Wilcox. A summary of the trade studies and cost sensitivity analysis is included. E D K

**N81-18213\*** BDM Corp, Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS. VOLUME 2** Final Report

31 Dec 1980 311 p 10 Vol

(Contract NAS8-33824)

(NASA-CR-161654, BDM/H-80-800-TR-Vol-2) Avail NTIS HC A14/MF A01 CSCL 21D

The major design related features of each generic plant system were characterized in a catalog. Based on the catalog and requirements data approximately 17 designs and cost estimates were developed for MBG and alternate products. A series of generic trade studies was conducted to support all of the design studies. A set of cost and programmatic analyses were conducted to supplement the designs. The cost methodology employed for the design and sensitivity studies was documented and implemented in a computer program. Plant design and construction schedules were developed for the K-T, Texaco, and B&W MBG

plant designs. A generic work breakdown structure was prepared, based on the K-T design to coincide with TVA's planned management approach. An extensive set of cost sensitivity analyses was completed for K-T, Texaco, and B&W design. Product price competitiveness was evaluated for MBG and the alternate products. A draft management policy and procedures manual was evaluated. A supporting technology development plan was developed to address high technology risk issues. The issues were identified and ranked in terms of importance and tractability and a plan developed for obtaining data or developing technology required to mitigate the risk. E D K

**N81-18214\*** BDM Corp, Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS. APPENDIX A. COAL GASIFICATION CATALOG** Final Report

31 Dec 1980 221 p refs 10 Vol

(Contract NAS8-33824)

(NASA-CR-161655, BDM/H-80-800-TR-App-A) Avail NTIS HC A10/MF A01 CSCL 21D

The scope of work in preparing the Coal Gasification Data Catalog included the following subtasks: (1) candidate system subsystem definition, (2) raw materials analysis, (3) market analysis for by-products, (4) alternate products analysis, (5) preliminary integrated facility requirements. Definition of candidate systems/subsystems includes the identity of and alternates for each process unit, raw material requirements, and the cost and design drivers for each process design. E D K

**N81-18215\*** BDM Corp, Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS. APPENDIX B. MEDIUM Btu GAS DESIGN** Final Report

31 Dec 1980 275 p 10 Vol

(Contract NAS8-33824)

(NASA-CR-161656, BDM/H-80-800-TR-App-B) Avail NTIS HC A12/MF A01 CSCL 21D

A four module 20,000 TPD, based on KT coal gasification technology was designed. The plant processes Kentucky No. 9 coal with provisions for up to five percent North Alabama coal. Medium Btu gas with heat content of 305 Btu/SCF and not more than 200 ppm sulfur is the primary plant product. Sulfur is recovered for scale as prilled sulfur. Ash disposal is on site. The plant is designed for zero water discharge. Trade studies provided the basis for not using boiler produced steam to drive prime movers. Thus process derived steam in excess of process requirements is superheated for power use in prime movers. Electricity from the TVA grid is used to supply the balance of the plant prime mover power requirements. A study of the effect of mine mouth coal cleaning showed that coal cleaning is not an economically preferred route. The design procedure involved defining available processes to meet the requirements of each system, technical/economic trade studies to select the preferred processes, and engineering design and flow sheet development for each module. Cost studies assumed a staggered construction schedule for the four modules beginning spring 1981 and a 90% on stream factor. E D K

**N81-18216\*** BDM Corp, Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS. APPENDIX C. ALTERNATE PRODUCT FACILITY DESIGNS** Final Report

31 Dec 1980 221 p refs 10 Vol

(Contract NAS8-33824)

(NASA-CR-161657, BDM/H-80-800-TR-APP-C) Avail NTIS HC A10/MF A01 CSCL 21D

The study of the production of methane, methanol, gasoline, and hydrogen by an add-on facility to a Koppers-Totzek based MBG plant is presented. Applications to a Texaco facility are inferred by evaluation of delta effects from the K-T cases. The production of methane from an add-on facility to a Lurgi based MBG plant and the co-production of methane and methanol from a Lurgi based system is studied. Studies are included of the production of methane from up to 50 percent of the MBG produced in an integrated K-T based plant and the production of methane from up to 50 percent of the MBG produced from

## 04 FUELS AND OTHER SOURCES OF ENERGY

an integrated plant in which module 1 is based on K-T technology and modules 2, 3, and 4 are based on Texaco technology

E D K

**N81-18217\*#** BDM Corp. Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS APPENDIX D COST AND ECONOMIC STUDIES Final Report**

31 Dec 1980 636 p 10 Vol

(Contract NAS8-33824)

(NASA-CR-161658, BDM/H-80-800-TR-App-D) Avail NTIS HC A99/MF A01 CSDL 21D

The detailed cost estimate documentation for the designs prepared in this study are presented. The include (1) Koppers-Totzek, (2) Texaco (3) Babcock and Wilcox, (4) BGC-Lurgi, and (5) Lurgi. The alternate product cost estimates include (1) Koppers-Totzek and Texaco single product facilities (methane, methanol, gasoline, hydrogen) (2) Koppers-Totzek SNG and MBG, (3) Koppers-Totzek and Texaco SNG and MBG, and (4) Lurgi-methane and Lurgi-methane and methanol

E D K

**N81-18218\*#** BDM Corp. Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS APPENDIX E COST ESTIMATION AND ECONOMIC EVALUATION METHODOLOGY Final Report**

31 Dec 1980 71 p refs 10 Vol

(Contract NAS8-33824)

(NASA-CR-161659, BDM/H-80-800-TR-App-E) Avail NTIS HC A04/MF A01 CSDL 21D

The cost estimation and economic evaluation methodologies presented are consistent with industry practice for assessing capital investment requirements and operating costs of coal conversion systems. All values stated are based on January 1980 dollars with appropriate recognition of the time value of money. Evaluation of project economic feasibility can be considered a two step process (subject to considerable refinement). First the costs of the project must be quantified and second, the price at which the product can be manufactured must be determined. These two major categories are discussed. The summary of methodology is divided into five parts: (1) systems costs, (2) instant plant costs, (3) annual operating costs, (4) escalation and discounting process, and (5) product pricing

E D K

**N81-18219\*#** BDM Corp. Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS APPENDIX F: CRITICAL TECHNOLOGY ITEMS/ISSUES Final Report**

31 Dec 1980 48 p refs 10 Vol

(Contract NAS8-33824)

(NASA-CR-161660, BDM/H-80-800-TR-App-F) Avail NTIS HC A17/MF A01 CSDL 21D

Critical technology items and issues are defined in which there is a need for developmental research in order to assure technical and economic success for the state of the art of coal gasification in the United States. Technology development needs for the main processing units and the supporting units are discussed. While development needs are shown for a large number of systems, the most critical areas are associated with the gasifier itself and those systems which either feed the gasifier or directly receive products from the gasifier

E D K

**N81-18220\*#** BDM Corp. Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS APPENDIX G COMMERCIAL DESIGN AND TECHNOLOGY EVALUATION Final Report**

31 Dec 1980 29 p 10 Vol

(Contract NAS8-33824)

(NASA-CR-161661, BDM/H-80-800-TR-App-G) Avail NTIS HC A03/MF A01 CSDL 21D

A technology evaluation of five coal gasifier systems (Koppers-Totzek, Texaco, Babcock and Wilcox, Lurgi and BGC/Lurgi) and procedures and criteria for evaluating competitive commercial coal gasification designs is presented. The technology evaluation is based upon the plant designs and cost estimates developed by the BDM-Mittelhauser team

E D K

**N81-18221\*#** BDM Corp. Huntsville, Ala  
**COAL GASIFICATION SYSTEMS ENGINEERING AND ANALYSIS APPENDIX H WORK BREAKDOWN STRUCTURE Final Report**

31 Dec 1980 142 p 10 Vol

(Contract NAS8-33824)

(NASA-CR-161662, BDM/H-80-800-TR-App-H) Avail NTIS HC A17/MF A01 CSDL 21D

A work breakdown structure (WBS) is presented which encompasses the multiple facets (hardware, software services, and other tasks) of the coal gasification program. The WBS is shown to provide the basis for the following management and control, cost estimating, budgeting and reporting, scheduling activities, organizational structuring, specification tree generation, weight allocation and control, procurement and contracting activities, and serves as a tool for program evaluation

R C T

**N81-18223#** Royal Inst of Tech., Stockholm (Sweden)  
**GASIFICATION AND DESULFURIZATION OF COAL BY INJECTION INTO MOLTEN METALS**

Anders Sundstroem May 1980 46 p refs

(STU-78-4560) Avail NTIS HC A03/MF A01

The desulfurization and gasification of coal was investigated on 10 resp. 20 kg scale by injecting coal powder with and without oxygen into inductively heated copper melts at approximately 1300 C. The variable parameters were the depth and temperature of the bath, the flow of oxygen, particle size and the contents of sulfur of the bath. The results show that Zn, Mn, and Pb are theoretically unsuitable as gasification agents, whereas the potential of Ni is considerably greater. Copper seems to be more suitable for the desulfurization of coal than for the gasification, especially owing to big losses of coal dust during gasification. These are probably due to deficient solubility of coal in the gas which was produced at gasification had very divergent CO/CO<sub>2</sub> ratios and very low sulfur containing gases, less than 175 ppm. There is a slight tendency of particle size dependent production of CO. This dependence could not be confirmed when the coal powder was desulfurized

DOE

**N81-18224#** Department of Energy, Washington, D C  
**GENERATOR GAS OPERATION OF MOTOR VEHICLES**

1981 25 p Transl into ENGLISH from Swedish article

(DOE-TR-219) Avail NTIS HC A02/MF A01

The Swedish history, development, and status of motor vehicles which operate on generator gas produced from burning wood chips are discussed. These vehicles, e.g. passenger cars, trucks, buses, tractors, are modified to accommodate the attached generator gas unit and to permit combustion of the generator gas in the vehicle engine. Data are included on fuel consumption for specific types of wood and for types of vehicles, the design and operation of generator gas equipment, and safety recommendations

DOE

**N81-18226#** UOP, Inc., Des Plaines, Ill  
**UPGRADING OF COAL LIQUIDS: UPGRADING DISTILLATES FROM COAL LIQUEFACTION Annual Report, 31 Jan 1979 - 31 Jan 1980**

A J deRossett, F J Riedl, L Hilfman, and R W Johnson Oct 1980 96 p refs

(Contracts DE-AC01-77ET-10131, EF-77-C-01-2566)

(FE-2566-42) Avail NTIS HC A05/MF A01

Coal derived naphthas from the H-Coal and Exxon donor solvent (EDS) and SRC-2 processes were hydrotreated and reformed in research pilot plants to 100 research octane number (RON) gasoline. Conditions for hydrotreating were relatively severe compared to those required to treat a Middle East naphtha. Reforming proceeded at relatively mild conditions. Hydrogen yield was greatly in excess of the amount required for hydrotreating. The 400 F(+) distillates from the H-Coal and EDS processes were converted in research pilot plants by hydrotreating, hydrocracking and fluid catalytic cracking (FCC). Hydrotreating alone gave high yields of environmentally acceptable No. 2 fuel oil. Hydrocracking to gasoline proceeded at operating conditions somewhat more severe than required for the Middle East gas oil. Hydrogen consumption was high. It was found that a portion of the hydrogen can be recovered by reforming the hydrocracked

naphtha to 100 RON gasoline. Additional hydrogen can potentially be recouped by steam reforming light gases DOE

**N81-18227#** Purdue Univ., Lafayette Ind. School of Chemical Engineering

**PHASE EQUILIBRIUM IN COAL LIQUEFACTION PROCESSES Final Report**

K C Chao, H M Lin, G D Nageshwar, H Y Kim, J L Oliphant, H M Sebastian, and J J Simnick Oct 1980 182 p refs. Sponsored by Electric Power Research Inst (EPRI Proj 367-2)

(EPRI-AP-1593) Avail NTIS HC A09/MF A01

Gas liquid equilibria were determined in simulation of coal liquefaction process conditions in mixtures of light gases + heavy hydrocarbons (polynuclear aromatics, N, S, and O containing aromatics, some paraffins, and naphthenes). The mixture systems investigated were 32 binary mixture systems of a light gas (hydrogen, methane, or carbon dioxide) + a heavy hydrocarbon, 2 ternary mixture systems of hydrogen + two heavy hydrocarbons, 2 ternary mixture systems of hydrogen + methane + a heavy hydrocarbon, 5 complex mixture systems of hydrogen + a coal oil fraction, and 4 complex mixture systems of methane + a coal oil fraction. Equilibrium data were determined at pressures up to 250 atm and temperatures up to 460(0) C which was substantially above the upper limit of previously reported data. A flow apparatus of special design made possible the attainment of the elevated temperatures at high pressures. Vapor pressures were determined for eight hydrocarbons at superatmospheric pressures using the same apparatus. A solubility parameter based correlation was developed for the solubility of hydrogen. The hydrogen, methane, and carbon dioxide data was analyzed and correlated with various degrees of success with the Soave equation of state, and Boublik-Alder-Chen-Kreglewski equation of state.

DOE

**N81-18228#** Oak Ridge National Lab., Tenn.

**INDIRECT CONVERSION OF COAL TO METHANOL AND GASOLINE: PRODUCT PRICE VS PRODUCT SLATE**

R M Wham, D J McCracken (Fluor Engineers and Constructors, Inc., Houston, Tex.), and R C Forrester III (Fluor Engineers and Constructors, Inc., Irvine Calif.) 1980 23 p refs. Presented at Coal Technol '80, 3rd Intern Coal Utilization Exhibition and Conf., Houston, Tex., 18-20 Nov 1980

(Contract W-7405-eng-26)

(CONF-801142-3) Avail NTIS HC A02/MF A01

The technical feasibility, economic competitiveness, and environmental acceptability of selected indirect coal liquefaction processes are described. Particular emphasis is placed on production of methanol as a principal product or methanol production for conversion to gasoline. Potential uses for the methanol are combustion in peaking type turbines or blending with gasoline to yield motor fuel. Conversion of methanol to gasoline is accomplished through the use of the Mobil methanol to gasoline (MTG) process. The conceptual designs are described for the indirect conversion of a Western subbituminous coal to either methanol or gasoline. The bases for the conceptual designs are given. The case designations are methanol production for turbine grade fuel, methanol production for gasoline blending, gasoline production with coproduction of SNG, and gasoline production maximized.

DOE

**N81-18230#** Department of Energy Bartlesville Okla. Energy Technology Center

**FLEET TRAILS USING METHANOL/GASOLINE BLENDS**  
Ken R Stamper 1980 10 p refs. Presented at 4th Intern Symp on Alcohol Fuels Technol Sao Paulo Brazil 5 Oct 1980

(CONF-801030-4) Avail NTIS HC A02/MF A01

Seven current production automobiles were used in a fleet study to determine the long term effects and end use influences of using 10% methanol/90% gasoline blends as automotive fuels. The vehicles were operated over a course designed to accumulate mileage at a rate and duty cycle similar to automobiles used by the private sector in the US. Vehicle tests were run at each 5000 mile accumulation interval to determine the fuel economy and the mass of pollutant emissions generated by the vehicles.

operating on the 10% methanol blend and to establish a basis for comparison on an unleaded, low octane Indolene. These data showed an average reduction in carbon monoxide emissions associated with the use of the 10% methanol blend. At the end of 50,000 miles of operation on the blend, the engine and fuel handling systems in four of the vehicles were disassembled for inspection and rating to identify any significant wear or materials incompatibility problems associated with long term operation on the methanol blend. Other significant observations as well as the results are reported.

DOE

**N81-18231#** Chevron Research Co., Richmond, Calif.  
**REFINING AND UPGRADING OF SYNFUELS FROM COAL AND OIL SHALES BY ADVANCED CATALYTIC PROCESSES**  
Quarterly Report, Apr. - Jun. 1980

R F Sullivan and D J O'Rear Jul 1980 27 p

(Contracts DE-AC01-76ET-10532 EF-76-C-01-2315)

(FE-2315-55) Avail NTIS HC A03/MF A01

The relationship between the measured cetane number and the calculated cetane index (ASTM D 976-66) was examined for 11 coal derived diesel fuels. The cetane index is consistently less than the measured cetane number. Octyl nitrate was shown to be an effective cetane number improver for coal derived diesel fuels. For a 40.2 cetane number base fuel which contained 2.4 vol % aromatics, 0.1 vol % octyl nitrate improved the cetane number by 3.5 and 0.3 vol % octyl nitrate improved the cetane number by 8.1. Aromatics were shown to inhibit the octyl nitrate as a cetane improver. In a short test, the feasibility of refining Wyodak H-Coal syncrude to a No. 2 fuel at low pressures was examined. Product made at 1000 psig total pressure (900 psia hydrogen) and 50% aromatics was stable. Products made at 500 psig total pressure (about 400 psia hydrogen) was unstable. Denitrified Wyodak H-Coal syncrude was hydrocracked in an extinction recycle pilot plant. The yields from this plant are very similar to the yields obtained from the denitrified Illinois H-Coal on SRC-2 syncrudes. This task will complete our experimental program on the Wyodak H-Coal syncrudes.

DOE

**N81-18232#** Oak Ridge National Lab., Tenn. Office of Coal Research

**HYDROCARBONIZATION RESEARCH COMPLETION REPORT**

E L Youngblood, H D Cochran, Jr., P R Westmoreland, C H Brown, Jr., G E Oswald, and R E Barker Jan 1981 134 p refs.

(Contract W-7405-eng-26)

(ORNL/TM-6693) Avail NTIS HC A07/MF A01

Hydrocarbonization is a relatively simple process used for producing oil substitute natural gas, and char by heating coal under a hydrogen rich atmosphere. This report describes studies that were performed in a bench scale hydrocarbonization system at Oak Ridge National Laboratory (ORNL) during the period 1975 to 1978. The results of mock up studies, coal metering valve and flowmeter development, and supporting work in an atmospheric hydrocarbonization system are also described. Oil, gas, and char yields were determined by hydrocarbonization of coal in a 0.1 m diam fluidized bed reactor operated at a pressure of 2170 kPa and at temperatures ranging from 694 to 854 K. The nominal coal feed rate was 4.5 kg/h. Wyodak subbituminous coal was used for most of the experiments. A maximum oil yield of approximately 21% based on moisture and ash free (maf) coal was achieved in the temperature range of 810 to 840 K. Recirculating fluidized bed, uniformly fluidized bed, and rapid hydropyrolysis reactors were used.

DOE

**N81-18233#** Oak Ridge National Lab., Tenn.  
**FUEL ALCOHOL EXTRACTION TECHNOLOGY COMMERCIALIZATION CONFERENCE**

A L Compere, W L Griffith, and J M Googin! 2 Dec 1980 30 p refs. Presented at Fuel Alcohol Extraction (FUALEX) Method of Neutral Solvents Extraction Technol. Commercialization Conf., Oak Ridge, Tenn., 2 Dec 1980

(Contract W-7405-eng-26)

(CONF-801212) Avail NTIS HC A03/MF A01

The fuaalex or fuel alcohol extraction process, uses a combination of hydrocarbon and surfactant to remove neutral solvents, such as butanol, ethanol, isopropanol, and acetone, from

## 04 FUELS AND OTHER SOURCES OF ENERGY

aqueous solution. The hydrocarbon extractants used may be fuels such as gasoline, furnace oil, and diesel fuel. Surfactant concentrations ranging from 1 to 10 g/liter and hydrocarbon ranging from 0.01 to 1 liter per liter aqueous alcohols solution were investigated. The fuelux process was tested on solutions which contain 5 percent total neutral solvents, since this is near maximum for the fermentation product stream. The neutral solvents are removed in the form of an emulsion which is white to light bluish in the visible range. The emulsion has potential for direct use in fuels or as an intermediate for obtaining purified solvents. DOE

### **N81-18234# TRW Systems Group, McLean, Va ENERGY BALANCES IN THE PRODUCTION AND END-USE OF METHANOL DERIVED FROM COAL**

10 Dec 1980 63 p refs

(Contract DE-AC01-79PE-70151)

(DOE/PE-70151/T4) Avail NTIS HC A04/MF A01

Petroleum gain (petroleum only), net premium fuel gain (natural gas and petroleum), and net energy gain (includes all fuels, does not include free energy from Sun). The base case selected for evaluation was an energy efficient coal to methanol plant located in Montana/Wyoming and using the Lurgi conversion process. The following variations of the base coal methanol case are also analyzed: gasoline from coal with methanol as an intermediate step, and methanol from coal. Computations are made for the product methanol as a replacement for unleaded gasoline in a conventional spark ignition engine and as a chemical feedstock. Regarding mileage of methanol/gasoline compared to that of regular unleaded gasoline, mileage of the two fuels equal, mileage 4 percent better with gasohol, and mileage 4 percent worse with gasohol. DOE

### **N81-18235# Systems Science and Software, La Jolla, Calif COMPUTER MODELING OF COAL GASIFICATION REAC- TORS, YEAR 4 Annual Report, Oct. 1978 - Sep. 1979**

T R Blake, D H Brownell, Jr., P J Chen, J L Cook, and G P Schneyer Mar 1980 62 p refs

(Contract DE-AC21-78ET-10242)

(FE-1770-86, SSS-R-80-4416) Avail NTIS  
HC A04/MF A01

The application of the fluidized bed computer model to specific gasifier systems was investigated. These simulations included jet penetration of bubble formation, solids mixing and product gas composition for a six-inch diameter bench scale reactor, and cold flow predictions of jet penetration and solids recirculation in two agglomerating combustor/gasifier reactors. The fluidized bed coal gasifier computer model was designed to provide a description of the hydrodynamic mixing and coupled chemistry within the reactor. A full description of the model is presented. DOE

### **N81-18236# United States Steel Corp., Monroeville, Pa USE OF COAL INJECTION AND OXYGEN IN A BLAST FURNACE TO PRODUCE FUEL GAS Final Report**

Dec 1980 37 p refs

(Contract DE-AC07-76ID-01570)

(IDO-10089) Avail NTIS HC A03/MF A01

The feasibility of operating a blast furnace with coal injection and oxygen to produce fuel gas was evaluated. Probable operating conditions were based on United States Steel Corporation's experience with coal injection on an experimental blast furnace. It was found that the cost of the gas produced would, as expected, be sensitive to the costs of coal, coke, and oxygen used and also to the capability of the process to burn coal instead of coke. To be economically viable, the medium Btu produced [270 Btu per standard cubic foot (Btu/scf)] from coal, coke, and oxygen at \$30 per ton (\$/T), \$100/T, and \$48.60/T, respectively, would have to have a selling price between \$6.74 per million Btu (\$/MMBtu) and \$7.38/MMBtu depending on the coal-to-coke ratio assumed to be achieved in the process. Because these selling prices are considerably higher than current costs for natural gas or fuel oil, it would appear that the operation of a blast furnace as a fuel gas producer would not be economically viable at this time. DOE

**N81-18237# Department of Energy, Bartlesville, Okla Bartlesville Energy Technology Center**

### **COMPARISONS OF GASOHOL AND GASOLINE IN LABORATORY AND FIELD TRIALS**

J R Allsup and M D Gurney 18 Dec 1980 7 p refs  
Presented at the 4th Intern Symp on Alc Fuels Technol., Sao Paulo, Brazil 5-8 Oct 1980

(CONF-801030-3) Avail NTIS HC A02/MF A01

An effort was made to obtain comparative field experience with gasohol and with gasoline used in controlled tests with units of a commercial service fleet. A total of 110 vehicles were involved with half of the units operated using a control gasoline and the other half operated using gasohol. At an appropriate point in the tests, fuels were switched so that both gasohol and gasoline related data were obtained from all individual test units. Vehicle operators observed and recorded information from the vehicles during use in normal field service. Vehicle drivers rated driveability and recorded the nature and circumstances of vehicle malfunction. Service records provided information on fuel economy and on fuel system problems. Emissions and fuel economy data were obtained using a chassis dynamometer to run the prescribed test routines. Results in comparing experience between using gasohol and using gasoline showed, on the average, regulated emissions to have been lower for vehicles fueled with gasohol. Other significant results are obtained. RCT

### **N81-18238# Rockwell International Corp., Canoga Park, Calif Energy Systems Group**

#### **COAL HYDROGASIFICATION PROCESS DEVELOPMENT, VOLUME 1: COAL STUDIES Annual Technical Progress Report**

L P Combs, S K Ubhayakar, L S Breese, D R Kahn, and W T Lee 20 Oct 1980 221 p refs

(Contracts DE-AC01-78ET-10328, ET-78-C-01-3125)

(FE-3125-24-Vol-1, ATPR-2-GFY-80) Avail NTIS  
HC A10/MF A01

Testing was concluded in a short-test-duration, engineering-scale hydrogasification test facility. Test results established a data base for other program tasks. Correlation of the data, using nonlinear multiple regression techniques, against a set of phenomenological hydropyrolysis reactions, leads to a powerful analytical predictive tool. The design was completed and construction started on a 2/4-TPH integrated process development unit capable of continuous operation for up to 30 days. DOE

### **N81-18239# Rockwell International Corp., Canoga Park, Calif Energy Systems Group**

#### **COAL HYDROGASIFICATION PROCESS DEVELOPMENT, VOLUME 2. PEAT STUDIES Annual Technical Progress Report**

K M Sprouse and J K Rosemary 20 Oct 1980 151 p refs

(Contract DE-AC01-78ET-10328)

(FE-3125-24-Vol-2, ATPR-2-GFY-80) Avail NTIS  
HC A08/MF A01

The effects of peat hydrogasification in an entrained flow reactor are discussed. Three phases: peat dense-phase feed system, flow studies, hydrogasification, entrained flow reactor testing, and preliminary peat process economic evaluations. The peat dense-phase feeding studies included low pressure (below 150 psig) testing at nominal solid peat flow rates of 1 ton/hr and analytical modeling efforts. The hydrogasification reactor testing was performed at peat flow rates of over 1000 lb/hr and reactor temperatures to 1900(0) F in hydrogen atmospheres from 500 to 1000 psig. A simple analytical kinetic model was developed to predict total carbon conversion as a function of reactor operating variables. DOE

### **N81-18240# Exxon Research and Engineering Co., Florham Park, N.J.**

#### **EDS COAL LIQUEFACTION PROCESS DEVELOPMENT, PHASE 4-5 Annual Technical Progress Report, 1 Jul. 1979 - 30 Jun 1980**

Oct 1980 491 p refs

(Contracts DE-AB01-77ET-10069, EF-77-A-01-2893)

(FE-2893-53) Avail NTIS (US Sales Only) HC A21/MF A01,  
DOE Depository Libraries

Laboratory process research and development studies conducted in support of a donor solvent coal liquefaction process are reported. Topic covered include operation of recycle units in the one ton per day pilot plant, solvent hydrogenation, catalysts, validation of the once-through unit, high pressure liquefaction, chemical structure of bottoms, coking yields, bottom solidification, hydrogen production, materials handling, erosion resistant nozzles, cost reduction, commercialization and industrial wastes, environmental engineering, value engineering, and laboratory guidance procedures. A R H

**N81-18241#** Rockwell International Corp., Thousand Oaks, Calif Science Center

**STUDIES OF THE MECHANISM OF COAL HYDROGENATION BY ELECTRON SPIN RESONANCE** Quarterly Technical Progress Report, 1 Jun. - 31 Aug. 1980

Ira B Goldberg Nov 1980 17 p refs

(Contract DE-AC22-80PC-30072)

(DOE/PC-30072/T2) Avail NTIS HC A02/MF A01

This is the second quarterly report on the program. Studies of Coal Hydrogenation by electron spin resonance was studied with emphasis on cell and heating rate optimization for carrying out in situ measurements. Preliminary characterization of the coal to be used was carried out. DOE

**N81-18242#** Southwest Research Inst., San Antonio, Tex  
**HYBRID FUELS FOR HIGHWAY TRANSPORTATION** Annual Technical Progress Report, 1 Jun. 1978 - 1 Jun. 1980

T W Ryan, W Likos, and C A Moses Jun 1980 134 p refs

(Contract DE-AC04-78CS-54240)

(DOE/CS-54240/T1, ATPR-2) Avail NTIS HC A07/MF A01

A program was developed to investigate the potential of hybrid fuels for use in highway transportation. Hybrids are fuels derived from combinations of readily available energetic non-conventional materials with petroleum. They are generally formulated as solutions, emulsions, or slurries. The underlying objective of the program is to reduce the use of petroleum derived fuels and/or to minimize the processing requirements of the finished hybrid fuels. During the first year of the program, extensive work was done on the development and testing of water and alcohol emulsions and alcohol solutions. In the second year, the emphasis was placed on the development and testing of hybrid fuel slurries. Components evaluated included carbohydrates and various forms of carbon. It was concluded that, of the slurries tested, the carbon (coke, carbon black, etc.) slurries have the most potential for development into finished fuels. The efforts during the third year will concentrate on advancing the development of the slurries (especially the carbon slurries) to the same point as the solutions and emulsions. DOE

**N81-18314** Houston Univ., Tex  
**OIL GANGLION DYNAMICS IN FLOW THROUGH POROUS MEDIA** Ph.D. Thesis

Ka Ming Ng 1980 196 p

Avail Univ Microfilms Order No 8103612

A model is formulated to study the transient behavior of oil ganglion populations during immiscible displacement in oil recovery processes. The model is composed of three components: a suitable model for granular porous media, a stochastic simulation method capable of predicting the fate of solitary ganglia, and two coupled population balance equations for studying the dynamics of oil ganglion populations. The porous medium model proposed is a network of interconnected unit cells of the constricted tube type. The permeability of this model is determined by both the statistical analysis and the network analysis. It is demonstrated that fluids in different portions of a porous medium interact with one another. Two methods are used in the simulation of the motion of solitary ganglion. It is found that the velocity of an oil blob decreases as its viscosity increases. Dissert Abstr

**N81-18343#** Illinois Inst of Tech., Chicago  
**SOLIDS CIRCULATION AROUND A JET IN A FLUIDIZED BED GASIFIER** Final Report, 1 Sep. 1978 - 30 Sep. 1980

Dimitri Gidaspow, Bozorg Ettehadi, Chungliang Lin, Anil Goyal,

and Robert W Lyczkowski 1980 79 p refs

(Contract DE-FG21-78ET-12229, Grant ET-78-G-01-3381)

(DOE/ET-12229/T1) Avail NTIS HC A05/MF A01

A hydrodynamic model to predict solids circulation around a jet in a fluidized bed gasifier was developed. To account for unequal velocities of solid and fluid phases, separate phase momentum balances were developed. Other fluid bed models used in the scale-up of gasifiers do not employ the principles of conservation of momentum. These models cannot predict fluid and particle motion. In such models solids mixing is described by means of empirical transfer coefficients. A two dimensional unsteady state computer code was developed to give gas and solid velocities, void fractions and pressure in a fluid bed with a jet. The growth, propagation and collapse of bubbles was calculated. Time-averaged void fractions were calculated that showed an agreement with void fractions measured with a gamma ray densitometer. DOE

**N81-18398#** Department of Energy, Washington, D C  
**INTERNAL COMBUSTION ENGINES FOR ALCOHOL MOTOR FUELS: A COMPILATION OF BACKGROUND TECHNICAL INFORMATION**

Nov 1980 362 p refs

(DOE/AF-0001) Avail NTIS HC A16/MF A01

This compilation, a draft training manual containing technical background information on internal combustion engines and alcohol motor fuel technologies, is presented in 3 parts. The first is a compilation of facts from the state of the art on internal combustion engine fuels and their characteristics and requisites and provides an overview of fuel sources, fuels technology and future projections for availability and alternatives. Part two compiles facts about alcohol chemistry, alcohol identification, production and use, examines ethanol as spirit and as fuel, and provides an overview of modern evaluation of alcohols as motor fuels and of the characteristics of alcohol fuels. The final section compiles cross references on the handling and combustion of fuels for IC engines, presents basic evaluations of events leading to the use of alcohols as motor fuels, reviews current applications of alcohols as motor fuels, describes the formulation of alcohol fuels for engines and engine and fuel handling hardware modifications for using alcohol fuels, and introduces the multifuel engines concept. DOE

**N81-18476#** California Univ., Los Angeles Dept of Earth and Space Sciences

**RESEARCH IN THE GEOSCIENCES RELATED TO, RESOURCE ASSESSMENT** Interim Progress Report

M G Kvelson 18 Jul 1980 15 p refs

(Contract DE-AT03-79ER-10119)

(DOE/IR-10119/T1) Avail NTIS HC A02/MF A01

Research progress is reported in the development of a field data acquisition and processing system for use in exploration geophysics. Analysis of seismic data from Imperial Valley and Mt Etna and the genesis of uranium ore deposited are presented. DOE

**N81-18477#** Oak Ridge National Lab., Tenn  
**COMMENTS ON LONG-TERM ASPECTS OF RENEWABLE VERSUS NONRENEWABLE RESOURCE SUBSTITUTION**

H E Goeller 1980 15 p Presented at the Interciencia Workshop on Mater for the Future, Kingston, Jamaica, 17-21 Nov 1980 (Contract W-7405-eng-26)

(CONF-801158-1) Avail NTIS HC A02/MF A01

Advantages and limitations of renewable resources as substitutes for nonrenewable resources are discussed, with particular emphasis on the longer term when economic resources of some of the more limited chemical elements will run out or will, or least, become too expensive to use except in absolutely necessary, nonsubstitutable uses. Renewable resources will continue to become available through natural processes, in some cases augmented by modern technology, but only at some maximum level. For example, the amount of hydroelectric power available in the world is determined by rainfall and topography. On the other hand, nonrenewable resources are generally regarded as being material sources that, once used, are gone forever. This is true for fossil fuels, where current demands are many



## 04 FUELS AND OTHER SOURCES OF ENERGY

orders of magnitude larger than rates of formation of new coal and petroleum. It is not true, however, for some of the atmospheric gases (e.g., nitrogen and argon) which are returned to the atmosphere either directly or through biological processes after use so that they are renewable resources. DOE

### **N81-18478#** Stanford Univ., Calif. **GEOTHERMAL RESERVOIR ENGINEERING COMPUTER CODE COMPARISON AND VALIDATION USING THE GEONZ SIMULATOR PROGRAM**

Roland N. Horne, D. O. Ogbe, K. Temeng, and H. J. Ramey, Jr.  
14 Nov 1980 67 p refs  
(Contract DE-AC03-80SF-11450)  
(DOE/SF-11450/1) Avail NTIS HC A04/MF A01

It was originally proposed to use the GEOTHERM geothermal simulator program to prepare solutions to the first five of the six Department of Energy computer code comparison sets. Valid solutions were anticipated in all of the five problems attempted, but it was expected that problems 3 and 4 might present some difficulties. A more recent version of the program, called GEONZ, became available and was used successfully on problems 3 and 4. The new program, GEONZ, had additional capabilities that enabled it to handle both superheated steam and counterflows of steam and water. The choice of the GEONZ code is discussed, followed by an in-depth description of the solutions obtained for problems 1 through 5. The five problems are: 1-D Avdonin Solution, 1-D well test analysis, 2-D flow in fracture/block medium, 2-D phase system with drainage, and flow in a 2-D areal reservoir. DOE

### **N81-18479#** Utah Univ., Salt Lake City Dept. of Geology and Geophysics

**THERMAL STUDIES IN A GEOTHERMAL AREA. REPORT 1: THERMAL STUDIES AT ROOSEVELT HOT SPRINGS, UTAH. REPORT 2: HEAT FLOW ABOVE AN ARBITRARILY DIPPING PLANE OF HEAT SOURCES. REPORT 3: A DATUM CORRECTION FOR HEAT FLOW MEASUREMENTS MADE ON AN ARBITRARY SURFACE**  
W. R. Wilson and D. S. Chapman Oct 1980 151 p refs  
(Contract DE-AC07-80ID-12079)

(DOE/ID-12079/19) Avail NTIS HC A08/MF A01

Interpretation of heat flow data is presented for 53 drill holes. The temperature profiles are classified in three spatially consistent patterns which delineate hydrologic recharge, active convection and discharge regions. DOE

### **N81-18480#** Virginia Polytechnic Inst. and State Univ., Blacksburg Dept. of Geological Sciences **EVALUATION AND TARGETING OF GEOTHERMAL ENERGY RESOURCES IN THE SOUTHEASTERN UNITED STATES** **Progress Report, 1 Oct 1979 - 30 Jun. 1980**

J. K. Costain Dec 1980 298 p refs

(Contract DE-AC05-78ET-27001)

(DOE/ET-27001/8) Avail NTIS HC A13/MF A01

Geological studies were conducted of the area including petrographic and stratigraphic analysis. Thermal mapping was used for possible site selection of geothermal energy power plants. Structural properties of the local geology are presented. TM

### **N81-18483** California Univ., Los Angeles **MILITARY WASTES-TO-ENERGY APPLICATIONS** **Ph.D. Thesis**

Keith Eichi Kawaoka 1980 275 p

Avail. Univ. Microfilms Order No. 8104006

Military waste material and byproduct stream and the potential for energy recovery and utilization are discussed. Feedstock material includes municipal-type solid waste, selected installation hazardous waste and biomass residue. Objectives are: (1) analyze the characteristics of the military waste stream, (2) identify potential energy recovery options, and (3) examine and assess the technical and economic feasibility and environmental and institutional impacts of various energy recovery approaches. Benefits of waste-to-energy conversion are: (1) waste is utilized as a resource, (2) nonrenewable conventional fuels are conserved, (3) waste volume is reduced, (4) there are low sulfur oxide

emissions from a combusted waste, (5) waste energy is a readily available and inexhaustible resource that reduces dependence on imported energy. Dissert. Abstr.

### **N81-18513#** Hawaiian Dredging and Construction Co., Honolulu **ENGINEERING AND ECONOMIC STUDIES FOR DIRECT APPLICATIONS OF GEOTHERMAL ENERGY IN AN INDUSTRIAL PARK IN PAHOA, HAWAII** **Quarterly Technical Progress Report**

15 Oct 1980 7 p

(Contract DE-AC03-79ET-27233)

(DOE/ET-27233/T2, QTPR-4) Avail NTIS HC A02/MF A01

The use of geothermal heat for industrial applications is discussed in terms of economic and technical feasibility. It is concluded that a direct heat geothermal industrial park located near Pahoa, Hawaii appears feasible. DOE

### **N81-18517#** Engineering Societies Commission on Energy, Inc., Washington, D. C.

**REGIONAL CONVERSION TO COAL Final Report**

Michael L. McKimney Mar 1980 119 p refs

(Contract EF-77-C-01-2468)

(FE-2468-63) Avail NTIS HC A06/MF A01

An investigation of powerplant coal conversion is described and the options and problems confronting a group of electric utility companies in an example region were examined. The region selected for the study was New England, but the analysis format is valid for other regions having different specific conditions but facing the same general conversion mandates. The report concludes that because of its physical characteristics, simple conversion to coal of a utility steam boiler unit designed for oil or gas is not feasible. Boiler replacement of pre-boiler coal liquefaction or gasification would be required to make the conversion to coal. Coal oil mixture combustion is a promising concept for the partial displacement of oil that could have significant application in New England. Coal derived synthetic boiler fuels, primarily liquids, could play a significant role in the conversion of existing units, but their availability in sufficient quantities by 1990 is doubtful. The region's indigenous coal and hydropower resources are not expected to impact the energy mix by 1990, if ever. DOE

### **N81-18525#** AeroChem Research Labs., Inc., Princeton, N. J. **RATE COEFFICIENTS OF COMBUSTION/FUEL CONVERSION REACTIONS BY HIGH-TEMPERATURE PHOTO-CHEMISTRY** **Progress Report, 1 Sep 1979 - 31 Aug 1980**

William Felder Sep 1980 17 p refs

(Contract DE-AC02-77ER-04169)

(COO-4169-5, AeroChem-TN-214)

Avail NTIS HC A02/MF A01

Reliable kinetic data on isolated elementary combustion reactions spanning a broad temperature range are required for modeling and scaling studies aimed at improving the performance of, and reducing the pollutant formation from fossil fuel burning devices. High temperature photochemistry was developed to provide such data. It combines the technology of the high temperature fast flow reactors developed to study kinetics of metal atom/oxide reactions in the 300 to 1900 K range with the methodology of the flash photolysis technique which, although used widely for study of such combustion reactions, was limited to studies at or near room temperature. DOE

### **N81-18526#** California Univ., Livermore Lawrence Livermore Lab

**WIND-POWER SITE-SCREENING METHODOLOGY**  
**Final Report**

J. J. Walton, C. A. Sherman, and J. B. Knox Oct 1980 66 p refs

(Contract W-7405-eng-48)

(UCRL-52938) Avail NTIS HC A04/MF A01

Principal components analysis techniques for classifying types of regional flow fields and a three dimensional diagnostic flow model were blended into a rotational for screening wind sites in the presence of complex terrain. Relevant contributing capabilities, the developed screening methodology the prospectors preliminary wind resource maps for the island of Oahu generated to guide



the development of the observational network, and the data base developed for testing are described. The use of the methodology on the island of Oahu is illustrated and two annual assessments of Oahu's wind energy potential are described. DOE

**N81-18547#** Utah Univ., Salt Lake City Dept of Geology and Geophysics

**MANAGEMENT ASSISTANCE FOR THE DEVELOPMENT OF HYDROTHERMAL ENERGY IN THE ROCKY MOUNTAIN/BASIN AND RANGE REGION** Final Report, 19 Oct. 1977 - 31 Dec. 1979

John R Bowman, Ronald L Bruhn, David S Chapman, Kenneth L Cook, Stanley H Evans, Jr., Gerald W Hohmann, William P Nash, Gary R Reynolds, William R Sill, Robert B. Smith et al Sep 1980 100 p refs  
(Contracts DE-AC07-78ET-28392, EG-78-C-07-1701)  
(DOE/ET-28392/T2) Avail NTIS HC A05/MF A01

Abstracts of forty-six reports on this contract are presented. A comprehensive list of technical reports produced on geothermal resources sponsored by US DOE is included. DOE

**N81-18553#** Gilbert Associates, Inc., Reading, Pa  
**RESEARCH AND EVALUATION OF BIOMASS RESOURCES/CONVERSION/UTILIZATION SYSTEMS (MARKET/EXPERIMENTAL ANALYSIS FOR DEVELOPMENT OF A DATA BASE FOR A FUELS FROM BIOMASS MODEL VOLUME 1: BIOMASS ALLOCATION MODEL** Technical Progress Report, period ending 30 Sep. 1980

Yong K Ahn, Herbert T Chen, Richard W Helm, Eric T Nelson, and Kevin J Shields 1980 131 p refs  
(Contracts DE-AC02-78ET-20611, ET-78-C-02-5022)  
(DOE/ET-20611/14) Avail NTIS HC A07/MF A01

A biomass allocation model was developed to show the most profitable combination of biomass feedstocks thermochemical conversion processes, and fuel products to serve the seasonal conditions in a regional market. This optimization model provides a tool for quickly calculating the most profitable biomass missions from a large number of potential biomass missions. Other components of the system serve as a convenient storage and retrieval mechanism for biomass marketing and thermochemical conversion processing data. The system can be accessed through the use of a computer terminal, or it could be adapted to a portable microprocessor. A User's Manual for the system is included. The validity of any biomass allocation solution provided by the allocation model is dependent on the accuracy of the data base. The initial data base was constructed from values obtained from the literature, and, consequently, as more current thermochemical conversion processing and manufacturing costs and efficiencies become available, the data base should be revised. DOE

**N81-19258#** Gulf Research and Development Co., Pittsburgh, Pa

**INVESTIGATION OF MECHANISM OF HYDROGEN TRANSFER IN COAL HYDROGENATION** Quarterly Progress Report, Mar. - May 1980

D C Cronauer and R G Ruberto Jul 1980 18 p refs  
(Contract DE-AC22-80PC-30080)  
(DOE/PC-30080/T1) Avail NTIS HC A02/MF A01

Emphasis is upon both hydrogen transfer fundamentals, namely, observing the rate of conversion, rate of hydrogen transfer, and the site of hydrogen transfer, and upon refining the techniques to measure hydrogen donor capacity. A kinetic model was prepared which correlates the data of the liquefaction of two types of coals in the presence of good and poor hydrogen donor solvents. This single kinetic model, which includes the reaction of coal + solvent (oil) yields more reaction coal, adequately explains the observed phenomena of a net consumption of solvent (for poor donor solvents) at low space times. TM

**N81-19312#** Southwest Research Inst., San Antonio, Tex Army Fuels and Lubricants Research Lab  
**LUBRICANTS FOR COMBATING EFFECTS OF HIGH-SULFUR FUEL** Interim Report

Edwin A Frame Jul 1980 150 p refs

(Contracts DAAK70-80-C-0001, DAAK70-78-C-0001, DA Proj 1L7-62733-AH-20)  
(AD-A094900, AFLRL-127) Avail NTIS HC A07/MF A01  
CSCL 11/8

Six lubricants were evaluated for their effectiveness in controlling the deleterious effects of using high-sulfur diesel fuel. Two lubricants were identified which have potential to substantially reduce deleterious effects when operating on high-sulfur fuel. A supplemental oil additive used in preservative engine oils was evaluated in three different lubricants with high-sulfur fuel. GRA

**N81-19316#** Pratt and Whitney Aircraft Group, East Hartford, Conn Commercial Products Div

**AN ASSESSMENT OF THE USE OF ANTIMISTING FUEL IN TURBOFAN ENGINES** Final Report, Sep. 1979 - Nov. 1980

A Fiorentino, R DeSaro, and T Franz Nov 1980 146 p refs

(Contract NAS3-22045)  
(NASA-CR-165258, PWA-5697-29) Avail. NTIS  
HC A07/MF A01 CSCL 21D

The effects of antimisting kerosene on the performance of the components from the fuel system and the combustor of a JT8D aircraft engine were evaluated. The problems associated with antimisting kerosene were identified and the extent of shearing or degradation required to allow the engine components to achieve satisfactory operation were determined. The performance of the combustor was assessed in a high pressure facility and in an altitude reight/cold ignition facility. The performance of the fuel pump and control system was evaluated in an open loop simulation. RCT

**N81-19317#** Energy and Minerals Research Co., Exton, Pa  
**EFFICIENT ULTRASONIC GRINDING: A NEW TECHNOLOGY FOR MICRON-SIZED COAL** Quarterly Technical Progress Report, 16 Jun. - 15 Sep. 1980

W B Tarpley, Jr., P L Howard, and G R Moulder 1 Oct 1980 19 p

(Contract DE-AC02-79ER-10466)  
(DOE/ER-10466/T1, QTPR-4) Avail NTIS HC A02/MF A01

The technical feasibility and economic promise of efficiently applying ultrasonic energy to the production of -10 micron coal fines is demonstrated. It is shown that such a system could overcome the inherent inefficiency and economic penalty of mechanical grinding, while producing better size uniformity in the product. An additional benefit associated with the mechanism of ultrasonic effect is the possibility of selective liberation of ash and pyrite inclusions. DOE

**N81-19327#** Institute of Gas Technology, Chicago, Ill  
**PREPARATION OF A COAL CONVERSION SYSTEMS TECHNICAL DATA BOOK** Annual Report, May 1978 - 30 Apr. 1979

Sep 1980 664 p refs  
(FE-2286-48) Avail NTIS HC A99/MF A01

Two correlations of vapor-liquid equilibria in the NH<sub>3</sub>-H<sub>2</sub>S-H<sub>2</sub>O system were tested on experimental data for the system. Correlations of the salting out coefficients of ammonia, carbon dioxide, and hydrogen sulfide at 25 C were developed. The basic, physical, and thermodynamic properties of xylenols and decalins are given. Enthalpies of distillate fractions of various syncrudes are presented and compared with correlations. The combustion characteristics of solvent refined coal are summarized. A report on the viscosity of slag is presented. Application of a formula for calculating the heating value of coal to coal chars to new data indicated larger standard deviations than those for the original data bank. The general fundamental design information on a fixed (moving) bed coal gasifier is reviewed and the possibility of using a computer model to generate design information is investigated. The problem of carbon deposition in methanators is reviewed. In gas solids transport, correlations on pressure drop in dilute phase pneumatic conveyor and vertical dense phase transport in lift line are evaluated. Processes for sulfur recovery in wastewater treatment and hydrocarbon incineration are described. DOE

## 04 FUELS AND OTHER SOURCES OF ENERGY

**N81-19328#** Chicago Univ., Ill  
**COAL TRANSFORMATION CHEMISTRY Quarterly Progress Report, 1 Mar - 31 May 1980**

L. M. Stock 1980 20 p refs  
(Contracts DE-AC22-80PC-30088, DE-AS02-77ET-10487)  
(DOE/PC-30088/1, QPR-1) Avail NTIS HC A02/MF A01

The development of a procedure for the alkylation of Illinois No 6 coal in liquid ammonia is discussed. Work on the chemistry of the liquefaction reaction indicates that phenolic compounds participate in free radical reactions in hydrogen donor solvents. Phenolic compounds and benzoic acid derivatives do not function as acid catalysts in their reactions with tetralin and other representative compounds. In addition, the reaction of styrene with tetralin at 400 C is shown to be a complex process involving rather deep-seated chemical transformations. DOE

**N81-19331#** Oregon Inst of Tech., Klamath Falls Geo-Heat Utilization Center

**ETHANOL: A BRIEF ECONOMIC EVALUATION**

Sep 1980 12 p  
(Contract DE-FG08-79ET-27256)

(DOE/ET-27256/T7) Avail NTIS HC A02/MF A01

A 10 MW geothermal flash steam power plant is described. A 10 million gallon per year ethanol plant is considered. The initial feed to the plant would be corn, with sugar beets as a possible alternate feed. The ultimate plan is to use waste products and biomass feed stocks. Geothermal water would provide the necessary process heat for the plant. The following conclusions are based on an ethanol plant that produces 10 million gallons of ethanol per year. Over a 20 year period, the plant using a corn feed stock would generate a rate of return of +12% present on a total equity capital investment of \$33,000,00. Over a 15 year period, the plant using a corn feed stock is probably not economically feasible since it would have a rate of return less than 12 percent or a total equity capital investment of \$33,000,000. A corn feed stock plant operates at a loss for the first seven years if 95 percent of the \$33,000,000 cost is debt financed. The plant is economically feasible only if offsetting energy income from other profitable operation permits taking advantage of investment tax credits and depletion allowances that are available. If this is true, the project is highly feasible, paying back twice the 5 percent equity capital in the first year. DOE

**N81-19332#** Oak Ridge National Lab., Tenn Environmental Sciences Div

**ENVIRONMENTAL METRICS OF SYN FUELS. 2: A COMPUTER-BASED CODING SCHEME FOR COAL-CONVERSION RESEARCH DATA**

R. H. Strand, M. P. Farrell (Union Carbide Corp.), T. K. Birchfield, C. W. Gudmundson (Union Carbide Corp.), M. E. Vansuch (Union Carbide Corp.), and H. N. Polovino (Union Carbide Corp.) Jan 1981 26 p refs

(Contract W-7405-eng-28)

(ORNL/TM-7525, Pub-1602) Avail NTIS HC A03/MF A01

The need to reduce the complexity of data encoding and error rates in studies using multiple data bases composed of hierarchical file structures is addressed. A coding scheme to represent long alphanumeric values, the efficiency of such a scheme, and error rate reduction are discussed. It is found that codes without embedded information (nonsense codes) circumvent the problems associated with smart codes. In addition, experience with several large environmental data bases indicates that coding errors are less frequent using nonsense codes than using smart codes. Since no information is contained in the nonsense code and classification levels are not correlated, there is no tendency for a code recorder to assume that two apparently associated values should code with approximately the same numeric code, when in fact the values are unrelated. The use of the FORMAT procedure in the Statistical Analysis System and of the nonsense code approach using variable labelling is presented. The increased storage efficiencies for numerical codes versus long alphanumeric strings are discussed. DOE

**N81-19333#** CH2M/Hill, Boise, Idaho  
**UTILIZATION OF GEOTHERMAL ENERGY FOR METHANE**

**PRODUCTION FOR J. A. ALBERTSOND LAND AND CATTLE COMPANY Final Report**

Jul 1980 201 p refs

(Contract DE-AC51-79ET-27230)

(DOE/ET-27230/T2) Avail NTIS HC A10/MF A01

The feasibility of an integrated system to utilize a geothermal resource for a bioconversion plant was studied. This integrated facility would use the manure from approximately 30,000 head of feedlot cattle as a feedstock for an anaerobic digestion plant. The findings on engineering design, geological assessment, environmental, economic, and institutional requirements of the proposed project are summarized. DOE

**N81-19334#** Battelle Columbus Labs., Ohio  
**DEVELOPMENT OF SWEET SORGHUM AS AN ENERGY CROP. VOLUME 3: INTEGRATION CONCEPTS**

D. A. Scantland, W. E. Riddle, T. A. McClure, P. G. Woodford, E. J. Honton, and E. S. Lipinsky 12 Dec 1980 147 p refs  
(Contract W-7405-eng-92)

(BML-2054-Vol-3) Avail NTIS HC A07/MF A01

For the past 3 years, Battelle's Columbus Division and several coinvestigators conducted interregional investigations related to biomass and sugar production for conversion to alcohol and other fuels. These investigations emphasized primarily the production of sweet sorghum and sugar cane due to their ability to produce high biomass and readily fermentable sugars' yields which allow a highly favorable energy balance when converted to ethanol. The objectives of the research include the following: (1) to conduct a feasibility analysis of the potential for integrating sugarcane and sugar beet production/processing with sweet sorghum, and (2) to formulate an analytical approach to estimate the economic impact of growing sweet sorghum as an energy crop upon the US agricultural system. This volume is comprised of two separate investigations pertaining to potential integration of sweet sorghum into US agriculture. DOE

**N81-19335#** Conoco Coal Development Co., Library, Pa  
**ZINC HALIDE HYDROCRACKING PROCESS FOR DISTILLATE FUELS FROM COAL. VOLUME 1: SUMMARY AND CONTINUOUS BENCH STUDIES Final Report, Jan. 1975 - Nov. 1979**

R. T. Struck, C. W. Zielke, M. Pell, J. T. Maskew, F. Sim, W. A. Rosenhoover, and W. E. Clark 1 Dec 1980 337 p refs  
(Contracts DE-AC01-76ET-10489, EX-76-C-01-1743)

(FE-1743-80-Vol-1) Avail NTIS HC A15/MF A01

The development of the Conoco process for liquefaction of coal using a pool of molten zinc chloride as catalyst is discussed. Continuous bench-scale hydrocracking and regeneration units (1 kg/h) showed that both bituminous and subbituminous coals are operable and convert to high yields of gasoline and other distillates with unusually low nitrogen and sulfur contents. A data base and a rate model were developed for Rosebud Seam subbituminous coal allowing conversions and product distributions to be predicted as functions of temperature, pressure, and residence time. Regeneration of the used catalyst was demonstrated giving 97(+)% removal of C, N, O, S and ash. A secondary zinc recovery step was developed increasing the recovery to 99.7%. DOE

**N81-19336#** Mueller Associates, Inc., Baltimore, Md  
**ALTERNATIVE FUELS UTILIZATION AND THE AUTOMOTIVE EMISSION CERTIFICATION PROCESS**

Washington DOE Mar 1980 43 p refs

(Contract DE-AC05-79CS-56051)

(DOE/CS-56051/T1) Avail NTIS HC A03/MF A01

The Clean Air Act of 1977 requires that commercially offered automotive fuels and fuel additives be substantially similar to fuels used in certifying model year 1975 and later vehicles. Procedures for certifying that vehicles perform with emissions that meet the Clean Air Act specifications and the impact of this emissions certification process on the use of alternative fuels, such as alcohols, alcohol-gasoline blends and synthetic fuels in highway vehicles is discussed. DOE

**N81-19337#** PRC Energy Analysis Co., McLean, Va  
**BIOMASS ENERGY SYSTEMS PROGRAM SUMMARY. INFORMATION CURRENT AS OF SEPTEMBER 30, 1979**  
 Oct. 1980 189 p  
 (Contract DE-AC01-77ET-21059)  
 (DOE/CS-21059/01) Avail. NTIS HC A09/MF A01

This program summary describes each of the DOE's Biomass Energy System's projects funded or in existence during fiscal year 1979 and reflects their status as of September 30, 1979. The summary provides an overview of the ongoing research, development, and demonstration efforts of the preceding fiscal year as well. DOE

**N81-19340#** NEUS, Inc., Santa Monica, Calif  
**BIORESOURCES DIGEST, A JOURNAL ON BIOMASS UTILIZATION. VOLUME 2, NUMBER 3, JULY 1980 Quarterly Report**  
 Harry Sobel, ed Jul 1980 63 p refs  
 (Grant NSF PFR-77-12500)  
 (PB81-123952, NSF/RA-800222-VOL-2) Avail. NTIS HC A04/MF A01 CSCL 21D

Grant awards listed in this issue include the following: lignocellulose-transforming microorganisms, pyrolytic conversion of lignocellulosic materials, lipids from microalgae, rubber analysis and guayule seed selection, regulation of rubber formation in guayule plants, chemical stimulation and breeding improvement of rubber yield in guayule hydrocarbon-producing plants as potential multi-use crops, and an animal waste management system for the 1980's GRA

**N81-19342#** TRW, Inc., McLean, Va Energy Systems Planning Div  
**ENERGY BALANCES IN THE PRODUCTION AND END-USE OF ALCOHOLS DERIVED FROM BIOMASS**  
 Oct 1980 141 p refs Sponsored in part by DOE Washington, DC  
 (PB81-125585, NAFC-80-10) Avail. NTIS HC A07/MF A01 CSCL 21D

The utility of converting one form of energy into another more valuable form is considered. Net fuel gain is defined, for the purpose of the savings in fuels (with special attention to premium fuel) obtained by substituting biomass derived ethanol (grain, woody-biomass, MSW, etc.) for a given end-use of a premium fuel. Six cases, encompassing three feedstocks, five process fuels, and three process variations are examined. For each case, two end-uses (automotive fuel use and replacement of petrochemical feedstocks) are scrutinized. Energy requirements calculated for the six process cycles accounted for fuels used in all stages of alcohol production, from agriculture through distribution of products to the end-user. GRA

**N81-19539#** Sandia Labs., Albuquerque, N Mex  
**STRATEGIC PETROLEUM RESERVE DATA ACQUISITION SYSTEM**  
 P D Menlitz and A G Bauer Oct 1980 180 p  
 (Contract DE-AC04-76DP-00789)  
 (SAND-80-2143) Avail. NTIS HC A09/MF A01

The Strategic Petroleum Reserve Data Acquisition System is a general purpose, digital data acquisition system designed for field use in DOE's Strategic Petroleum Reserve testing and monitoring program. The system is computer driven, under the control of an operator. The system is designed to allow the operator to perform pre-test system configuration, test monitoring and control and post test analysis. This document is a system description and an operator users manual. Topics covered include configuration and running on-line tests, software documentation, and maintenance programming information. DOE

**N81-19540#** Science Applications, Inc., McLean, Va  
**HEAVY OIL RESERVOIRS RECOVERABLE BY THERMAL TECHNOLOGY Annual Report**  
 Patnick Kujawa Feb 1981 339 p refs Prepared in cooperation with DOE, Oakland, Calif  
 (Contract DE-AC03-78ET-12380)  
 (DOE/ET-12380/1-Vol-3) Avail. NTIS HC A15/MF A01

Reservoir, production, and project data are presented for target reservoirs thermally recoverable by steam drive which are

equal to or greater than 2500 feet deep and contain heavy oil in the 8 to 25(0) API gravity range. Data were sought depicting and characterizing individual reservoirs as opposed to data covering an entire field with more than one producing interval or reservoir. DOE

**N81-19541#** North Carolina Univ., Chapel Hill Dept of Geology  
**PEAT RESOURCES OF NORTH CAROLINA Annual Report**  
 Lee J Otte and Ray L Ingram Nov 1980 65 p  
 (Contract DE-AC01-79ET-148933)  
 (DOE/ET-14893/T1) Avail. NTIS HC A04/MF A01

Peat deposits of North Carolina are of three main geological types representing the accumulation of organic matter in pocosins - broad shallow depressions on an uplifted sea floor, river flood plains, and Carolina Bays - elliptical depressions of unknown origin. Pocosin deposits normally range in thickness from 1 to 8 feet. River flood plain peats are of unknown extent. They occur as lenses in alluvial sands and clays and may attain thickness of 20 feet. The ash content usually exceeds 10 percent. Five to six hundred Carolina Bays from 0.2 to 3 miles in length are scattered over the Coastal Plain. DOE

**N81-19553#** Institute of Gas Technology, Chicago, Ill  
**ANALYSIS OF GEOPRESSURED AQUIFERS Annual Report, 1979**  
 Mark G Doherty Jun 1980 64 p refs  
 (PB81-123416, GRI-79/0040) Avail. NTIS HC A04/MF A01 CSCL 08I

The purpose of this project is to assemble data to analyze the possibility of natural gas production from watered-out geopressured gas cap wells and hydrogeopressured aquifers. The technical and economic feasibility of hydraulically fracturing a tight geopressured aquifer to increase reservoir permeability as well as gas production were examined. GRA

**N81-19563#** Aeronautical Research Labs., Melbourne (Australia)  
**WIND ENERGY - HOW RELIABLE**  
 Douglas J Sherman Jan 1980 36 p refs  
 (AD-A094988, ARL/STRUC-380) Avail. NTIS HC A03/MF A01 CSCL 04/2

The reliability of a wind energy system depends on the size of the propeller and the size of the back-up energy storage. Design of the optimum system for a given reliability level can be performed if a time series of wind speed data is available. However, a design based on conventional meteorological records, which sample the wind speed with a ten minute averaging time at three-hourly intervals, will over-estimate the storage by a factor of approximately 2, and if the wind speed is only available on a daily basis the storage will be over-estimated by a factor of 2.5 to 4.0. This is because a propeller can respond to wind speed changes in much less than ten minutes and also because three-hourly sampling does not often pick up the brief high-speed incidents which generate a significant part of the wind energy. A nomogram is presented, based on some continuous wind speed measurements, which enables storages calculated from three-hourly or daily data to be appropriately reduced because of these two effects. GRA

**N81-19588#** Oak Ridge National Lab., Tenn Fossil Energy Program  
**FOSSIL ENERGY PROGRAM Quarterly Progress Report, period ending 30 Sep. 1980**  
 L E McNeese Jan 1981 348 p refs  
 (Contract W-7405-eng-26)  
 (ORNL-5702) Avail. NTIS HC A15/MF A01

Progress is reported for the period July 1 through September 30 for the Oak Ridge National Laboratory research and development projects that are carried out in support of the increased utilization of coal and other fossil fuels as sources of clean energy. These projects are supported by various parts of DOE including Fossil Energy, Basic Energy Sciences, Office of Health and Environmental Research, Office of Environmental Compliance and Overview, Economic Regulatory Administration, Power Research Institute, and by the Tennessee Valley Authority.

## 04 FUELS AND OTHER SOURCES OF ENERGY

and the EPA Office of Research and Development through interagency agreements DOE

**N81-19597#** Oregon Inst of Tech., Klamath Falls Geo-Heat Utilization Center

### **ALASKA: A GUIDE TO GEOTHERMAL ENERGY DEVELOPMENT**

N Basescu, R Gordon Bloomquist, Charles Higbee, Debra Justus, and Stuart Simpson Jun 1980 117 p refs Prepared in cooperation with Alaska State Div of Energy and Power Development

(Contract DE-AS06-77ET-28476)

(DOE/ET-28476/T12) Avail NTIS HC A06/MF A01

Alaska's geothermal potential, exploration, drilling, utilization, and legal and institutional setting are covered. Economic factors of direct use projects are discussed. DOE

**N81-19598#** Oregon Inst of Tech., Klamath Falls Geo-Heat Utilization Center

### **OREGON: A GUIDE TO GEOTHERMAL ENERGY DEVELOPMENT**

Debra Justus, Neil Basescu, R Gordon Bloomquist, Charles Higbee, and Stuart Simpson Jun 1980 121 p refs (Contract DE-AS06-77ET-28476)

(DOE/ET-28476/T11) Avail NTIS HC A06/MF A01

Oregon's geothermal potential exploration, drilling, utilization, legal and institutional setting are covered Economic factors of direct use projects are discussed DOE

### **N81-19616# Science Applications, Inc., McLean, Va HEAVY OIL RESERVOIRS RECOVERABLE BY THERMAL TECHNOLOGY Annual Report**

Patrick Kujawa Feb 1981 178 p Prepared in cooperation with DOE, Oakland, Calif

(Contract DE-AC03-78ET-12380)

(DOE/ET-12380/1-Vol-1) Avail NTIS HC A09/MF A01

Data are presented on reservoirs that contain heavy oil in the 8 to 25(0) API gravity range, contain at least ten million barrels of oil currently in place, and are noncarbonate in lithology. The reservoirs within these constraints were analyzed in light of applicable recovery technology, either steam drive or in situ combustion, and then ranked hierarchically as candidate reservoirs. An extensive basis for heavy oil development is provided, however, it is recommended that data on carbonate reservoirs, and tar sands be compiled. It was discovered that operators, and industrial and government analysts will lump heavy oil reservoirs as poor producers, however, it was found that upon detailed analysis, a large number, so categorized, were producing very well. A big problem in producing heavy oil is that of regulation, specifically, it was found that the regulatory constraints are so fluid and changing that one cannot settle on a favorable recovery and production plan with enough confidence in the regulatory requirements to commit capital to the project DOE

### **N81-19617# Science Applications, Inc., McLean, Va HEAVY OIL RESERVOIRS RECOVERABLE BY THERMAL TECHNOLOGY Annual Report**

P Kujawa Feb 1981 529 p refs

(Contract DE-AC03-78ET-12380)

(DOE/ET-12380/1-Vol-2) Avail NTIS HC A23/MF A01

Reservoir, production, and project data for target reservoirs which contain heavy oil in the 8 to 25(0) API gravity range and are susceptible to recovery by in situ combustion and steam drive are presented. The reservoirs for steam recovery are less than 2500 feet deep to comply with state of the art technology. In cases where one reservoir would be a target for in situ combustion or steam drive, that reservoir is reported in both sections. Data were collected from three source types: hands-on, once removed, and twice removed. In all cases, data were sought depicting and characterizing individual reservoirs as opposed to data covering an entire field with more than one producing interval or reservoir. The data sources are listed at the end of each case. A complete listing of operators and projects is included as well as a bibliography of source material DOE

**N81-19699#** Sandia Labs., Albuquerque, N Mex Geothermal Research Div

### **KILAUEA IKI LAVA LAKE EXPERIMENT PLANS**

J C Dunn and R G Hills Jan 1981 64 p refs

(SAND-80-1653) Avail NTIS HC A04/MF A01

Twelve experimental studies are proposed to complete field laboratory work at Kilauea Iki lava lake. Of these twelve experiments, eleven do not require the presence of melt. Some studies are designed to use proven techniques in order to expand our existing knowledge, while others are designed to test new concepts. Experiments are grouped into three main categories: geophysics, energy extraction, and drilling technology. Each experiment is described in terms of its location, purpose, background, configuration, operation, and feasibility DOE

### **N81-20202 Pennsylvania State Univ., University Park CLASSIFICATION OF PETROLEUM SAMPLES FROM GAS CHROMATOGRAPHIC DATA BY PATTERN RECOGNITION TECHNIQUES AND SIMULATION OF MASS SPECTRA BY REGRESSION ANALYSIS OF STRUCTURAL DESCRIPTORS Ph.D. Thesis**

Hayden Adams Clark 1980 148 p

Avail Univ Microfilms Order No 8105709

A study of the classification of petroleum samples using pattern recognition analysis of gas chromatographic data was performed. A set of 42 gas chromatograms of petroleum samples was coded using 19 descriptors: peak heights above unresolved background of the normal alkanes from nC14 through nC25; peak heights of the branched alkanes pristane and phytane; and five ratios of these 14 raw descriptors. A linear learning machine, a heuristic method of finding a discriminant function, was trained to recognize samples and predict unknowns. Predictive abilities of 87 to 100 percent were obtained. K nearest neighbor classifications were made for comparison. Further study, using data from both weathered and unweathered samples, confirmed that samples could be recognized correctly when the samples were of like origin and weathering history. Four types of oil were represented by gas chromatograms taken before and after artificial weathering. Dissert Abstr

### **N81-20226# Castle Technology Corp., Lexington, Mass SURVEY OF ELECTROCHEMICAL PRODUCTION OF INORGANIC COMPOUNDS Final Report**

J Paul Pemsler and Robert A Spitz Oct 1980 145 p refs (Contract W-31-109-eng-38)

(ANL/OEPM-80-3) Avail NTIS HC A07/MF A01

The electrochemical generation of inorganic compounds, excluding chlorine/caustic, was critically reviewed. About 60 x 10 to the 12th power Btu/y fossil fuel equivalent will be used in the year 2000 for the electrosynthesis of inorganic compounds. Significant energy savings in chlorine production results from the development of suitable electrocatalysts for lowering the cathodic overpotential. Perchlorates, electrolytic hypochlorite, electrolytic manganese dioxide, fluorine and other miscellaneous compounds use relatively small amounts of electrical energy. Implementation of caustic scrubber technology for stack gas cleanup results in appreciable amounts of sodium sulfate which are electrolyzed to regenerate caustic. Hydrogen peroxide, now produced by the alkyl anthraquinone process, is made electrolytically by coupling anodic oxidation of sulfate with cathodic reduction of oxygen in alkaline solution. A novel energy efficient approach which uses an oxygen enhanced anodic reaction is examined DOE

**N81-20227#** Duquesne Light Co., Pittsburgh, Pa Dept of Chemistry

### **HYDROGEN BONDING IN ASPHALTENES AND COAL LIQUIDS Quarterly Report, 1 Aug. - 31 Oct. 1980**

N C Li, L Jones, and N F Yaggi 1980 37 p refs

(Contract DE-AC22-80PC-30262, Grant PHS-RR-00292)

(DOE/PC-30262/T1) Avail NTIS HC A03/MF A01

A coal derived liquid (SRC-2) and its fractions were characterized by 600 MHz(1)H NMR spectrometer. The saturate fraction, being 8.1% by weight of unfractionated coal-liquid, is mainly composed of n-alkanes of high carbon numbers and the content of cycloalkanes is negligible. The aromatic fraction (49.0%) contains a considerable amount of partially hydrogenated polynuclear compounds. Double resonance techniques were used for chemical shift identification of beta-CH2 and alpha-CH2

protons attached to aromatic ring structures. The decoupled signals may be used for quantitative analysis of donor hydrogens, which are known to be effective in hydrogen transfer phenomenon in coal liquefaction processes. The aromatic fraction contains larger amounts of CH<sub>3</sub> groups attached to condensed aromatic ring structures, which appear as singlets in the region of 2.4 to 2.7 ppm, whereas in acidic fractions almost all benzylic CH<sub>3</sub> groups are attached to mono-aromatic ring structures. DOE

**N81-20290#** Logistics Management Inst., Washington, D C  
**THE DEVELOPMENT OF SYNTHETIC FUELS: DEPARTMENT OF DEFENSE LOGISTICS IMPLICATIONS** Final Report  
 Connelly D Stevenson Nov 1980 35 p  
 (Contract MDA903-77-C-0370)  
 (AD-A095713, LMI-MLO10) Avail NTIS HC A03/MF A01  
 CSDL 21/4

The Department of Defense (DoD) has been testing synthetic fuels, especially shale oil, since 1970. The DoD regards synthetic fuels as potential alternative liquid hydrocarbon energy source, especially for mobility applications. The Energy Security Act (ESA) requires the DoD to consume a substantial portion of the initial output of synthetic fuels in order to provide a guaranteed market for the new industry. It is impossible to predict the synthetic fuel production rate growth. The DoD should make incremental flexible projections of synthetic fuel use rates, both for testing and for operational applications, in order to carry out its ESA responsibilities and simultaneously to exploit the synthetic fuels potential. GRA

**N81-20292#** Utah Univ., Salt Lake City Dept of Mining and Fuels Engineering  
**APPLIED RESEARCH AND EVALUATION OF PROCESS CONCEPTS FOR LIQUEFACTION AND GASIFICATION OF WESTERN COALS** Final Report, 1 Jun. 1975 - 31 Jul. 1980

W H Wiser Sep 1980 311 p refs  
 (Contracts DE-AC01-76ET-10527, E(49-18)-2006)  
 (DOE/ET-10527/T1) Avail NTIS HC A14/MF A01

An attempt was made to conduct the process of converting coal to methane at temperatures below 500 C in a single reactor. The various parameters and factors are investigated, including commercially available catalysts, which might make such a process possible. The results from the single stage gasification process with nickel-moly on alumina as a catalyst, a reactor temperature of 500 C, and a hydrogen pressure of 1000 psi are: gases 41.3%, liquids 39.4%, and char 19.3%. The overall conversion of liquids and gases is comparable to the conversion in two stages, however, the liquid yields are higher in the single stage process and yields of ethane are slightly higher than the yields of methane. RCT

**N81-20293#** Computer Sciences Corp., Washington, D C  
**OFFICE OF ALCOHOL FUELS PROGRAM PLAN, FY 1981**  
 Oct 1980 122 p  
 (Contract DE-AC01-79CR-10001)  
 (DOE/AF-10001/T2) Avail NTIS HC A06/MF A01

The goal of the Office of Alcohol Fuels is to promote the production, distribution, and use of alcohol fuels. The program objectives are defined and the strategy for implementation is described. An organizational model of the operation is included. The roles of the 3 program offices and various field offices are described. DOE

**N81-20296#** Rockwell International Corp., Canoga Park, Calif  
 Energy Systems Group  
**MOLTEN SALT COAL GASIFICATION PROCESS DEVELOPMENT UNIT, PHASE 1. VOLUME 1. PDU OPERATIONS** Final Report

A L Kohl May 1980 244 p  
 (Contract DE-AC03-77ET-10298)  
 (DOE/ET-10298/66-VOL-1) Avail NTIS HC A11/MF A01

Five extended test runs were made. The observed product gas composition was quite close to that predicted on the basis of earlier small scale tests and thermodynamic considerations. All plant systems were operated in an integrated manner during

one of the runs. The principal problem encountered during the five test runs was maintaining a continuous flow of melt from the gasifier to the quench tank. Test data and discussions regarding plant equipment and process performance are presented. The program also included a commercial plant study which showed the process to be attractive for use in a combined cycle, electric power plant. DOE

**N81-20297#** Department of Energy, Washington, D C Div of Fossil Fuel Processing  
**COAL CONVERSION 1979 TECHNICAL REPORT**  
 Sep 1980 179 p refs  
 (DOE/FE-0010) Avail NTIS HC A09/MF A01

Individual reports are made on research programs which are being conducted by various organizations and institutions for the commercial development of processes for converting coal into products that substitute for those derived from oil and natural gas. Gasification, liquefaction, and demonstration processes and plants are covered. DOE

**N81-20301#** Brookhaven National Lab., Upton, N Y Dept of Energy and Environment  
**FLASH PYROLYSIS AND HYDROPYROLYSIS OF COAL**  
 Meyer Steinberg and Bharat Bhatt Oct 1980 22 p refs  
 Presented at the Specialist Workshop on Fast Pyrolysis of Biomass, Copper Mountain, Colo., 20 Oct 1980  
 (Contract DE-AC02-76CH-00016)  
 (BNL-28577, CONF-8010126-1) Avail NTIS  
 HC A02/MF A01

Rapid pyrolysis of coal usually produces larger yields of volatile matter including liquid and gaseous hydrocarbons than slow pyrolysis. Rapid pyrolysis in vacuum or with an inert atmosphere yields lower conversions of coal to liquid and gaseous hydrocarbons than hydrolysis in a hydrogen atmosphere. Pyrolysis in a higher pressure inert atmosphere tends to decrease overall yields. Rapid pyrolysis in an inert atmosphere produces larger amounts of heavier liquids and tars than hydrolysis. Hydrolysis at higher hydrogen pressures produces higher overall yields. Rapid pyrolysis at higher temperatures tends to decrease yields and produce lower molecular weight species. Rapid hydrolysis at higher temperatures produces more gaseous hydrocarbons and lower liquid yields. There are optimum residence times for maximizing either liquid or gaseous yields. Pyrolysis in an inert atmosphere at longer residence times tend to increase conversions but then becomes constant after devolatilization is complete. DOE

**N81-20302#** Bechtel National, Inc., San Francisco, Calif  
**COAL PREPARATION USING MAGNETIC SEPARATION. VOLUME 5: EVALUATION OF MAGNETIC COAL DESULFURIZATION CONCEPTS** Final Report  
 F V Karlson, H Huettnerich, M Epstein, O N Degiovanni, and P J - Chasseigne Jul 1980 187 p refs  
 (EPRI Proj 980-5)  
 (EPRI-CS-1517-Vol-5) Avail NTIS HC A09/MF A01

Magnetic separator designs performed by four contractors were reviewed. A complete plant conceptual design was developed, based on high gradient magnetic separator (HGMS) designs proposed by Sala Magnetics, Inc., and the Magnetic Corporation of America (MCA). A design for a conventional heavy medium plant was also developed and costed to establish a point of comparison for the HGMS designs. The HGMS design provided by Sala is based on their commercial operating experience in the iron ore concentration industry and operation of a one ton/hour continuous pilot plant, while the superconducting HGMS proposed by MCA represents a conceptual design based on bench scale data. The three plants were designed to clean 2.64 million tons/year of feed and produce approximately 2.2 million tons/year of clean coal. Also, a technical review of the Magnex process as developed by Nedlog Technology Group/Hazen Research, Inc., was performed. DOE

**N81-20304#** Rockwell International Corp., Canoga Park, Calif  
 Energy Systems Group  
**COAL HYDROGASIFICATION PROCESS DEVELOPMENT Quarterly Technical Progress Report, 1 Oct. - 31 Dec. 1980**

## 04 FUELS AND OTHER SOURCES OF ENERGY

L P Combs, L S Breese, D R Kahn, M D Schuman, C W Adamson, and W T Lee Jan 1981 41 p refs  
(Contracts DE-AC01-78ET-10328, ET-78-C-01-3125)  
(DOE/ET-10328/27) Avail NTIS HC A03/MF A01

A program schedule delineating the breakdown of the overall program into tasks and logical subtasks and time-phased relationships among them is shown. The major tasks are summarized. Task I is concerned with the engineering-scale testing. Task II is concerned with design, construction, and testing. Task III provides for process optimization studies and for preliminary design of a commercial plant. DOE

**N81-20305#** Oak Ridge National Lab., Tenn. Environmental Sciences Div

### ENVIRONMETRICS OF SYNFUELS. 1: PROCESSING THE AUTOMATED PDP-11 DATA COMPONENTS FOR THE UMD GASIFIER FACILITY

R H Strand, M P Farrell, C W Gudmundson (Union Carbide Corp.), T K Birchfield (Union Carbide Corp.), S S Casada (Union Carbide Corp.), and M E Vansuch (Union Carbide Corp.) Jan 1981 34 p

(Contract W-7405-eng-26)

(ORNL/TM-7428) Avail NTIS HC A03/MF A01

This report summarizes the techniques and procedures used to handle automated data collected at the University of Minnesota-Duluth (UMD) campus coal gasification facility. This facility, which is partially funded by the Department of Energy, is being evaluated by scientists at Oak Ridge National Laboratory (ORNL) for its potential health and environmental effects. Automatic data collections and manually collected and sample results data are used for this assessment. A data management project at ORNL handles these and other UMD data for the Gasifiers in Industry Program. The procedures developed within the data management project for handling two categories of automated data are documented. The examples use actual data from the first one and a half years of gasifier operation. DOE

**N81-20306#** Arizona State Univ., Tempe. Coll. of Engineering and Applied Sciences

### CONVERSION OF CELLULOSIC WASTES TO LIQUID FUELS Interim Report

J L Kuester Sep 1980 74 p refs

(Contracts DE-AS02-76CS-40202, EY-76-S-02-2982)

(COO-2982-57) Avail NTIS HC A04/MF A01

A project to convert waste cellulosic (biomass) materials to quality liquid hydrocarbon fuels is described. The basic approach is indirect liquefaction, i.e., thermal gasification followed by catalytic liquefaction. The indirect approach results in separation of the oxygen in the biomass feedstock, i.e., oxygenated compounds do not appear in the liquid hydrocarbon fuel product. The process is capable of accepting a wide variety of feedstocks. Potential products include medium quality gas, normal propanol, diesel fuel and/or high octane gasoline. A fluidized bed pyrolysis system is used for gasification. The pyrolyzer can be fluidized with recycle pyrolysis gas, steam or recycle liquefaction system of gas or some combination thereof. The tasks specified were: (1) feedstock studies, (2) gasification system optimization, (3) waste stream characterization, and (4) liquid fuels synthesis. DOE

**N81-20525#** Sandia Labs., Albuquerque, N. Mex.  
**COMPARATIVE ASSESSMENT OF FIVE POTENTIAL SITES FOR HYDROTHERMAL-MAGMA SYSTEMS: SUMMARY**

W C Luth and H C Hardee Nov 1980 54 p

(Contract DE-AC04-76DP-00789)

(DOE/TIC-11303) Avail NTIS HC A04/MF A01

Five potential hydrothermal-magma sites were assessed: the Geysers-Clear Lake, Ca.; Long Valley, Ca.; Rio Grande Rift, NM; Roosevelt Hot Springs, Ut.; and Sahon Trough, Ca. Background information (geology, geochemistry, geophysics, and energy transport) was gathered on the five sites as a preliminary stage to site selection. Criteria for site selection are that potential sites have identifiable, or likely, hydrothermal systems and associated magma sources, and the important scientific questions can be identified and answered by deep scientific holes. Recommendations were made. DOE

**N81-20562#** New Zealand Energy Research and Development Committee, Auckland

### ENGINEERING STUDY OF PELLETING WASTE PAPER FOR ENERGY RECOVERY Final Report

1980 11 p refs

(NZERDC-53, ISSN-0110-1692)

Avail NTIS

HC A02/MF A01

Scientific work completed by the Environmental Ethics Trust is reported. As the production of pellets, the source of raw material, and the burning characteristics were already established by the Trust, the report concentrates on the economics of production as being one of the two critical factors not yet established. These costs are given for various throughputs to determine the most economic production rate and to establish likely production costs with a given source of raw material. The other critical factor discussed is the possible market for the pellets; for without a market, the economics of the process are meaningless. DOE

**N81-20565#** VIAK A.B., Vaellingby (Sweden).

### ENERGY OUT OF GROUNDWATER

Torgny Agerstrand and Lars O Eriksson Mar 1980 42 p refs In SWEDISH

(NE/HE1V-BU/8) Avail NTIS HC A03/MF A01

The purpose of this inventory is to estimate those energy resources of the built-up area which are stored in aquifers with good tapping facilities. It is presumed that the energy is extracted by conventional heat pump technique in a relatively big scale. The following conditions have to be met: (1) adequate access to ground water having ample and stable temperature, (2) facilities to exploit the ground water at a lower temperature, (3) a well built-up residential area, and (4) access to reasonably priced momentum power for the heat pump. The total power requirement per tenement will be 5 kW. Thus 295,000 tenements in built-up areas can be supplied with heat to 90 percent of their yearly requirement by means of energy from ground water and the heat pump. Conflict of interests reduces the coverage to 184,000 tenements. DOE

**N81-20671#** Toledo Metropolitan Area Council of Governments, Ohio

### GROUNDWATER AS AN ALTERNATIVE ENERGY SOURCE FOR SPACE HEATING AND COOLING, GEOTHERMAL HEAT EXTRACTION

Jul 1980 37 p refs

(Contract W-31-109-eng-38)

(DOE/TIC-11357, INFORMATION-5)

Avail NTIS

HC A03/MF A01

The technology of the groundwater heat pump (GWHP), its applicability to the Toledo metropolitan area council of governments region, and relative economics of its use are addressed. The operation of the GWHP in both the heating and cooling modes is discussed as well as its advantages and disadvantages. A comparison is made between GWHP and other heating and cooling systems both in operation and cost. A detailed analysis is given to the legal implications of direct groundwater use and its related impacts. RCT

**N81-20580#** Los Alamos Scientific Lab., N. Mex.

### BASIC RESEARCH NEEDED FOR THE DEVELOPMENT OF GEOTHERMAL ENERGY

R L Aamodt and R E Riecker Oct 1980 22 p refs

(Contract W-7405-eng-36)

(LA-8562-MS) Avail NTIS HC A02/MF A01

Basic research needed to facilitate development of geothermal energy is identified. The present state of knowledge of geothermal energy is presented and specific recommendations for further research, with status and priorities are listed. Discussion is limited to a small number of applicable concepts, namely: origin of geothermal flux, transport of geothermal energy, geothermal reservoirs, rock-water interactions, and geophysical and geochemical exploration. DOE

**N81-20581#** Lund Univ. (Sweden)

### MARINE BIOMASS: ALGAE AS SOURCE OF ENERGY

Lars Edler, Torgny von Wachenfeldt, and Lars Emmelin Apr 1980

115 p. refs In SWEDISH

(NE/BIO-80/12) Avail NTIS (US Sales only)  
HC A06/MF A01

Calculations based on data from laboratory and field measurements indicate that a production of as much as 115 tons of algae (dry matter) per hectare and year could be achieved. Culture of marine algae along the Swedish coast would probably take place in shallow, sheltered waters. Using a succession of naturally occurring species a growing season of 240 days could be achieved. With a production of 115 tons dm ha/1 year/1 an output of approximately 110 MWhT/ha/1 year/1 of methane gas would be feasible using anaerobic fermentation. The area of the Baltic inside the 5 m depth curve is 19,000 sq km. If 10% of this area were available, a production of around 20 TWhT of gas annually would be the maximum potential of the system. A system is described for growing algae in the shallow marine environment. Energy analysis of the system indicates that approximately 5% of the energy output from an algae based methane plant would be required for growth, harvesting and conversion to methane. DOE

**N81-20592# GEOMET, Inc., Gaithersburg, Md  
WIND ENERGY RESOURCE ATLAS. VOLUME 4: THE  
NORTHEAST REGION**

K E Pickering, J M Vilardo, J T Schakenbach, D L Elliott (Pacific Northwest Lab), W R Barchet (Pacific Northwest Lab), and R L George (Pacific Northwest Lab) Sep 1980 228 p refs

(Contract DE-AC06-76RL-01830)

(PNL-3195-WERA-4) Avail NTIS HC A11/MF A01

This atlas is composed of introductory and background information, a regional summary of the wind resource, and assessments of the wind resource in each state of the region. Background is presented on how the wind resource is assessed and on how the results of the assessment should be interpreted. A description of the wind resource on a regional scale is then given. The results of the wind energy assessments for each state are assembled in this chapter into an overview and summary of the various features of the regional wind energy resource. An introduction and outline are provided for in the descriptions of the wind resource given for each state. Assessments for individual states are presented. The state wind energy resources are described in greater detail than is the regional wind energy resource, and features of selected stations are discussed. DOE

**N81-21153# State Univ of New York, Buffalo Dept of  
Chemical Engineering**

**HYDROGEN-METHANE SEPARATION PROCESSES AND  
RELATED PHENOMENA**

J T Saunders, S S Wang, and R T Yang Jan 1981 50 p refs

(Contract DE-AC21-80MC-14386)

(DOE/METC-14386/108) Avail NTIS HC A03/MF A01

A literature survey on processes for separating hydrogen and methane is presented. This was done in conjunction with work developing a more energy efficient and lower cost process based on cyclic, fixed bed processes using coal chars as the sorbents. Although the review has covered all hydrocarbon separation processes, the focuses were on physical adsorption phenomena and theories (for both single and mixed gases), surface and pore characteristics of coals and heat-treated coals, and the continuous or semi continuous chromatographic separation methods. Processes of hydrocarbon separation based on absorption/desorption, competitive adsorption, the cyclic (including parametric pumping) processes, absorption on coal chars, and absorption on raw coals are investigated. J D H

**N81-21154# State Univ of New York, Buffalo School of  
Engineering and Applied Science**

**CATALYTIC COMBUSTION OF SYNTHETIC FUELS Semian-  
nual Report, 1 Aug. 1980 - 31 Jan. 1981**

L A Kennedy and Eli Ruckenstein 1981 6 p

(Contract DE-FG22-80PC-30220)

(DOE/PC-30220/T1) Avail NTIS HC A02/MF A01

The efforts on this project were directed towards three goals: (1) catalyst development (2) preliminary measurements of fuel

bound nitrogen conversion, and (3) design of a droplet injector and vaporization section for use with SRC-II liquids. An experimental apparatus was designed to examine NO conversion in a catalytic combustor. Argon-oxygen is the oxidizing gas. Minimizing conversion of fuel nitrogen to nitrogen oxides is the aim of this task. A multipoint injector for coal derived liquid fuels is being designed. J D H

**N81-21179# Oak Ridge National Lab, Tenn  
STRESS CORROSION STUDIES IN SOLVENT REFINED  
COAL LIQUEFACTION PILOT PLANTS**

V B Baylor, J R Keiser, M D Allen, and E J Lawrence Dec 1980 48 p refs

(Contract W-7405-eng-28)

(ORNL/TM-7513) Avail NTIS HC A03/MF A01

The causes of stress corrosion cracking in solvent refined coal (SRC) reactor materials are examined. To screen candidate materials of construction for resistance to stress corrosion cracking, racks of stressed U bend specimens in welded and as wrought conditions were exposed at the Wilsonville and Fort Lewis SRC pilot plants. Alloys that are suitable for critical plant applications were identified. DOE

**N81-21217# Department of Energy, Grand Forks, N Dak Grand  
Forks Energy Technology Center**

**OBSERVATIONS ON TEST STOCKPILES OF DRIED LIGNITE  
AND SUBBITUMINOUS COALS**

S A Cooley, L E Paulson, and R C Ellman 1981 14 p refs

(DOE/GFETC/RI-80/5) Avail NTIS HC A02/MF A01

Dried low rank coal stockpiles were monitored from 1974 to 1980. Moisture content, heating value, and pile temperature showed little changes since compaction. Indications are that dried coal can be stockpiled for extended periods. DOE

**N81-21218# Air Products and Chemicals, Inc., Allentown, Pa  
CRYOGENIC METHANE SEPARATION/CATALYTIC HY-  
DROGASIFICATION PROCESS ANALYSIS Quarterly  
Report**

J Klosek 2 Dec. 1980 17 p

(Contract DE-AC01-78ET-10325)

(DOE/ET-10325/T3) Avail NTIS HC A02/MF A01

Trade-off and optimization studies are reported for the Short Residence Time Hydrogasification (SRT-H) and the Catalytic Coal Gasification (CCG) processes in the acid gas removal and cryogenic separation areas. Subtasks include block flow sheet, overall heat and material balance, utility summary, four-line equipment description, investment and treatment cost summaries and final report writing in addition to monthly and quarterly reports. DOE

**N81-21220# Department of Energy, Washington, D C  
ALTERNATIVE FUELS PRODUCTION PROGRAM Semian-  
nual Report**

Nov 1980 188 p

(DOE/RA-0058/2) Avail NTIS HC A09/MF A01

The provisions of Public Law 96-126 and subsequent legislation by Congress, applicable to the alternative fuels production program are described. Emphasis is placed on program strategies and objectives as well as specific implementation approaches. Results of several feasibility studies conducted under the program are presented. R.C.T

**N81-21222# Gulf Research and Development Co., Pittsburgh, Pa**

**INVESTIGATION OF THE LIQUEFACTION OF PARTIALLY  
DRIED AND OXIDIZED COALS Final Report**

D C Cronauer, R G Ruberto, R S Silver, R J Jenkins (Pennsylvania State Univ), and A Davis (Pennsylvania State Univ) Nov 1980 177 p refs. Sponsored by Electric Power Research Inst

(EPRI Proj 779-25)

(EPRI-AP-1625) Avail NTIS HC A09/MF A01

The effect of predrying and partial oxidation on the liquefaction behavior of subbituminous coal was examined. It was found from both micro and bench scale experiments that the drying of

## 04 FUELS AND OTHER SOURCES OF ENERGY

Belle Ayr subbituminous coal, even in nitrogen, results in a significant reduction of product yields when a comparison is made to similar runs using as-received coal. A further reduction occurs when the drying gas contains oxygen. As observed from a microscopic study of the reaction product residues, the yield reduction is due in part to a prepolymerization of coal liquid products resulting in a sizable portion of coke-like solids. Samples of both Belle Ayr subbituminous and Powhatan bituminous coals were dried in various gases in three scales of equipment, namely, TGA and laboratory and bench-scale fluid bed units. The rates and maximum levels of coal oxidation are discussed. It is noted that the lower rank coal oxidizes more readily, but the maximum up-take of oxygen is only about 4 wt % while that of the higher rank coal is about 8 wt %.

DOE

**N81-21223#** Oak Ridge National Lab., Tenn. Chemical Technology Div.

### **LIQUEFACTION TECHNOLOGY ASSESSMENT. PHASE 1: INDIRECT LIQUEFACTION OF COAL TO METHANOL AND GASOLINE USING AVAILABLE TECHNOLOGY**

R. M. Wham, J. F. Fisher, R. C. Forrester, III, A. R. Irvine, R. Salmon, S. P. N. Singh, and W. C. Ulrich. Feb. 1981. 403 p. refs.

(Contract W-7405-eng-26)

(ORNL-5664) Avail. NTIS HC A18/MF A01

Major liquefaction technologies employed were ICI low pressure methanol synthesis and Mobil-MTG conversion of methanol to gasoline. Four major cases were studied, representing different product slates. In each case, the economic study was based on the detailed process design of a conceptual, self-sufficient, commercial facility using a coal feed rate to the gasifiers of 16,000 tons per stream day on a moisture and ash-free basis. This corresponds to a total as-received coal feed rate of about 30,000 TPSD to the facility. Process designs, equipment summaries, cost estimates, and operating requirements were prepared. Economic sensitivity studies showed that the two factors having the greatest influence on product price were the method of financing and the inclusion of escalation of inflation. Depending on the financing assumptions, the initial gasoline selling price in 1979 dollars varied from \$0.78 to \$1.25/gallon. This price must be escalated at 6%/yr to obtain the price in the start-up year, or in any other year of operation.

DOE

### **N81-21224#** Battelle Pacific Northwest Labs., Richland, Wash. **METHANOL PRODUCTION WITH ELEMENTAL PHOSPHORUS BYPRODUCT GAS: TECHNICAL AND ECONOMIC FEASIBILITY**

S. E. Lyke. Jan. 1981. 200 p. refs.

(Contract DE-AC06-78RL-01830)

(PNL-3684) Avail. NTIS HC A09/MF A01

The technical and economic feasibility of using a phosphorus byproduct stream as a substitute for part of the natural gas in methanol production is assessed. Economic tradeoffs between several alternative methods of supplying the necessary hydrogen gas for methanol production are established. A preliminary basic design of a plant to clean and compress the off gas, return recovered phosphorus to the phosphorus plant, and produce methanol by using the phosphorus off gases is presented. Detailed economic analyses of the production of elemental phosphorus and methanol, a methanol plant feasibility study, and methanol market study are presented.

J. D. H.

**N81-21228#** Argonne National Lab., Ill. Materials Science Div.

### **MATERIALS TECHNOLOGY FOR COAL CONVERSION PROCESSES** Progress Report, Apr. - Jun. 1980

William A. Ellingson. Oct. 1980. 70 p. refs.

(Contract W-31-109-eng-38)

(ANL-80-93) Avail. NTIS HC A04/MF A01

High chromia content and high density were identified as important factors in minimizing corrosion of refractories. Results from the high temperature nondestructive erosion scanner revealed the presence of a hard film composed of Cr, Fe, S, and O<sub>2</sub> which reduced erosive wear which is acoustically transparent. Further

improvements in the erosion scanner data acquisition system through employment of a correction for through wall thermal gradients reduced data scatter. Qualitative detection of internal liquid leaks past critical valves in coal liquefaction plants seems possible through use of low velocity ultrasonic or strain sensitive flowmeters together with passive acoustic systems. Studies of high temperature gaseous corrosion of low Btu environments show that the potential exists for sulfide attack even in high chromium alloys such as 310 SS. Failure analysis activities included analysis of a failed internal transfer line and a thermocouple sheath.

DOE

### **N81-21229#** Fluor Engineers and Constructors, Inc., Irvine, Calif. **ECONOMIC COMPARISON OF MOLTEN CARBONATE FUEL CELLS AND GAS TURBINES IN COAL GASIFICATION BASED POWER PLANTS** Final Report

C. D. Crawford, R. P. Dawkins, and J. R. Joiner. Sep. 1980. 444 p.

(EPRI Proj. 239-2)

(EPRI-AP-1543) Avail. NTIS HC A19/MF A01

The results of screening type process evaluation for heat integration of coal gasification processes with two alternate advanced combined cycle power generation systems are presented. One system was composed of a molten carbonate fuel cell prime cycle and a steam bottoming cycle. The second system contained a 2600 F gas turbine prime cycle and a steam bottoming cycle. The three coal gasification processes utilized included the oxygen blown entrained gasifier, the air blown entrained gasifier, and the slagging gasifier.

DOE

### **N81-21230#** RANN, Inc., Palo Alto, Calif. **COMPARATIVE ANALYSIS OF COAL USE OPTIONS FOR REDUCING THE DEPENDENCE OF UTILITIES ON IMPORTED OIL**

A. J. Eggers, Jr. 3 Jan. 1980. 54 p. refs.

(Contract DE-AC01-78RA-12301)

(DOE/RA-12301-T1) Avail. NTIS HC A04/MF A01

The conversion of utilities from oil-fired to coal-fired to yield an import reduction of 0.75 MBD by 1990. It is indicated therefore that the program development and management techniques employed in the Apollo Polans and Minuteman programs may have useful application to the utility conversion program. These techniques include comparative systems and mission mode analysis, and the application of these techniques to the utility conversion program is discussed. It is suggested that DOE/RA initiate an in-house task force effort to make a comparative analysis of conversion alternatives to meet this goal. This analysis is discussed in some detail and it should consider the coal delivery as well as the conversion elements of the overall coal use system with a view to focusing on problems which must be addressed.

DOE

### **N81-21231#** Sandia Labs., Albuquerque, N. Mex. **CATALYTIC EFFECTS IN COAL GASIFICATION** Quarterly Report, Apr. - Jun. 1980

T. D. Padrick. Nov. 1980. 18 p. refs.

(Contract DE-AC04-76DP-00789)

(SAND-80-2151) Avail. NTIS HC A02/MF A01

The effects of mineral matter on the devolatilization of coal and on the subsequent char gasification were determined. Eastern bituminous coals whose mineral matter content, as determined by X-ray analysis of low temperature ash, ranged from less than 5% to more than 20% were selected for study. Chemical and physical characterization revealed that these coals had similar rank and petrographic content. Baseline thermal gravimetric experiments in which the coals were heated from ambient to 1000 C at 5 C/min under nitrogen or hydrogen were completed. Also the composition of the gas evolved during both the devolatilization regime and the subsequent period of slower char gasification was measured.

J. M. S.

### **N81-21232#** General Accounting Office, Washington, D. C. Energy and Minerals Div. **LIQUEFYING COAL FOR FUTURE ENERGY NEEDS**

12 Aug. 1980. 43 p. refs.

(PB81-135956 EMD-80-84) Avail. NTIS HC A03/MF A01  
CSCL 07A



## 04 FUELS AND OTHER SOURCES OF ENERGY

Coal liquefaction is a technology which can augment petroleum derived products such as gasoline and boiler fuels. There are no commercial plants operating or under construction in the United States for either of the two types of coal liquefaction direct and indirect. If any portion of the national goals for synthetic fuels is to be met with coal liquefaction, the bulk of the production is likely to come from the indirect processes. GRA

**N81-21233#** Office of Technology Assessment, Washington, D C  
**ENERGY FROM BIOLOGICAL PROCESSES. VOLUME 2: TECHNICAL AND ENVIRONMENTAL ANALYSES**  
Jul. 1980 228 p refs  
(PB81-134769, OTA-E-128, LC-80-600118) Avail NTIS HC A11/MF A01 CSCL 21D

Forestry, agriculture, processing wastes, and various unconventional energy sources including oil-bearing and aquatic plants are considered. Energy conversion technologies discussed include thermochemical conversions, fermentation by ethanol production, anaerobic digestion, use of alcohol fuels, select energy balances, and chemicals from biomass. Technical, economic, and environmental details are presented and analyzed. GRA

**N81-21234#** Washington Univ., Seattle Coll of Forest Resources  
**ENERGY FROM BIOLOGICAL PROCESSES. VOLUME 3: APPENDIXES. PART A: ENERGY FROM WOOD**  
James S Bethel, David G Briggs, Lorenzo Garay, Stanley P Gessel, William D Kitto, Warren F Lake, Amadeo J Rossi, Gerald F Schreuder, David A Tillman, and Larry G Zuller. Jul 1980 387 p refs  
(PB81-134777, OTA-C-78-339) Avail NTIS HC A17/MF A01 CSCL 21D

The feasibility of fostering further substitution of wood for fossil fuels was assessed. It is concluded that there is a surplus of wood that could be used for fuel in substitution for fossil fuels, and, on a renewable basis, this supply could be very substantially increased if it were national policy to do so. GRA

**N81-21235#** Office of Technology Assessment, Washington, D. C.  
**ENERGY FROM BIOLOGICAL PROCESSES. VOLUME 3: APPENDIXES. PART B: AGRICULTURE, UNCONVENTIONAL CROPS, AND SELECTED BIOMASS WASTES Final Report**  
Jul. 1980 856 p refs 3 Vol  
(PB81-134785) Avail NTIS HC A99/MF A01 CSCL 21D  
Working papers presented include: The Potential of Producing Energy From Agriculture, Cropland Availability for Biomass Production, Energy From Agriculture, Unconventional Crops, Energy From Aquaculture Biomass Systems, Fresh and Brackish Water Aquatic Plants, Energy From Agriculture, Animal Wastes, and Energy From Agriculture, Agricultural Processing Wastes. GRA

**N81-21236#** Office of Technology Assessment, Washington, D. C.  
**ENERGY FROM BIOLOGICAL PROCESSES. VOLUME 3: APPENDIXES. PART C: SELECTED CONVERSION TECHNOLOGIES AND END USE**  
Sep 1980 719 p refs 3 Vol  
(PB81-134793) Avail NTIS HC A99/MF A01 CSCL 21D  
Contents: End Use of Fluids from Biomass as Energy Resources in Both Transportation and Nontransportation Sectors, Thermochemical Conversion of Biomass: The Scientific Aspects, Engineering Aspects of Thermochemical Conversion, and Biological Production of Gas. GRA

**N81-21237#** Textron, Inc., Buffalo, N Y  
**COAL GASIFIER WALL PROTECTION SYSTEM Report, 15**  
Jan. 1979 - May 1980  
Dale M Slaughter. Apr 1980 132 p refs. Sponsored by New York State Energy Research and Development Authority  
(PB81-141921, NYSERDA-80-5) Avail NTIS HC A07/MF A01 CSCL 21D

When coal is converted to other forms, as much as 5 to 30 percent of it is left as ash. That ash can foul the interior of the conversion system, cutting efficiency, and sometimes causing total shut down. Molten or solidified ash (slag) build up occurs in coal gasifiers where temperatures are so high that the ash melts. Finding materials and developing designs to eliminate slag accumulation are emphasized. GRA

**N81-21381#** Department of Energy, Morgantown, W Va Energy Systems Planning Div  
**EVERLASTING SLIDING-DISC VALVE METC SOA TEST VALVE NO. B-3, STATE-OF-THE-ART LOCKHOPPER VALVE TESTING AND DEVELOPMENT PROJECT**  
J F Gardner, R C Hall, R G Hornbeck, R A Griffith, T M Yost, D M Harvey, W E Galvin (EG/G, Morgantown, W Va), T R Gayheart (EG/G, Morgantown, W Va), and S K Kapur (TRW, Denver). Aug 1980 42 p refs  
(Contracts DE-AM21-80MC-15422, DE-AT21-80MC-14689) (DOE/METC-SP-80/17) Avail NTIS HC A03/MF A01

The Everlasting Sliding-Disc Valve accumulated 740 valve cycles in the valve static test unit and over 16,000 valve cycles in the valve dynamic test unit. Only minor operating problems, primarily erratic motion and some scoring of the seating surface, were encountered with coarse limestone (5/16 x 1/8 in) particles. Operation with fine solids (100 mesh limestone) showed excellent performance. The actuator level arm failed twice but a change in clearances solved the problem. Based on its performance in testing, the sliding disc valve, with minor modifications, is a very promising choice for feedside lockhopper service in coal conversion and utilization. DOE

**N81-21423\*#** Instituto Geografico Nacional, Madrid (Spain)  
**THERMAL MAPPING, GEOTHERMAL SOURCE LOCATION, NATURAL EFFLUENTS AND PLANT STRESS IN THE MEDITERRANEAN COAST OF SPAIN Progress Report**  
Rodolfo Nunez delas Cuevas, D Fernando Lopez de Sagredo (Univ Politecnica de Madrid), D Joaquin Melia Miralles (Valencia Univ), D Pedro Herranz Araujo (Univ Complutense), D Jesus Paredes Perlado (Centro de Estudios Hidrograficos, Madrid), D Gregorio Parrilla (Inst Espanol de Oceanografia, Madrid), D J Luis Picon (Centro de Investigacion, Madrid), and D J Luis Labrandero, Principal Investigators (Consejo Superior de Investigaciones Cientificas, Madrid). 30 Jun 1980 3 p. Sponsored by NASA HCMM  
(E81-10119, NASA-CR-164113, PR-3) Avail NTIS HC A02/MF A01 CSCL 13B

Although no significant results were achieved during the report period, research continues. A sample of imagery showing thermal inertia and temperature differences over the northeastern United States and Europe was received. The project coordinator attended a TELLUS Project meeting in Ispra, Italy at which general guidelines for the future were established and the quality of the data received was discussed. A R H

**N81-21463#** California Univ., Berkeley Lawrence Berkeley Lab. Earth Sciences Div  
**UPDATED PLAN FOR SUPPORT OF RESEARCH RELATED TO GEOTHERMAL RESERVOIR ENGINEERING**  
J. H. Howard, N E Goldstein, and A N Graf. Sep 1980 59 p refs  
(Contract W-7405-eng-48)  
(LBL-10807) Avail NTIS HC A04/MF A01

The original plan for support of research in geothermal reservoir engineering, GREMP, was reviewed and compared with accomplishments to date. A commentary on the comparison and an updated plan are presented. Also included are a justification of the updated plan and a reviewed management plan. DOE

**N81-21464#** Department of Energy, Washington, D C Office of Coal Supply Development  
**WESTERN COAL SURVEY: A SURVEY OF COAL MINING CAPACITY IN THE WEST**  
Jan 1981 60 p  
(DOE/RA-0045/1) Avail NTIS HC A04/MF A01

The purpose of the survey is to track progress and changes in productive capacity. Specifically, the survey seeks estimates

## 04 FUELS AND OTHER SOURCES OF ENERGY

of current and future productive capacity, of amounts of coal currently under contract, and of potential constraints to higher production. The report identifies 116 western mines producing 200,000 tons or more in 1980, 209 such mines in 1985 and 221 in 1990. All but 29 of the future operations are expected to be producing by the end of 1985. Of these 29, 12 begin production in 1986 and 9 in 1987. Six existing mines are expected to be mined out or abandoned by 1990. DOE

**N81-21468#** Sandia Labs., Albuquerque, N. Mex. SPR Geotechnical Div. **STRATEGIC PETROLEUM RESERVE (SPR) GEOLOGICAL SUMMARY. WEEKS ISLAND SALT DOME** Terri Smith Ortiz. Oct 1980. 54 p. refs. (Contract DE-AC04-78DP-00789) (SAND-80-1323) Avail NTIS HC A04/MF A01

A portion of the Weeks Island Salt Dome in southern Louisiana was purchased for use as a crude oil storage facility. mine Geotechnical investigations of the conventional underground salt mine are summarized. Topics cover site geology, material properties of the salt, the condition of the oil storage area, the status of other activities in the salt dome, and recommendations. DOE

**N81-21550#** Delegationen for Energiforskning, Stockholm (Sweden). **PRODUCTION OF A RAW MATERIAL FOR ENERGY PRODUCTION IN AGRICULTURE** Goeran Hellstrom. Apr 1980. 48 p. refs. In SWEDISH (DFE-31) Avail NTIS (US Sales Only) HC A03/MF A01. DOE Depository Libraries

The total amount of energy in products produced by Swedish agriculture was estimated to 80 TWh. 30 TWh for cereals, 15 TWh for grass and leguminosae, and 35 TWh for straw and other agricultural wastes. Of this production a large part will be used as food even in the future. New plants that would produce more energy than the ones traditionally grown in Sweden are discussed. Also other types of energy from agriculture are discussed such as methane from manure, methanol from gasification processes, and ethanol from fermentative processes. Costs were estimated from different alternatives. DOE

**N81-21562#** New Mexico State Univ., Las Cruces. **REGIONAL OPERATIONS RESEARCH PROGRAM FOR COMMERCIALIZATION OF GEOTHERMAL ENERGY IN THE ROCKY MOUNTAIN BASIN AND RANGE** Final Report. 1 Aug. 1978 - 28 Feb. 1980. J. M. Marlin, Roy Cuniff, Paul McDevitt, Kenneth Nowotny, and Patrick O'Dea. Jan 1981. 126 p. Sponsored in part by New Mexico Energy and Minerals Dept. and Four Corners Regional Commission. (Contract DE-AS07-78ID-01756) (DOE/ID-01756/T1, EMD-78-2236) Avail NTIS HC A07/MF A01

The work accomplished from August 1978 to February 1980 in the Regional Operations Research efforts for the Rocky Mountain Basin and Range Geothermal Commercialization Program is described. The work included continued data acquisition and extension of the data base, enhancement and refinement of the economic models for electric and direct use applications, site-specific and aggregated analyses in support of the state teams and special analyses in support of several federal agencies. DOE

**N81-21573#** Los Alamos Scientific Lab., N. Mex. **HEAT-FLOW MEASUREMENTS IN THE STATE OF ARKANSAS** Final Report. R. F. Roy, Bruce Taylor, Arthur J. Pyron, and James C. Maxwell. Oct 1980. 16 p. refs. (Contract W-7405-eng-36) (LA-8569-MS) Avail NTIS HC A02/MF A01

The pertinent holes are located in the four major geological divisions of the state. Despite the presence of hot springs in the Ouachita region, these figures are not especially encouraging as indicators of the a possible geothermal resource, and the low heat-flow in the syenite intrusion at Little Rock is certainly

disappointing in terms of hot dry rock exploitation. The most promising area geothermally is in the southern counties (in the Gulf coastal plain), where a compilation of geothermal gradient estimates, made from published well-temperature data, shows a trend towards higher than average gradients. DOE

**N81-21585#** Denver Univ., Colo. Denver Research Inst. **MUNICIPAL GEOTHERMAL HEAT UTILIZATION PLAN FOR GLENWOOD SPRINGS, COLORADO** Final Technical Report. 31 Dec 1980. 276 p. refs. (Contract DE-AS07-79ID-12049) (DOE/ID-12049-3) Avail NTIS HC A13/MF A01

The results show that the use of geothermal heat is indeed feasible when compared to the cost of natural gas. The proposed system is composed of a wellhead plate heat exchanger which feeds a closed distribution loop of treated water circulated to the buildings which form the load. The base case system was designed to supply twice the demand created by the seven public buildings in order to take advantage of some economies of scale. To increase the utilization factor of the available geothermal energy, a peaking boiler which burns natural gas is recommended. Disposal of the cooled brine would be via underground injection. DOE

**N81-21604#** Battelle Pacific Northwest Labs., Richland, Wash. **INVESTIGATIONS ON CATALYZED STEAM GASIFICATION OF BIOMASS. APPENDIX B: FEASIBILITY STUDY OF METHANOL PRODUCTION VIA CATALYTIC GASIFICATION OF 2000 TONS OF WOOD PER DAY** L. K. Mudge, S. L. Weber, D. H. Mitchell, L. J. Sealock, Jr., R. J. Robertus, and Davy McKee. Jan 1981. 124 p. (Contract DE-AC06-76RL-01830) (PNL-3695-App-B) Avail NTIS HC A06/MF A01

The plant design in this study was developed from information on gasifier operation supplied by the Pacific Northwest Laboratory (PNL), operated by Battelle. PNL obtained this information from laboratory and process development unit testing. The plant is designed to process 2000 tons per day of dry wood to methanol. Plant production is 997 tons per day of methanol with a HHV of 9784 Btu per pound. All process and support facilities necessary to convert wood to methanol are included in this study. DOE

**N81-21610#** Department of Energy, Washington, D. C. Energy Information Administration. **PERFORMANCE PROFILES OF MAJOR ENERGY PRODUCERS** Dec 1980. 111 p. refs. (DOE/EIA-0206/78) Avail NTIS HC A08/MF A01

Data for 26 major energy producing companies (coal, oil, gas, nuclear) for 1977 and 1978 are presented. Data were collected using the Financial Reporting System (FRS) reporting Form EIA-28 which collects disaggregated financial data on revenues and expenses, assets and liabilities, and sources and uses of funds. The overall corporate financial performance of 26 FRS companies are compared with the other major industrial companies. Differences in relative commitment and profitability associated with alternative lines of corporate activity are examined. The size composition and international character of FRS companies are examined. Oil and gas resource development efforts in 1978 are traced. Data on resource development expenditures are complemented by information on reserve holdings, changes in reserves, and characteristics of exploration and development efforts. Foreign activity is compared with domestic. DOE

**N81-21615#** California Univ., Livermore. Lawrence Livermore Lab. **SYNOPSIS OF R AND D IN GEOTHERMAL-GEOCHEMICAL ENGINEERING AT THE LAWRENCE LIVERMORE NATIONAL LABORATORY, 1976 - 1980** J. E. Harrar, comp. Dec 1980. 23 p. refs. (Contract W-7405-eng-48) (UCID-18863) Avail NTIS HC A02/MF A01

Research is summarized on geothermal field test apparatus, brine acidification as a means of scale control at the Salton

Sea Geothermal Field, tests of seeding and other chemical methods for the control of scale at the Salton Sea Geothermal Field, tests of proprietary organic additives for the control of scale at the Salton Sea Geothermal Field, tests of generic organic compounds for control of scale at Salton Sea Geothermal Field, studies of the dissolution of geothermal scale, chemical measurement developments, chemical modeling of geothermal systems, processing of geothermal brine effluents for injection, hydrogen sulfide abatement using geothermal brine effluents, use of surface waters to supplement injection at the Salton Sea Geothermal Field, and measurement of injectability of geothermal brines  
DOE

**N81-21616#** Los Alamos Scientific Lab., N Mex Systems Analysis and Assessment Div  
**MICRO-LEVEL LAND USE IMPACTS OF BIOCONVERSION**  
M.S. Thesis

Virginia Kay Barber Parsons Nov 1980 94 p refs  
(Contract W-7405-eng-36)

(LA-8599-T) Avail NTIS HC A05/MF A01

Implementation of the land intensive bioenergy technologies involves actions that impact existing land use at the local level. Due to the differences in crop type, yield per acre, existing land use conditions, and agricultural practices throughout the U.S., microlevel information is necessary. The local biomass potential is examined based on existing land use in seven countries in different agricultural regions throughout the U.S. These case studies serve as a basis for identifying the microlevel land use impacts of the bioconversion technologies  
DOE

**N81-21623#** Los Alamos Scientific Lab., N Mex  
**GEOTHERMAL ENERGY ENHANCEMENT BY THERMAL FRACTURE**

Ruth B Demuth and Francis H Harlow 1980 70 p ref  
Sponsored by DOE

(LA-8428) Avail NTIS HC A04/MF A01

A large, vertical, circular fracture created deep within hot rock is connected to the surface through two holes. The inlet provides a source of cold water and the outlet extracts heated water. Cooling of the rock produces thermal stresses that fracture the rock adjacent to the primary crack, thereby enhancing the heat extraction rate by means of convective transport. The properties of the thermal fracture network vary with position and time. The REX code for high-speed computer was written and used to study the coupled processes of primary-crack flow and lateral thermal fracture heat transport. Calculations for elapsed times of 100 yr show that thermal fracture enhancement can double the heat extraction rate over the results from conduction alone  
S F

**N81-21712#** Nuclear Utility Services, Inc., Rockville, Md  
**WIND ENERGY RESOURCE ATLAS. VOLUME 5: THE EAST CENTRAL REGION**

R Brode, R Stoner, D L Elliott (Pacific Northwest Lab.), W R Barchet (Pacific Northwest Lab.), and R L George (Pacific Northwest Lab.) 1980 214 p refs

(Contract DE-AC06-76RL-01830)

(PNL-3185-Vol-5) Avail NTIS HC A10/MF A01

This atlas of the wind energy resource is composed of introductory and background information, a regional summary of the wind resource, and assessments of the wind resource in each state of the region. Background is presented on how the wind resource is assessed and on how the results of the assessment should be interpreted. A description of the wind resource on a regional scale is given. The results of the wind energy assessments for each state are assembled into an overview and summary of the various features of the regional wind energy resource. Assessments for individual states are presented. The state wind energy resources are described in greater detail than is the regional wind energy resource, and features of selected stations are discussed. States include Delaware, Maryland, Kentucky, North Carolina, Tennessee, Virginia, and West Virginia  
DOE

**N81-21875#** Argonne National Lab., Ill Components Technology Div

**MONITORING TEMPERATURES IN COAL CONVERSION AND COMBUSTION PROCESSES VIA ULTRASOUND**

N Gopalsami (Illinois Univ at Chicago Circle), A C Raptis, and T P Mulcahey Feb 1980 48 p refs

(Contract W-31-109-eng-38)

(ANL-FE-49622-TM09, TM-9) Avail NTIS HC A03/MF A01

The state of the art of instrumentation for monitoring temperatures in coal conversion and combustion systems is examined. The instrumentation types studied include thermocouples, radiation pyrometers, and acoustical thermometers. The capabilities and limitations of each type are reviewed. A feasibility study of the ultrasonic thermometry is described. A mathematical model of a pulse-echo ultrasonic temperature measurement system is developed using linear system theory. The mathematical model lends itself to the adaptation of generalized correlation techniques for the estimation of propagation delays. Computer simulations are made to test the efficacy of the signal processing techniques for noise-free as well as noisy signals. Based on the theoretical study, acoustic techniques to measure temperature in reactors and combustors are feasible  
DOE

**Page Intentionally Left Blank**

## 05

### ENERGY CONVERSION

Includes photovoltaic, thermoelectric, geothermal, ocean thermal, and wind energy conversion Also includes nuclear reactors and magnetohydrodynamic generators

**A81-19810** Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations P F Dunn, G Fabris, E S Pierson, and M Petrick (Argonne National Laboratory, Argonne, Ill.) In *MHD-flows and turbulence II* Jerusalem, Israel Universities Press, 1980, p 145-155 16 refs Research supported by the U.S. Navy and U.S. Department of Energy

Experimental results of single and two-phase liquid-metal MHD investigations using circular and rectangular test-section geometries are presented Single-phase pressure gradient data for the circular geometry are compared with the existing MHD theory, the two-phase results for both geometries agree with a two-phase MHD correlation developed here Tests were conducted in a 10-cm diameter circular stainless-steel pipe with sodium and nitrogen over the range of liquid mean velocities of 2-4 m/s, mixture qualities from zero to 0.0053, and magnetic flux densities from zero to 0.9 T, at 530-810 K A T

**A81-19812** Liquid metal MHD generators with shunt layer P S Lykoudis (Argonne National Laboratory, Argonne, Ill., Purdue University, West Lafayette, Ind.) In *MHD-flows and turbulence II* Jerusalem, Israel Universities Press, 1980, p 183-191 ERDA-Navy-sponsored research

An analysis of the shunt layer in a liquid metal magnetohydrodynamic generator was performed in a closed form assuming a two-dimensional duct with a uniform two-phase core with walls wetted by liquid An expression is derived for the generator efficiency as a function of the load factor using standard Hartmann layer approximations The efficiency has the same expression with a uniform working fluid at an effective Hartmann number in terms of ratios of viscosity and electrical conductivity for the two-phase to the liquid phase value It was concluded that the high Hartmann number at which generators operate the shunt layer does not significantly decrease generator efficiency A T

**A81-19814** Pulsed self-excited MHD power generation at large energy densities B Zauderer and E Tate (General Electric Co., King of Prussia, Pa.) In *MHD-flows and turbulence II* Jerusalem, Israel Universities Press, 1980, p 207-221 6 refs

An experimental investigation of the physical, electromagnetic, and gas dynamic processes in the production of pulsed, self-excited MHD power is presented The MHD channel is inserted into the electrically driven shock-tunnel section so that its front face provides a reflecting end wall for the shock, the plasma flows from the reflected region through a converging-diverging nozzle to achieve supersonic velocity in the active region of the generator The voltage losses at the electrodes were independent of current, the plasma conductivity was equivalent to a 13,000 K argon plasma, with temperatures above 18,000 K expected in the reflected region A T

**A81-20022** # Approximate three-dimensional electric solution for a frame-type MHD generator W Unkel (MIT, Cambridge, Mass.) *Journal of Energy*, vol 4, Nov-Dec 1980, p 245-251 14 refs Contract No E(49-18) 2215

An approximate technique to determine the potential distribution and integral performance characteristics of a frame-type MHD channel is presented In addition to including the effect of the conducting sideframes, the model considers the effects of finite segmentation and the effects of variable plasma conductivity Hall parameter, and velocity In its simplest form, the approximate technique effects results for the three-dimensional potential distribution by solution of an ordinary differential equation The accuracy of the technique is demonstrated by comparison with results of more

detailed calculations and by comparison with experimental results These comparisons show good agreement both for the integrated generator performance and for the current distribution to the electrode frame In contrast to the detailed calculation procedure, the approximate technique has modest solution times and can be incorporated in a MHD generator design and prediction code

(Author)

**A81-20025** # Performance assessment of a Flettner wind turbine P Crimi *Journal of Energy*, vol 4, Nov-Dec 1980, p 281-283 8 refs

A study undertaken to provide a preliminary assessment of a wind turbine developed in the early 20th century by Flettner is discussed It is noted that with the Magnus effect providing lift, the turbine functions aerodynamically in the same way as a propeller-type device Significant factors affecting the overall cost of power production with a Flettner turbine are identified, including the relatively low power coefficient which arises from the low section lift-drag ratio, and the relatively low tip speed, also deriving from this ratio It is concluded that the aerodynamic performance of a hybrid configuration with constant-chord, fixed-pitch conventional blading at the tips would lie roughly midway between that of a Flettner and a propeller-type wind turbine C R

**A81-20225** # The rebirth of the Rankine cycle B Sternlicht and D D Colosimo (Mechanical Technology, Inc., Latham, N.Y.) *Mechanical Engineering*, vol 103, Jan. 1981, p 41-47 6 refs

With fossil fuels diminishing and increasingly expensive, the need for alternate energy sources becomes imperative In the combined industrial, utility, and federal sectors, there are close to 25 quads of thermal wastes that could be profitably tapped for such a purpose and heat engine cycles such as the Rankine cycle could be effective in converting such flows to useful power The Rankine cycle operates at a 40 percent efficiency at the top end of its peak cycle temperature range, which is roughly 200-1000 F, a range lower than other cycles but well within that of many thermal waste streams Installation costs for waste heat recovery systems are comparable to those of coal-fired electrical plants (\$800-\$1000/kW) and those of nuclear plants (\$1200/kW and up) Waste heat recovery, however, is based on systems whose operating energy costs are zero Economic and investment analyses are included R S

**A81-20548** # Preliminary Faraday performance of a large MHD generator at high magnetic field R F Starr, L S Christensen, G W Garrison, and G L Whitehead (ARO, Inc., Arnold Engineering Development Center, Arnold Air Force Station, Tenn.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St Louis, Mo., Jan 12-15, 1981, Paper 81-0028* 12 p 7 refs Research sponsored by the U.S. Department of Energy

The High Performance Demonstration Experiment showed that an MHD generator simulating a commercial scale device can convert 16 to 18% of the available thermal energy into electrical power Results have been obtained with the channel in the Faraday configuration and magnetic field strengths ranging from 1.5 to 3.5 Tesla, a maximum Faraday power of 23 MW was produced representing an enthalpy extraction of 9% An analysis is presented of the electrical and aerodynamic characteristics of the channel including the voltage drop in the cold plasma layers near the electrode walls A T

**A81-20549** # Comparison of analytical and experimental studies of the HPDE MHD generator performance Z El Derini, E Doss, and C Lenzo (Argonne National Laboratory, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St Louis, Mo., Jan 12-15, 1981, Paper 81-0029* 11 p 6 refs

The MHD generator performance of the High Performance Demonstration Experiment (HPDE) has been analyzed using the ANL quasi-three-dimensional computer model Computations performed for the operating conditions of tests No. 10 and 14 indicate that, for both tests, the trends and magnitudes of the experimental

## 05 ENERGY CONSERVATION

data for various electrical and gasdynamic variables are in good agreement with the analytical predictions. The variation of the channel performance as a function of the channel wall temperature, surface roughness, load factor, and magnetic field strength is examined, and numerical examples are given. Performance maps, showing channel enthalpy extraction versus isentropic efficiency, are generated for range of magnetic field strengths, loading parameters, and electrode surface temperatures. A 'diagnostic data analysis' (DDA) procedure has been developed for further verification of the accuracy of the predictions of the quasi-three-dimensional model. In this procedure, the experimental data are used to compute the gasdynamic flow parameters and the boundary layer voltage drop characteristics in terms of average electrical conductivity and average electrical resistance. The results of this DDA procedure and those of the quasi-three-dimensional model are in good agreement. (Author)

**A81-20550 #** Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes. F. L. Galanga, J. T. Lineberry, Y. C. L. Wu, M. H. Scott, W. E. Baucum, and R. W. Clemons (Tennessee, University, Tullahoma, Tenn.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0030*. 14 p. 13 refs. Contract No. DE-AC02-79ET-10815

Tests were conducted at the University of Tennessee Space Institute, Energy Conversion Division, in support of technology development of coal-fired MHD generator systems. The primary objectives of the test series were to evaluate the overall electrical performance of the 60 deg DCW generator with vitiation heated oxidizer, to study the thermal behavior of capped versus solid frame electrodes, and to investigate various power take-off schemes. Results from the above-mentioned areas of investigation are presented and discussed. (Author)

**A81-20551 #** A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions. J. T. Lineberry, F. L. Galanga, B. Liu, Y. C. L. Wu, M. H. Scott (Tennessee, University, Tullahoma, Tenn.), Y. C. Pan, and E. D. Doss (Argonne National Laboratory, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0031*. 16 p. 19 refs. Contract No. DE-AC02-79T-10815

Experimental data collected from recent coal-fired MHD generator tests are compared to theoretical predictions. Three independent numerical models are employed for this comparison; a one-dimensional model, a two-dimensional model which includes modeling of the slag layer, and a quasi-three-dimensional model. Comparisons are made between measured gas dynamic and generator electrical performance parameters to those predicted by each method. These comparisons are drawn for a fixed set of generator operating conditions which include an experimentally inferred entrance temperature. The analyses illustrate the effects of flow field dimensionality on generator performance predictions. Discussions on the applications and limitations of each code are included along with suggestions for refinements to achieve an improved modeling of real MHD phenomena. (Author)

**A81-20552 #** U-25B MHD generator performance. E. Doss, B. F. Picologlou, Y. Pan (Argonne National Laboratory, Argonne, Ill.), and T. Petrie (Southern Illinois University, Carbondale, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0032*. 10 p. 9 refs. Contract No. W-31-109-eng-38.

The performance of the U-25B MHD generator is analyzed with theoretical predictive models developed at Argonne National Laboratory. Modifications and improvements of the computer codes, motivated from study of the experimental results, are outlined and discussed. The theoretical predictions are compared to experimental results and good agreement is found. Sensitivity studies involving a number of input parameters are used to identify those parameters that have a strong impact on generator performance. (Author)

**A81-20601 #** Plasma diagnostics of MHD generators. A. M. Demirjian (Avco Everett Research Laboratory, Inc., Everett, Mass.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0099*. 6 p. 5 refs. Contract No. DE-AC01-80ET-15614

Average measurements of conductivities and Hall parameters in a Faraday MHD generator are presented. The measurement scheme is simple and requires no special probes other than peg walls that provide the two-dimensional voltage fields in the generator. No corrections are made for the conductivity profiles at the generator walls. The use of this scheme for the estimation of average flow velocities is described which may provide a valuable tool to diagnose the generator performance in real time. (Author)

**A81-20602 #** Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant. D. L. Murphree, R. L. Cook, L. E. Bauman, R. D. Benton (Mississippi State University, Mississippi State, Miss.), P. B. Probert (Babcock and Wilcox Co., Fossil Power Generation Div., Barberton, Ohio), and R. C. Selby (U.S. Department of Energy, Chicago Operations and Regional Office, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0110*. 12 p. 14 refs. Contract No. DE-AC02-80ET-15601

Highly efficient and environmentally acceptable, the coal-fired MHD power plant is an attractive facility for producing electricity. The design of its downstream system, however, presents technological risks which must be corrected if such a plant is to be commercially viable before the end of the century. The heat recovery/seed recovery system (HRSR) at its present stage is vulnerable to corrosion on the gas side of the radiant furnace, the secondary superheater, and the intermediate temperature air heater. Slagging and fouling of the heat transfer surface have yet to be eliminated. Gas chemistry, radiant heat transfer, and particulate removal are other problematic areas which are being researched in a DOE development program whose test activities at three facilities are contributing to an MHD/HRSR data base. In addition, a 20 MWt system to study HRSR design, is being now assembled in Tennessee. R S

**A81-20603 #** Utilization of staged combustion for controlling NO<sub>x</sub> emissions from a test facility simulating a coal-fired MHD power plant. A. G. Wehr and R. Tang (Mississippi State University, Mississippi State, Miss.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0101*. 7 p. 9 refs. Contract No. DE-AC02-80ET-15601.

The MHD Energy Center has constructed a test stand that will simulate the conditions that are present at any point in a coal-fired MHD power plant. This test stand was used to examine the effect of primary combustion stoichiometry and various secondary combustion parameters on the generation of nitrogen oxides. The secondary combustion air was injected at eight different locations along the length of the test stand, and the gas stream was sampled at four different locations during each series of tests. The results are also reported for a study of the role of char in the decomposition of NO(x). (Author)

**A81-20604 #** The effect of secondary combustion on nitric oxide concentrations in a MHD combustion gas. P. F. Dunn, T. R. Johnson, C. B. Reed, M. G. Chasanov, and M. A. Inbody (Argonne National Laboratory, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0102*. 10 p. 23 refs. Contract No. W-31-109-eng-38.

Results are presented of recent investigations of the effect of secondary combustion on nitric oxide concentrations in an MHD combustion gas. Forty-one experiments, in which NO concentration measurements were made, were conducted. In 16 of those experiments, secondary combustion of the MHD combustion gas was

achieved over two temperature ranges (1500-1800 K and 1700-2000 K) A model assuming instantaneous mixing, and using a modification of the NASA chemical kinetics code, predicted to within 10% for all clean-fuel experiments conducted the measured changes in NO concentrations that resulted from secondary combustion This model was extended to estimate changes in NO concentrations that would occur during secondary combustion in a larger MHD facility. It is established that, in addition to other parameters including mixing, the heat loss from the secondary combustion zone strongly influences the amount of NO reformed during secondary combustion

(Author)

**A81-20649 \* #** The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc. A A Vetter, C D Maxwell, T F Swean, Jr., S T Demetriades, D A Oliver, and C D Bangerter (STD Research Corp., Arcadia, Calif.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo, Jan 12-15, 1981, Paper 81-0173* 16 p. 39 refs. Research supported by the Reynolds Metal Co. and U.S. Department of Energy, NSF Grant No C-727, Contracts No DEN3-179, No DEN3-202

Data from sufficiently well-instrumented, short-duration experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc., are compared to analyses with multidimensional and time-dependent simulations with the STD/MHD computer codes. These analyses reveal detailed features of major transient events, severe loss mechanisms, and anomalous MHD behavior In particular, these analyses predicted higher-than-design voltage drops, Hall voltage overshoots, and asymmetric voltage drops before the experimental data were available The predictions obtained with these analyses are in excellent agreement with the experimental data and the failure predictions are consistent with the experiments The design of large, high-interaction or advanced MHD experiments will require application of sophisticated, detailed and comprehensive computational procedures in order to account for the critical mechanisms which led to the observed behavior in these experiments

(Author)

**A81-20650 #** Three-dimensional analysis of MHD generators - Development of electrical solution. R K Ahluwalia, S P Vanka, K H Im, and S A Zwick (Argonne National Laboratory, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo, Jan 12-15, 1981, Paper 81-0175* 11 p 14 refs Contract No W-31-109-eng-38

A model for calculating three-dimensional current and electric field distributions in MHD generator channels is formulated and numerically solved The chief advantage of this model is that its solution can be implemented on the digital computer in less than one CPU second, and thus the model can be conveniently coupled to a full three-dimensional gas dynamic analysis The model is equally valid for Faraday, diagonal insulating-side-wall, and diagonal conducting-sidewall channels Accuracy of the model is calibrated by comparing its predictions with the results of three-dimensional finite segmentation analyses The model is found to perform best for channels with low wall temperatures and low electrode pitch-to-height ratios, and when the boundary layers are thick The effects of the nonuniformity in normal current density, as predicted by the model, leading to velocity overshoots in the boundary layers, and of the transverse nonuniformity in Hall current density, generating secondary flows, are discussed

(Author)

**A81-20651 #** Electrical effects of coal slag in a diffuse mode MHD generator. R M Nelson (Stanford University, Stanford, Calif., Iowa State University of Science and Technology, Ames, Iowa) and J K Koester (Stanford University, Stanford, Calif.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo, Jan 12-15, 1981, Paper 81-0176* 12 p. 8 refs. Research supported by the Electric Power Research Institute

Ten high-temperature (1700-2000 K) platinum-rhodium capped magnesia electrodes were successfully tested in a slagging MHD generator with diffuse mode (non-arcing) current transport at 3

amps/sq cm occurring for electrode temperatures over 1800 K. A diffuse mode, two-dimensional model for current density and potential distributions was developed which includes the effects of slag layer hydrodynamics, slag layer energy transport, and assumed plasma boundary layers Numerical and experimental results are compared and the effects of slag, current density, generator size, wall temperature, and cathode shorting on generator performance are numerically determined

(Author)

**A81-20652 #** Preliminary results of analytical modeling of subsonic MHD diffusers. C C P Pian, R Kessler, and A Solbes (Avco Everett Research Laboratory, Inc., Everett, Mass.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo, Jan 12-15, 1981, Paper 81-0177* 9 p 10 refs. Contract No DE-AC01-80ET-15614

An integral technique is described which models the subsonic MHD diffuser The diffuser flow is assumed fully developed and with overshoots in the sidewall velocity profiles A power law relationship is assumed for the enthalpy distribution and a modified classical profile is proposed for the velocity distribution The governing equations are derived, along with a discussion of the procedure for their solution Preliminary results simulating a low-speed subsonic diffuser are also presented

(Author)

**A81-20653 #** Investigative data analysis technique for MHD generators W Unkel, J Schwoerer, J D Teare, and J F Louis (MIT, Cambridge, Mass.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo, Jan 12-15, 1981, Paper 81-0174* 15 p Research supported by the U.S. Department of Energy

A method of data analysis is developed for MHD generators The axial distributions of core properties are accurately determined without a detailed boundary layer calculation and without accurate knowledge of wall temperature, wall roughness, absolute conductivity level, or inlet conditions In addition to the inputs required for a direct (i.e., design mode) calculation of channel characteristics, the method requires axial distributions of static pressure and, for a diagonal generator, requires axial distributions of Hall voltage at several levels of generator loading The technique also determines the distribution of the plasma resistance parameter and with additional assumptions, evaluates the interframe leakage resistance and local boundary layer size and shape Data from the sixth and seventh joint US/USSR tests with the U25-B facility are analyzed with the technique The technique establishes the degree to which a code can be validated by comparison with overall generator data The technique is shown to be a useful supplement to the usual design mode computer codes and the technique is ideally suited to onsite data analysis

(Author)

**A81-20683 \* #** Radiatively coupled thermionic and thermo-electric power system concept. K Shimada and R. Ewell (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Calif.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0217* 7 p Contract No. NAS7-100.

The study presented showed that the large power systems (about 100 kW) utilizing radiatively coupled thermionic or thermo-electric converters could be designed so that the power subsystem could be contained in a Space Shuttle bay as a part of an electrically propelled spacecraft The radiatively coupled system requires a large number of individual converters since the transferred heat is smaller than with the conductively coupled system, but the advantages of the new system indicates merit for further study The advantages are (1) good electrical isolation between converters and the heat source, (2) physical separation of converters from the heat source (making the system fabrication manageable), and (3) elimination of radiator heat pipes, which are required in an all-heat-pipe power system In addition, the specific weight of the radiatively coupled power systems favorably compares with that of the all-heat-pipe systems

(Author)

## 05 ENERGY CONSERVATION

**A81-20696 #** Power conditioning and control requirements of coal fired MHD generators. A M Demirjian and I M Quijano (Avco Everett Research Laboratory, Inc., Everett, Mass.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0246* 9 p 5 refs Contract No DE-AC01-80ET-15614

The operational characteristics of coal fired open-cycle linear MHD generators are presented. The salient features of loading and control requirements of Faraday and diagonal generators are analyzed and circuits that meet these requirements are presented. Consolidation and current control circuits are discussed elaborating on the design considerations for operating them with MHD generators. Such circuits are shown to have relatively low losses reflecting in higher than 98-99% efficiencies (Author)

**A81-20698 \* #** On the magnetoaerothermal instability. S T Demetriades, D A Oliver, T F Swean, Jr., and C D Maxwell (STD Research Corp., Arcadia, Calif.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0248* 14 p 18 refs Research supported by the Northrop Corp., U.S. Department of the Interior, U.S. Department of Energy, and ERDA, NSF Grant No. C-727, Contracts No. AF-49(638)-1160, No. DEN3-179, No. DEN3-202

A fundamental instability in MHD channel flow, hitherto unknown or unappreciated, is described. Lorentz force-driven secondary flow cells preferentially couple core temperature gradient modes into the near fields of the anode wall leading to a locally growing Lorentz force which eventually separates the anode boundary layer. The instability is described with both heuristic order-of-magnitude analyses and detailed three-dimensional, turbulent, MHD flow computations. This magnetoaerothermal instability will be manifested in commercial scale MHD generators of moderate MHD interaction parameter. Methods of control and prevention of the magnetoaerothermal instability exist (Author)

**A81-20699 #** Performance of MHD generators with electrode current control. A M Demirjian and C C P Pian (Avco Everett Research Laboratory, Inc., Everett, Mass.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0249* 7 p Contract No. DE-AC01-80ET-15614

Current controllers developed for regulating the electrode currents of the diagonal generator against the effect of slag driven cathode wall nonuniformities can also be used as power shufflers that force the electrode currents to be proportional to the generator load current. Power shufflers eliminate axial currents in the plasma, driven by the mismatches between the isopotentials of the uncontrolled diagonal generator and its load current requirements. The generator performance with shuffle power is shown to be identical to a uniform electrode current Faraday generator under all loading conditions. Analysis shows that diagonal generators with current control and power shufflers may embody the advantages of both Faraday and diagonal configurations with reduced control and power conditioning requirements (Author)

**A81-20700 #** Feasibility of the inflow disk generator for open-cycle MHD power generation. T Nakamura, W E Lear, and R H Eustis (Stanford University, Stanford, Calif.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0250* 18 p 51 refs Research supported by the Electric Power Research Institute

A feasibility study of the inflow disk MHD generator for baseload applications was performed. Each design element, i.e., the combustor, the inlet flow path, the generator channel, the diffuser and the magnet, was studied in detail in order to provide a comprehensive assessment of the inflow disk generator. Based on these results, the performance of the inflow disk generator was calculated for two different thermal inputs: 1250 MW(th) and 2500 MW(th). It was shown that the performance of the inflow disk generator is similar to that of the diagonal generator within the uncertainty of the analysis (Author)

**A81-20747 #** Heat transfer in slagging MHD radiant boilers. K H Im, R K Ahluwalia, and G Berry (Argonne National Laboratory, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0316* 13 p 14 refs Contract No. W-31-109-eng-38

A combined convection-radiation model is formulated to study heat transfer characteristics of slagging MHD radiant boilers. The model includes the contributions of carbon dioxide, water vapor, potassium atoms, and slag particles to gas radiation; it also accounts for the presence of slag layer on the wall of the radiant boiler. In order to determine the slag layer dynamics, the mechanism of slag particle deposition by thermophoresis and by fluid turbulence is investigated. The role of a slag layer in moderating the influence of refractory thickness on heat transfer is illustrated. The calculations indicate that an adequately slow cooling rate of the combustion gas can be realized in the radiant boiler (Author)

**A81-20748 #** Off-design study of an open cycle MHD power plant with oxygen enrichment. H K Geyer and G F Berry (Argonne National Laboratory, Argonne, Ill.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0319* 9 p 12 refs

Some of the more important aspects of off-design operation for a magnetohydrodynamic (MHD) power plant are discussed. It is noted that the plant must be designed to meet part-load and overload conditions and that the optimal design should be subject to a specified load demand curve. An analysis is made for off-design regimes to determine the compatible joint operating conditions for an MHD topping cycle, a steam bottoming plant, a turbine train, a compressor, and an oxygen separation plant. The analysis is subject to such constraints as metal temperatures, second law violations, component performance requirements, and environmental considerations C R

**A81-20802 #** Pressurized fluidized bed - A technology for combined cycle power generation. S Moskowitz (Curtiss-Wright Corp., Wood-Ridge, N.J.) and J Geffken (U.S. Department of Energy, Germantown, Md.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0392* 9 p

The production of electric power using high sulfur coal in an environmentally clean and efficient manner is a major element in this country's goal for energy independence. One coal combustion technique which has had demonstrable progress toward accomplishing this goal is the pressurized fluidized bed process. A pilot plant program sponsored by the Department of Energy to design a power generation system of 13 MWe size has been instrumental in developing the PFB technology. The paper describes the technology test programs that have been conducted, to establish the design criteria and to select the design configurations and materials for the pilot plant. Over 10,000 hours of tests have demonstrated adequate fluid bed combustion characteristics, gaseous emissions levels at one-third the level permitted by EPA for NO(x) and SO<sub>2</sub>, and durability for the in-bed heat exchanger and the turbine blade materials (Author)

**A81-20805 \* #** Status of commercial phosphoric acid fuel cell system development. M Warshaw, P R Prokopius, S N Simons, and R B King (NASA, Lewis Research Center, Phosphoric Acid Fuel Cell Program Load Center Office, Cleveland, Ohio) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 19th, St. Louis, Mo., Jan. 12-15, 1981, Paper 81-0396* 9 p 12 refs

A review of the current commercial phosphoric acid fuel cell system development efforts is presented. In both the electric utility and on-site integrated energy system applications, reducing cost and increasing reliability are important. The barrier to the attainment of these goals has been materials. The differences in approach among the three major participants are their technological features, including electrodes, matrices, intercell cooling, bipolar/separator plates,



electrolyte management, fuel selection and system design philosophy (Author)

**A81-21062 #** Theory of a conducting MHD motor with a free field (K teori konduktivnogo MGD-dvizhiteia so svobodnym polem) V I Khonichev and V I Iakovlev *PMTF - Zhurnal Prikladnoi Mekhaniki i Tekhnicheskoi Fiziki*, Sept-Oct 1980, p 109-118 6 refs In Russian

An analysis was made of the effectiveness of a conducting MHD motor with a free field using a flat plate finite width model. The variational problem of determining the optimal potential distribution on the plate with maximum efficiency was solved. It was shown that the consideration of the end effects determines some of the unknown characteristics of the system A.T.

**A81-21064 #** MK-generators using the transition of a semiconductor material into a conducting state (MK-generatory s ispol'zovaniem perekhoda poluprovodnikovogo materiala v provodiashee sostoianie) E I Bichenkov, S D. Gilev, and A M. Trubachev *PMTF - Zhurnal Prikladnoi Mekhaniki i Tekhnicheskoi Fiziki*, Sept-Oct 1980, p 125-129 9 refs In Russian

Experimental results are presented on plane and coaxial MK-generators with cavities filled with powdered Si. An evaluation of the coefficients of current amplification is made in the framework of an electrotechnical model. A significant dependence of the generator parameters on the ratio of mass velocity to the velocity of the shock wave in Si is demonstrated A.T.

**A81-21065 #** Magnetohydrodynamic generator of electrical energy using gasification products of lignite coal (Magnitogidrodinamicheskii generator elektroenergii na produktakh gazifikatsii burykh uglei) V A Derevianko, V S Slavin, and V S Sokolov *PMTF - Zhurnal Prikladnoi Mekhaniki i Tekhnicheskoi Fiziki*, Sept-Oct. 1980, p 129-138 14 refs In Russian

An investigation is presented of an MHD generator of electrical energy fueled by gasification products of lignite coals using the T-layer effect which eliminates caustic additives. A quasi-one-dimensional theory of linear MHD processes is constructed on the basis of MHD equations, a design of an industrial generator is discussed A.T.

**A81-21096 #** Operational, control and protective system transient analyses of the closed-cycle GT-HTGR power plant. F L Openshaw and T W Chan (General Atomic Co., San Diego, Calif.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/HT-1* 11 p. 10 refs. Members, \$2 00, nonmembers, \$4 00 Contract No. DE-AT03-76SF-70046

This paper presents a description of the analyses of the control/protective system preliminary designs for the gas turbine high-temperature gas-cooled reactor (GT-HTGR) power plant. The purpose of these systems is the control and safe operation of the plant in accordance with utility practice for large nuclear generation stations, and in the event of an abnormal or accident condition to shut the plant down in an orderly manner and maintain it in a safe shutdown condition. Several unique characteristics inherent in the operation of the closed-cycle multiple-loop GT-HTGR design have presented special modeling and/or control design requirements or resulted in unusual conditions. The GT-HTGR dynamic modeling, control/protective system design, and transient analyses are illustrated in this paper through discussion of a few selected transient events and the special modeling and control operation for these events (Author)

**A81-21103 #** Electrical conductivity and Hall parameter measurements in Faraday MHD generators. A M Demirjian (Avco Everett Research Laboratory, Inc., Everett, Mass.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/HT-9* 6 p 5 refs Members, \$2 00, nonmembers, \$4 00

An experimental technique to measure the axial distribution of

plasma electrical conductivities and Hall parameter, is described. Basic discussion of the underlying assumptions and their justification is presented, the data show that the electrical conductivity measurements agree with other experimental results. In the absence of other experimental data, confidence in the Hall parameter measurements was reinforced by agreements with analytical results (Author)

**A81-21104 #** MHD electrode performance - Heat transfer and voltage drops. A M Demirjian (Avco Everett Research Laboratory, Inc., Everett, Mass.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/HT-10*. 7 p 6 refs Members, \$2 00, nonmembers, \$4 00

The electrical and thermal performance of arc mode electrodes was investigated in environments typical of large scale coal fired MHD generators by measuring electrode voltage drops and heat fluxes. The electrode metal temperatures were about 260 C, while plasma interface temperatures were controlled by a flowing slag layer at 1800 K. The measurements show that the cathode voltage drops correlate with the normalized current density parameter modified by the Hall effect concentration factor. An increased heat flux on the anode wall coincided with reduced anode voltage drop indicating increased current leakage in the boundary layers A.T.

**A81-21105 #** On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution. G D Roy and L W Crawford (Tennessee, University, Tullahoma, Tenn.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/HT-11* 10 p 9 refs. Members, \$2 00, nonmembers, \$4 00 Contract No. DE-AC02-79ET-10815

This paper presents results from heat transfer studies performed in 7.5 MWt and 15 MWt direct coal-fired magnetohydrodynamic systems for electrical power generation. Heat transfer from the various components is measured to determine system heat balance and the influence of parameters related to coal combustion on heat transfer. The measured heat flux from electrode walls is compared with a quasi-one-dimensional model and extended for off-design operation. The heat flux values are used in a computer model to evaluate temperature distributions in electrode frames and caps and are compared with measurements taken during power runs (Author)

**A81-21138 #** Torque ripple in a Darrieus, vertical axis wind turbine. R C Reuter, Jr (Sandia Laboratories, Albuquerque, N Mex.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/Sol-13* 7 p 9 refs. Members, \$2 00, nonmembers, \$4 00 Contract No. AT(29-1) 789

Interaction between a steady wind and a rotating, Darrieus, vertical axis wind turbine produces time periodic aerodynamic loads which cause time dependent torque variations, referred to as torque ripple, to occur in the mechanical link between the turbine and the electrical generator. There is concern for the effect of torque ripple upon fatigue life of drive train components and upon power quality. An analytical solution characterizing the phenomenon of torque ripple has been obtained which is based upon a Fourier expansion of the time dependent features of the problem. Numerical results for torque ripple, some experimental data, determination of acceptable levels and methods of controlling it, are presented and discussed (Author)

**A81-21142 #** VAWTDYN - A numerical package for the dynamic analysis of vertical axis wind turbines. D W Lobitz and W N Sullivan (Sandia Laboratories, Albuquerque, N Mex.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/Sol-18* 7 p 10 refs Members, \$2 00, nonmembers, \$4 00 Contract No. DE AC04-76DP-00789

The dynamic behavior of wind turbines is a major factor governing their overall fatigue life and reliability. This paper describes a package developed for the dynamic analysis of the Darrieus vertical axis wind turbine. The model on which the package is based includes the major rotor elastic degrees of freedom,

## 05 ENERGY CONSERVATION

gyroscopic effects, and structural damping. The equations of motion are discussed and several example solutions are presented. Comparisons are made between model predictions and data from operational rotors (Author)

**A81-21143 # Binary Rankine-cycle engines for solar-thermal power systems.** J P Abbin, Jr (Sandia Laboratories, Albuquerque, N Mex.) *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/Sol-19* 6 p 10 refs Members, \$2 00, nonmembers, \$4 00 Contract No. DE-AC04-76DP-00789

Binary Rankine-cycle engines have the potential to provide thermal-to-electric conversion efficiencies of 40 percent or more at relatively moderate temperatures and pressures, e g, 1000 F (538 C) and 180 psia (1200 kPa). Even though moderate-temperature binary Rankine engines have been operated successfully in commercial service for many years, none are presently operated or under development. The reasons are discussed in this paper. In addition, projected performance for a new binary Rankine engine is compared with that of other moderate and high temperature engines. The argument is made that even relatively small binary Rankine engines have a high potential for providing efficient energy conversion at conditions that are readily achievable with two-axis tracking, point-focusing, solar-collector systems currently under development (Author)

**A81-21162 # The nuclear closed-cycle gas turbine /HTGR-GT/ - Dry cooled commercial power plant studies** C F McDonald and C R Boland (General Atomic Co., San Diego, Calif.) (*American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, New Orleans, La., Mar 10-13, 1980, Paper 80-GT-82*) *ASME, Transactions, Journal of Engineering for Power*, vol 103, Jan 1981, p 89-100 29 refs Contract No. DE-AT03-76SF-70046

Combining the modern and proven power conversion system of the closed-cycle gas turbine (CCGT) with an advanced high-temperature gas-cooled reactor (HTGR) results in a power plant well suited to projected utility needs into the twenty-first century. The gas turbine HTGR (HTGR-GT) power plant benefits are consistent with national energy goals, and the high power conversion efficiency potential satisfies increasingly important resource conservation demands. Established technology bases for the HTGR-GT are outlined, together with the extensive design and development program necessary to commercialize the nuclear CCGT plant for utility service in the 1990s. The most recent design studies for a dry-cooled commercial plant of 800 to 1200 MW(e) power based on both nonintercooled and intercooled cycles are outlined and various primary system aspects are discussed. Details are given of the reactor turbine system and on integrating the major power conversion components in the prestressed concrete reactor vessel (Author)

**A81-21163 # The nutating traction drive** Y Kemper (Vadotec Corp., Troy, Mich.) (*American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, New Orleans, La., Mar 10-13, 1980, Paper 80-GT-99*) *ASME, Transactions, Journal of Engineering for Power*, vol 103, Jan 1981, p 154-157

The unique torque speed characteristic of the single-shaft gas turbine requires that it have a continuously variable-ratio transmission for successful application to automotive use. This paper discusses the development of a novel mechanical transmission which has the power density required for highway vehicles. Cost and efficiency are competitive with conventional automatic transmissions. (Author)

**A81-21466 Nonlinear evolution of ablation-driven Rayleigh-Taylor instability.** R L McCrory (Rochester, University, Rochester, N.Y.), L Montierth, R L Morse (Arizona, University, Tucson, Ariz.), and C P Verdon (Arizona, University, Tucson, Ariz., Rochester, University, Rochester, N.Y.). *Physical Review Letters*, vol 46, Feb 2, 1981, p 336-339 14 refs Contract No. DE-AC08-

80DP-40124

Simulations of the Rayleigh-Taylor instability of ablatively accelerated thin-shell fusion targets show that the nonlinear evolution exhibits spike amplitude saturation due to ablative mass removal, the shell anterior surface evolves to a laminar (nonturbulent) quasistationary distorted state. The perturbed flow causes a significant departure from spherically symmetric behavior, but the laminar shell interior structure makes it appear possible to retain some of the advantages of larger-aspect-ratio fusion targets (Author)

**A81-21480 Effects of toroidal coupling on the stability of tearing modes** B Carreras (Institute for Advanced Study, Princeton, N.J.), H R Hicks, and D K Lee (Oak Ridge National Laboratory, Oak Ridge, Tenn.) *Physics of Fluids*, vol 24, Jan 1981, p 66-77 17 refs Contracts No. W-7405-eng-26, No. DE-AC02-76ET

The time evolution of tearing modes in toroidal geometry is studied in the low-beta and large-aspect-ratio limit. An initial value three-dimensional computer code which numerically advances the reduced set of resistive magnetohydrodynamic equations is employed. Toroidicity has, in general, a destabilizing effect on tearing modes in this limit. A generalization of Delta-prime formalism can be used to study the linear regime. The results obtained in this way are in very good agreement with the results from the initial value code. The nonlinear phase of the evolution is also followed numerically. In the case of strong interaction of different helicities, a larger region of stochastic magnetic field lines results than in the cylindrical geometry case (Author)

**A81-21494 Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator** R N Singh and K Natesan (Argonne National Laboratory, Argonne, Ill.). *Corrosion*, vol 36, May 1980, p 230-241 11 refs Research supported by the U.S. Department of Energy

Metallic materials selected for the balance of plant construction of an open cycle coal fired magnetohydrodynamic (MHD) generator must withstand the corrosive-erosive conditions in these systems. The corrosion behavior of carbon steel, chromium-molybdenum ferritic steel, austenitic stainless steels, and nickel base alloys, has been evaluated after exposure to complex gas mixtures that simulate a coal fired MHD environment with substoichiometric combustion. The results show that sulfidation was the predominant mode of interaction for the alloys in this environment. Carbon steel and Cr-Mo steels suffered significant sulfidation attack, while the austenitic stainless steels exhibited superior resistance to corrosion. It is concluded that low cost ferritic steels with a stainless steel cladding or a ramming refractory coating can be used for protection of the radiant boiler components of a typical coal fired MHD generator system (Author)

**A81-21640 Selective fast neutron detector** R. E. Chrien and J. D. Strachan (Princeton University, Princeton, N.J.) *Review of Scientific Instruments*, vol 51, Dec 1980, p 1638-1640 7 refs Contract No. DE-AC02-76CH-03073

A ZnO(Ga) scintillator has been developed which selectively detects 14 MeV neutrons in a large 2.5 MeV neutron and hard X-ray background. The detector will be useful in measuring the 14 MeV neutron emission with trace concentrations of tritium in a predominantly deuterium plasma during early experiments in the Tokamak Fusion Test Reactor (TFTR) or the Joint European Torus (JET) (Author)

**A81-21641 Voltage and current sensors for a high-density z-pinch experiment.** C A Ekdahl (California, University, Los Alamos, N. Mex.) *Review of Scientific Instruments*, vol 51, Dec 1980, p 1645-1648 7 refs Research sponsored by the U.S. Department of Energy

Capacitively-coupled transmission-line voltage sensors and inductive-shunt current sensors used in experiments with a high-density gas-embedded z pinch have provided accurate and reliable measurements. Design and construction of these sensors is described, and their calibration is discussed in detail (Author)

**A81-22176 #** Investigation of dynamics of a waterwave power plant (Issledovanie dinamiki tipovoi volnovoi energeticheskoi ustanovki) G I Denisenko, A S. Tsybenko, and S. A Lavrikov (Kievskii Politehnicheskii Institut, Kiev, Ukrainian SSR) *Problemy Prochnosti*, Jan 1981, p 27-31 5 refs In Russian

Waterwave power plant dynamic processes are examined. Equations of motion are derived for such a system, a computation algorithm is constructed illustrated by an example of utilization of sea wave energy. A T

**A81-22400** Fuel cells - A survey. I. M A Parrish (Lambson, Ltd., Castleford, Yorks., England) *Materials in Engineering*, vol 2, Dec 1980, p 68-72 36 refs

The nature, history and types of fuel cells are outlined with attention to the contributions of Davy, Grove, Mond and Langer, Ostwald, Jacques, Haber, and Brunner, and Bacon. Advantages and applications of the fuel cell as an energy converter are noted. Fuels and oxidants are surveyed and types of electrolyte are described. L S

**A81-22526 \* #** Stability of large horizontal-axis axisymmetric wind turbines M S Hirschbein (NASA, Lewis Research Center, Cleveland, Ohio) and M I Young (Delaware, University, Newark, Del) *Miami International Conference on Alternative Energy Sources*, 3rd, Miami, Fla., Dec 15-17, 1980, Paper 35 p 19 refs

The stability of large horizontal-axis, axisymmetric, power producing wind turbines is examined within the framework of an analytical model which includes dynamic coupling of the rotor, tower, and power generating system. The aerodynamic loading is derived from blade element theory. Stability is determined by the eigenvalues of a set of linearized constant-coefficient differential equations. All results presented are based on a 3-bladed, 300-ft diameter, 2.0-MW wind turbine. It is shown that unstable or weakly stable behavior can be caused by aerodynamic forces due to motion of the rotor blades and tower in the plane of rotation or by mechanical coupling between the rotor system and the tower. V L

**A81-22659** The development of advanced structural materials for fusion power J L Scott (Oak Ridge National Laboratory, Oak Ridge, Tenn.) In *The 1980's - Payoff decade for advanced materials*, Proceedings of the Twenty-fifth National Symposium and Exhibition, San Diego, Calif., May 6-8, 1980. Azusa, Calif., Society for the Advancement of Material and Process Engineering, 1980, p 330-339. 11 refs. Contract No W-7405-eng-26

It is noted that once physics questions are resolved limitations imposed by the nature of the materials under consideration for fusion reactor first walls and blankets will pose a major problem. The development of fusion reactor materials is seen as being hampered by the lack of a large-volume, high-flux source of neutrons of appropriate energies. The environment in which the first wall and blanket must exist is described, and properties of the alloys being considered are presented. It is noted that while preliminary data on austenitic stainless steel (type 316) show some encouraging trends, the properties of this material are not particularly favorable in terms of thermal stress resistance. It is concluded that the alloy eventually selected will probably be developed specifically for the fusion application. C.R

**A81-22775** HGP-A wellhead generator feasibility project. *Geothermal Energy*, vol 8, Mar. 1980, p 33-38. Research sponsored by the U.S. Department of Energy, University of Hawaii, and Hawaii Electric Light Co.

The geothermal power plant to be built over the Kapoho geothermal reservoir in Hawaii is discussed. Attention is given to the organization and financing of the project. It is noted that because there is a risk of volcanic eruption occurring near or at the site, the plant is designed so that specific pieces of equipment will be easily removable and transportable to avoid lava flows. The electrical output of the plant's generator will be 2.8 MW. A description is given of the various systems of the plant, namely the steam supply system, cooling water system, and system for hydrogen sulfide abatement. It

is noted that geoscientists have estimated that this reservoir may have the capacity of 500,000 kW for 100 years. The contribution that the plant can make to the state's economy is assessed. C R

**A81-22876** Limits to plasma science. T W Johnston (Québec Université, Varennes, Canada) *IEEE, Proceedings*, vol 69, Feb 1981, p 149-158 70 refs

Since fundamental limits to plasma science are the well-known ones of relativity and quantum mechanics, various practical limits are discussed for plasma science in several domains of current interest: applications (mainly controlled thermonuclear fusion, both magnetic confinement and ablative compression); investigation of natural plasma (in space near earth and solar system and in astrophysics). Some historical flavor is imparted by also considering the effect of limits on three domains of interest since the 1940s: plasma frequency devices for microwave applications at millimeter wavelengths, solid-state plasmas, and reentry vehicle plasmas. In general, while one can identify the nature of the limits, refining their 'values' or making firm predictions in view of possible 'breakthroughs' is seen to be unlikely to be worth doing. (Author)

**A81-22900** Contribution of ocean thermal energy conversion to world energy needs. W H Avery and G L Dugger (Johns Hopkins University, Laurel, Md.) *International Journal of Ambient Energy*, vol 1, July 1980, p 177-190 46 refs

Ocean Thermal Energy Conversion (OTEC) can provide energy to all countries. It can deliver the energy (1) to regions bordered by warm ocean waters via direct electric-power transmission or (2) to other areas not bordered by warm ocean waters, via an energy-intensive material produced on OTEC plantships cruising on the high seas in the tropics. Ammonia is an outstanding choice for an energy-intensive material because it can (a) replace ammonia now made from natural gas to conserve fuel, (b) serve as a synthetic fuel, or (c) provide an easily transported, storable source of hydrogen for fuel cells to generate electric power where needed anywhere in the world. Costs of OTEC ammonia and of electricity delivered directly or via fuel cells are projected to be competitive with costs of electricity from coal or nuclear plants by 1990, if rapid OTEC development is pursued. (Author)

**A81-23063** Optical spectrum of a closed cycle MHD generator plasma. M Zlatanovic (Beograd, Univerzitet, Belgrade, Yugoslavia) and A F C Sens (Eindhoven, Technische Hogeschool, Eindhoven, Netherlands) *Journal of Quantitative Spectroscopy and Radiative Transfer*, vol 25, Mar 1981, p 291-294 5 refs

The spectra of argon-cesium plasmas, used as working fluids of closed-cycle MHD generators, were investigated in the visible and near-IR regions by using a Hilger-Watts medium quartz spectrograph. A number of argon and cesium lines was observed, as well as some lines originating from the impurities present in the cesium capsule. The molecular bands of aluminum monoxide have also been detected. The population temperatures estimated from relative intensities of cesium lines lie below those obtained by using either the line-reversal method or recombination-radiation measurements. The intensities of some neutral cesium lines follow the Boltzmann population relation at the population temperature. The Zeeman effect and reversed profiles of cesium resonance lines were not observed because of low resolution of the spectrograph used and because of light scattering on the film. (Author)

**A81-23066 #** A review of the icing problem for aerogenerators. A R Mortimer (Science Research Council, Rutherford and Appleton Laboratories, Didcot, Oxon, England) *Wind Engineering*, vol 4, no 4, 1980, p 183-191 15 refs

**A81-23067 #** A performance analysis for horizontal axis wind turbines applicable to variable pitch or airbrake control. R I Lewis and K Y Cheng (Newcastle-upon-Tyne, University, Newcastle-upon-Tyne, England) *Wind Engineering*, vol 4, no 4, 1980, p 192-210 6 refs

## 05 ENERGY CONSERVATION

A theoretical analysis is developed for predicting the performance of horizontal axis wind turbines of prescribed geometry and of known profile aerodynamics. The solution is based upon the matching of axial thrust according to momentum control volume analysis to that corresponding to the aerodynamic blade forces, and unlike most theories allows for the division of stagnation pressure loss in the wake between shaft power and frictional losses. The theory also predicts the influence of air brakes upon the system characteristic, and makes it possible to compute characteristics with variable pitch control applied to the whole blade or parts of it. A design method is also presented for selection of blade geometry to suit prescribed radial distribution of blade loading. (Author)

**A81-23068 #** Integration of wind power into Australian electricity grids without storage - A computer simulation. M Diesendorf (Commonwealth Scientific and Industrial Research Organization, Div of Mathematics and Statistics, Canberra, Australia) and B Martin (Australian National University, Canberra, Australia). *Wind Engineering*, vol 4, no 4, 1980, p. 211-226. 10 refs. Research supported by the National Energy Research, Development and Demonstration Council of Australia.

A computer simulation is performed of the operation of two fuel-based Australian State electricity grids (WA and SA) with zero storage and added hypothetical wind power capacity. It is found that wind energy contributions of 20 percent (WA) and 30 percent (SA) of the annual grid energy output can be achieved before the losses of unutilized wind energy increase to 20 percent of wind energy generation. The results are sensitive to the extent to which the output of conventional units can be regulated or 'cycled'. Small modifications to the grid operating strategy can affect the extent to which wind energy substitutes for a mixture of peak, intermediate and base load fuel or mainly for base load fuel. The most economical operation strategy is not necessarily the one which places wind at the top of the merit order. (Author)

**A81-23426** Applied Superconductivity Conference, Santa Fe, N. Mex., September 29-October 2, 1980, Proceedings. Conference sponsored by APS, IEEE, DOE, et al. Edited by S J S. Loran (Stanford University, Stanford, Calif.) *IEEE Transactions on Magnetics*, vol. MAG-17, Jan. 1981. 1180 p.

The conference focused on magnets for fusion technology, Ni-Ti conductors and critical current standards, microbridges and arrays, rotating machinery, discontinuous filament A15 superconductors, materials for tunnel junctions, magnets for energy storage and MHD, magnet technology, multifilamentary Nb3Sn conductors, and cavities and resonators. Papers included superconducting magnets for toroidal fusion reactors, the circular form of the linear superconducting machine for marine propulsion, elastic buckling of superconducting Yin-Yang magnets for fusion, and magnetic energy storage. A.T.

**A81-23436** Flux pump excited brushless alternator. A M Ferendeci, O K. Mawardi (Case Western Reserve University, Cleveland, Ohio), M J Melfi (Reliance Electric Co., Cleveland, Ohio), and H Laquer (Applied Superconductivity Conference, Santa Fe, N. Mex., Sept. 29-Oct. 2, 1980) *IEEE Transactions on Magnetics*, vol. MAG-17, Jan. 1981, p. 146-148. Contract No. F33615-79-C-2038.

Experimental measurements obtained for a novel brushless superconducting alternator that makes use of a flux pump of the rotating spot type are presented. The flux pump, used to provide the excitation current of the field, incorporates several features of a machine studied theoretically and reported in an earlier paper. The flux pumping is achieved with six electromagnets having pole pieces of special configurations to yield high efficiency and rapid pumping rates. The maximum design values for the current in the pump is 1,300 amps, and for the rotational speed, 500 rpm. Sensors installed on the generator yield information on the spatial and temporal behavior of the magnetic field in the flux spot and on the operational characteristics of the pump. The preliminary observations are compared with the theoretical predictions. (Author)

**A81-23441** A superconducting magnet for Stanford University. J F Parmer, G D Magnuson, R G Jones, W D Taylor, S D Peck, J P Waszczak (General Dynamics Corp., Convair Div., San Diego, Calif.), J E C. Williams, and E S Bobrov (MIT, Cambridge, Mass.). (Applied Superconductivity Conference, Santa Fe, N. Mex., Sept. 29-Oct. 2, 1980) *IEEE Transactions on Magnetics*, vol. MAG-17, Jan. 1981, p. 344-347. 5 refs.

Three MHD superconducting magnets are being developed for coal power generation. A rectangular saddle magnet uses a non-metallic substructure for conductor support, a circular magnet contains the radial Lorentz forces by interlayer bands instead of a superstructure, and a circular saddle magnet supports conductors with a metallic substructure. A substructure support provides conductor movement within the winding controlled by the limits of frictional heating of the conductor and reacts with a significant part of the magnetically induced loads. During a seismic event or MHD channel-induced vibration of the winding, eddy currents induced in the vacuum vessel provide damping for the controls of resonant amplitude. A.T.

**A81-23442** The design of a tapered bore superconducting MHD magnet system. Z J J Stekly, R D Pillsbury, Jr., W F B Punchard, and S Mushnick (Magnetic Corporation of America, Waltham, Mass.). (Applied Superconductivity Conference, Santa Fe, N. Mex., Sept. 29-Oct. 2, 1980.) *IEEE Transactions on Magnetics*, vol. MAG-17, Jan. 1981, p. 348-351. USAF-supported research.

A superconducting MHD magnet will produce a magnetic field on axis which tapers from 4 T to 2.75 T over an active field length of 1.04 m. The warm bore has a minimum ID of 0.29 m at the inlet and 0.53 m at the outlet, the magnet windings, structure, and helium vessel are 1.77 m long weighing 818 kg. A 24 strand Rutherford cable with a Kapton and B-stage epoxy-glass wrap is wound onto a cold bore tube in the shape of an annular saddle with arched end turns, the windings are separated by an internal structure to transmit the Lorentz body forces to the superstructure. (Author)

**A81-23443** ETF magnet design alternatives for the national MHD program. P. G. Marston, R J Thome, A M Dawson, E S Bobrov, and A M Hatch (MIT, Cambridge, Mass.). (Applied Superconductivity Conference, Santa Fe, N. Mex., Sept. 29-Oct. 2, 1980.) *IEEE Transactions on Magnetics*, vol. MAG-17, Jan. 1981, p. 352-355. 6 refs. Research supported by the U.S. Department of Energy and NSF.

Five superconducting magnet designs are evaluated for a 200 MWe test facility requiring a magnet with an on-axis field of 6 T, an inlet bore area of 4 sq m, storing 6 x 10 to the 9th J. The designs include a straightforward rectangular saddle coil set, a 'Cask' configuration based on staves and corner blocks as the main support structure, and an internally cooled, cabled superconductor to minimize the substructure and eliminate the helium vessel. Also, a modular design using six coils with individual helium vessels and an integrated structure produces a simplest configuration which utilizes a natural rectangular interface for packaging the MHD channel and its connections, and results in a lower capital cost. A.T.

**A81-23447** A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet. G D. Magnuson and E L Woods (General Dynamics Corp., Convair Div., San Diego, Calif.). (Applied Superconductivity Conference, Santa Fe, N. Mex., Sept. 29-Oct. 2, 1980) *IEEE Transactions on Magnetics*, vol. MAG-17, Jan. 1981, p. 456-459. Research sponsored by the U.S. Department of Energy.

**A81-23451** Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility. S-T. Wang, L Genens, J Gonczy, H Ludwig, M Lieberg, E Kraft, D Gacek, Y.-C. Huang, and C-J Chen (Argonne National Laboratory, Argonne, Ill.). (Applied Superconductivity Conference, Santa Fe, N. Mex., Sept. 29-Oct. 2, 1980) *IEEE Transactions on Magnetics*, vol. MAG 17, Jan. 1981, p. 529-532. Research supported by the U.S. Department of Energy.

The Argonne National Laboratory has designed and is constructing a 6 T large aperture superconducting MHD magnet for use in the Coal-Fired Flow Facility (CFFF) at the University of Tennessee Space Institute (UTSI) at Tullahoma, Tennessee. The magnet system consists of the superconducting magnet, a magnet power supply, an integrated instrumentation for operation, control and protection, and a complete cryogenic facility including a CTI Model 2800 helium refrigerator/liquefier with two compressors, helium gas handling system and a 7500 liter liquid helium dewar. The complete system will be tested at Argonne, IL in 1981. This paper first briefly reviews the magnet design. Second, the coil fabrication programs are described in detail. (Author)

**A81-23452** Reliability of large superconducting magnets through design. C D Henning (California, University, Livermore, Calif.). (Applied Superconductivity Conference, Santa Fe, N Mex., Sept 29-Oct 2, 1980) IEEE Transactions on Magnetics, vol MAG-17, Jan 1981, p 618-625. 17 refs. Contract No W-7405-eng-48.

Design and quality control of large superconducting magnets for reliability comparable to pressure vessels are discussed. The failure modes are analyzed including thermoelectric instabilities, electrical shorts, cryogenic/vacuum defects, and mechanical malfunctions. Design must take into consideration conductor stability, insulation based on the Paschen curves, and the possible burnout of cryogenic transition leads if the He flow is interrupted. The final stage of the metal drawing process should stress the superconductor material to a stress value higher than the magnet design stress, cabled conductors should be used to achieve mechanical redundancy, and ground-plane insulation must be multilayered for arc prevention. A T.

**A81-23466** Superconducting generators - Economics, technical considerations and ancillary technology. J J Bzura, F Abtahi, and L J Stratton (Arthur D Little, Inc., Cambridge, Mass.). (Applied Superconductivity Conference, Santa Fe, N Mex., Sept 29-Oct 2, 1980) IEEE Transactions on Magnetics, vol MAG 17, Jan 1981, p 880-883. 6 refs. Research supported by the U.S. Department of Energy.

An economic analysis of superconducting generators was performed and compared with analyses by Westinghouse and General Electric. Superconducting generators were compared with conventional generators over a 30-year operating life using three energy sources (nuclear fuel, coal and oil), and including the effects of inflation on fuel and operating costs. The ADL analysis shows that operating cost savings of a 1200 MVA superconducting unit can be approximately 70% of the capital cost of a conventional generator driven by a coal-fired steam turbine. Principal R&D needs for superconducting generators and the limitations of ancillary technology are also discussed. (Author)

**A81-23515** Lifting hydro's potential. N Lihach. EPRI Journal, vol 5, Dec 1980, p 6-13.

The advantages of hydroelectric power, in terms of capital, operating and maintenance costs and in terms of fuel and environmental considerations, are causing an upgrading of existing installations to provide more generating capacity. Hydrocapacity supplies 1/8 of the U.S. electric energy and will probably increase from 50 to 100% by the early 2000's as the price of other forms of energy rises. Ways of increasing output are better water control, upgrading of hydrogenerators, standardization of turbines, and methods of pumped hydro, an energy storage technique. An obstacle to this aim is the cumbersome licensing process of competing federal agencies which places a particular burden on small projects. D.K.

**A81-23694 \*** Large wind-turbine projects in the United States wind energy program. R L Thomas and W H Robbins (NASA, Lewis Research Center, Cleveland, Ohio). Journal of Industrial Aerodynamics, vol 5, May 1980, p 323-335.

The technological development of large, horizontal-axis wind turbines (100 kW-2500 kW) is surveyed with attention to prototype

projects managed by NASA. Technical feasibility has been demonstrated in utility service for systems with a rated power of up to 200 kW and a rotor diameter of 125 ft (Mod-OA). Current designs of large wind turbines such as the 2500 kW Mod-2 are projected to be cost competitive for utility applications when produced in quantity, with capital costs of 600 to 700 dollars per kW (in 1977 dollars).

L S

**A81-23695** Current developments in small wind energy conversion systems. A C Hansen and C P Butterfield (Rockwell International Corp., Energy Systems Group, Golden, Colo.). Journal of Industrial Aerodynamics, vol 5, May 1980, p 337-356. 23 refs.

The development of Small Wind Energy Conversion Systems (SWECS) with capacities under 100 kW and rotor diameters of approximately 30 meters is surveyed with a view to current prototypes, design programs, cost factors and wind systems testing. The characteristics of development SWECS and the projected cost of energy from the new prototypes are given. A primary objective of the Rocky Flats Test Center is the determination of the SWECS power output as a function of average wind speed. One-second average values of wind speed and power output are continuously recorded for each wind turbine and the data are analyzed using the Method of Bins. Areas of research discussed include rotor/wind dynamic interaction, and measurements of power output and blade root bending moments. It is noted that a reliable method of load spectrum prediction would be invaluable in designing for fatigue.

L S

**A81-23696** Wind-turbine aerodynamics. R E Wilson (Oregon State University, Corvallis, Ore.). Journal of Industrial Aerodynamics, vol 5, May 1980, p 357-372. 16 refs.

The aerodynamics of wind turbines is reviewed starting with effects of lift and drag on translating devices and proceeding through the performance aerodynamics of the horizontal-axis and vertical axis machines currently in service. Horizontal-axis rotor aerodynamics is outlined and the performance limits are presented along with key assumptions and problem areas. The Darrieus rotor multiple streamtube analysis is developed and compared with fixed and free wake analyses for an idealized case. (Author)

**A81-23697** Aeroelastic stability and response analysis of large horizontal-axis wind turbines. P P Friedmann (California, University, Los Angeles, Calif.). Journal of Industrial Aerodynamics, vol 5, May 1980, p 373-401. 36 refs.

The purpose of this review is to present recent research on aeroelastic and structural dynamic aspects of large horizontal-axis wind turbines in a unified manner. The literature available in the field is reviewed with considerable detail and the fundamental differences between helicopter rotor aeroelastic problems and the wind turbine aeroelastic problem are carefully outlined. Formulation of the isolated blade aeroelastic problem, as well as the coupled rotor/tower system, are treated with considerable detail. Results illustrating the characteristics of the isolated blade behavior are presented. Coupled rotor/tower behavior is also illustrated with an emphasis on rotor-tower-yaw drive interaction and rotor/tower interaction. Various other structural dynamic and aeroelastic problems occurring in wind turbines are also briefly discussed. (Author)

**A81-23698** The performance of arrays of wind turbines. D J Milborrow (Central Electricity Generating Board, Central Electricity Research Laboratories, Leatherhead, Surrey, England). Journal of Industrial Aerodynamics, vol 5, May 1980, p 403-430. 32 refs.

To assess the amount of power available in the wind, interactions between wind turbines in an array, or cluster, have been studied using a number of experimental techniques, and methods of mathematical analysis. These studies have included wake measurements behind wind turbine rotors and wind tunnel tests of model clusters, together with analyses using wake mixing and boundary-layer theories. The results from these studies are reviewed and

## 05 ENERGY CONSERVATION

compared and it is shown that there is reasonable agreement between the estimates for the power loss due to interactive effects in a cluster generating 1000 MW (about 25% is lost, if the rotors are spaced 10 diameters apart) Estimates of the output from larger arrays show some variation and there are conflicting views on the effects of certain parameters - such as rotor height Other topics requiring further study - such as the influence of machine design - are also identified and discussed. (Author)

**A81-23711 Trends and developments in magnetic confinement fusion reactor concepts.** C. C. Baker (Argonne National Laboratory, Argonne, Ill.), G. A. Carlson (California, University, Livermore, Calif.), and R. A. Krakowski (California, University, Los Alamos, N. Mex.). *Nuclear Technology/Fusion*, vol. 1, Jan. 1981, p. 5-78. 214 refs.

An overview is presented of recent design trends and developments in reactor concepts for magnetic confinement fusion The paper emphasizes the engineering and technology considerations of commercial fusion reactor concepts. Emphasis is placed on reactors that operate on the deuterium/tritium/lithium fuel cycle. Recent developments in tokamak, mirror, and Elmo Bumpy Torus reactor concepts are described, as well as a survey of recent developments on a wide variety of alternate magnetic fusion reactor concepts. The paper emphasizes recent developments of these concepts within the last two to three years. (Author)

**A81-23712 Contribution of activation products to fusion accident risk. I - A preliminary investigation.** J. P. Holdren (California, University, Berkeley and Livermore, Calif.). *Nuclear Technology/Fusion*, vol. 1, Jan. 1981, p. 79-89. 25 refs. Research sponsored by the U.S. Department of Energy

The health hazards of activation products from fusion-reactor accidents are dealt with in a study on an early conceptual tokamak reactor, using a simple consequence model based on that of the Nuclear Regulatory Commission's Reactor Safety Study (the Rasmussen Report) in order to determine conceivable radiation doses near the plant boundary Though tritium releases appear to result in fewer casualties than those predicted for the most severe accidents in fission reactors of similar electrical-generating capacity, the boundary doses of stainless-steel and molybdenum structures subject to massive lithium fires are comparable to the doses similarly calculated for 'worst case' light water reactor accidents. Calculations and tables are given for major activation products, their stored energy and their boundary doses in severe fusion and fission accidents Remedies are suggested for greatly reducing the potential for activation product release from fusion reactors, such as the use of low activation materials, the reduction of stored energy by putting lithium in relatively non-reactive form and the use of deuterium-deuterium instead of D-T reactions. D.K.

**A81-23713 Preliminary skyshine calculations for the Poloidal Diverter Tokamak Experiment.** D. W. Nigg and F. J. Wheeler (EG & G Idaho, Inc., Idaho Falls, Idaho). *Nuclear Technology/Fusion*, vol. 1, Jan. 1981, p. 90-98. 10 refs. Research supported by the U.S. Department of Energy

A calculational model is presented to estimate the radiation dose, due to the skyshine effect, in the control room and at the site boundary of the Poloidal Diverter Experiment (PDX) facility at Princeton University which requires substantial radiation shielding The required composition and thickness of a water-filled roof shield that would reduce this effect to an acceptable level is computed, using an efficient one-dimensional model with an Sn calculation in slab geometry. The actual neutron skyshine dose is computed using a Monte Carlo model with the neutron source at the roof surface obtained from the slab Sn calculation, and the capture gamma dose is computed using a simple point-kernel single-scatter method. It is maintained that the slab model provides the exact probability of leakage out the top surface of the roof and that it is nearly as accurate as and much less costly than multi-dimensional techniques. D.K.

**A81-23714 Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor.** M. M. H. Ragheb (Illinois, University, Urbana, Ill.), A. C. Klein, and C. W. Maynard (Wisconsin, University, Madison, Wis.). *Nuclear Technology/Fusion*, vol. 1, Jan. 1981, p. 99-119. 33 refs. Research supported by the Electric Power Research Institute

A Monte Carlo three-dimensional neutronics analysis for the last mirror-beam duct system for the SOLASE conceptual laser-driven fusion power reactor design is presented Detailed geometric configurations including the reactor cavity, the two last mirrors, and the three-section two-right-angle bends duct are modeled. Measurements are given of the dimensions and compositions of the reactor components, and of neutron scalar fluxes, spatial dependencies and neutron volumetric heating rates for the cases of aluminum or Boral as laser beam duct liners, and ordinary concrete or lead mortar as shield material. A three-dimensional modeling of laser-driven reactor penetrations is employed. The particle leakage is found to be excessively high for the configuration of the conceptual design considered and the advantages and disadvantages of various solutions, such as the use of Boral as a duct liner and the use of lead mortar instead of ordinary concrete as a shield material, are considered. D.K.

**A81-23716 An economics method for symbiotic fusion-fission electricity generation systems.** D. H. Berwald and J. A. Maniscalco (TRW, Inc., Redondo Beach, Calif.) *Nuclear Technology/Fusion*, vol. 1, Jan. 1981, p. 128-136. 15 refs. Research supported by the Exxon Research and Engineering Co. and University of Rochester

A self-consistent analytical methodology for evaluating the economic incentives for symbiotic electricity generation systems that consist of fusion breeder reactors and supported fission converter reactors is developed This methodology employs a discounted cash flow analysis of breeder and converter direct operating costs and indirect capital costs, as well as a novel treatment of fissile inventory charges. Three figures of merit are emphasized (1) the leveled cost of electricity generated by the symbiotic system, (2) the leveled cost of fuel exchanged by the breeder and converter reactors in the system, and (3) the equivalent cost of fuel to produce the same leveled electricity cost in an alternatively fueled converter reactor A fission converter operating on the current once-through fuel cycle is a special case of the above The method is equally applicable to symbiotic systems that utilize spallation accelerator breeder reactors. (Author)

**A81-23717 Performance and economics analysis of several laser fusion breeder fueled electricity generation systems.** D. H. Berwald and J. A. Maniscalco (TRW, Inc., Redondo Beach, Calif.) *Nuclear Technology/Fusion*, vol. 1, Jan. 1981, p. 137-159. 32 refs. Research supported by the Exxon Research and Engineering Co

The paper evaluates the potential of several future electricity generating systems composed of laser fusion-driven breeder reactors that provide fissile fuel for current technology light water fission power reactors (LWRs) The performance and economic feasibility of four fusion breeder blanket technologies for laser fusion drivers, namely uranium fast fission (UFF) blankets, uranium-thorium fast fission (UTFF) blankets, thorium fast fission (TFF) blankets and thorium-suppressed fission (TSF) blankets, are considered, including design and costs of two kinds, fixed (indirect) costs associated with plant capital and variable (direct) costs associated with fuel processing and operation and maintenance Results indicate that the UTFF and TFF systems produce electricity most inexpensively and that any of the four breeder blanket concepts, including the TSF and UFF systems, can produce electricity for about 25 to 33% above the cost of electricity produced by a new LWR operating on the current once-through cycle It is suggested that fusion breeders could supply most or all of our fissile fuel makeup requirements within about 20 years after commercial introduction D.K.

**A81-23719 Tides and turbines.** R. H. Charlier *Sea Frontiers*, vol. 26, Nov.-Dec. 1980, p. 355-362

Tidal power plants are examined with attention to potential sites worldwide and to existing projects in France, the Soviet Union, and China. It is noted that maximum power cannot always be made available during peak demand periods because of the continuous variation of the daily tidal cycle throughout the year. However, this can be alleviated if a two-pool design or pumping are used. The economic impact of tidal power has been favorable, with the use of cellular units reducing construction costs substantially. L S

**A81-23747 #** Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips (Elektricheskie kharakteristiki MGD-generatorov so sploshnymi elektrodami i lineinym raspredeleniem potentsiala na kontsevykh prostavkakh). G. P. Bazarov, V. A. Biturin, E. N. Kufa, and S. A. Medin. *Magnitnaia Gidrodinamika*, Oct-Dec 1980, p. 107-114. 9 refs. In Russian.

A numerical analysis is used to study the local and integral characteristics of the end sections of Faraday-type MHD generators with solid electrodes and sectioned metallic end strips. The characteristics are investigated in relation to the length of the strips, their position relative to the decreasing magnetic field, and the mode of channel loading for a linear distribution of potential on the strips. It is shown that there exist optimal dimensions of end strips and optimal positions relative to the magnetic field. The characteristics of channels with different end configurations are examined. B J

**A81-23848** The fusion-supported decentralized nuclear energy system. D. L. Jassby (Princeton University, Princeton, N.J.). *Journal of Fusion Energy*, vol 1, Jan 1981, p. 59-67. 21 refs. Contract No. EY-76-C-02-3073.

A decentralized nuclear energy system is proposed comprising mass-produced pressurized water reactors in the size range 10 to 300 MW (thermal), to be used for the production of process heat, space heat, and electricity in applications where petroleum and natural gas are presently used. Special attention is given to maximizing the refueling interval with no interim batch shuffling in order to minimize fuel transport, reactor downtime, and opportunity for fissile diversion. The smallest reactors could be deployed as 'nuclear batteries', kept in the equivalent of spent-fuel shipping casks and returned to nuclear fuel centers for refueling. These objectives demand a substantial fissile enrichment (7 to 15%). The preferred fissile fuel is U-233, which offers an order of magnitude savings in ore requirements (compared with U-235 fuel), and whose higher conversion ratio in thermal reactors serves to extend the period of useful reactivity and relieve demand on the fissile breeding plants (compared with Pu-239 fuel). Application of the neutral-beam-driven tokamak fusion-neutron source to a U-233 breeding pilot plant is examined. This scheme can be extended in part to a decentralized fusion energy system, wherein remotely located large fusion reactors supply excess tritium to a distributed system of relatively small nonbreeding D-T reactors. (Author)

**A81-23901 #** Direct conversion of chemical energy to electrical energy (Priamoe prevrashchenie khimicheskoi energii v elektricheskuiu). N. S. Lidorenko and G. G. Muchnik (Moskovskii Fiziko-Tekhnicheskii Institut, Moscow, USSR). *Priroda*, Jan 1981, p. 8-19. 7 refs. In Russian.

Various aspects of the development of direct electrochemical conversion are reviewed. The principles of operation of electrochemical generators are described, along with approaches to the analysis of such generators and the problem of catalysis. The basic engineering problems in the fabrication of electrochemical generators are considered, and the prospects of their utilization in electric automobiles and electric power stations are discussed. B J

**A81-23955** Power from water waves. D. V. Evans (Bristol, University, Bristol, England). In *Annual review of fluid mechanics*, Volume 13. Palo Alto, Calif., Annual Reviews, Inc., 1981, p. 157-187. 75 refs.

A review is presented of wave-energy devices and hydrodynamic properties of idealized equipment for extracting power from waves.

The governing equations involve the fluid hydrodynamic theory applied to machines with zero forward speed which can absorb energy from the neighboring wave field. A mixture of waves of different amplitudes, periods, wavelengths, and directions with randomly distributed phases coexist at a given time, a mathematical model of the sea surface assumes it to be an infinite superposition of wave trains of various amplitudes and frequencies. A theory was developed for the oscillation of two-dimensional energy-absorbing cylindrical sections which can be utilized for estimating hydrodynamic characteristics of fully three-dimensional ship hulls. Finally, three-dimensional wave-energy absorbers are represented by expressions in terms of the force amplitude, direction of motion, and the damping coefficient. A T.

**A81-24209** Low-temperature thermal emission rectifier with an oxidized titanium collector. V. K. Tskhakaia and V. I. Iarygin. (*Zhurnal Tekhnicheskoi Fiziki*, vol 50, May 1980, p. 957-962.) *Soviet Physics - Technical Physics*, vol 25, May 1980, p. 577-580. 11 refs. Translation.

Experimental results are presented on the operation of a thermionic converter with a W(110) emitter and an oxidized-titanium collector. It is shown that the output and emission characteristics of the converter are stable for times not less than 1800 hours. The minimum work function of the collector was 1.35 eV at a collector temperature of 823 C, the barrier index was 1.95 eV. It is suggested that the surface of the collector was a stable film of titanium suboxide. B J

**A81-24433** An analytical expression for the average output power of a wind machine. W. R. Powell (Johns Hopkins University, Laurel, Md.). *Solar Energy*, vol 26, no 1, 1981, p. 77-80. 7 refs. Research supported by the U.S. Coast Guard, Contract No. N00017-72-C-4401.

**A81-24447** Submarine hydro-electro-osmotic power plants for an efficient exploitation of salinity gradients. M. Reali (Ente Nazionale per l'Energia Elettrica, Milan, Italy). *Energy* (UK), vol 6, Mar 1981, p. 227-231. 12 refs.

An energy-conversion scheme, which allows efficient exploitation of salinity gradients, is proposed. This is a submarine hydro-electro-osmotic power plant in which fresh surface water is conveyed through a penstock to a submerged hydraulic turbine for the generation of electric power. The water leaves the turbine outlet depressurized and finally diffuses out in the sea, by osmosis, through a semipermeable barrier. (Author)

**A81-24617** Performance calculation of a vertical-axis wind power converter (Leistungsberechnung für einen Windenergiekonverter mit vertikaler Achse). M. Fallen and J. Ziegler (Kaiserslautern, Universität, Kaiserslautern, West Germany). *Brennstoff-Wärme-Kraft*, vol 33, Feb 1981, p. 54-59. 8 refs. In German.

The performance calculation of a vertical-axis wind power converter is carried out by Strickland's DART model, modified for the H-Darrieus rotor. The basic equations are solved by an iterative method. The influence of blade number, wheel geometry, and profile shape on the performance is determined, and results are compared with those for other windmill designs. B J

**A81-24811** On the flow of an ionized gas in a MHD generator with segmented electrodes. L. Brinzanescu (Bucuresti, Institutul Politehnic, Bucharest, Rumania) and L. Dragos (Bucuresti, Universitatea, Bucharest, Rumania). *Acta Mechanica*, vol. 38, no 3-4, 1981, p. 131-141.

A mathematical model is given for the flow of ionized gases in an MHD channel on the hypothesis that the external magnetic field is applied only in the zone of the electrodes. The rectangular cross-section channel carries N pairs of segmented electrodes. The solution is expressed in terms of Fourier series distinct in the electrode zones from those in the insulator zones. The coefficients are determined by the matching conditions at the ends of the



## 05 ENERGY CONSERVATION

electrodes The characteristics of the generator are determined and a computing program for  $N = 2$  is given D K

**A81-24975** The sea trial of the wave power generator 'Kaimei' Y Masuda and T Miyazaki (Japan Marine Science and Technology Center, Japan) *Energy Developments in Japan*, vol 3, Oct 1980, p 165-179

An experimental Japanese prototype of a wave-power electricity generator system is examined Construction details and experimental data are presented The ship-type floating structure, 80 meters in length and 500 tons dead weight, used a non-valve Wells turbine of 0.6 m diameter with four wings, whose energy conversion efficiency was found to be greater than 60% with very small waves, and whose safety factor was found to be greater than that of the impulse turbine The 'Kaimei' is concluded to be promising, but some technical problems, including increasing and smoothing the output power, remain to be solved D K

**A81-25067** New developments in wind systems technology. R L Moment and C. P Butterfield (Rockwell International Corp., Golden, Colo.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D C., Hemisphere Publishing Corp., 1981, p 1519-1530.

The design details of the prototype 1.2 kW, 8 kW, and 40 kW wind power systems are presented The prototypes are either nearing completion or currently undergoing tests at the Rocky Flats Test Center The 1.2 kW is a high-reliability system for remote applications in severe weather environments with a dc output for charging batteries The 8 kW is intended for farm residence use with an output of 60 Hz for tie-in with a utility The 40 kW will be used for irrigation or small community applications and is being designed for both 60 Hz ac electrical utility tie-in and mechanical output formats. Emphasis was placed on developing designs suitable for near-term commercialization and for potential cost-effectiveness L S

**A81-25068** An analysis for aerodynamic performance of the vertical axis 'phi' type rotor wind turbine D-J Ye (Tsinghua University, Peking, Communist China) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4. Washington, D C., Hemisphere Publishing Corp., 1981, p 1531-1542 9 refs

A method of calculating the aerodynamic performance of the vertical axis phi-type rotor wind turbine is proposed Two integral equations determining the work output of the turbine are derived from a stream sheet taken on a differential length of the rotor along the vertical axis Given the equality of the equations, the factor of influence and the wind energy efficiency of the stream sheet are obtained By the summation of the efficiencies of all the stream sheets, the aerodynamic performance of the wind turbine is determined regardless of differences in shape or the shear effects of the wind L.S.

**A81-25069** The flow field about a vertical axis wind turbine T E Base and L. J Russell (Western Ontario, University, London, Canada) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D C., Hemisphere Publishing Corp., 1981, p 1543-1560 5 refs.

An approach to determine the performance of a straight bladed vertical axis wind turbine is introduced, and an expression is derived for the blockage factor of a vertical shaft straight bladed turbine A comparison of the two types of vertical axis turbines is made The effect of solidity on the power output of a vertical axis straight bladed machine is studied It is shown that higher maximum power coefficients are attainable at lower solidities up to an optimum solidity value A vortex model describing the flow field about a vertical axis wind turbine is outlined The flow field consisted of a regular intermittent coherent singular pattern of finite vortex filaments shed from the blade every half revolution The computed

vortex models will improve the determination of the aerodynamics associated with critical blade vibrations L S.

**A81-25070** The characteristics of two, simple, automatic speed-control devices for horizontal axis wind-turbines. J A C Kentfield (Calgary, University, Calgary, Alberta, Canada) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D.C., Hemisphere Publishing Corp., 1981, p 1561-1580 6 refs

**A81-25071** A new concept in horizontal axis wind turbine rotors. V P Roan (Florida, University, Gainesville, Fla.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D C., Hemisphere Publishing Corp., 1981, p 1581-1586

A new concept for horizontal axis wind turbine rotors was developed at the University of Florida The main feature of this concept is a 'segmented' blade design using uniform airfoil sections separated by thin aerodynamic fences. The fences allow the individual segments to have different orientations to provide desired twist and pitch. Several prototypes have been built and tested and a wind machine using this concept was the overall winner in the wind division of the ERA II SCORE competition in 1977 (Author)

**A81-25072** An unconventional wind machine J R Sheff (Lowell, University, Lowell, Mass.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D C., Hemisphere Publishing Corp., 1981, p 1587-1598 10 refs.

The installation of natural draft cooling towers in 1000 MWE nuclear, oil, gas, peat or wood plants is discussed It is estimated that up to 17 MWE could be saved for other uses such as sale by this method The examples of a coal fired power plant in New Mexico and the Catawba and Seabrook Nuclear Stations are used to derive a cost analysis of the natural draft towers It is concluded that these towers are generally competitive with nuclear power and other projected wind machine costs L S

**A81-25073** Commercial, or usable, size Campbell Chinese type windmill J S Campbell In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D C., Hemisphere Publishing Corp., 1981, p 1599-1621 5 refs.

An adequately large, home-use size, model of the Campbell Chinese type windmill has been designed, built, debugged and partially tested Two basic windmills, operating side by side and assembled on one supporting structure, constitute the complete windmill This complete windmill can be readily tilted down to a horizontal position to provide protection from destructive winds or to make upper parts accessible for maintenance Minimum feasible weight was a design aim, and some important weight reduction features are included in the descriptions. The testing of only one basic windmill on the supporting structure has been started (Author)

**A81-25074** Estimating the wind's potential for small scale energy generation using available local climatological data D L Miller (Pennsylvania State University, Middletown, Pa.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington, D.C., Hemisphere Publishing Corp., 1981, p. 1623-1633

**A81-25075** Wind energy utilization possibilities in Turkey. S. Oney, T Yarman, and B Tekes (Istanbul, Technical University, Istanbul, Turkey) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 4 Washington,



D C , Hemisphere Publishing Corp , 1981, p 1635-1656 5 refs

An analysis of the wind energy utilization possibilities in Turkey is presented Monthly wind speed maps based on data of the last twenty to thirty years are provided The minimum wind energy speed of nine meters per second is found to be satisfied in approximately 25 percent of the country It is concluded that the installation of several small (1-10 kW) wind generators in the southeastern part of the country may be fruitful, particularly during the summer months when wind energy may be coupled with solar power  
L S

**A81-25076** Wind energy conversion in the MW range. L Lois (Maryland, University, College Park, Md) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp , 1981, p 1659-1667 14 refs

The purpose of this paper is threefold (1) to show that certain wind patterns above the continental United States are particularly suited for wind energy conversion utilizing wind powered stations in the MWe range, (2) to describe a system specifically designed for such stations, and (3) to present calculations which show that such a system is within the range of existing technology The proposed system is based on the existence of a wind pattern called the low level jet in which (a) the average wind speed is 2.0 to 3.0 times higher than at the 300 ft level, and (b) the diurnal and seasonal variations are smaller than at 300 ft The higher specific power and utilization factor which result from the characteristics of the low level jet contribute to higher power level per installation and power cost per unit energy produced  
(Author)

**A81-25077** Dynamic response of power generating wind turbines. D W Adkins and M I Young (Delaware, University, Newark, Del) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp , 1981, p 1669-1681 5 refs

A model is presented of the rotational dynamics of a large wind turbine driving synchronous and nonsynchronous electric generators The rotor is assumed rigid with constant-chord blades and is modeled by aerodynamic strip theory The loads include a dc generator with either field current control or blade pitch control and a synchronous alternator with blade pitch control These models are used to evaluate rotational response of the wind turbine to step-changes in wind speed  
(Author)

**A81-25078** Reliability, energy, and cost effects of wind integration with conventional electrical generating systems W A Buehring, K A Hub, C C Huber, J C Vankuiken (Argonne National Laboratory, Argonne, Ill), and J G Gros (U S Department of Energy, Washington, D C) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp , 1981, p 1683-1695 11 refs

The potential impacts of incorporating wind turbines, without the aid of storage devices, into a conventional electrical generating system is investigated A description of the methods and assumptions used to model the integrated operation of wind turbines in a utility system is given Limitations of the methods and qualifications for the results are identified and discussed It is concluded that, with both energy and reliability benefits, there is a reasonable potential for wind generators to be competitive, in limited penetrations, with conventional capacity  
(Author)

**A81-25079** Sources and potential uses of wave energy. D D Woodbridge (Hittman Associates, Inc., Columbia, Md) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp., 1981, p 1727-1742 11 refs

An analysis of ocean wave energy and its uses is presented The ocean energy conversion systems surveyed include the ocean valve, the spherical vane, the hinged raft and the oscillating water column systems The configuration of the Ocean Swell and Wave Energy Converter (OSWEC) is detailed, and its potential power output is discussed It is noted that the utilization of a single OSWEC system of 20 MW would result in a savings of nearly 25,000 barrels of oil a month.  
L S

**A81-25080** Small scale power generation utilizing wave energy. G N Nurick and R K Dutkiewicz (Cape Town, University, Cape Town, Republic of South Africa) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp , 1981, p 1751-1760 15 refs.

The Differential Area Piston Compressor (DAPC) small wave power generator is described The DAPC has two moving parts, a vertical moving float, and a turbo-alternator A large float connected to a piston which has a smaller area moves in a vertical direction under the impulse from the vertical movement of the wave so that the piston compresses air The air passes through the turbo-alternator via a storage accumulator Each unit would have to be designed according to the wave characteristics of the considered area of application The dimensions, power output, and efficiency of the unit and the relationship between these and the wave characteristics are discussed  
L S

**A81-25081** The design and analysis of a vertical axis ocean current power plant C C Richard, J R Hartzog, R V Sorge, J V. Quigley, and G R Adams (U S Naval Academy, Annapolis, Md) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp , 1981, p 1761-1768

This paper discusses a calculation of the power generated by a vertical axis ocean current power plant An analytical model is presented and a computer solution described Results of the calculation show the optimum angles of the blades about the vertical axis to maximize power output, as well as the total extractable power of the plant for various ocean current velocities Tow tank tests are described for a scale model of the plant Additionally, the advantages and economics of the proposed design are discussed  
(Author)

**A81-25082** Some new conceptions in the approach to harnessing tidal energy. A. M Gorlov (Northeastern University, Boston, Mass) In Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla , December 10-13, 1979 Volume 4 Washington, D C , Hemisphere Publishing Corp , 1981, p 1771-1795 10 refs Research sponsored by the U S Department of Energy

A method of converting ocean tide energy into compressed air energy for subsequent conversion to electrical and other forms of industrial energy is presented The tidal energy is converted to compressed air energy by means of specialized chambers which are put on the ocean bed Ocean water from the dammed region passes through the chamber where it works as a natural piston compressing air in the upper part of the closure The compressed air can be expanded through high speed compact gas turbines or any type of reciprocating engine The flexible reinforced plastic barrier should be substantially cheaper than a conventional rigid dam and can be designed so that by means of special floats it becomes a self-supported and self-regulated weightless structural system which can dam a large shallow space of ocean without having to be connected to special bays  
L S

**A81-25083** The utilization of the free and at present dissipated gravitational force inherent in tidal motion by conversion to electrical energy, using compressed air as the active intermediary A W Baber (Technical College of Smethwick, Warley, Worcs ,

## 05 ENERGY CONSERVATION

England) In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 4 Washington, D.C., Hemisphere Publishing Corp., 1981, p 1797-1811

**A81-25084** **Korea tidal power and beyond** W O Song (Korea Ocean Research and Development Institute, Seoul, South Korea) and E van Walsum (Shawinigan Engineering Co., Ltd., Montreal, Canada) In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 4 Washington, D.C., Hemisphere Publishing Corp., 1981, p 1813-1832 10 refs United Nations Contract No ROK/72/027

A study evaluating the tidal power potential on the west coast of Korea is presented. The tidal power plant concept applied to all sites features prefabricated caissons from which the powerhouse and the sluice sections of the plant are built up. In the screening process, all 13 potential sites were compared on the basis of a single basin and single effect schemes operated to produce the maximum amount of energy. The four sites identified as having potential for development (the inner Asan Bay, the outer Asan Bay, the Incheon Bay, and the Garorim Bay) are economically evaluated. It is noted that harbor development and land reclamation can proceed in conjunction with tidal power development. L S

**A81-25085** **A perspective on OTEC plants** L W Zelby (Oklahoma University, Norman, Okla.) In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 4 Washington, D.C., Hemisphere Publishing Corp., 1981, p 1835-1842 25 refs

An ocean thermal energy conversion plant (OTEC) concept is analyzed with a view to economic and environmental constraints, positive net energy yield, and the quantities of construction materials used. It is noted that many such materials are not renewable. The plant discussed is a 240 MWe plant consisting of a partially submerged floating platform housing four power modules, each containing two 30 MWe generators. The plant is expected to have a lifespan of 100 years for the platform and 35 years for the power modules and to deliver 1.13 billion kWh per year. The projected OTEC plant seems to satisfy environmental, net energy, and economic criteria but requires very large quantities of concrete, steel and titanium. It is concluded that OTEC expansion should be deferred until more information can be gathered by a small pilot plant. L S

**A81-25086** **A bottom fixed OTEC plant on the edge of a continental /or island/ shelf.** J C Daidola, N S. Basar (M. Rosenblatt and Son, Inc., New York, N.Y.), and D. S. Sasser (University of Puerto Rico, Mayaguez, P.R.) In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 4 Washington, D.C., Hemisphere Publishing Corp., 1981, p 1843-1857. 12 refs.

A generic type of shallow water bottom fixed ocean thermal energy conversion plant (SBF-OTEC) is considered. The SBF-OTEC consists of a platform structure rigidly attached to the seabed at the edge of a continental or island shelf. It is noted that the cold water, warm water and combined discharge pipes to be used in connection with this plant are not subject to the very large hydrodynamic forces acting on a pipe attached to a floating platform. The characteristics of the platform and the SBF-OTEC systems are given and the costs, prospects for commercialization and potential island location sites are discussed. L.S.

**A81-25087** **Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants** M K Goldstein (JGC Corp., Yokohama, Japan), D Rezachek, and C. S. Chen (Hawaii University, Honolulu, Hawaii) In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 4

Washington, D.C., Hemisphere Publishing Corp., 1981, p 1875-1892 12 refs

The use of an Ocean Thermal Energy Conversion Related Bottoming Cycle (ORBC) to recover the waste heat generated by a large nuclear or fossil power plant is considered. To take advantage of an ORBC, a plant must be located close to cold, deep ocean water, either open-ocean or shore-based. The ORBC can also be retrofitted to existing shore-based nuclear plants or it can be a part of the design of future plants. The increased efficiency of a nuclear floating system due to the ammonia bottoming cycle and ORBC systems is shown for the example of the proposed facility in Murata, Japan. It is noted that the size of the heat exchangers and the diameter of the cold water pipe would be relatively smaller for an ORBC than for a conventional ocean thermal energy conversion system. L.S.

**A81-25092** **Making geothermal power competitive.** L L Fassbender and C. H. Bloomster (Battelle Pacific Northwest Laboratories, Richland, Wash.) In: *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 5 Washington, D.C., Hemisphere Publishing Corp., 1981, p 2009-2021. 6 refs Contract No EY-76-C-06-1830

The near-term supply curve for the electrical applications of geothermal energy is presented, and the impacts of technological improvements are illustrated. The curve is derived using the subsurface temperature, reservoir thickness, and heat content estimates made by the U.S. Geological Survey for the identified high-temperature and intermediate-temperature hydrothermal resources of the western U.S. Each step in the curve is composed of one or more geothermal resources identified by the USGS. Both high- and intermediate-temperature resources were included up to an arbitrary cost ceiling of 100 mills/kWh. Curves are drawn to show the impacts of combinations of technological advances expected to be achieved by 1982 and 1985. It is shown that most of the identified hydrothermal resources could become competitive with conventional energy sources for electrical power production by 1985. L.S.

**A81-25095** **The utilization of geothermal energy in the Philippines.** L U Rivero (De La Salle University, Manila, Philippines). In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5. Washington, D.C., Hemisphere Publishing Corp., 1981, p 2071-2075 15 refs

A history of the exploration of the geothermal resources as well as the construction of the geothermal power plants in the Philippines is given. The cost and the viability of such plants under Philippine conditions are presented. The necessity of a planned development around the geothermal plant - such as heat-consuming industries - is stressed. (Author)

**A81-25097** **An evaluation of alternate energy sources for the Guyana energy crisis.** M Sankies (University of Guyana, Georgetown, Guyana) In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5 Washington, D.C., Hemisphere Publishing Corp., 1981, p 2125-2153. 11 refs

Hydropower, tidal power, and Ocean Thermal Energy Conversion (OTEC) are evaluated as energy sources for the economic development of Guyana. The realization of a 3000 MW hydropower scheme is expected to promote industries such as an aluminum smelting plant and an ammonium nitrate plant in the hinterland. A proposal is made for a tidal power plant on the Saint John River with a million kW capacity. Although Guyana's geological location and atmospheric conditions make it a favorable site for solar seapower, OTEC cannot be considered as a current alternative. It is concluded that hydropower will play an important role as an inexpensive source of energy for industry, and that tidal power will supply coastal areas and function as part of the sea-defense system. L.S.

**A81-25099** **Alternative energy source II**, Proceedings of the Second Miami International Conference, Miami Beach, Fla.,

**December 10-13, 1979 Volume 6 - Nuclear energy Conference** supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.) Washington, D.C., Hemisphere Publishing Corp., 1981. 438 p. Price of nine volumes, \$595.

This volume examines conventional nuclear energy, breeder reactors, and thermonuclear energy. The particular papers presented consider current developments in nuclear breeder technology, fusion-driven fissile fuel breeder systems, and the fusion fission hybrid reactor. The implications of nuclear energy utilization in the Philippines and the internationally safeguarded atomic fuel exchanger center for the Asian-Pacific basin are also discussed. L.S.

**A81-25101 The future of fusion power comes into focus.** W. B. Briggs (McDonnell Douglas Astronautics Co., St. Louis, Mo.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 6. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2523-2533.

Experimental studies of plasma behavior from the five large tokamaks and one mirror which began operations in 1978-79 are briefly surveyed, and the progress of the Mirror Fusion Test Facility and the Tokamak Fusion Test Reactor is noted as part of an outline of the U.S. fusion power program. The advanced designs described include the Engineering Test Facility, The International Tokamak Reactor, and the Commercial Tokamak study. Department of Energy policies and recent changes in government fusion organization are discussed, and industry participation and the economics of fusion are addressed. Experimental facilities and projects under development which do not utilize a research reactor are also discussed. L.S.

**A81-25102 Concept evaluation of nuclear fusion driven symbiotic energy systems.** J. P. Renier and T. J. Hoffman (Oak Ridge National Laboratory, Oak Ridge, Tenn.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 6. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2539-2577. 18 refs.

An analysis of systems based on D-T and semi-catalyzed D-D fusion-powered U233 breeders is presented. Metallic thorium pebble-bed blankets with a batch reprocessing mode and a molten salt blanket with on-line continuous or batch reprocessing were used. Neutronics depletion calculations are coupled with a scenario optimization and a cost analysis code. The fusion-driven symbioses are compared with LMFBR-driven energy systems. The analyses of the symbiotic energy systems were performed at equilibrium, at the maximum rate of grid expansion and for a given nuclear power demand. Attractive schemes are identified based on D-T driven fusion-drivers operated with low plasma performance parameters. L.S.

**A81-25103 The fusion fission hybrid - Roles in the energy economy.** R. T. Perry (Wisconsin, University, Madison, Wis.), B. R. Leonard, Jr., and V. L. Teofil (Battelle Pacific Northwest Laboratories, Richland, Wash.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 6. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2579-2584. 8 refs.

The fusion-fission hybrid reactor is characterized and its roles in the U.S. power economy are defined. The hybrid can be utilized as a fuel factory, as a stand-alone power producer, in the production of hydrogen for use in the manufacture of synthetic fuels, as an alternative to the fast breeder reactor, and as a technological base for pure fusion. It is noted that because of its prolific fissile fuel production, there are economic windows in which the hybrids could feed the light water reactor industry until the fast breeder becomes established. L.S.

**A81-25104 Overview of nonelectrical applications of fusion.** G. H. Miley (Illinois, University, Urbana, Ill.). In: *Alternative*

*energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 6. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2585-2613. 64 refs.

The potential for, and importance of, nonelectrical applications of fusion energy is discussed. Three possibilities are reviewed in some detail: fusion-fission hybrids for fissile fuel production, high-temperature electrolysis and thermochemical processes for hydrogen production, and high-temperature steam for coal gasification. The hybrid could be an early application of fusion if this route is identified as a desirable goal. Hydrogen production and coal gasification processes appear feasible and could be developed as a part of the conventional fusion blanket research and development. The question of economics, particularly in view of the high capital cost of fusion plants, remains an open issue requiring more study. (Author)

**A81-25105 Fusion reactors as high-temperature process heat sources.** J. H. Pendergrass and L. A. Booth (California, University, Los Alamos, N. Mex.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 6. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2615-2642. 33 refs.

The reasons for interest in fusion process heat sources, the present United States requirements for process heat, and process industry criteria for selection of thermal energy sources are reviewed. Constraints on process heat fusion reactor design, conceptual solutions to design problems, and energy delivery characteristics of present process heat fusion reactor concepts are described. Projections of the time frame and potential for commercialization of fusion process heat sources are presented. (Author)

**A81-25106 Laser fusion systems for process heat.** K. D. Kok, W. H. Goldthwaite, R. S. Denning, H. I. Avci, F. J. Bates, R. C. Dykhuizen, J. C. Skelton, and C. T. Walters (Battelle Columbus Laboratories, Columbus, Ohio). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 6. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2643-2658. 17 refs.

The suitability of laser fusion power plants as sources of process heat for industry is investigated. Process heat requirements are tabulated according to process temperature and unit size for 19 energy intensive industries. Specifications based on this tabulation were determined for five conceptual plant designs. The industry criteria having the greatest effect on the design and the evaluation of the concepts were the needs for high availability, minimal energy production costs, and compatibility with process heat requirements. The principal variations in design related to the differences in the blanket materials and coolant requirements. The analysis of the designs indicates that an acceptable level of plant availability can be achieved by the use of redundant components. L.S.

**A81-25119 Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal.** R. Tabi (New York Institute of Technology, Old Westbury, N.Y.) and J. E. Mesko (Pope, Evans and Robbins, Inc., New York, N.Y.). In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 7. Washington, D.C., Hemisphere Publishing Corp., 1981, p. 2837-2846. Research supported by the Institute of Gas Technology.

An alternative to direct coal-combustion for electric power generation is liquefaction of coal prior to combustion in a combined gas-steam turbine plant. For optimization of the overall efficiency of the power plant, individual subsystem efficiencies must be analyzed, but the prevailing energy analysis based on the first law of thermodynamics is insufficient for this purpose and can be misleading. The paper presents a complete thermodynamic analysis of an 873 MWe combined gas-steam turbine cycle, which utilizes semiclean fuel from the H-Coal process. (Author)

## 05 ENERGY CONSERVATION

**A81-25123** Thermodynamic calculations for Otto cycle engines using methanol as a fuel. M F Bardon (Royal Military College of Canada, Kingston, Ontario, Canada) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 7 Washington, D C, Hemisphere Publishing Corp., 1981, p 2887-2908 14 refs

Equations are derived to permit calculation of the work required for the isentropic compression of a two phase fuel-air mixture. Methanol evaporation during compression is shown to substantially reduce compression work and thereby improve cycle efficiency and maximum power. Effects of evaporative cooling in the intake manifold are calculated. Energy density of methanol and gasoline fuel-air charges are compared. Both phase equilibrium and evaporation rate are shown to be causes of the poor cold starting performance of methanol (Author)

**A81-25131** The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources. T J Marusak (Mechanical Technology, Inc., Latham, N Y) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 7 Washington, D C, Hemisphere Publishing Corp., 1981, p 3007-3013

The thermodynamic and mechanical advantages of free-piston Stirling engines developed to date by NASA, and their future potential as small powerplants, are discussed. Applications include heat-pumps, mobile electric power systems, solar thermal electric power generation and multiple heat source-capability power systems. Existing prototypes have demonstrated engine efficiencies of 33% even at low output levels, and an advanced design capable of 40% efficiency and an output power of more than 3 kW is currently undergoing extensive testing O.C

**A81-25132** An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine. J Kamoshida (Shibaura Institute of Technology, Tokyo, Japan) and N Isshiki (Tokyo Institute of Technology, Tokyo, Japan) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979* Volume 7 Washington, D C, Hemisphere Publishing Corp., 1981, p 3015-3029

The thermodynamics and corrosive chemistry of a lithium salt solution thermal energy storage device under various heat pump operation and vehicle propulsion conditions are discussed. Propulsion system theoretical efficiencies are compared with figures obtained from an experimental vehicle's operation, and it is determined that storage capacity is comparable with that of lead-acid batteries, with about 40% of theoretical capacity being liberated. Extensive charts and figures are provided of salt solution conditions encountered in the course of the experimental vehicle's testing O.C

**A81-25325** Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes. E Fanghanel, G Schukat (Leuna-Merseburg, Technische Hochschule, Merseburg, East Germany), K. Wiesener, and A Fuhrmann (Dresden, Technische Universität, Dresden, East Germany) *Journal of Power Sources*, vol 6, Apr 1981, p 193-197 10 refs

Tetrathiafulvalenes have been examined as metal-free electrocatalysts for the cathodic reduction of oxygen at monolayer carbon diffusion electrodes in sulphuric acid. The polarizability of the electrodes increases in the following order: conjugatively-connected polymeric tetrathiafulvalenes, catalyst-free electrodes, non-conjugatively-connected polymeric tetrathiafulvalenes, and monomeric tetrathiafulvalenes. Only electrodes that are covered by conjugatively polymeric tetrathiafulvalenes exhibit a better performance than the active carbon P 33 used as carrier; this fact is discussed in terms of the increased electronic catalyst conductivity (Author)

**A81-25381** A study of a commercial MHD power plant scheme. S A Pashkov and E V Shishkov (Akademii Nauk SSSR, Institut Vysokikh Temperatur, Moscow, USSR) *Indian Academy of Sciences, Proceedings (Engineering Sciences)*, vol 3, July 1980, p 81-87 12 refs

Power engineering specialists are currently interested in electrical power stations with magnetohydrodynamic generators. This paper is devoted to an investigation of one of the possible process flow diagrams of MHD electrical power plants. The structure of MHD electrical power plants, the interrelation between the aggregates, issues concerning the starting of the plant and the working of the power unit under various partial load conditions are discussed. With the availability of new theoretical and experimental data, the process flow diagrams of industrial MHD electrical power plants will naturally undergo changes. However, the methodical approach and the investigation described in this paper should retain their validity for all process flow diagrams of electrical power plants with MHD generators (Author)

**A81-25480 #** Metal hydrides in energy conversion systems. G Alefeld (München, Technische Universität, Garching, West Germany) In *Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979* Sendai, Japan, Japan Institute of Metals, 1980, p 25-32 28 refs

The properties of metal hydrides and the interaction of hydrogen with metals are important parameters needed for many technical applications. A short review is given with emphasis on fusion reactor technology, hydrogen storage, metal hydride power cycles and Stirling engines (Author)

**A81-25492 #** HVEM in situ hydriding of hydrogen storage materials. E A Kenik (Oak Ridge National Laboratory, Oak Ridge, Tenn.), J Mullins, S Spooner, and B R Livesay (Georgia Institute of Technology, Atlanta, Ga.) In *Hydrogen in metals, Proceedings of the Second International Symposium, Minakami, Gumma, Japan, November 26-29, 1979* Sendai, Japan, Japan Institute of Metals, 1980, p 321-324 Contract No W-7405-eng-26

The microstructural changes induced during hydriding have been investigated by high-voltage electron microscopy and in situ hydriding studies of LaCo<sub>5</sub> and LaNi<sub>2</sub>Co<sub>3</sub> thin foil specimens. There appears to be an activation barrier to hydriding at low hydrogen pressures which may be reduced or eliminated by heating to 200°C under a low partial pressure of hydrogen. Internal stresses generated by hydriding result in cracking and ultimately in fracturing, due to some dislocation mechanism such as slip or twinning or the generation of internal stresses itself O.C

**A81-25602** Development of advanced electrocatalysts for phosphoric acid fuel cells. P Stonehart (Stonehart Associates, Inc., Madison, Conn.) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 34-37

Research supported by the Electric Power Research Institute, Contract No DE-AC03-78ET 15365. The role of the carbon support for platinum electrocatalysts is discussed with a view to the process of carbon corrosion. The relationships between decrease in surface area, platinum utilization, and carbon corrosion is discussed. It appears that catalysts deposited on graphitic supports are more stable than electrocatalysts deposited on ungraphitized supports. Future electrocatalysts will be designed on new high surface area materials so that platinum surface areas will be maintained above 60 sq m/g after 40,000 hours at 200 g L.S

**A81-25608** The oxygen electrode - A major problem in energy conversion. Ch Fabjan (Wien, Technische Universität, Vienna, Austria) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 233-237 27 refs

The electrode reactions of oxygen are examined with a view to the evaluation of the cathodic reaction orders. The oxygen electrode

in phosphoric acid and alkaline electrolytes is reviewed. A consideration of the presented data indicates that long-term development should favor oxygen electrodes for alkaline electrolytes, particularly in batteries for electric vehicles. L S

**A81-25609 Electrochemistry of oxygen** E Yeager (Case Western Reserve University, Cleveland, Ohio) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p. 238-241

The factors which control the performance of O<sub>2</sub> cathodes and anodes for metal-air batteries and fuel cells are discussed with a view toward the production of O<sub>2</sub> electrocatalysts of reasonable cost and life. The general features of air cathodes are noted, and the reaction pathways for O<sub>2</sub> electroreduction in acid electrolytes are examined. O<sub>2</sub> generation electrocatalysts are reviewed. Some of the mixed transition metal oxides including the perovskites are particularly promising as O<sub>2</sub> generation catalysts. L S

**A81-25611 Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte** R Fleischmann, J Heffler, and H Boehm (Telefunken AG, Frankfurt am Main, West Germany) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p. 245-247

A fuel cell system operating with tungsten carbide anodes and platinum supported cathodes in a phosphoric acid electrolyte for crude gas conversion is examined. The converter consists of a cracking reactor, control and starting unit, fuel cell stack, dc/ac converter, methanol tank, pump, valves, and air fan. The automatically working system is controlled by temperature sensors in the cracking reactor and the fuel cell. The fuel cell stack consists of bipolar contact cells by means of which the whole cross-section is pressed on ribbed graphite plates. The plates contact the electrodes, assure gas separation, and provide the porous electrodes with fuel and oxidant gases. The cell components and the results of battery tests are given. L S

**A81-25625 Calculation of the internal heat exchange cycle of a Stirling engine** (Raschet parametrov vnutrennego teploobmennogo kontura dvigatel'ia Stirlinga) V S Trukhov, I A Tursunbaev, and G Ia Umarov Tashkent, Izdatel'stvo Fan, 1979 80 p. 62 refs. In Russian

The current status of research and development on Stirling engines is reviewed, and the technical and economic feasibility of the utilization of such engines in energy systems (e.g., solar systems) is considered. Engineering methods for the calculation and optimization of heat exchangers are presented with allowance for consideration of thermal and hydraulic losses. Recommendations are given on the optimization of pistons and drive for a single-cylinder Stirling engine. B J

**A81-26006 Gas turbine combustor design problems** Edited by A H Lefebvre (Purdue University, West Lafayette, Ind.) Washington, D.C., Hemisphere Publishing Corp., 1980 447 p. \$45

The book focuses on gas turbine combustor problems, fuels and combustion, pattern factors and wall temperatures, relighting, emissions, modeling, and diagnostics. Papers were presented on vortex-controlled diffusers in annular combustor flowpaths, residual fuel combustion in industrial gas turbines, combustor cooling, combustion of coal-derived liquids and shale oil in gas turbines, and spray diagnostics. A T

**A81-26007 Problems and promises in gas turbine combustor design development** D A Hudson (USAF, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio) In *Gas turbine combustor design problems* Washington, D.C., Hemisphere Publishing Corp., 1980, p. 3-9, Discussion, p. 9, 10

Current design emphasis for gas turbine engine combustion systems is in part durability. The development of combustion systems which meet durability goals has required concentration on solving the problems of accurate duty cycle definition and high

temperature maldistributions. Recent improvements in the understanding of aircraft utilization has allowed accurate duty cycle descriptions which, in turn, has improved our capability to design more durable combustion systems. Maldistribution of high temperature regions in the combustor continues to be the greatest causal factor of distress to the combustion system. These maldistributions of high temperature are caused primarily by ill-defined and poorly controlled flow fields in the dome of the combustion system. The most challenging and beneficial research facing the combustor designer today is an improved understanding of the flow field in the combustor dome region. Future combustion systems will be facing many problems from new fuels effects, advanced aerodynamics, reduced wall cooling, and combustion instabilities. To meet the challenges of current and future problems, promising new techniques such as combustion modelling, variable geometry and new non-metallic materials are being developed. (Author)

**A81-26009 Problems due to multifuel operation of gas turbine combustors** J Odgers (Calgary, University, Calgary, Alberta, Canada) In *Gas turbine combustor design problems* Washington, D.C., Hemisphere Publishing Corp., 1980, p. 71-84, Discussion, p. 84, 85 11 refs

The effects of fuel changes in gas turbine operation are examined. Costly refinery treatment will be needed for aircraft and industrial applications unless the current NO<sub>x</sub> specifications are relaxed, the greater C/H ratios (aromatics) can be alleviated by assuming that the flame emissivity of all fuels is unity. Improved conditions could also result from airblast atomizers used as a partial premixed system. A dual gas/liquid injection system is practical when the gas is a pure hydrocarbon of high calorific content (such as methane or propane), but cannot be utilized with a low Btu gas due to a possible compressor mismatch. It is concluded that the major problem in multifuel applications is expensive refinery processing due to the bound nitrogen. A T

**A81-26010 Residual fuel combustion in industrial gas turbines** C Wilkes (General Electric Co., Schenectady, N.Y.) In *Gas turbine combustor design problems* Washington, D.C., Hemisphere Publishing Corp., 1980, p. 87-109, Discussion, p. 109, 110 17 refs

The problems of combustion of residual fuels in industrial gas turbines due to strict emission rules and increases in pressure ratios and inlet temperatures require greater efforts from combustion engineers. Computer data acquisition methods, online information processing, and better instrumentation provide increased testing rates to determine combustor dimensions, fuel properties, and hydrogen distribution, the effects of H content on specific gravity, heating values, and flame temperatures are computed to compare combustor performances. Corrosion caused by Na, K, and V is serious for hot metal components downstream of the combustor, tests are time-consuming and costly, but the effects of residual fuel impurities and inhibitors on particulates will be estimated in the future. A T

**A81-26016 Combustion of coal-derived liquids and shale oil in gas turbine combustors** J M Beer and S Hanson (MIT, Cambridge, Mass.) In *Gas turbine combustor design problems* Washington, D.C., Hemisphere Publishing Corp., 1980, p. 225-244, Discussion, p. 244 17 refs

It can be expected that high nitrogen content coal derived fuels and shale oil will play an increasing role as gas turbine fuels during the 1980s. A thermodynamic and kinetic analysis implies that high temperature fuel rich conditions in the first stage of a combustor may be favorable for converting most of the fuel nitrogen into N<sub>2</sub> rather than NO. These conditions, however, are also conducive to soot formation in the first stage of the combustion process. While soot will further reduce NO to CO<sub>2</sub>, CO, and N<sub>2</sub> the carbon may not be fully burned in the second, fuel-lean stage on the combustor with the result of particulate emission. Fuel-nitrogen transformations at gas turbine combustion conditions are discussed, with special reference to these new fuels. Reactions between NO and gaseous hydrocarbons, and soot respectively are considered and the relevance

## 05 ENERGY CONSERVATION

of some of the results of pyrolysis and combustion studies carried out with bituminous coals is discussed. A theoretical and experimental program which can yield information on the nitrogenous product distribution of pyrolyzing and burning of droplet arrays of coal liquids and shale oil is outlined (Author)

**A81-26018** Coalescence/dispersion modeling of gas turbine combustors. D T Pratt (Utah, University, Salt Lake City, Utah) In Gas turbine combustor design problems

Washington, D C, Hemisphere Publishing Corp., 1980, p 315-330 18 refs Research supported by the University of Utah and Avco Corp, NSF Grant No ENG-76-84533

The Mellor turbulent mixing time theory (1976) indicates that this parameter is the most significant characteristic of gas turbine combustors. However, the classical reactor theoretic and finite-difference solutions of the governing differential equations considered the turbulent mixing time as either zero or infinite. Stochastic and Monte Carlo techniques can include the mixing time for simple chemistries, preliminary analyses of a new algorithm for integrating the batch-reaction chemical equations show a possibility of practical combined modeling of finite-rate micromixing and complex finite rate chemistry required for the determination of pollutant formation and combustor stability. A T

**A81-26062** Theory of an induction MHD propeller with a free field. V I Iakovlev (PMTF - Zhurnal Prikladnoi Mekhaniki i Tekhnicheskoi Fiziki, May-June 1980, p 105-116) Journal of Applied Mechanics and Technical Physics, vol 21, no 3, Nov 1980, p 376-384. 9 refs Translation

From the present analysis it can be seen that allowance for the longitudinal edge effect in the evaluation of the energetic characteristics of MHD propulsion reduces markedly the values predicted by Phillips (1962) for a given magnetic field intensity. At the same time, the magnetic field required to obtain a given efficiency value is higher than the predicted value. A method of improving propulsion efficiency by 'amplitude modulation' is proposed. V.P

**A81-26552** Self-magnetically insulated ion diode. J P VanDevender, J P Quintenz, R J Leeper, D J Johnson, and J T Crow (Sandia Laboratories, Albuquerque, N Mex) Journal of Applied Physics, vol 52, Jan 1981, p 4-12 19 refs Contract No DE-AC04-76DP-00789

Light ion diodes for producing 1-100 TW ion beams are required for inertial confinement fusion. The theory, numerical simulations, and experiments on a self-magnetically insulated ion diode are presented. The treatment is from the point of view of a self-magnetically insulated transmission line with an ion loss current and differs from the usual treatment of the pinched electron beam diode. The simulations show that the ratio  $V/IZ(0) = 0.25$  in such a structure with voltage  $V$ , local total current  $I$ , and local vacuum wave impedance  $Z(0)$ . The ion current density is enhanced by a factor of approximately 2 over the simple space-charge limited value. The simulation results are verified in an experiment. An analytical theory is then presented for scaling the results to produce a focused beam of protons with a power of up to 10 to the 13th W. (Author)

**A81-26570** Charge exchange and energy loss of carbon ions in air-plasma channels. T P Wright, T A. Green, and T A Mehlhorn (Sandia Laboratories, Albuquerque, N. Mex) Journal of Applied Physics, vol 52, Jan 1981, p. 147-150 17 refs

A model is developed to study two loss mechanisms during the propagation of high-power beams of carbon ions in current-carrying air-plasma channels. Such channels can provide the necessary standoff between the diodes and the target in light-ion-driven inertial confinement fusion. Particle losses due to radial charge exchange diffusion across the channel magnetic field as well as collisional energy losses are studied. Semiempirical charge exchange cross sections are derived from literature sources and used in a Monte Carlo transport code with the energy loss modeled in the continuous slowing down approximation. We conclude that charge exchange losses are probably not of major concern for light ion beam inertial

confinement fusion reactor configurations using channel transport, whereas collisional energy loss can be detrimental if the plasma channel density is too large (Author)

**A81-26571** Anode plasma behavior in a magnetically insulated ion diode. D J Johnson, E J T Burns, J P Quintenz, K W Bieg, A V. Farnsworth, Jr, L P. Mix, and M. A. Palmer (Sandia Laboratories, Albuquerque, N Mex) Journal of Applied Physics, vol 52, Jan 1981, p 168-174. 17 refs Contract No. DE-AC04-76DP-00789

The nature and time evolution of the 'surface flashover' anode plasma in a magnetically insulated ion diode is studied. Holographic interferometric and spectrographic measurements indicate a plasma with an electron density of  $5 \times 10$  to the 16th per cu cm and a temperature of approximately 5 eV which is created by electric breakdown along a surface parallel to the imposed pulsed electric field. The divergence of the ion beam accelerated from this plasma is governed by the spatial nonuniformities of the plasma. The beam is composed primarily of protons for the experiments studied. Contrary to expectations, a substantial  $C(4+)$  beam component was not observed (Author)

**A81-26851** Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, University of Wisconsin, Madison, Wis., August 21-24, 1979. Conference supported by the Aerospace Corp., General Electric Co., NBS, et al. Edited by K D Timmerhaus and H A Snyder (Colorado, University, Boulder, Colo) New York, Plenum Press, 1980. 866 p \$59.50

A number of superconductivity applications are discussed including MHD and fusion magnets, energy transfer and storage, rotating machinery, magnet technology, and cryogenic techniques. Attention is also given to cooling superconducting systems, heat transfer in helium, liquefaction and refrigeration, and cryogenic applications in space technology and resource utilization. P T H

**A81-26852** Superconducting MHD magnet engineering program. P G Marston, A M Dawson, D B Montgomery, and J E C Williams (MIT, Cambridge, Mass) In Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979. New York, Plenum Press, 1980, p 1-11 5 refs

The MIT Francis Bitter National Magnet Laboratory has been designated as the DOE magnet program field office to assist with the creation and management of a national program of superconducting MHD magnet technology development. This activity will include conceptual design and subsequent contract management for a number of large magnets destined for use in a variety of MHD experimental facilities. The technology development program is dynamically integrated with the magnet construction management in order to identify design and manufacturing techniques for commercial scale units, identify failure modes, and safety and risk configurations, define evaluation and success criteria, predict costs, provide the fundamental engineering data base and design tools, and perform verification testing and modeling. P T H

**A81-26853** Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications. R J Thome, R D Pillsbury, H R Segal, and B O Pederson (Magnetic Corporation of America, Waltham, Mass) In Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979

New York, Plenum Press, 1980, p 12-18 Contract No EX-77-A-01 2295

The method used in the present study involved the development of a set of cost factors in the general areas of system components, fabrication, and assembly. Components with features expected to be strongly dependent on the current level were studied in sufficient detail to allow their characteristics to be determined for cost-estimating purposes; these included conductor, substructure, the power supply subsystem, and the refrigerator/liquefier subsystem.

Cost estimates for magnet fabrication and system assembly were developed by generating hypothetical manufacturing flow diagrams, assigning cost elements to the individual steps, and integrating these elements into cost factors dependent on current level and cost factors assumed to be independent of current level. Preliminary results appear to imply that future reference designs for large-scale MHD magnets should consider operating levels somewhat higher than the 10 to 20 kA typically used to date P T H

**A81-26854** Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute S-T Wang, L R Turner, L Genens, W Pelczarski, J Hoffman, J Gonczy, H Ludwig, R C Niemann, K F Mataya, and E Kraft (Argonne National Laboratory, Argonne, Ill.) In *Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979* New York, Plenum Press, 1980, p. 19-29 Research supported by the U.S. Department of Energy.

The superconducting magnet system of the coal-fired flow facility at the University of Tennessee Space Institute consists of a superconducting magnet, a magnet cryostat, a helium refrigerator/liquefier facility, a helium gas-handling system, apparatus for cryogenic transfer and storage, a magnet power supply, an integrated instrumentation and control system including a computer for magnet operation, data acquisition, system status and diagnosis, and magnet protection. For a given conductor design, cooling provisions, and given coil structure, it is possible to compute the minimum propagating energy and perform verification experiments. This paper describes the coil configurations, conductor design, coil structure, cryostability, electromagnetic forces and pressure, structural support and stress analysis, and power supply, instrumentation, and magnet protection P T H

**A81-26855** Cryogenic aspects of the UTSI-CFFF superconducting dipole magnet for MHD research R C Niemann, S-T Wang, J W Dawson, L Genens, R P Smith, L R Turner, J D Gonczy, J Hoffman, K F Mataya (Argonne National Laboratory, Argonne, Ill.), and P Smelser In *Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979* New York, Plenum Press, 1980, p. 30-38 Research supported by the U.S. Department of Energy

The Argonne National Laboratory has designed and is constructing a 6-T 0.8-m minimum warm bore superconducting dipole magnet system for MHD research. The system will be installed and operated at the University of Tennessee Space Institute Coal Fired Fuel Facility. The system will consist of a coil assembly contained in a liquid helium cryostat, a helium refrigerator/liquefier system, and controls and instrumentation for cooldown and steady-state operation P T H

**A81-26856** Safety analysis of the UTSI-CFFF superconducting magnet L R Turner, S-T Wang, R P Smith (Argonne National Laboratory, Argonne, Ill.), P C Vander Arend (Cryogenic Consultants, Inc., Allentown, Pa.), and Y-H Hsu (General Atomic Co., San Diego, Calif.) In *Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979* New York, Plenum Press, 1980, p. 39-48 5 refs. Research supported by the U.S. Department of Energy

The paper presents a safety analysis of the University of Tennessee Space Institute-Coal Fired Flow Facility. Attention is given to the quench analysis, followed by the cryostat fault condition analysis. Two analyses of exposed turns are also discussed: the first shows that gas cooling protects uncovered turns, and the second shows that the cryostat pressure relief system protects them. Finally, the failure mode and safety analysis is presented P T H

**A81-26857** Engineering aspects of cryogenic laser-fusion targets. D L Musinski, T M Henderson, R J Simms, T R Pattinson (KMS Fusion, Inc., Ann Arbor, Mich.), and R B. Jacobs

(R B. Jacobs Associates, Inc., Boulder, Colo.). In *Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979*

New York, Plenum Press, 1980, p. 49-60 13 refs. Contracts No. EY-76-C-02-2709, No. ES-77-C-02-4149, No. ED-78-C-08-1598, No. DE-AC08-78DP-40030.

Experiments with cryogenic liquid-layer targets, using point-contact conduction cooling, have opened the way to experiments with solid-layer targets. The engineering and integration of successively more complex systems have identified the critical design features and procedures needed to obtain uniformity of the fuel layer. The technology has been refined and extended in several iterative steps to eliminate the major causes of nonuniformity and to provide an interferometric viewing system that enables an operator to observe and evaluate the layer formation. The gaseous helium shroud and retraction system were shown to be capable of producing and presenting to the laser a satisfactorily uniform (not greater than 20% WNU) solid-fuel-layer target. P T H

**A81-26881** Liquid nitrogen as an energy source for an automotive vehicle. M. V. Sussman (Tufts University, Medford, Mass.). In *Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979* New York, Plenum Press, 1980, p. 831-837. 8 refs.

It is suggested that liquid nitrogen can serve as a portable, safe, benign, inexhaustible, nonpolluting energy storage means. Emphasis is placed on the application of liquid nitrogen to Rankine-cycle-powered automotive vehicles. The cost of operation has been found to be three to six times the current cost of gasoline and about the same as that of lead-acid battery operation. P.T.H

**A81-26975** Aeroelastic stability of wind turbine rotors. P. C. Hensing (Delft, Technische Hogeschool, Delft, Netherlands). In *Recent advances in structural dynamics, Proceedings of the International Conference, Southampton, England, July 7-11, 1980. Volume 2.* Southampton, University of Southampton, 1980, p. 631-639 5 refs.

The paper deals with the aeroelastic instability of wind turbine rotors with low blade torsional frequency such as tipvane rotors. The types of instabilities discussed include two-degrees-of-freedom flutter, stall-flutter, and torsional divergence. Theoretical flutter boundaries are compared with experimental data. V.L.

**A81-27551 #** Overview of wind energy systems - Issues in development and application. P. M. Moretti (Oklahoma State University, Stillwater, Okla.) and R. W. Thresher (Oregon State University, Corvallis, Ore.) *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 3-10 32 refs.

An overview of the current status of wind energy technology and system development is presented with major emphasis placed on the key issues which face the commercialization of wind technology. The basic fundamentals of the technology are reviewed and the direction of current development is outlined. Economic considerations are discussed both from a machine development point of view and the utility-industry cost-of-service approach. In addition, the problems associated with wind turbine performance testing are discussed and a short review of operational experience is provided. These topics are all considered in the context of providing the reader with an understanding of wind system technology, a general knowledge of current problems, and the expected trends for the future. (Author)

**A81-27553 #** Flow field analysis and performance of wind turbines employing slotted diffusers. A. L. Loeffler, Jr. (Grumman Aerospace Corp., Research Dept., Bethpage, N.Y.) *ASME, Transactions, Journal of Solar Energy Engineering*, vol. 103, Feb. 1981, p. 17-22 8 refs.

Operation of diffuser-augmented wind turbines (DAWTs) utilizing slotted walls for tangential blowing as a boundary layer control measure has been analyzed using the method of singularities (MOS)

## 05 ENERGY CONSERVATION

The diffuser wall and the drop in total pressure through the turbine are represented by a series of ring vortices along the diffuser surface and along the wake boundary. Diffuser included angles of 60 to 80 deg are considered, in contrast to the conventional range of 7 to 10 deg. Agreement with Grumman Research Department experimental data with respect to overall performance and pressure and velocity distributions is reasonably good. In particular, the existence of the observed large pressure reduction at the diffuser exit plate is predicted. A consequence of this agreement is that Reynolds number scaling effects are small for slotted DAWTs, so that MOS analyses hold promise for other innovative diffuser designs and flow problems. (Author)

**A81-27966 #** Linear induction-type MHD machine with a winding connected to the voltage source (Lineinai induktsionnaya MGD-mashina s obmotkoi, nodkluchennoi k istochniku napriazheniya) S A Buganis and V I Chesonis *Magnitnaya Gidrodinamika*, Jan-Mar 1981, p 87-92. In Russian

**A81-27967 #** A numerical study of the nonuniform loading of a segmented MHD channel (Chislennoe issledovanie neodnorodnogo nagruzheniya sektiionirovannogo MGD-kanala) V A Bitiurin, B M Burakhanov, and S A Medin *Magnitnaya Gidrodinamika*, Jan-Mar 1981, p 93-100. 6 refs. In Russian

The characteristics of an MHD generator are analyzed given nonuniform loading of various segments. In making the analysis, the numerical solution to the two-dimensional problem of the distribution of the current and potential in a segmented MHD channel having a nonuniform flow of an anisotropically conducting plasma is used. Two cases are considered. In the first, the load parameters in one of the segments of the channel's working section vary while the other segments are subjected to fixed equilibrium loading. In the other, the external load parameters in a uniform section of the channel vary synchronously, here, each of the loads is connected to two segments the adjacent electrodes of which are joined through equal ballast resistors. The results of the numerical experiment are used in constructing volt-ampere characteristics for channel segments subjected to nonuniform loading. Attention is given to certain features of the various methods used in regulating external loads. C R

**A81-27968 #** Transient processes and self-excited oscillations in the electrical circuit of an MHD generator (Perekhodnye protsessy i avtokolebaniya v elektricheskoi tsepi MGD-generatora) A V Gubarev and S A Laptev *Magnitnaya Gidrodinamika*, Jan-Mar 1981, p 101-106. In Russian

Transient processes in the circuit of an MHD generator having diagonal electrode switching are considered. The existence of limiting values for the angle of inclination of the coils is established, at this value, the system becomes self-excited. The characteristics of the diagonal design are compared with those of the Hall and Faraday MHD generators. For an MHD generator having an inductive external load, the stability of an infinitely distant point on the phase plane I(1)-I(2) is investigated. In this way, the plausibility of limiting cycles in the system is established, that is, the possibility of obtaining an alternating current in the load circuit. C R

**A81-28217 #** Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition K D Annen, P J Kuzmenko, R Keating, and S A Self (Stanford University, Stanford, Calif.) (*International Conference on MHD Electrical Power Generation*, 7th, MIT, Cambridge, Mass., June 16-20, 1980) *Journal of Energy*, vol 5, Jan-Feb 1981, p 31-38. 20 refs. NSF Grant No ENG-77-23932, Contract No DE-AC01-80ET-15611

Simultaneous measurements of the electron concentration by submillimeter interferometry and of the positive ion concentration by a swept electric probe have been made in an ethanol-fueled, potassium-seeded combustion plasma. Phosphorous was added to the reactants to match the maximum phosphorous concentration anticipated in coal-fired MHD plasmas. The electric probe was calibrated against the interferometer to check the probe theory, it is concluded that because of theory limitations the absolute accuracy of the probe

is no better than 50%. However, the discrepancy is systematic over the range of interest to MHD, enabling the probe to provide reliable relative measurement having good temporal and spatial resolution. The effect of the phosphorous on the electron concentration was found to be much smaller than previously predicted. The results indicate that the reduction in the electron concentration is no more than 15% for conditions appropriate to the downstream end of a coal-fired MHD generator. (Author)

**A81-28219 \* #** Radiatively coupled thermionic power system concept K Shimada (California Institute of Technology, Jet Propulsion Laboratory, Electric Propulsion and Power Section, Pasadena, Calif.) *Journal of Energy*, vol 5, Jan-Feb 1981, p 60, 61. Contract No NAS7-100

It is shown that thermionic converters at moderate emitter temperatures of about 1600 K can be designed for a radiatively coupled 100 kWe device. A nuclear reactor is a primary heat source, with heat pipes extracting heat from the reactor and distributing it over a large surface opposite an array of thermionic energy converters. The radiative heat transfer across the vacuum gap heats up the thermionic emitters, and excess heat from the converters is radiated from the collector electrodes to the vacuum of space, the heat transfer is controlled by the energy density to be transferred, and by the temperature differential between the heat source and the heat receiver. It is concluded that this system achieves isolation of power converter modules from the heat source, elimination of additional radiators, and reduction of converter dimensions. A T

**A81-28395** Theoretical advantages of pn+/+type Cu2S-ZnO solar cell M Burgelman and H J Pauwels (Gent, Rijksuniversiteit, Ghent, Belgium) *Electronics Letters*, vol 17, Mar 19, 1981, p 224-226. 10 refs

**A81-28550** A primer on economic feasibility for direct-users. W B Eastlake (Idaho State Office of Energy, Boise, Idaho) *Geothermal Energy*, vol 8, Oct-Nov 1980, p 29-32

An economic feasibility analysis of building a geothermal direct-use system to replace conventional fuel is presented. Future savings are evaluated in terms of present worth and a hypothetical space-heating system is used as an example to compare the cost of geothermal heat with conventional fuel, and to calculate the internal rate of return. It is shown that the system pays for itself in less than three years, due to lower operational costs. A flow diagram is provided to explain the process. K S

**A81-28614 #** The possibilities of improving the efficiency of gas turbines (Die Moglichkeiten zur Verbesserung des Wirkungsgrades der Gasturbinen) F Toth *Acta Technica*, vol 89, no 3-4, 1979, p 347-352. In German

Advantages of multistage chamber turbines over traditional blade turbines are discussed. Possible improvements in efficiency fall into three areas: gains in the maximal amount of mechanical energy from the thermal energy of the gas, transformation of mechanical energy of gas into useful work, and utilization of the energy of the consumed gas as useful work. The advantages of the chamber turbines are that the gas does double work in all expansions except the last and that the pressure energy of the gas can be utilized during combustion as well as at the outflow from the chamber. Multistage chamber turbines utilize, at optimal speed of rotation, only 40% of the kinetic energy of the gas, the other 60% results from the pressure energy of the gas. The major advantage of chamber over blade turbines is that they incur fewer aerodynamic losses in their utilization of pressure energy. D K

**A81-29031** Energy analysis of four geothermal technologies R A Herendeen and R L Plant (Illinois, University, Urbana, Ill.) *Energy* (UK), vol 6, Jan 1981, p 73-82. 31 refs. Contract No ET 78-S-02-5085

Detailed comparisons of energy inputs and outputs are presented for four geothermal electric technologies: liquid-dominated, hot



dry rock, geopressure and vapor dominated. The standard energy analysis is used which involves the energy costing of the inputs to the energy systems including the total energy needed for manufacturing and delivery as well as support, operation and maintenance activities, and the output electricity. Ratios of net electrical energy outputs over plant lifetimes to energy inputs are found to exceed unity in all cases, even in view of the necessary uncertainties in the calculations. The highest energy ratio, amounting to  $13 + \text{or} - 4$ , is obtained for vapor-dominated (dry-steam systems), which are currently in commercial use for energy production in the United States. The values obtained are noted to be either equal to or less than those obtained by others, primarily due to considerations of the cost of environmental controls for the liquid-dominated systems. A L W

**A81-29070 #** A new breed of an air breathing engine. M Berchtold (Zurich, Eidgenössische Technische Hochschule, Zurich, Switzerland) In International Symposium on Air Breathing Engines, 5th, Bangalore, India, February 16-22, 1981, Proceedings Bangalore, National Aeronautical Laboratory, 1981, p 29-1 to 29-6 6 refs

Small shaft power gas turbines of less than 200 HP are presently unavailable for light aircraft propulsion. The use of recuperators, as proposed for improving the efficiency in automotive small gas turbines, is not feasible for aircraft installation. The wave pressure exchanger 'Compresx', used in connection with conventional turbomachines, promises to become an efficient and compact powerplant. Its low weight and the absence of vibrations makes it well suited for the propulsion of light aircrafts. The 'Compresx' is capable to utilize high peak cycle temperatures due to the fact that the rotor is exposed to both the air to be compressed and the hot gas to be expanded. Theoretical and experimental experience accumulated with wave pressure exchangers applied to Diesel engines supercharging, allows to predict the performance of this new turbine engine. The expected efficiency of 27 is competitive with present aircraft piston engines. (Author)

**A81-29115 #** Transpiration air cooled turbine blade - A technology for future generation aircraft and industrial gas turbine engines using coal or coal derived fuels. R Raj (City College, New York, N Y) In International Symposium on Air Breathing Engines, 5th, Bangalore, India, February 16-22, 1981, Proceedings Symposium sponsored by ICAS, AIAA, UNESCO, et al Bangalore, India, National Aeronautical Laboratory, 1981 25 p 34 refs

An insight to the design and development of the transpiration air cooled turbine blade concept is presented in this paper. The technology considerations include a discussion of the blade concept, heat transfer effectiveness, thermo-aerodynamics, erosion-corrosion-deposition resistance characteristics and technology status. In recent developments the transpiration cooling concept achieved operation at high temperatures of 3000 F (1650 C) while offering protection for the turbine blades from damage due to particulate emission from a combustion process simulating the use of coal or coal-derivatives. The technology achieved in this field is at a stage where nations dependent on importation of oil and natural gas can consider the shift to coal or other forms of fossil fuels for operating highly efficient gas turbines in a combined cycle for electric power generation. (Author)

**A81-29199** Osmo-power - Theory and performance of an osmo-power pilot plant. H H G Jellinek (Clarkson College of Technology, Potsdam, N Y) and H Masuda (Clarkson College of Technology, Potsdam, N Y, National Chemistry Laboratory for Industry, Tokyo, Japan) *Ocean Engineering*, vol 8, no 2, 1981, p 103-128 8 refs Contract No EG-77-S-05-5440

A theoretical and experimental study of the production of useful energy by the natural process of osmosis is presented. Using the results of the study a conceptual design of an osmotic pilot plant is performed. The power produced by a 1.6 MW/sq km plant has a competitive cost with that produced by both fossil power plants and nuclear power plants. (Author)

**A81-29200** OTEC cold water pipe design for problems caused by vortex-excited oscillations. O M Griffin (U S Navy, Naval Research Laboratory, Washington, D C) *Ocean Engineering*, vol. 8, no. 2, 1981, p 129-181, 183-209 84 refs

The objective of this paper is to survey recent results pertaining to the vortex-excited oscillations of structures in general and to consider the application of these findings to the design of the OTEC Ocean Thermal Energy Conversion cold water pipe. Practical design calculations are given as examples throughout the various sections of the report. This paper is limited in scope to the problems of vortex shedding from bluff, flexible structures in steady currents and the resulting vortex-excited oscillations. The effects of flow non-uniformities, surface roughness of the cylinder, and inclination to the incident flow are considered in addition to the case of a smooth cylinder in a uniform stream. Emphasis is placed upon design procedures, hydrodynamic coefficients applicable in practice, and the specification of structural response parameters relevant to the OTEC cold water pipe. (Author)

**A81-29243** Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis. A Alesina (Sassari, Università, Sassari, Italy) and M G B Venturini (Texas Instruments, Ltd, Bedford, England) *IEEE Transactions on Circuits and Systems*, vol CAS-28, Apr 1981, p 319-330 13 refs

Consideration is given to the design and Fourier analysis of a family of solid-state power converters which synthesize the assigned slow-varying waveforms by means of high-frequency switching, thereby requiring a minimum of reactive elements. The basic structure of this type of power converter is analyzed in terms of a switching matrix model of the electronic switches, and a general waveform synthesis technique is presented which makes little use of reactive elements. A general condition is presented for the applicability of this type of conversion in a given situation, and a method is proposed which allows a straight-forward design of a converter if the condition is met. A general model is introduced in which the converter is represented as a two-port multipole time-varying linear circuit element consisting of a matrix of linear modulators. Finally, an example is presented of the design of an ac-ac converter capable of sinusoidal waveform, frequency, amplitude, phase and power factor conversion, which can be regarded as a generalized transformer. A L W

**A81-29958 \* #** Ultra-lean combustion at high inlet temperatures. D N Anderson (NASA, Lewis Research Center, Cleveland, Ohio) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex, Mar 9-12, 1981, Paper 81-GT-44* 9 p 13 refs Members, \$2.00, nonmembers, \$4.00

Combustion at inlet-air temperatures of 1100 to 1250 K was studied for application to advanced automotive gas turbine engines. Combustion was initiated by the hot environment, and therefore no external ignition source was used. Combustion was stabilized without a flameholder. The tests were performed in a 12-cm-diameter test section at a pressure of 250,000 Pa, with reference velocities of 32 to 60 m/s and at maximum combustion temperatures of 1350 to 1850 K. Number 2 diesel fuel was injected by means of a multiple source fuel injector. Unburned hydrocarbon emissions were negligible for all test conditions. Nitrogen oxide emissions were less than 1.9 g NO<sub>2</sub>/kg fuel for combustion temperatures below 1680 K. Carbon monoxide emissions were less than 16 g CO/kg fuel for combustion temperatures greater than 1600 K, inlet air temperatures higher than 1150 K, and residence times greater than 4.3 ms. (Author)

**A81-29959 #** Economics of heavy fuels in gas turbines and combined cycles. L O Tomlinson and R K Alff (General Electric Co., Schenectady, N Y) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex, Mar 9-12, 1981, Paper 81-GT-45* 11 p 6 refs Members, \$2.00, nonmembers, \$4.00

Operating experience has established the ability of gas turbines and combined cycles to utilize heavy fuel oils for power generation economically and reliably. The technical factors related to operation

## 05 ENERGY CONSERVATION

of gas turbines on heavy oils are discussed and installation and operating costs are developed for each of these factors for economic evaluation. Factors influencing heavy oil use include fuel specifications and treatment to prevent corrosion of hot parts, the effects of ash deposition on turbine nozzles and buckets and on boiler heat transfer surface, turbine and boiler cleaning techniques and their use for maintaining capability, and downtime for cleaning. (Author)

**A81-29963 #** Combustion of methanol and liquefied butane in a gas turbine combustor. S. Kajita, J. Kitajima, and T. Kimura (Kawasaki Heavy Industries, Ltd., Akashi, Japan). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-50.* 8 p. Members, \$2.00, nonmembers, \$4.00.

Combustion tests with a gas turbine combustor were carried out to clarify the technical problems caused when liquefied butane was supplied and burned in the liquid phase in addition to evaluating methanol and liquefied butane as an alternative fuel. For methanol, a conventional dual-orifice type fuel injector, and for liquefied butane, the same dual-orifice type injector and two types of multi-hole injectors were tested. The results of combustion tests with both fuels were compared with those of conventional gas turbine fuels - kerosene and natural gas with respect to combustion performances and exhaust emissions. It was found that both fuels had some advantages over conventional fuels. (Author)

**A81-29964 #** Effect of water injection for NO<sub>x</sub> reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor. P. R. Mulik, P. P. Singh (Westinghouse Electric Corp., Pittsburgh, Pa.), and A. Cohn (Electric Power Research Institute, Palo Alto, Calif.). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-51.* 9 p. 11 refs. Members, \$2.00, nonmembers, \$4.00. Research supported by the Electric Power Research Institute.

A total of five combustion tests utilizing water injection for control of NO<sub>x</sub> emissions have been conducted on three types of coal-derived liquid (CDL) fuels from the H-Coal and SRC II processes along with a shale-derived liquid (SDL) fuel. Actual testing was performed in a 0.14 m diameter gas-turbine-type combustor. For comparative purposes, each run with a synthetic liquid fuel was preceded by a baseline run utilizing No. 2 distillate oil. The effectiveness of water injection was found to decrease as the fuel-bound nitrogen (FBN) content of the synthetic liquids increased. (Author)

**A81-29974 #** Methanol combustion in a 26-MW gas turbine. W. H. von Klein Smid (Southern California Edison Co., Rosemead, Calif.), H. Schreiber (Electric Power Research Institute, Palo Alto, Calif.), and R. D. Klapatch (United Technologies Corp., Farmington, Conn.). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-64.* 6 p. Members, \$2.00, nonmembers, \$4.00.

Combustion tests of methanol were conducted on a 26-MW gas turbine for a period of 523 total hours. The methanol fueled gas turbine was operated in tandem with an identical gas turbine fueled with distillate (Jet A). Emissions and performance data were recorded and hot section inspections were carried out on both machines periodically during the test program. A comparison of data recorded during the test program clearly indicates that methanol is a superior fuel for gas turbines. (Author)

**A81-29975 #** Gas turbine materials evaluation program utilizing coal derived gaseous fuel. M. L. Williams, C. C. Yates (Pittsburgh, University, Pittsburgh, Pa.), G. B. Manning (U.S. Department of Energy, Washington, D.C.), and R. R. Peterson (Mitre Corp., McLean, Va.). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-65.* 3 p. Members, \$2.00, nonmembers, \$4.00.

A gas turbine materials evaluation test facility under the sponsorship of the U.S. Department of Energy is described. The

objective of the mobile test facility is to obtain dynamic and static test data on the erosion/corrosion characteristics of materials exposed to the hot products of the combustion of coal-derived fuels. The engine being utilized for the tests is the WR 24-7 aircraft turbojet unit reconfigured to burn coke oven gas. Approximately 100 hours of engine operating time have been logged to date. L. S.

**A81-29978 #** Comparison of the HTTT reheat-gas-turbine combined cycle with the HTTT nonreheat gas-turbine combined cycle. I. G. Rice and P. E. Jenkins (Texas A & M University, College Station, Tex.). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-69.* 13 p. 16 refs. Members, \$2.00, nonmembers, \$4.00.

High-temperature turbine technology (HTTT) when applied to the reheat-gas-turbine combined cycle offers distinct advantages over the presently contemplated HTTT simple-cycle gas-turbine combined cycle being developed for gaseous fuel derived from coal. Specific improvements are: (1) higher combined-cycle efficiency, (2) higher specific output per unit of air flow, (3) less critical high-temperature nozzle-vane and rotating-blade surface area to be cooled, (4) less strategic high temperature metal material to be used, and (5) less overall cycle-cooling degradation allowing growth potential. New cooling techniques employing steam are required to accomplish these projections, which necessitate advanced research and development and presently unavailable analytical approaches. (Author)

**A81-30008 #** Combined gas and steam cycle for a gas-cooled solar tower power plant. B. Becker, H. H. Finckh, and R. Meyer-Pittroff (Kraftwerk Union AG, Mulheim, West Germany). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-102.* 14 p. 6 refs. Members, \$2.00, nonmembers, \$4.00. Research sponsored by the Bundesministerium für Forschung und Technologie, Internationale Reaktorbau Gesellschaft GmbH, and Maschinenfabrik Augsburg-Nürnberg AG.

The design and optimization of a combined gas and steam turbine cycle incorporating both solar heating and a waste heat steam generator are investigated. Several variants of the combined cycle are considered and efficiency-enhancing features introduced. It is demonstrated that both straight solar and fossil-fueled constant load requirements are met, for a system with 800°C solar receiver temperature and 20 MWe capacity. O. C.

**A81-30009 #** Modified Brayton cycles utilizing alcohol fuels. M. F. Bardon (Royal Military College of Canada, Kingston, Ontario, Canada). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-103.* 8 p. 14 refs. Members, \$2.00, nonmembers, \$4.00.

It is already well known that alcohols can be burned in open cycle gas turbines by direct firing in the combustor. This paper demonstrates however that there are significant improvements in thermal efficiency possible by modifying the manner in which alcohols are used in Brayton cycle engines. It is shown that injection of the alcohol during the compression process can materially improve both thermal efficiency and specific work because of the intercooling effect of evaporation. Calculations are given which demonstrate the improvement theoretically possible at representative values of peak turbine inlet temperature. It is also shown that the optimum pressure ratio for both regenerated and unregenerated cycles is different when such compressor evaporative intercooling is used rather than simply injecting the fuel into the combustor. (Author)

**A81-30014 \* #** Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels. D. J. White, A. Batakis, R. T. LeCren (Solar Turbines International, San Diego, Calif.), and H. G. Yacobucci (NASA, Lewis Research Center, Cleveland, Ohio). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-109.* 11 p. Members, \$2.00, nonmembers, \$4.00.

Research supported by the U S Department of Energy

Design concepts are presented for lean-lean and staged rich-lean combustors. The combustors are designed for the dry reduction of thermal NO(x), control of NO(x) from fuels containing high levels of organic nitrogen, and control of smoke from low hydrogen content fuels. The combustor concepts are tested with a wide variety of fuels including a middle distillate, a petroleum based heavy residual, a coal derived synthetic, and ratios of blends of these fuels. The configurations of the lean-lean and rich-lean combustion systems are provided along with a description of the test rig and test procedure. L.S.

**A81-30029 \* #** Evaluation of advanced combustors for dry NO<sub>x</sub>/ suppression with nitrogen bearing fuels in utility and industrial gas turbines. M B. Cutrone, M B. Hilt (General Electric Co., Schenectady, N.Y.), A Goyal, E E. Ekstedt (General Electric Co., Evendale, Ohio), and J. Notardonato (NASA, Lewis Research Center, Cleveland, Ohio) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-125* 10 p Members, \$2 00, nonmembers, \$4 00 Research supported by the U S Department of Energy

**A81-30031 #** A baseload gas turbine to meet utility requirements for reliability and availability. P E Grevstad, M J. Smith (United Technologies Corp., Power Systems Div., South Windsor, Conn.), and R. L. Duncan (Electric Power Research Institute, Palo Alto, Calif.) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar. 9-12, 1981, Paper 81-GT-127* 8 p. 10 refs. Members, \$2.00, nonmembers, \$4.00. Research supported by the Electric Power Research Institute.

The development of a new, 120 MW gas turbine, designed specifically for baseload service and incorporating a coal gasifier-fueled combined cycle, is described. The goals of the development program were the high reliability and availability and low maintenance costs typical of steam turbines. It is estimated that the introduction of air-cooled turbine airfoils and new combustor liner technology will allow the design output to rise to 165 MW. Rigorous emissions requirements are met by the gasifier combined cycle, despite the use of ordinary coal stocks. O.C.

**A81-30034 #** Design analysis of high-efficiency low-stress ceramic gas turbines. D G Wilson (MIT, Cambridge, Mass.) and L Wood *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-130* 8 p 14 refs. Members, \$2 00, nonmembers, \$4 00

The gains which can be realized in gas-turbine cycles by lowering the pressure ratio, increasing the degree of regeneration, and utilizing multistage compressors and turbines, are much increased design-point thermal efficiency, very much higher part-load efficiency, and much reduced centrifugal stress, attachment stress, and foreign-object-damage stress. These gains, and the size penalty associated with this approach, are evaluated to a first approximation. The net benefits should be substantial for many applications where size limits are not stringent, for instance trucks and boats, and where reduced fuel consumption is of paramount importance (Author)

**A81-30051 #** ITI GT601 - A new approach to vehicular gas turbine power unit design. G D Woodhouse (Garrett Corp., Phoenix, Ariz.) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-152* 16 p Members, \$2 00, nonmembers, \$4 00

The design and development of the GT601 336 to 485 kW gas turbine power plant for highway trucks are outlined. The GT601 is a medium-pressure ratio, recuperated-cycle, free-turbine engine. The engine comprises a two-stage centrifugal compressor, a single-can combustor, a radial-inflow gas generator turbine, and a two-stage power turbine utilizing variable geometry stators. The engine is controlled by a hydromechanical fuel-metering system. Start-sequencing and control-trimming are handled by an electronic control module. The GT601 is economically competitive with the diesel engine developments projected for the late 1980's and meets emission and noise environmental goals. L.S.

**A81-30080 #** Progress in the development of the Marine Spey, SM1A D E Williams (Rolls-Royce, Ltd., Coventry, England) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-186* 8 p Members, \$2 00, nonmembers, \$4 00

**A81-30083 #** A market research effort leading to the development of a high efficiency 10,000 shp gas turbine system. K Frankfort (Thomassen Holland, Rheden, Netherlands) and J Rich (Fern Engineering, Bourne, Mass.) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-190* 8 p Members, \$2 00, nonmembers, \$4 00

Results of two market research surveys are presented to establish design criteria, performance parameters, and product specification for a 10,000 shp flange-to-flange gas turbine system. The design of the turbine, designated as the TF-10, consists basically of a two stage centrifugal compressor driven by a single stage axial turbine, an annular combustor and a two stage axial load turbine. An optimization study was carried out to achieve the highest level of performance attainable. Performance parameters, which include rated power, rated speed, gas generator speed, thermal efficiency, heat rate, rotor inlet temperature, turbine exhaust temperature, regenerator exhaust temperature, and compressor pressure ratio, were established for operation at ISO conditions. The major potential market was identified as gas transmission and distribution. The survey also indicated a growing interest in cogeneration of power and heat. The research identified the requirements of the market place and integrated those requirements with the product development program. K S

**A81-30084 #** Engine cycle selection for advanced technology engine studies. C L Lehman and V J Crafa (Grumman Aerospace Corp., Air Breathing Propulsion Section, Bethpage, N Y.) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-191* 8 p 6 refs. Members, \$2 00, nonmembers, \$4 00

The Installed Propulsion Performance (IPP) and Propulsion Selector and Integration (PSI) programs are discussed. The IPP program interfaces with the source performance deck from the engine manufacturer to derive installed performance in a representative installation. Installation correction factors are selected from a large data bank with appropriate inlet, nozzle, engine air bleed, and horsepower extraction data selected from existing system designs and modified to the needs of the particular configuration. The PSI program is used to analyze propulsion system and mission performance. The internal design data routines of PSI are configured to generate an aircraft design consistent with engine dimensional, weight, and center of gravity characteristics. The program has several specialized subroutines to account for unique engine installations such as V/STOL. The results of studies using the IPP-PSI methodology are given for several high performance aircraft. L S

**A81-30091 #** Small gas turbine with large parabolic dish collectors. K Bammert (Hannover, Universitat, Hannover, West Germany), A Sutsch (Institute for Computer Assisted Research in Astronomy, Alterswil, Switzerland), M Simon (Maschinenfabrik Augsburg-Nürnberg AG, Munich, West Germany), and A Mobarak (Cairo, University, Cairo, Egypt) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex., Mar 9-12, 1981, Paper 81-GT-201* 13 p 26 refs. Members, \$2 00, nonmembers, \$4 00

A cost and efficiency comparison of different solar power plants demonstrates that the large parabolic dish system with a turbo converter is superior to other solar thermal power plants in the power range of 50 to 2000 kW. Selection and design criteria for the dish, the gas turbine set, and the receiver are provided and discussed. When not in power conversion mode, the proposed dish system can be used for various kinds of communication and data transmission. An advanced layout for a 250 kW gas turbo converter with recuperator is presented in detail. L S

## 05 ENERGY CONSERVATION

**A81-30101 #** Coal-fired heaters for CCGT cogeneration service J Campbell, Jr, G A Hastings (Rockwell International Corp, Rocketdyne Div, Canoga Park, Calif), and C E Holt (Battelle Columbus Laboratories, Columbus, Ohio) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex, Mar 9-12, 1981, Paper 81-GT-212* 10 p 7 refs Members, \$2 00, nonmembers, \$4 00

This paper discusses a current research and development program whose object is to advance the technical readiness of large, coal-fired heaters to supply the input to closed-cycle gas turbine cogeneration systems. Such closed-cycle systems become increasingly attractive as energy costs increase. The gas turbine working fluid is completely isolated from the products of coal combustion, thus avoiding corrosion and erosion of the gas turbine system. Additionally, the nature of the thermodynamic cycles is frequently such as to afford substantial savings in coal input requirements as compared to steam turbine based systems producing equivalent process heat and power. This paper describes three fired heater concepts that are under development for CCGT service. The organization of the research and development program, and the development needs of the fired heaters that are to be satisfied by the R&D program, are discussed (Author)

**A81-30102 #** Cooled radial in-flow turbines for advanced gas turbine engines J M Lane (U.S. Army, Applied Technology Laboratory, Fort Eustis, Va) *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex, Mar 9-12, 1981, Paper 81-GT-213* 9 p 9 refs Members, \$2 00, nonmembers, \$4 00

It is noted that while the radial in-flow turbine has consistently demonstrated its capability as a high-performance component for small gas turbine engines, its use has been restricted to lower turbine-inlet-temperature cycles. This is because of insurmountable problems regarding the manufacture of radial turbine rotors having internal cooling passages. It is pointed out that these cycle temperature limitations are inconsistent with modern trends toward higher-performance, fuel-conservative engines. The results of several Army-sponsored programs are presented, the first of which deals with the performance potential for the high-temperature radial turbine. The results of two successful programs for developing fabrication techniques for internally cooled radial turbines, including mechanical integrity testing, are also discussed. C R.

**A81-30106 #** Analytical consideration of fuel economy and dynamic response of a regenerative high temperature automobile gas turbine II T Takeuchi, T Itoh, and T Ishida (Nissan Motor Co., Ltd, Central Engineering Laboratories, Yokosuka, Japan). *American Society of Mechanical Engineers, Gas Turbine Conference and Products Show, Houston, Tex, Mar 9-12, 1981, Paper 81-GT-218* 8 p Members, \$2 00, nonmembers, \$4 00

**A81-30112 #** Wellbore flow characteristics for optimal energy recovery from Gulf Coast geopressured geothermal sources. J P Lamb and C L Hamburger (Texas, University, Austin, Tex). *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex, Jan 18-22, 1981, Paper 81-Pet-18* 6 p 15 refs Members, \$2 00, nonmembers, \$4 00.

Geopressured geothermal brines contain potential energy in three forms: dissolved methane, high pressure, and high temperature. For optimal resource utilization one must separate the natural gas while simultaneously maximizing the conversion processes required for the liquid phase. The present paper discusses some basic thermodynamic concepts which determine the conversion effectiveness of hydraulic and thermal energy components. Using realistic resource data for Texas and Louisiana, it is shown that there is a range of well flow rates which maximizes the brine energy recovery. The effects of salinity levels on various flow parameters are also illustrated, in general, salinity is found to have a minor effect on theoretical performance. Hence, the major influence of dissolved solids would be on equipment performance (Author)

**A81-30114 #** Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources H E Khalifa (United Technologies Research Center, East Hartford, Conn). *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex, Jan 18-22, 1981, Paper 81-Pet-5* 6 p 16 refs Members, \$2 00, nonmembers, \$4 00

The paper presents an analysis of the performance and economics of a novel hybrid energy conversion system that would efficiently utilize the methane, hydraulic and thermal energy produced by geopressured-geothermal resources. The novel system comprises a methane-fueled gas turbine whose waste heat is used to superheat the vapor generated from the geopressured brine in an otherwise-conventional double-flash power plant. The analysis indicates that, compared to a conventional double-flash system, the hybrid system can generate nearly 44 percent more work from the thermal energy of the brine, in addition to the outputs of the gas and hydraulic turbines. Conservative preliminary economic estimates indicate that the unit installed cost of the hybrid plant would be about 25 percent lower than that of a conventional system constructed at the same geopressured resource site. (Author)

**N81-16056\*#** Jet Propulsion Lab., California Inst of Tech, Pasadena

### TWO-STAGE COMBUSTION FOR REDUCING POLLUTANT EMISSIONS FROM GAS TURBINE COMBUSTORS

Richard M Clayton and David H Lewis 1 Feb 1981 86 p refs

(Contract NAS7-100)

(NASA-CR-163877, JPL-Pub-80-63) Avail NTIS HC A05/MF A01 CSCL 21E

Combustion and emission results are presented for a premix combustor fueled with admixtures of JP5 with neat H2 and of JP5 with simulated partial-oxidation product gas. The combustor was operated with inlet-air state conditions typical of cruise power for high performance aviation engines. Ultralow NOx, CO and HC emissions and extended lean burning limits were achieved simultaneously. Laboratory scale studies of the non-catalyzed rich-burning characteristics of several paraffin-series hydrocarbon fuels and of JP5 showed sooting limits at equivalence ratios of about 2.0 and that in order to achieve very rich sootless burning it is necessary to premix the reactants thoroughly and to use high levels of air preheat. The application of two-stage combustion for the reduction of fuel NOx was reviewed. An experimental combustor designed and constructed for two-stage combustion experiments is described. TM

**N81-16061#** Purdue Univ, Lafayette, Ind Combustion Lab AGT-1500 COMBUSTOR AND FUEL EFFECTS MODELING Final Technical Report, 1 Sep. 1978 - 31 Aug. 1980

P. A Leonard, J E Peters, and A M Mellor 1 Oct 1980 72 p refs

(Contract DAAG29-78-C-0169, Grant DAAG29-78-G-0092)

(AD-A092255, PURDU-CL-80-03, AD-A15642 5-E) Avail NTIS HC A04/MF A01 CSCL 21/5

The influence of alternative fuels on gas turbine engine performance is considered analytically. Broad specification or alternative fuels may have viscosities and wider boiling point temperature distributions which adversely affect atomization and vaporization processes within gas turbine combustors, leading to performance penalties in ignition, lean blowoff and combustion efficiency. These performance measures have been modeled by considering ratios of characteristic times which describe the controlling physical processes of fluid mechanic mixing, kinetics and fuel evaporation. Semi-empirical models are developed which describe lean blowoff, ignition and combustion efficiency of the AVCO-Lycoming AGT-1500 combustor and other combustors. These expressions can be used to assist design of fuel tolerant combustors, and to assess impacts associated with fuel type selection. GRA

**N81-16456#** KMS Fusion, Inc., Ann Arbor, Mich THE CHEMICALLY PUMPED IODINE LASER AS A FUSION DRIVER

George E Busch 1980 4 p refs  
(Contract DE-AC08-78DP-40030)  
(KMSF-U-944, CONF-800208-19) Avail NTIS  
HC A02/MF A01

A chemically pumped iodine laser is evaluated for fusion requirements. Efficiencies greater than 8 percent and long energy storage times are predicted, with high repetition rates and elimination of pulsed power supplies. Author

**N81-16570\*** National Aeronautics and Space Administration  
Lewis Research Center, Cleveland, Ohio  
**PERFORMANCE CALCULATIONS FOR 1000 MW<sub>e</sub> MHD/  
STEAM POWER PLANTS**  
C C P Pien 1981 15 p refs Presented at the 19th Aerospace  
Sci Meeting, St Louis, 12-15 Jan 1981, sponsored by AIAA  
(Contract DE-A101-77ET-10769)  
(NASA-TM-81687, DOE/NASA/10769-13, E-688) Avail  
NTIS HC A02/MF A01 CSCL 10B

The effects of MHD generator operating conditions and constraints on the performance of MHD/steam power plants are investigated. Power plants using high temperature combustion air preheat (2500 F) and plants using intermediate temperature preheat (1100 F) with oxygen enrichment are considered. Variations of these two types of power plants are compared on the basis of fixed total electrical output (1000 MWe). Results are presented to show the effects of generator plant length and level of oxygen enrichment on the plant thermodynamic efficiency and on the required generator mass flow rate. Factors affecting the optimum levels of oxygen enrichment are analyzed. It is shown that oxygen enrichment can reduce magnet stored energy requirement. Author

**N81-16571\*** National Aeronautics and Space Administration  
Lewis Research Center, Cleveland, Ohio  
**OFF-DESIGN ANALYSIS OF A GAS TURBINE POWER-  
PLANT AUGMENTED BY STEAM INJECTION USING  
VARIOUS FUELS**  
Robert J Stochl Nov 1980 29 p refs  
(NASA-TM-81611, E-609) Avail NTIS HC A03/MF A01 CSCL  
10B

Results are compared using coal derived low and intermediate heating value fuel gases and a conventional distillate. The results indicate that steam injection provides substantial increases in both power and efficiency within the available compressor surge margin. The results also indicate that these performance gains are relatively insensitive as to the type of fuel. Also, in a cogeneration application, steam injection could provide some degree of flexibility by varying the split between power and process steam. T M

**N81-16579\*** Westinghouse Electric Corp., Pittsburgh, Pa  
**CELL MODULE AND FUEL CONDITIONER DEVELOPMENT  
Quarterly Report, Jul. - Sep. 1980**  
D Q Hoover, Jr Oct 1980 88 p  
(Contracts DEN3-161, DE-AI03-79ET-11272)  
(NASA-CR-185189, DOE/NASA/0161-5,  
Rept-80-9E6-MARED-R4, QR-4) Avail NTIS  
HC A04/MF A01 CSCL 10A

Measurements of stack height changes with temperature and cell material characteristics were made. Stack 559 was assembled and components were fabricated for 560, 561, and 562. Stack 425 was transferred from the parallel DOE program and installed in the OS/IES simulation loop for mechanical and electrical testing. Construction and preliminary checkout of the 2 kW test facility was completed and design and procurement of the 8 kW test facility was initiated. The fuel conditioning subsystem design continued to evolve, and the state points for the current design were calculated at full and part load conditions. Steam reforming catalyst activity tests were essentially completed and aging tests and CO shift converter tests were initiated. Author

**N81-16589\*** Energy Research Corp., Danbury, Conn  
**IMPROVEMENT OF PHOSPHORIC ACID FUEL CELL  
STACKS Final Technical Report, Aug. 1977 - Jun. 1980**  
S G Abens, F J Ascenzo, B S Baker, G Garretson, and M

Lambrecht Jul 1980 88 p  
(Contract DAAK70-77-C-0174 DA Proj 1L2-63702-DG-10)  
(AD-A092814) Avail NTIS HC A05/MF A01 CSCL 10/2

Phosphoric acid fuel cell components and stack assembly methods were evaluated. Electrodes with Pt loading between 0.3 and 0.9 g/sq ft were employed. Matrix materials were phenolic (Kynol) fibers and SiC. A new ERC proprietary matrix was used also. Graphite bipolar plates with 33% phenolic resin binder were used. Stacks were tested on hydrogen and simulated reformed methanol for up to 18,000 hours. Two 80 cell (2.1 kW) stacks and a methanol reformer were built and delivered to MERADCOM. GRA

**N81-16597\*** Oak Ridge National Lab., Tenn. Operations Div  
**RADIOISOTOPE POWERED LIGHT SOURCES**  
F N Case and W C Remini 1980 14 p Sponsored in part  
by USAF  
(Contract W-7405-eng-26)  
(CONF-801157-1) Avail NTIS HC A02/MF A01

The background and current status of the use of radioisotopes to excite phosphors to produce visible light are discussed. Current energy conservation needs provided the incentive for the development of illuminators for air field markers using both byproduct krypton-85 and processed tritium. L F M

**N81-16598\*** United Technologies Corp., South Windsor, Conn  
Power Systems Div  
**IMPROVED FC-1 CELL TECHNOLOGY Final Report,  
1 Mar. - 31 Dec. 1979**  
R D Breault, J V Congdon, R D Coykendall, and W L Luoma  
Oct 1980 49 p Sponsored in part by Electric Power Research  
Inst  
(Contract DE-AC03-76ET-11301, EPRI Proj 842-5)  
(EPRI-EM-1566) Avail NTIS HC A03/MF A01

Fuel cell performance in the ribbed substrate cell configuration consistent with that projected for a commercial power plant is demonstrated. Tests were conducted on subscale cells and on two 20 cell stacks of 4.8 MW demonstrator size cell components. These tests evaluated cell stack materials, processes, components, and assembly configurations. The first task was to conduct a component development effort to introduce improvements in 3.7 square foot, ribbed substrate acid cell repeating parts which represented advances in performance, function, life, and lower cost for application in higher pressure and temperature power plants. Specific areas of change were the electrode substrate, catalyst, matrix, seals, separator plates, and coolers. Full sized ribbed substrate stack components incorporating more stable materials were evaluated at increased pressure (93 psia) and temperature (405 F) conditions. Two 20 cell stacks with a 3.7 square feet, ribbed substrate cell configuration were tested. S F

**N81-16602\*** Westinghouse Electric Corp., Pittsburgh, Pa  
Research and Development Center  
**AIR/GAS SYSTEM DYNAMICS OF FOSSIL FUEL POWER  
PLANTS. VOLUME 4: EXPERIMENTAL VIBRATION AND  
ACOUSTIC TEST DATA OF A 500-MW UNIT Interim  
Report**  
F R Goldschmied, D N Wormley, and D Rowell Oct 1980  
174 p refs Prepared in cooperation with MIT, Cambridge  
(EPRI Proj 1651)  
(EPRI-CS-1444-Vol-4) Avail NTIS HC A08/MF A01

Vibration and acoustic tests were made in a 500 MW oil fired unit, in conjunction to system dynamics pressure data. The test data were taken on one forced draft fan, on one induced draft fan and on the gas recirculation fan. Both cold tests and hot tests were taken for all fans. Identical fans were used for forced draft and for induced draft installation but the acoustic characteristics were different. A total of 145 spectrum plots are presented. Twenty five vibration spectrums are given, where acceleration level, g, is plotted against frequency, two frequency ranges are used, 0-20 Hz and 0-200 Hz. One hundred and twenty acoustic spectrums are given, where sound level is plotted against frequency, three frequency ranges are used, 0-20 Hz, 0-200 Hz, and 0-2000 Hz. The test data are presented for future reference without concomitant analysis at this time. Author

## 05 ENERGY CONSERVATION

**N81-16609#** Stanford Linear Accelerator Center, Calif  
**ULTRA HEADLESS HYDRO POWER**  
 F F Hall Sep 1980 4 p refs Presented at 3rd Intern Conf on Alternative Sources, Miami Beach, Fla., 15-17 Dec 1980 (Contract DE-AC03-76SF-00515)  
 (SLAC-Pub-2613, CONF-801210-3) Avail NTIS  
 HC A02/MF A01

Site selection considerations were reviewed for hydroelectric power stations. Design factors influencing energy conversion efficiency are presented. Electric energy storage technology was reviewed. Principles for the ultimate attainment of hydropower from the least head are discussed. TM

**N81-16615#** National Technical Information Service, Springfield, Va.  
**HYDROCARBON FUEL CELLS. CITATIONS FROM THE AMERICAN PETROLEUM INSTITUTE DATA BASE Progress Report, 1987 - Jul, 1980**  
 Diane M Cavagnaro Oct. 1980 135 p Supersedes NTIS/PS-79/0718 and NTIS/PS-78/0651  
 (PB81-800021; NTIS/PS-79/0718, NTIS/PS-78/0651) Avail NTIS HC \$30.00/MF \$30.00 CSCL 10B

This bibliography cites worldwide research on hydrocarbon fuel cells. The citations cover applications, design, performance, fabrication, catalysts, and electrochemistry. This updated bibliography contains 130 citations, 2 of which are new entries to the previous edition. GRA

**N81-16896#** Committee on Science and Technology (U S House)  
**FUSION ENERGY RESEARCH, DEVELOPMENT, AND DEMONSTRATION ACT OF 1980**

Washington GPO 1980 26 p Rept to accompany H. R. 6308 presented by the Comm on Sci and Technol at the 96th Congr., 2nd Sess., 17 Jun 1980  
 (H-Rept-96-1096) Avail US Capitol, House Document Room

An accelerated program for development of magnetic fusion energy leading to commercialization of the technology is described. The fusion technology will provide energy for the generation of electricity and production of heat, hydrogen and synthetic fuels. S F

**N81-16899#** Massachusetts Inst of Tech., Cambridge  
**MHD EFFECTS ON VISCOUS AND THERMAL WAKES AND THEIR INFLUENCE ON THE PERFORMANCE OF MHD GENERATORS**

Steven J Schneider (Westinghouse Research and Development Center, Pittsburgh, Pa.) and Jean F Louis 8 Jan 1979 38 p refs Backup Document for AIAA Synoptic Scheduled for Publication in the Journal of Aircraft, Jan/Mar 1981 (LOG-E281) Avail NTIS HC A03/MF A01

The development of velocity and thermal wakes induced by inlet vanes are analyzed separately and their influence on the performance of magnetohydrodynamic (MHD) generators is evaluated. The velocity wake has uniform conductivity, a magnetic field parallel to the vorticity and uniform current passed through the channel. An analytical solution is determined for the wake as a function of the MHD interaction parameter where the rising interaction parameter causes a greater velocity defect and the greater velocity defect decreases the electrical efficiency. The thermal wake has uniform velocity at any cross section of the channel, a magnetic field parallel to the vorticity and uniform current passed through the channel. An analytical solution for the conductivity wake as a function of the MHD interaction parameter is presented. This solution is exact only for the case of maximum power delivered to the load but is also accurate for a channel with loading factor less than 0.7. Increasing the interaction parameter decreases the thermal defect and the decreased thermal defect increases the electrical efficiency. M G

**N81-16906#** Brookhaven National Lab., Upton, N Y Dept of Nuclear Energy  
**HYFIRE: A TOKAMAK HIGH TEMPERATURE ELECTROLYSIS SYSTEM**  
 J A Fillo, J R Powell, M Steinberg, R Benenati, F Horn, H

Isaacs, O W Lazareth, H Makowitz, and J Usher 1980 10 p refs Presented at the 3rd Miami Intern Conf on Alternative Energy Sources, Miami Beach, Fla., 15-17 Dec 1980 Sponsored in part by DOE  
 (BNL-28679, CONF-801210-9) Avail NTIS  
 HC A02/MF A01

The conceptual design HYFIRE, a commercial fusion Tokamak reactor, high temperature electrolysis system, is discussed with emphasis on the adaptability of the STARFIRE power reactor to a synfuel application. The HYFIRE blanket must perform three functions: (1) provide high temperature (approximately 1400 C) process steam at moderate pressures (in the range of 10 to 30 atm) to the high temperature electrolysis (HTE) units, (2) provide high temperature (approximately 700 to 800 C) heat to a thermal power cycle for generation of electricity to the HTE units; and (3) breed enough tritium to sustain the D-T fuel cycle. In addition to thermal energy for the decomposition of steam into its constituents, H<sub>2</sub> and D<sub>2</sub>, electrical input is required. Fourteen hundred degree steam coupled with 40% power cycle efficiency results in a process efficiency (conversion of fusion energy to hydrogen chemical energy) of 50%. A R H

**N81-16909#** Westinghouse Electric Corp., Pittsburgh, Pa Research Labs  
**OPERATIONAL ANALYSIS OF OPEN-CYCLE MHD Final Report**

T E Lippert and D A McCutchan Jul 1980 268 p refs (EPRI Proj 639-1) Avail NTIS HC A12/MF A01

Open cycle magnetohydrodynamic (OCMHD) conceptual power plant designs are studied in the context of a utility system to form a better basis for understanding their design, design requirements, and market possibilities. Based on assumed or projected plant costs and performance characteristics, assumed economics and escalation factors, and one coal supply and delivery scenario, overall and regional OCMHD utility market possibilities are reviewed. Additionally, for one hypothetical utility system a generation expansion plan is developed that includes OCMHD as a baseload power generating station. The impact on generation system economics and operation of alternating selected MHD plant cost and performance characteristics is reviewed. Baseload plant availability is shown as an important plant design consideration, and a general methodology and data base is developed to assess the impact on design and cost of various reliability decisions. An overall plant availability goal is set and the required availabilities of various MHD high technology components are derived to meet the plant goal. The approach is then extended to projecting channel life goals for various plant design configurations and assumptions. Author

**N81-17527\*#** Stonehart Associates, Inc., Madison, Conn  
**PREPARATION AND EVALUATION OF ADVANCED ELECTROCATALYSTS FOR PHOSPHORIC ACID FUEL CELLS Quarterly Report, Jul. - Sep. 1980**

Paul Stonehart, John Baris, and Peter Pagliaro Sep 1980 30 p refs (Contract DEN3-176) (NASA-CR-165179, DOE/NASA/0176-80/3, QR-3) Avail NTIS HC A03/MF A01 CSCL 10A

Results are presented for hydrogen oxidation and hydrogen oxidation poisoned by carbon monoxide at levels between 0 and 30%. Due to the high activities that are now being observed for our platinum based electrocatalysts, the hydrogen concentrations were reduced to 10% levels in the gas supplies. Perturbation techniques were used to determine that a mechanism for the efficient operation of our porous gas diffusion electrodes is diffusion of the carbon monoxide out of the electrode structure through the electrolyte film on the electro-catalyst. A survey of the literature on platinum group materials (PGM) was carried out so that an identification of successful electrocatalysts could be made. Two PGM electrocatalysts were prepared and performance data for hydrogen oxidation in hot phosphoric acid in the presence of high carbon monoxide concentrations showed that they matched the best platinum on carbon electrocatalysts but with an electrocatalyst cost that was half of the platinum catalyst cost. Author

**N81-17594#** Westinghouse Electric Corp., Lester, Pa. Power Systems Co

**OCEAN THERMAL ENERGY CONVERSION POWER SYSTEM**

**DEVELOPMENT: PSD-1, PHASE 2 Final Design Report**

30 Jun 1980 515 p refs

(Contract DE-AC03-79ET-21039)

(DOE/ET-21039/1) Avail NTIS HC A22/MF A01

The PSD-1 program provides a heat exchanger system consisting of an evaporator, condenser and various ancillaries with ammonia used as a working fluid in a closed simulated Rankine cycle. Primary design concerns include control of biofouling corrosion and erosion of aluminum tubes, selection of materials, and the development of a basis for scale up to large heat exchangers so as to ultimately demonstrate economic feasibility on a commercial scale. The PSD-1 test article was devised to verify thermodynamic, environmental and mechanical performance of basic design concepts. The detailed design, development, fabrication, checklist, delivery, installation support, and operation support for the Test Article Heat Exchangers are described.

DOE

**N81-17606#** Babcock and Wilcox Co., Alliance, Ohio  
**STUDY OF SEED-REPROCESSING SYSTEMS FOR OPEN-CYCLE COAL-FIRED MHD POWER PLANTS.**

A Sheth (Argonne National Lab.) Jul 1980 63 p refs Prepared in cooperation with J. E. Sirrine Co

(Contract DE-AC02-79ET-15613)

(DOE/ET-15613-T1-App) Avail NTIS HC A04/MF A01

Of the several processes that are capable of separating sulfur from potassium sulfate, the process developed by Pittsburgh Energy Research Center (PERC), and the Formate process were selected for the detailed mass and energy balance calculations. As a basis for the calculations, an MHD power plant of 450 Mwt size and burning Illinois no. 6 coal was selected. In the mass balance calculations, the role played by various trace impurities was included to the extent of current knowledge about such impurities and their impacts on process chemistry. The results given should be considered as preliminary values because various simplifying assumptions were made and factors such as heat losses and component efficiencies were excluded. On the basis of net energy requirements, the Formate process showed a slight advantage, however, it produced a potentially unacceptable sludge as the sulfur containing waste.

DOE

**N81-17619#** Institute of Gas Technology, Chicago, Ill  
**FUEL CELL SUPPORT STUDIES: ON-SITE MOLTEN CARBONATE SYSTEMS Final Report, 1 Dec. 1978 - 30 Nov. 1979**

Ronald M. Bowman, Bassam J. Jody, Kuang C. Lu, and Keith F. Blurton. Gas Research Inst. Oct 1980 214 p refs Sponsored by Gas Research Inst.

(PB81-113672, GRI-79/0067)

Avail NTIS

HC A10/MF A01 CSCL 10B

The potential energy savings which could be obtained from industrial cogeneration using molten carbonate fuel cells are assessed. A natural gas-fueled molten carbonate fuel cell system was configured, and its efficiency and the quantity and quality of its rejected heat were calculated. Potential energy savings, environmental benefits, and impact on overall gas consumption from using the system in a cogenerative mode in 13 selected energy-intensive industries were determined. General equations were derived for the calculation of potential energy savings using any cogeneration system.

GRA

**N81-17883#** Sandia Labs., Albuquerque, N. Mex  
**DRIVERS FOR LIGHT ION FUSION**

J. P. VanDervender. 1980 12 p refs Presented at the 4th ANS Topical Meeting on the Technol. of Controlled Fusion, King of Prussia, Pa., 14-17 Oct 1980.

(Contract DE-AC04-76DP-00789)

(SAND-80-2432C, CONF-801011-20)

Avail NTIS

HC A02/MF A01

The light ion approach to inertial confinement fusion requires the production of 10 to the 13th power to 10 to the 14th power watt and 10 to the 6th power to 10 to the 7th power joule pulses. The accelerator technology developed in the

particle beam fusion program is capable of fulfilling these requirements.

DOE

**N81-17910#** Los Alamos Scientific Lab., N. Mex  
**POSSIBLE APPLICATION OF ELECTROMAGNETIC GUNS TO IMPACT FUSION**

R. N. Kostoff (DOE), F. L. Ribe (Washington Univ.), and A. T. Peebles. 1980 9 p refs Presented at the Electromagnetic Guns and Launchers Conf., San Diego, Calif., 4-6 Nov 1980. (Contract W-7405-eng-36)

(LA-UR-80-3137, CONF-801138-4)

Avail NTIS

HC A02/MF A01

The concept of impact fusion is discussed in terms of application to generation of electric power. Target interactions and acceleration systems are addressed. The potential of the rail gun as an impact fusion macroparticle accelerator is assessed including the relative advantages of the rail gun.

J M S

**N81-17911#** Edgerton, Germeshausen and Grier, Inc., Idaho Falls, Idaho

**ENVIRONMENTAL AND SAFETY ISSUES OF THE FUSION FUEL CYCLE**

J. G. Crocker. 1980 13 p refs Presented at the 4th ANS Topical Meeting on the Technol. of Controlled Nucl. Fusion, King of Prussia, Pa., 14 Oct 1980.

(Contract DE-AC07-76ID-01570)

(CONF-801011-88) Avail NTIS HC A02/MF A01

The environmental and safety concerns inherent in the development of fusion energy are discussed. Specific topics covered include: (1) safe and reliable techniques for tritium control, (2) reduce the quantity of activation products produced, and (3) provide designs to limit the potential for accidents that could result in release of radioactive materials. Because of the inherent safety features of fusion and the early start that has been made in safety problem recognition and solution, fusion should be among the lower risk technologies for generation of commercial power.

DOE

**N81-18153** Stanford Univ., Calif  
**OPTICAL DIAGNOSTIC MEASUREMENTS OF COAL SLAG PARAMETERS IN COMBUSTION MHD SYSTEMS**  
Ph.D. Thesis

Peter Carl Annessohn. 1980 183 p.

Avail Univ. Microfilms Order No. 8103481

A diagnostic technique capable of making continuous, in situ measurements of slag layer thickness was developed. This technique was then applied in a magnetohydrodynamic (MHD) system for comparison with the predictions of one of the existing hydrodynamic models. A diagnostic technique capable of making in situ measurements of ash droplet size and concentration at the exit of an MHD combustor was also developed and the sensitivity of these quantities was studied with respect to various combustion parameters. A slag layer surface position monitor employing a laser triangulation method was developed and used to measure variations in slag layer thickness as a function of substrate temperature for a variety of ash loadings and total reactant flowrates. These measurements, on both eastern and western coals, were in excellent agreement with theoretical predictions based on estimated properties of these slags. Slag layer thickness is shown to decrease with increasing substrate temperature and plasma velocity. Increased deposition rate, slag viscosity and thermal conductivity all led to increased slag layer thickness.

Dissert. Abstr.

**N81-18247#** Office National d'Etudes et de Recherches Aérospatiales, Paris (France)

**CLOSED-CYCLE HELIUM GAS TURBINE FOR SOLAR TOWER POWER PLANT**

Pierre Duran. In: La Rech. Aérospatiale, Bimonthly Bull. No. 1980-2 (ESA-TT-652) 1980 p. 35-50 refs. Translated into English from La Rech. Aérospatiale, Bull. Bimestriel (Paris), no. 1980-2, Mar.-Apr. 1980 p. 109-122. Original report in FRENCH previously announced as A80-46228.

Avail NTIS HC A05/MF A01



## 05 ENERGY CONSERVATION

Closed-cycle helium gas turbines with an atmospheric cold heat source, currently under development for very high temperature nuclear power plants, are discussed for use in solar energy conversion systems not requiring long term thermal storage. In the 10 MW-el range, and with a turbine inlet temperature of 900 C, the thermal efficiency of a complex gas turbine, including cooling between low pressure and high pressure compressors as well as reheating between high pressure and low pressure turbine and regenerative heat exchangers, lies between 41 and 43%. The efficiency is constant in time and is sustained even at off-design operation, it is equivalent to the efficiency achieved by a thermal power plant, which allows running the solar plant with an auxiliary fossil fuel combustor

Author (ESA)

**N81-18484** Virginia Polytechnic Inst and State Univ Blacksburg  
**THE AERODYNAMIC ANALYSIS OF A 10 KW HORIZONTAL-AXIS WINDMILL** Ph D. Thesis  
Reginald Lee Figard 1980 154 p  
Aval Univ Microfilms Order No 8101878

An aerodynamic study of the performance and the flowfield in the vicinity of the rotor of a three bladed 10kW horizontal-axis windmill is presented. The windmill has a 6.38 m (20.92 ft) diameter rotor and is rated at 10kW in a 13.41m/s (44.0 fps) wind. Three basic approaches are utilized. First, field measurements of the performance and the axial velocity and turbulence behind the rotor were conducted. Second, wind tunnel tests of a 1:5 scale model were performed. Third, theoretical analyses of the windmill were made. This included performance predictions with a computerized, modified blade element (vortex theory) analysis and the development and utilization of a numerical procedure employing the full Navier-Stokes equations in axisymmetric form to examine the wake development in detail. The results of each of the three approaches shows agreement within 10 to 15% with the other two approaches. The theoretical performance analysis underpredicts both the field and wind tunnel results while scaled-up wind tunnel results overpredicted the field results. The axial velocities immediately behind the rotor are compared for all three cases and the results correspond to the performance results

Dissert Abstr

**N81-18491\*** Westinghouse Electric Corp., Pittsburgh, Pa  
Advanced Energy Systems Div  
**DISK MHD GENERATOR STUDY** Final Report  
F D Retallick et al Oct 1980 424 p refs  
(Contract DEN3-139 DE-A101-77ET-10769)  
(NASA-CR-159872, DOE/NASA/O139-1, AESD-TME-3064)  
Aval NTIS HC A18/MF A01 CSCL 10A

Directly-fired separately-fired and oxygen-augmented MHD power plants incorporating a disk geometry for the MHD generator were studied. The base parameters defined for four near-optimum-performance MHD steam power systems of various types are presented. The finally selected systems consisted of (1) two directly fired cases one at 1920 K (2996F) preheat and the other at 1850 K (2500 F) preheat, (2) a separately-fired case where the air is preheated to the same level as the higher temperature directly-fired cases and (3) an oxygen augmented case with the same generator inlet temperature of 2839 (4650F) as the high temperature directly-fired and separately-fired cases. Supersonic Mach numbers at the generator inlet, gas inlet swirl, and constant Hall field operation were specified based on disk generator optimization. System pressures were based on optimization of MHD net power. Supercritical reheat steam plants were used in all cases. Open and closed cycle component costs are summarized and compared

A R H

**N81-18494\*** Westinghouse Research and Development Center, Pittsburgh, Pa  
**CELL MODULE AND FUEL CONDITIONER** Quarterly Report, Jul - Sep 1980  
D Q Hoover, Jr Oct 1980 72 p  
(Contracts DEN3-161, DE-A103-79ET-11272)  
(NASA-CR-165189, DOE/NASA/O161-5, Rept-80-9E6-MARED-R4, QR-4) Aval NTIS  
HC A04/MF A01 CSCL 10A

Measurements of stack height changes with temperature and cell material characteristics were made. Stack 559 was assembled

and components were fabricated for 560, 561, and 562. Stack 425 was transferred from the parallel DOE program and installed in the OS/IES simulation loop for mechanical and electrical testing. Construction and preliminary checkout of the 2 kW test facility was completed and design and procurement of the 8 kW test facility was initiated. The fuel conditioning subsystem design continued to evolve and the state points for the current design were calculated at full and part load conditions. Steam reforming catalyst activity tests were essentially completed and aging tests and CO shift converter tests were initiated

Author

**N81-18496\*** Stonehart Associates, Inc., Madison, Conn  
**PREPARATION AND EVALUATION OF ADVANCED ELECTROCATALYSTS FOR PHOSPHORIC ACID FUEL CELLS** Quarterly Report, Oct - Dec, 1980

Paul Stonehart, John Baris, John Hochmuth, and Peter Pagliaro  
31 Dec 1980 35 p  
(Contracts DEN3-176 DE-AL01-80ET-17088)  
(NASA-CR-165245, DOE/NASA/O176-80/4, GR-4) Aval  
NTIS HC A03/MF A01 CSCL 10A

Alloy electrocatalysts on carbon supports were developed for hydrogen oxidation in the presence of carbon monoxide. These electrocatalysts match the best platinum on carbon catalysts for performance yet cost half as much. The results demonstrate that a significant reduction in anode electrocatalyst material cost can be achieved by replacing the platinum. Since surface characterization of this catalyst is important to explain its performance, several approaches and pitfalls to the elucidation of the surface characterization are presented

T M

**N81-18497\*** National Bureau of Standards, Washington, D C  
Metallurgy Div  
**NON-NOBLE CATALYSTS AND CATALYST SUPPORTS FOR PHOSPHORIC ACID FUEL CELLS** Quarterly Report, Aug. - Nov. 1980

A J McAlister Nov 1980 13 p refs  
(NASA Order C-46229D, Contract DE-AL01-80ET-17088)  
(NASA-CR-165221, DOE/NASA/6229-1 QR-1) Aval NTIS  
HC A02/MF A01 CSCL 10A

Tungsten carbide which is known to be active for hydrogen oxidation and CO tolerant has a hexagonal structure. Titanium carbide is inactive and has a cubic structure. Four different samples of the cubic alloys Wx-1Tx C were prepared and found to be active and CO tolerant. These alloys are of interest as possible phosphoric acid fuel cell catalysts. They also are of interest as opportunities to study the activity of W in a different crystalline environment and to correlate the activities of the surface sites with surface composition

Author

**N81-18518\*** Brookhaven National Lab., Upton, N Y  
**FUEL-CELLS FOR ELECTRIC UTILITY AND TRANSPORTATION APPLICATIONS**

S Srinivasan 1980 22 p refs Presented at 5th Australian Electrochem Conf Perth Australia, 18 Aug 1980  
(Contract DE-AC02-76CH-00016)  
(BNL-28696, CONF-800883-1) Aval NTIS  
HC A02/MF A01

The current status and expected progress status of the fuel cell research and development programs in the USA electrochemical problem areas techno-economic assessments of fuel cells for electric and/or gas utilities and for transportation and other candidate fuel cells and their applications are presented. For electric and/or gas utility applications the most likely candidates are phosphoric, molten carbonate and solid electrolyte fuel cells. The first will be coupled with a reformer (to convert natural gas, petroleum-derived, or biomass fuels to hydrogen) while the second and third will be linked with a coal gasifier. A fuel cell/battery hybrid power source is an attractive option for electric vehicles with projected performance characteristics approaching those for internal combustion or diesel engine powered vehicles. For this application, with coal-derived methanol as the fuel, a fuel cell with an acid electrolyte is essential with pure hydrogen, alkaline fuel cells show promise

DOE

**N81-18529\*** Physical Sciences, Inc., Woburn, Mass  
**TASK REPORT NO 3 SYSTEMS ANALYSIS OF ORGANIC**



**RANKINE BOTTOMING CYCLES**

D Bloomfield and S Fried Dec 1980 62 p refs  
(Contract DE-AC21-80MC-14361)  
(PSI-TR-245) Avail NTIS HC A04/MF A01

A model was developed that predicts the design performance and cost of a Fuel Cell/Rankine cycle powerplant. The Rankine cycle utilizes the rejected heat of an 113 MW phosphoric acid fuel cell powerplant. Improvements in the total plant heat rate and efficiency of up to 10% were attainable, using ammonia as the working fluid. The increase in total plant cost divided by the increase in total plant power ranged from \$298/kW to \$1069/kW for the cases run, and was a strong function of ambient temperature. The concept appears to be capable of producing substantial energy savings in large fuel cell powerplants, at reasonable costs. However, a much more detailed study that includes such factors as duty cycle, future cost of fuel and site meteorology needs to be done to prove the design for any potential site. DOE

**N81-18538#** Lockheed Missiles and Space Co., Palo Alto, Calif  
Metallurgy and Composites Lab

**ELECTRODE MATERIALS FOR COAL-FIRED MHD GENERATORS Final Report, 1 Mar. 1977 - 31 May 1978**

R A Perkins Oct 1980 163 p refs  
(Contract EPRI Proj 468-2)

(EPRI-AP-1562) Avail NTIS HC A08/MF A01

Metallic materials are evaluated as electrodes for coal fired MHD generators. A laboratory test that simulates the electrochemical and corrosive environment was developed and used to characterize electrode behavior in a diffuse current flow (nonarcing) mode of operation. High current density requires that an electron transport mechanism of current flow be maintained. With inert, stable electrodes, anode polarization occurs and ionic conduction prevails, limiting current to low values. The nature of this behavior and approaches to overcoming anodic polarization are studied as a function of electrode material, slag composition, and temperature. By operating at high temperatures and with controlled slag chemistries to produce a very fluid slag, depolarization may be achieved by mechanical mixing. Interrupted current flow are required to aid in breaking down anodic polarization. DOE

**N81-18548#** Texas A&M Univ., College Station Dept of Mechanical Engineering

**TECHNICAL AND ECONOMIC FEASIBILITY OF A THERMAL GRADIENT UTILIZATION CYCLE (TGUC) POWER PLANT Final Report**

Ashok M Raju, David A Renfro, and Thomas R Laik 1980 115 p refs

(Contract DE-FG01-78CS-56604)

(DOE/CS-56604/T1) Avail NTIS HC A06/MF A01

Power is generated by exploiting the natural atmospheric temperature gradient. A low grade energy source is used to vaporize a fluid which rises in a pipe to a higher elevation where it is condensed. The cycle is completed by passing the condensed liquid through a turbine as it returns to the lower elevation. A digital computer model was developed and used to simulate the operation of the cycle and to conduct a parametric study. Life cycle cost analysis and energy analyses were conducted for the specific case of a TGUC using the ambient air at the lower elevation as an energy source. Although the cycle has a low thermal efficiency and is site specific, it is technically feasible. Variations in mass flow rate of the working fluid and elevation were found to affect the cycle power output to a large extent. The investment cost of a hypothetical 10 megawatt TGUC power plant was determined to be \$3,080 per kilowatt, with life cycle busbar costs of electricity ranging from 47 to 55 Mills per kilowatt hour depending on the method of financing. DOE

**N81-18550# Sandia Labs., Albuquerque, N Mex  
PROCEEDINGS OF THE VERTICAL AXIS WIND TURBINE (VAWT) DESIGN TECHNOLOGY SEMINAR FOR INDUSTRY**

Sidney F Johnston, ed Aug 1980 339 p refs  
(Contract DE-AC04-76DP-00789)

(SAND-80-0984, CONF-8004128)  
HC A15/MF A01

Avail NTIS

The objective of the program is to develop technology that results in economical, industry produced, and commercially marketable wind energy systems. The purpose of the VAWT Design Technology Seminar for Industry was to provide for the exchange of the current state of the art and predictions for future VAWT technology. Emphasis was placed on technology transfer on Sandia's technical developments and on defining the available analytic and design tools. DOE

**N81-18558#** Water and Power Resources Service Denver, Colo  
Engineering and Research Center

**SOLAR/HYDRO INTEGRATION STUDY Technical Progress Report, Feb. - Jul. 1980**

1980 47 p refs

(Contract DE-AI03-79SF-10505)

(DOE/SF-10505/4) Avail NTIS HC A03/MF A01

The Water and Power Resources Service in cooperation with the Department of Energy (DOE) is investigating the technical and economic feasibility of integrating solar central receiver powerplants with the Federal hydroelectric power system in the southwest United States. The principal hydro facility in this region is Hoover Dam. Typical meteorological year data were obtained for Las Vegas from the Solar Energy Research Institute. Plots of available solar energy at Yuma and Mormon Mesa are presented for several operational threshold levels. The data show that a solar plant's operational time can be reduced by 20% and still utilize more than 97% of the available solar energy. The Mormon Mesa site has slightly more solar energy available than the Yuma site. A meteorological surface observation network (MESONET) weather station is being prepared for installation at the Yuma site. The MESONET station which normally measures temperature, relative humidity, barometric pressure, wind speed, and wind direction will be retrofitted to measure direct beam and global radiation. The radiation data will be used in dynamic simulations of solar power systems. DOE

**N81-18562# Foster-Miller Associates, Inc., Waltham Mass  
DESIGN AND DEVELOPMENT OF STIRLING ENGINES FOR STATIONARY POWER GENERATION APPLICATIONS IN THE 500 TO 3000 HORSEPOWER RANGE Quarterly Report**

Feb 1980 61 p refs

(Contracts DE-AC02-79ET-15208, W-31-109-eng-38)

(DOE/ET-15208/1, QR-1) Avail NTIS HC A04/MF A01

Initial work on the design and development of Stirling engines for stationary integrated energy systems is reported. Information is included on a market assessment, design methodology, evaluation of engine thermodynamic performance and preliminary system design. It is concluded that Stirling engines employing clean fossil fuels cannot compete with diesel engines. However, combustion technology exists for the successful burning of coal derived fuels in a large stationary Stirling engine. High efficiency is predicted for such an engine and further development work is recommended. DOE

**N81-18565 Colorado Univ at Boulder  
AERODYNAMIC ANALYSIS OF PROPELLER-TYPE WINDMILLS WITH HELICAL TRAILING VORTICES Ph D Thesis  
Ta-Ching Shiao 1980 75 p**

Avail Univ Microfilms Order No 8103137

To improve the strip theory for computing the performance of a propeller type windmill a realistic analysis is formulated to include the wake effect. The finite-wing theory is applied to a rotor blade to find its circulation distribution with the downwash determined from a direct integration of Biot-Savart's law based on the entire helical trailing vortex system. An iterative procedure was developed to determine the sectional properties at some selected stations. A computer program is constructed for the computation in which the empirical lift and drag data of the blade airfoil section are programmed. The torque, thrust and power output of the windmill are obtained by integrating the sectional aerodynamic properties from hub to tip along the blades. Two windmills, one with twisted and tapered blades and the

## 05 ENERGY CONSERVATION

other with uniform blades, are used as examples in predicting the performances  
Dissert Abstr

**N81-18877** Stanford Univ, Calif

### FLUCTUATIONS IN COMBUSTION-DRIVEN MHD GENERATORS Ph.D. Thesis

John Paul Barton 1980 414 p

Avail Univ Microfilms Order No 8103483

The results of an experimental and theoretical investigation of the inherent fluctuations that occur within combustion driven magnetohydrodynamic generators are presented. The primary concern was to determine the presence and effects of axially propagating linear hydrodynamic traveling waves of the magnetoacoustic and magnetoentropic types. The possible development of large fluctuations in high magnetic interaction MHD generators caused by hydrodynamic traveling waves propagating with increasing amplitude was considered. Experimentally time resolved measurements of pressures, electrode currents, and internal differential voltages within a laboratory scale, combustion driven MHD generator facility were analyzed to determine the nature of the inherent fluctuations. A special probe tube microphone provided a sensitive measurement of the pressure fluctuations within a combustion driven MHD generator duct.

Dissert Abstr

**N81-18998\*** Jet Propulsion Lab, California Inst of Tech, Pasadena

### FUEL CELLS FEASIBILITY

D Schonfeld and T Charrn In *its* The Telecommun and Data Acquisition 15 Feb 1981 p 154-168 refs

Avail NTIS HC A09/MF A01 CSCL 10A

The technical and economic status of fuel cells is assessed with emphasis on their potential benefits to the Deep Space Network. The fuel cell, what it is, how it operates, and what its outputs are, is reviewed. Major technical problems of the fuel cell and its components are highlighted. Due to these problems and economic considerations it is concluded that fuel cells will not become commercially viable until the early 1990s. JMS

**N81-19257\*** Western Reserve Univ, Cleveland, Ohio Dept of Chemistry

### RECENT ADVANCES IN THE SCIENCES OF ELECTROCATALYSIS

Ernest Yedger 1 Nov 1980 60 p refs Presented at the Acheson Natl Meeting of the Electrochem Soc, Cleveland, Oct 1980

(Contract N00014-75-C-0953, NR Proj 359-451)

(AD-A095095, TR-52) Avail NTIS HC A04/MF A01 CSCL 07/4

This paper was presented as the Acheson Award lecture at the national meeting of the Electrochemical Society in October 1980 and surveys recent developments in the field of electrocatalysis, including work in the author's laboratory, most of which was carried out with the support of ONR. The first part surveys techniques for obtaining information concerning electrode surfaces and particularly species adsorbed on such surfaces. Special attention is focused on in-situ optical techniques (ultraviolet, visible, infrared, Raman) and the use of ex-situ surface physics techniques, the latter in conjunction with electrochemical studies of single crystal electrode surfaces. The second part of the paper summarizes the present state of understanding of hydrogen and oxygen electrocatalysis. GRA

**N81-19259\*** Westinghouse Electric Corp, Concordville, Pa Combustion Turbine Systems Div

### GAS TURBINE COMBUSTOR PERFORMANCE ON SYNTHETIC FUELS, VOLUME 1 Final Report

S M DeCorso, P W Pillsbury, G Bauserman, P R Mulik, and T R Stein Nov 1980 68 p Sponsored by Electric Power Research Inst (EPRI Proj 989-1)

(EPRI-AP-1623-Vol-1) Avail NTIS HC A04/MF A01

The effects of burning coal and shale derived synthetic liquid in state of the art gas turbine combustors were determined

Ten types of coal derived liquid fuels from the SRC-I, SRC-II, EDS, and H-Coal processes, and three hydrogenated shale oil fuels were utilized. The combustion and emission performance of fuels other than petroleum was obtained. Synthetic fuels burned approximately as expected from extrapolation of the combustion results obtained with petroleum fuels. It was concluded that synthetic fuels with hydrogen content approximately 0.2% should be satisfactory for engines of current design. All fuels were landed acceptably by standard fuel forwarding systems. Emissions of CO, UHC and particulates were at about the same low levels as for petroleum distillate No. 2 analysis and correlation of NO sub x emissions and wall temperatures versus fuel properties were developed for prediction of these effects over a range of operating conditions. DOE

**N81-19266\*** Tennessee Univ, Tullahoma Energy Conversion Div

### INVESTIGATION OF SWIRLING FLOW MIXING FOR APPLICATION IN AN MHD PULVERIZED COAL COMBUSTOR USING ISOTHERMAL MODELING M.S. Thesis Interim Report

William H Power May 1980 81 p refs

(Contract DE-AC02-79ET-10815)

(DOE/ET-10815/39) Avail NTIS HC A05/MF A01

A one fourth dimensionally scaled combustor model was developed for isothermal flow testing. A comparison was made of cold flow tests using 3 swirler designs with a base case oxidizer injector design of perforated plate which demonstrated acceptable performance in the 4 lbm/sec MHD combustor. The three swirlers that were evaluated were designed to allow a wide range of swirl intensity to be investigated. The design criterion of the swirler was the swirl number which has been related to swirler geometry. The results of the study showed that the swirlers that were tested fell short of the mixing characteristics displayed with the perforated plate base case oxidizer injector. The data obtained with the cold flow model established that the actual swirl numbers of two of the swirlers were much lower than the design swirl numbers. Recirculation zones were defined for all configurations that were tested, and a comparison of velocity profiles was made for the configurations. DOE

**N81-19402\*** Westinghouse Electric Corp, Athens Ga Distribution Transformer Div

### OPTIMIZATION OF DISTRIBUTION TRANSFORMER EFFICIENCY CHARACTERISTICS Final Report

H Braunstein 4 Dec 1979 428 p refs

(Contract DE-AC01-78ET-29298)

(DOE/ET-29298/T1) Avail NTIS HC A19/MF A01

A method for distribution transformer loss evaluation was derived. The total levelized annual cost method was used and was extended to account properly for conditions of energy cost inflation, peak load growth and transformer changeout during the evaluation period. The loss costs included were the no-load and load power losses, no-load and load reactive losses, and the energy cost of regulation. The demand and energy components of loss costs were treated separately to account correctly for the diversity of load losses and energy cost inflation. An analysis was performed to find what level of transformer loss yields the minimum total levelized annual cost for a given kVA rating and a given set of load and cost parameters. Initial transformer costs as a function of no-load loss, load loss, and kVA were generated and used in the evaluation. Both single and multiple efficiency designs were considered. The total levelized annual costs of the two designs were compared. In each case the multiple efficiency design was less costly. A sensitivity analysis was performed to find the change in total levelized annual cost due to changes in the input parameters. DOE

**N81-19464\*** Department of Energy, Washington, D C Office of Transportation Programs

### AUTOMOTIVE TECHNOLOGY DEVELOPMENT PROGRAM Annual Report to Congress, 30 Sep. 1980

30 Sep 1980 30 p

(DOE/CS-0089/1, AR-2) Avail NTIS HC A03/MF A01

Advanced gas turbine (AGT) engines, advanced Stirling

engines (ASE), vehicles and vehicle components to use with advanced, energy conserving automotive propulsion systems are described. For the AGT, accomplishments included awarded contracts for AGT development, completed reference powertrain design, initiated design and fabrication of testing facilities, and testing of components. For the ASE, components were tested up to 4000 h. A turbocompound diesel engine completed 54,000 miles of road testing and showed a 5 percent fuel economy improvement. Ten thousand miles of road testing a prototype Diesel Organic Rankine Bottoming Cycle in a heavy truck engine showed a 10 percent fuel economy gain. Three hundred standard GSA vehicles, operated with a Controlled Speed Accessory Drive showed, a 6 to 8 percent fuel economy gain.

DOE

**N81-19486#** United Technologies Corp., South Windsor, Conn. Power Systems Div.  
**HIGH-RELIABILITY GAS TURBINE COMBINED-CYCLE DEVELOPMENT PROGRAM, PHASE 1 Interim Report**  
 F H Boenig and J H Lewis Oct 1980 544 p  
 (EPRI Proj 1187-1)  
 (EPRI-AP-1599-Vol-1) Avail NTIS HC A23/MF A01

Phase 1 of a multiphase program leading to the development of a High Reliability Gas Turbine is described. The engine would be used for base load, combined cycle applications. Phase 1 was a conceptual design study of both the gas turbine itself and the full plant. High reliability was reflected in a concept that features ruggedness and simplicity. Ease of maintenance was provided through structural simplicity and modularization. Component designs for the gas turbine were selected on the basis of a review of past operational experience and an in depth statistical reliability analysis. Design details were then determined using trade off and parametric studies. Reliability in the auxiliary and balance of plant waste heat recovery equipment was provided by redundancy of critical components as well as the use of proven equipment. The final gas turbine design is a 107 MW, single shaft engine. Projected availability for the final engine installed in a combined cycle plant is 92 percent.

DOE

**N81-19495#** Rockwell International Corp., Golden, Colo.  
**WIND MACHINE FATIGUE ANALYSIS AND LIFE PREDICTION**

C A Waldon Apr 1980 66 p refs  
 (Contract DE-AC04-76DP-03533)  
 (RFP-3135/3533/80-19) Avail NTIS HC A04/MF A01

A technique for measuring fatigue and predicting fatigue life for different wind regimes is described. Presented are the techniques for locating high stress measuring points, obtaining data, using computer programs for calculating fatigue reduction, and finally predicting fatigue life.

DOE

**N81-19497#** Atomic Energy Commission Research Establishment, Riso (Denmark). Engineering Dept.  
**STATIC DEFLECTION AND EIGENFREQUENCY ANALYSIS OF THE NIBE WIND TURBINE ROTORS. THEORETICAL BACKGROUND**

Per Lundsager Feb 1980 31 p refs  
 (RISOE-M-2199, ISBN-87-550-0627-2, ISSN-0416-6435)  
 Avail NTIS HC A03/MF A01

The theory of thin-walled multicell structures is used to calculate the cross-sectional properties of rotor blades. The theory is developed for beams of inhomogeneous materials. The blade is then modeled using the finite element method. A stayed and a cantilevered blade, each consisting of a steel part and a glass fiber part, were analyzed. Static deflection caused by extreme wind load along with the five to ten lowest eigenfrequencies were calculated. Results deviated less than 15 percent from theoretical predictions.

Author (ESA)

**N81-19561\*#** National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.  
**IMPROVED THERMIONIC ENERGY CONVERTERS Patent Application**

James F Morris, inventor (to NASA) Filed 19 Feb 1981 11 p

(NASA-Case-LEW-12443-1, US-Patent-Appl-SN-235797) Avail NTIS HC A02/MF A01 CSCL 10A

The efficiency of thermionic energy converters is improved by reducing plasma losses. This is achieved by internal distribution of tiny shorted cesium diodes driven by the thermal gradient between the primary emitter and the collector. The tiny, shorted diode distribution comprises protrusions of the emitter material from the main emitter face which contact the main collector face thermally but not electrically. The main collector ends of the protrusions are separated from the main collector by a thin layer of insulation, such as aluminum oxide. The diode effect will increase with the use of metals that adsorb cesium less readily for the main emitter ends of the tiny protrusions and metals that adsorb cesium more readily for the main collector ends of the protrusions.

Author

**N81-19573\*#** Westinghouse Research and Development Center, Pittsburgh, Pa. Research and Development Center.  
**CELL MODULE AND FUEL CONDITIONER DEVELOPMENT Quarterly Report, Oct. - Dec. 1980**  
 D Q Hoover, Jr Jan 1981 72 p refs  
 (Contracts DEN3-161, DE-AI01-80ET-17088)  
 (NASA-CR-165190, DOE/NASA/0161-6, Rept-80-9E6-MARED-R5, QR-5) Avail NTIS HC A04/MF A01 CSCL 10A

The test results of and post test analysis of Stack 559 are reported. The design features and construction status of Stacks 560, 561, 562 and 563 are described. The measurements of cell materials compressibility are rationalized and summarized and an explanation of their uses is given. Preliminary results of a manifold material/coating survey are given. The results of shift converter catalyst performance tests and reforming catalyst aging tests are reported. State points for full load and part load operation of the fuel conditioning subsystem tabulated. Work on the data base for the fuel conditioner ancillary subsystems is summarized.

TM

**N81-19579#** United Technologies Corp., South Windsor, Conn. Power Systems Div.  
**OPTIMIZATION OF CARBON-SUPPORTED PLATINUM CATALYSTS FOR FUEL CELL ELECTRODES Final Technical Report, Oct. 1979 - Oct. 1980**

H R Kunz, F J Luczak, and G A Gruver Dec, 1980 51 p  
 (Contract DAAK70-79-C-0151, DA Proj 1L1-62733-AH-20) (AD-A084714, PSD/UTC-FCR-2834) Avail NTIS HC A04/MF A01 CSCL 09/1

The objective of this program was to optimize electrodes using the carbon supported platinum catalysts at the operating conditions required for use in methanol air, phosphoric acid electrolyte, fuel cell power plants for U.S. Army applications. Cathodes using proprietary, supported platinum catalyst, GSA-6, were fabricated with various degrees of hydrophobicity by adjusting the Teflon content in the catalyst layer and by changing the Teflon sintering cycle. These cathodes were tested with supported platinum anodes in eighteen subscale cells at the Army power plant operating conditions for periods exceeding 5000 hours. The optimum structure, on the basis of peak cell voltage, endurance stability, and manufacturing reproducibility was found to be one containing 47.5% Teflon. A standard United proprietary anode catalyst showed satisfactory peak performance and endurance stability. The cells with optimized electrodes exceeded the program 500 hour performance goal of 0.620V at 200 mA/cubic centimeters by 0.020V. The 6000 hour performance goal of 0.590 V at 200 mA/cubic centimeters was projected to be exceeded by 0.036 to 0.038 V (based on over 4000 hours of operation).

GRA

**N81-19581#** Grumman Energy Systems, Inc., Bohemia, N.Y.  
**DEVELOPMENT OF AN 8 KILOWATT WIND TURBINE GENERATOR FOR RESIDENTIAL TYPE APPLICATIONS. PHASE 1: DESIGN AND ANALYSIS. VOLUME 2: TECHNICAL REPORT**  
 F M Adler, L G Angeloff, P Henton, and P W King Mar 1980 92 p refs  
 (Contract DE-AC04-76DP-03533)

## 05 ENERGY CONSERVATION

(RFP-3007-Vol-2) Avail NTIS HC A05/MF A01

The Windstream 25 (WS-25) WTG showed a good match with the requirements for the 8kW WTG. The configuration overview, cost analysis, and design criteria are presented. The parametric and trade off studies, as well as supporting analysis are included. It was concluded that the WTG fell short of the original statement in only one area, that of achieving the target capital cost goal of \$750/kW (1977 dollars) E D K

### **N81-19583# Catalytica Associates, Inc., Santa Clara, Calif DISTILLATE FUEL-OIL PROCESSING FOR PHOSPHORIC ACID FUEL CELL POWER PLANTS**

Feb 1980 141 p refs

(Contract DE-AC03-77ET-13323)

(DOE/ET-13323/2) Avail NTIS HC A07/MF A01

Efforts to develop distillate oil steam reforming processes are reviewed, and the applicability of these processes for integration with the fuel cell are discussed. The development efforts can be grouped into the following processing approaches: high temperature steam reforming, autothermal reforming, autothermal gasification, and ultra desulfurization followed by steam reforming. Sulfur in the feed is a problem in the process development. DOE

### **N81-19585# Zaiminger Engineering Co., San Jose, Calif WIND POWER GENERATION DYNAMIC IMPACTS ON ELECTRIC UTILITY SYSTEMS Final Report**

H W Zaiminger Nov 1980 88 p refs Sponsored by Electric Power Research Inst

(EPRI-AP-1614) Avail NTIS HC A05/MF A01

A primary application of windpower generation on utility systems is expected to be large clusters of megawatt scale wind turbine (WT) units connected to the utility transmission network and operated as part of the overall utility generation mix. Wind fluctuations will result in minute to minute WT output variations. Large penetrations of wind turbines may cause dynamic impacts such as severe system swings, excessive frequency excursions, or system instability. These potential dynamic impacts, considering the integrated wind power plants, utility conventional generation, and transmission system, may limit the potential WT penetration and/or cause significant system operating restrictions. An initial assessment of potential wind power generation dynamic impacts on utility systems from a global utility perspective was made. Dynamic study of minute to minute ramping, frequency excursion, and short term transient stability was performed. DOE

### **N81-19600# Rockwell International Corp., Golden, Colo Rocky Flats Wind System Program**

#### **SMALL WIND SYSTEMS TECHNOLOGY ASSESSMENT. STATE OF THE ART AND NEAR TERM GOALS**

W S Bollmeier, C P Butterfield, R P Cingo, A C Hansen, D C Shepherd, and J L Tangler Feb 1980 84 p refs

(Contract DE-AC04-78DP-03533)

(RFP-3136/3533/80/18) Avail NTIS HC A05/MF A01

Commercially available small wind conversion systems (SWECS), DOE funded prototype SWECS, and possible second generation advanced concepts are assessed from the standpoint of several key Figures-of-Merit including cost of energy, dollars per pound, kilowatt hours per year per pound, and kilowatt hours per year per square meter of rotor area. The reliability, performance, and installation and maintenance costs of these systems are also assessed. It is concluded that current SWECS, while nearing the threshold of competitiveness with conventional energy sources, are inhibited from reaching their lowest cost potential by the use of off-the-shelf components, less than optimum rotor designs, and (in some cases) overly complicated control systems. The comparisons of improved DOE prototypes and possible advanced concept SWECS shows that, in many size ranges, considerable reductions in energy cost can be achieved. DOE

### **N81-19601# Rockwell International Corp., Golden, Colo DUNLITE MODEL 81/002550 WIND TURBINE GENERATOR Final Test Report**

K K Higashi Feb 1980 24 p refs

(Contract DE-AC04-78DP-03533)

(RFP-3149/3533/80-17) Avail NTIS HC A02/MF A01

The Dunlite Model 81/002550 Wind Turbine Generator has met all manufacturer claims of performance and reliability. The machine operated satisfactorily in wind up to the manufacturer rated survival speed of 36 m/s (80 mph). In addition, the Dunlite operated in winds exceeding 22.5 m/s (50 mph) for eight hours without incurring damage. Major damage to the machine occurred when wind speeds exceeded 40.3 m/s (90 mph). If winds of this velocity are expected, the manufacturer offers a high speed model of this wind turbine designed to withstand winds of 49.5 m/s (110 mph). Testing of the Dunlite designed to withstand winds of 49.5 m/s (110 mph). Testing of the Dunlite indicated that the machine is capable of producing its rated output of 2 kw at 11 m/s (25 mph). DOE

### **N81-19604# California Univ., Livermore Lawrence Livermore Lab**

#### **CHARACTERISTICS OF ACIDIC ELECTROLYTE HYDRO- GEN-AIR FUEL BATTERIES (3)**

H Tajima, M Sekurai, K Mizukami, and R Endo Dec 1980 11 p refs Transl into ENGLISH from a Japanese source

(Contract W-7405-eng-48)

(UCRL-Trans-11655) Avail NTIS HC A02/MF A01

The electrode characteristics of hydrogen air fuel batteries using phosphoric acid as the electrolyte using hydrogen reformed from natural gas were studied. The effects of the impurities, particularly CO, contained in the gas were examined. The effects of the carrier on poisoning of platinum by CO were studied using porous hydrogen electrodes in which carbon was used as the carrier and platinum as the catalyst. Also, the effects of the carrier on poisoning in cases where the catalyst used was a compound catalyst consisting of platinum and ruthenium, an oxidation catalyst of CO, are reported. Results are presented and discussed. DOE

### **N81-19619# Midwest Research Inst., Golden, Colo MOD 2 WIND TURBINE DEVELOPMENT PROJECT**

Oct 1980 24 p refs

(Contract DE-AC02-77CG-00178)

(SERI/SP-732-728) Avail NTIS HC A02/MF A01

A wind turbine to produce energy for less than 5 cents/kWh based on 1980 cost forecasts was designed. The pricing method used to project the Mod 2 energy costs is the levelized fixed charge rate approach, generally accepted in the electric utility industry as a basis for relative ranking of energy alternatives. This method derives a levelized energy price necessary to recover utility's purchasing, installing, owning, operating, and maintenance costs. DOE

### **N81-19632# Westinghouse Electric Corp., Concordville, Pa Combustion Turbine Systems Div**

#### **HIGH-RELIABILITY GAS TURBINE COMBINED-CYCLE DEVELOPMENT PROGRAM, PHASE 1 Final Report**

R E Strong, D J Amos, K H Eagle, and G L Francois Nov 1980 362 p

(EPRI Proj 1187-2)

(EPRI-AP-1598) Avail NTIS HC A16/MF A01

The development of a conceptual centerline design of a highly reliable combustion turbine combined cycle (CTCC) electric power generating plant having the twin design availability goals of 0.95 for the combustion turbine (CT) engine and 0.90 for the combined cycle (CC) plant, together with a CT engine starting reliability of 0.99 is described. The work and results of six interrelated tasks are described: (1) reliability analyses of current CT engines/plants, (2) eight CT unit/CC plant reliability design trade off studies, (3) high reliability CT unit and CC plant conceptual designs, (4) definition of technology research projects required to complete development of the conceptual CTCC plant, (5) analyses of the conceptual designs to determine what modifications are required for peaking duty application and use of lower grade petroleum and coal derived fuels, and (6) analyses of installed and current design CT engines/CC plants to determine what retrofit modifications and design changes can be made to economically improve their availability. DOE

**N81-19636#** Aeronautical Research Inst of Sweden, Stockholm Structures Dept

**STUDY OF WIND ENERGY CONVERSION SYSTEMS (WECS) IN A FARM AREA AND WECS SAFETY LIMIT REQUIREMENTS. MINUTES FROM EXPERT MEETING IEA, RESEARCH AND DEVELOPMENT WECS, ANNEX ONE, SUBTASK A1**

Sigge Eggwertz Jun 1980 114 p refs Partly in ENGLISH and DUTCH Proceedings of IEA WECS Sub-Task A1 Meeting, Stockholm, 25 Feb 1980  
(Contract SWEDBESD-5060-601)

(FFA-TN-HU-2218) Avail NTIS HC A06/MF A01

The proceedings include the description of two 2500 kW windmill prototypes, safety studies performed in several countries, and a contribution concerning fault tree analysis and load case recommendations. The introduction of safe zone, the crack detection system, and operation during icing conditions are discussed  
Author (ESA)

**N81-19637#** Atomic Energy Commission Research Establishment, Riso (Denmark) Physics Dept  
**ANALYSIS OF DATA FROM THE GEDSER WIND TURBINE 1977 TO 1979**

P Lundsager, S Frandsen, and C J Christensen Aug 1980 137 p refs Sponsored by Danish Ministry of Energy, Danish Electric Utilities and Danish Ship Research Lab (RISOE-M-2242, ISBN-87-550-0693-0, ISSN-0418-6435)  
Avail NTIS HC A07/MF A01

Power characteristics based on 10 min averages, coherence between measurements of wind and electric power based on high speed scanning, drive train oscillations and structural response of the rotor on a 200 kW windmill are analyzed. Theoretical models are developed and evaluated. The measurements are summarized and a Gedser Wind turbine on Easter Island is compared to other Danish, Swedish and American experimental wind turbines  
Author (ESA)

**N81-19639#** Bonn Univ (West Germany) Inst fuer Physikalische Chemie

**ELECTRODES AND DIAPHRAGMS FOR FUEL CELLS Final Report**

Wolf Vielstich, Hermann Schladitz, and Ernst Knauf (Physikalische-Chemie Forschungslabor) Bundesministerium fuer Forschung und Technologie Dec 1979 50 p refs In GERMAN, ENGLISH summary Sponsored by Bundesministerium fuer Forschung und Technologie (BMFT-FB-T-79:140, ISSN-0340-7608)  
Avail NTIS HC A03/MF A01

Polycrystalline electrodes made up of iron whiskers or nickel whiskers were investigated for application in water electrolysis and supporting material in fuel cells. For fuel cell studies an asbestos polymer separator was used. Electrodes of different thickness and having layers of different catalysts were studied. The best results were obtained with the nickel-whisker electrode which was used as an anode and a cathode in half cells. The nickel-whisker electrode was sintered in an H<sub>2</sub> atmosphere at 800 C, in 2mm thick, and has a porous volume of 70%. Whisker electrodes had to be covered by platings when they were used in a glycol-air fuel cell. The activity of these electrodes is strongly dependent on platinum layer formation and on the nature of the supporting material  
Author (ESA)

**N81-19888#** California Univ Berkeley Lawrence Berkeley Lab Accelerator and Fusion Research Div

**TRANSPORT OF LOW ENERGY POSITIVE AND NEGATIVE ION BEAM BY PERMANENT MAGNETS**

K N Leung, K W Ehlers, and E B Hooper Jr Oct 1980 7 p refs Presented at the 2d Intern Symp on the Prod and Neutralization of Negative Hydrogen Ions and Beams, Upton NY, 6-10 Oct 1980  
(Contract W-7405-eng-48)

(LBL-11636) Avail NTIS HC A02/MF A01

An experimental investigation of low energy ion beam guiding by a surface magnetic field generated by samarium cobalt magnets has been performed. It was found that magnets arranged in a multi-ring cusp configuration produced the best beam transport

efficiency in agreement with calculation of the charged particle trajectories for this particular magnet arrangement. This geometry is predicted to yield no distortion in the phase space of the beam. The effect is proportional to charge squared and is therefore independent of the sign of the charge of the particle being transported  
DOE

**N81-19920\*#** National Aeronautics and Space Administration Lewis Research Center, Cleveland, Ohio  
**THERMIONIC ENERGY CONVERSION (TEC) TOPPING THERMOELECTRICS**

James F Morris 1981 16 p refs Proposed for presentation at Intern Conf on Plasma Sci, Santa Fe, N Mex., 18-20 May 1981, sponsored by IEEE  
(Contract EC-77-A-31-1062)  
(NASA-TM-81677, E-702, DOE/NASA/1062-8) Avail NTIS HC A02/MF A01 CSCL 201

Performance expectations for thermionic and thermoelectric energy conversion systems are reviewed. It is noted that internal radiation effects diminish thermoelectric figures of merit significantly at 1000 K and substantially at 2000 K, the effective thermal conductivity contribution of intrathermoelectric radiative dissipation increases with the third power of temperature. It is argued that a consideration of thermoelectric power generation with high temperature heat sources should include utilization of thermionic energy conversion (TEC) topping thermoelectrics. However TEC alone or TEC topping more efficient conversion systems like steam or gas turbines, combined cycles, or Stirling engines would be more desirable generally  
M G

**N81-19932#** Argonne National Lab III Engineering Div  
**TWO-DIMENSIONAL MHD GENERATOR MODEL**

H K Geyer, R K Ahluwalia, and E D Doss Sep 1980 103 p refs  
(Contract W-31-109-eng-38)

(ANL/MHD-80-11) Avail NTIS HC A06/MF A01

A steady state two dimensional MHD generator code, GEN, is presented. The code solves the equations of conservation of mass, momentum and energy, using a Von Mises transformation and a local linearization of the equations. By splitting the source terms into a part proportional to the axial pressure gradient and a part independent of the gradient the pressure distribution along the channel is easily obtained to satisfy various criteria. Thus the code can run effectively in both design modes where the channel geometry is determined and analysis modes where the geometry is previously known. The code also employs a mixing length concept for turbulent flows. Cebeci and Chang's wall roughness model, and an extension of that model to the effective thermal diffusivities. Results on code validation as well as comparisons of skin friction and Stanton number calculations with experimental results are presented  
DOE

**N81-20037#** Aeronautical Research Inst of Sweden, Stockholm  
**THE VELOCITY INDUCED BY THE WAKE OF A WIND TURBINE IN A SHEAR LAYER, INCLUDING GROUND EFFECT**

Bo C A Johansson Jun 1980 42 p refs  
(FFA-133, ISSN-SW-0081-5640) Avail NTIS HC A03/MF A01

A theory for the calculation of the velocity field induced by the wake of a horizontal axis wind turbine in a wind shear layer and in the vicinity of a plane ground surface, when the force distribution of the turbine is known, is developed. The turbine is approximated by a disk area of continuous distributions of thrust and force parallel to the disk plane. Its wake is represented by a semi-infinite cylinder of distributed vorticity. A numerical example is calculated and distributions of velocity normal to the disk plane and ground effect influences are shown. The theory is based on assumptions strictly valid only for small perturbations of the undisturbed flow.  
Author (ESA)

**N81-20356** Iowa State Univ of Science and Technology, Ames  
**WIND GENERATOR NETWORK METHODOLOGY AND ANALYSIS** Ph.D. Thesis

## 05 ENERGY CONSERVATION

James Neils Peterson 1980 115 p  
 Avail Univ. Microfilms Order No 8106042

The methodology of optimal allocation of wind generators was developed and was applied to actual hourly wind speed data from six known windy sites in the Pacific Northwest. The problem of selecting the best combination of  $n$  wind generator sites out of a possible  $N$  sites (for  $n$  less than  $N$ ) was also examined. A hypothetical network consisting of three wind generator sites was investigated prior to analyzing the actual wind speed data. By allocating unequal numbers of wind generators to the different sites, the total network power variance was minimized. The number allocated to each site was determined as a function of the wind power mean values and variances at each site as well as the site to site correlations in wind power fluctuations. Network power variances were given as a function of the correlation coefficient between two of the sites. A comparison was made of the network variances for both equal and optimal allocations of the wind generators at the three sites.

Dissert. Abstr

**N81-20427#** Westinghouse Electric Corp., Philadelphia, Pa  
**STEAM TURBINES FOR LARGE POWER OUTPUTS**  
 W G Steltz In Von Karman Inst for Fluid Dyn Steam Turbines for Large Power Outputs 1980 70 p refs (For primary document see N81-20426 11-37)

Avail NTIS HC A25/MF A01

An historical perspective on steam turbine development is presented, then design considerations specific to steam turbine blade paths are reviewed. Thermal to mechanical energy conversion in turbomachinery is described in terms of the force developed on the blading. The magnitude of the force developed is determined by application of Newton laws. Turbine stage designs and stage performance characteristics are given. Low pressure turbine design is also addressed, including comparison of turbine flow field solutions using the matrix and streamline curvature techniques. Physical chemistry turbine design aspects are discussed and blade to blade flow analysis techniques are summarized, emphasizing the conservation equations of mass and momentum.

Author (ESA)

**N81-20434#** United Technologies Corp., South Windsor, Conn  
 Power Systems Div  
**HIGH-RELIABILITY GAS TURBINE COMBINED-CYCLE DEVELOPMENT PROGRAM, PHASE 1. VOLUME 2: APPENDIXES Interim Report**  
 F H Boenig and J H Lewis Oct 1980 124 p refs Sponsored by Electric Power Research Inst (EPRI Proj 1187-1)

(EPRI-AP-1599-Vol-2) Avail NTIS HC A06/MF A01

Results are presented of Phase 1 of a multiphase program leading to the development of a High Reliability Gas Turbine. The engine would be used for the base load, combined cycle application starting in the mid-1980's. The design, with primary emphasis on reliability, recognizes the need on the part of the electric utility user for high operating availability together with low maintenance cost to take full advantage of the capital cost and efficiency advantage offered by the combined cycle plant. Phase 1 was a conceptual design study of both the gas turbine itself and the full plant. Component designs for the gas turbine were selected on the basis of a review of past operational experience and an in-depth statistical reliability analysis. Reliability in the auxiliary and balance of plant waste heat recovery equipment was provided by redundancy of critical components as well as the use of proven equipment.

DOE

**N81-20440#** General Electric Co., Schenectady, N Y. Gas Turbine Div  
**DEVELOPMENT OF HIGH-TEMPERATURE TURBINE SUBSYSTEM TECHNOLOGY TO A TECHNOLOGY READINESS STATUS, PHASE 2 Quarterly Report, Jul. - Sep. 1980**

M W Horner Oct 1980 '89 p  
 (Contracts DE-AC01-76ET-1034, EX-76-C-01-1806) (FE-1806-96) Avail. NTIS HC A05/MF A01

Progress is reported in the design, development and testing

of a high-temperature gas turbine for use in a combined-cycle power plant, with coal-derived fuel, at a firing temperature of 2600 F and with growth capability to 3000 F. Topics covered include hot gas path development test, turbine simulation tests, shock tunnel tests, low-temperature, low Btu gas cleanup system tests, aerodynamics tests, motorized rig tests, and air turbine tests. An update of gas-fueled and liquid-fueled combined power plant design is included.

DOE

**N81-20543#** National Aeronautics and Space Administration, Washington, D C.  
**LARGE WIND ENERGY CONVERTER: GROWIAN 3 MW Final Report**

J. E. Feustel, S. Helm, and F. Koerber Nov. 1980 90 p Transl into ENGLISH of "Grosse Windenergieanlage Growian 3 MW. Baureife Unterlagen fuer Grosse Windenergieanlage" Rept. ET 4088A Nuremberg, Nov. 1979 92 p Transl. by Kanner (Leo) Associates, Redwood City, Calif. Original doc. prep by Maschinenfabrik Augsburg-Nuernberg A.G., Nuremberg (Contract NASw-3199) (NASA-TM-75404) Avail: NTIS HC A05/MF A01 CSCL 10A

The final report on the projected application of larger-scale wind turbine on the northern German coast is summarized. The designs of the tower, machinery housing, rotor, and rotor blades are described accompanied various construction materials are examined. Rotor blade adjustment devices auxiliary and accessory equipment are examined.

ARH

**N81-20564#** Acres Shawinigan Ltd., Toronto (Ontario)  
**STUDY OF THE POTENTIAL FOR COGENERATION IN CANADA: INDUSTRIAL STEAM TURBINES. VOLUME 2: ECONOMIC POTENTIAL**  
 Dec 1979 254 p  
 (NP-25187-Vol-2) Avail. NTIS (US Sales Only) HC A12/MF A01, DOE Depository Libraries

The economic potential, with the identification of the technical possibilities that could prove to be economically viable, for industrial cogeneration is discussed. Emphasis is placed on the point of view of society as a whole and as well as on what may be thought of as the direct production costs of electric power generation. These are the elements of cost that would fall within the purview of an accountant and it omits the opportunity costs of non-market elements. Calculation methods and results of the social savings and price scenarios are presented. Specifically, information on the economic potential of cogeneration in Nova Scotia, New Brunswick, Quebec, Ontario, Manitoba, Saskatchewan, Alberta, and British Columbia is detailed.

DOE

**N81-20590#** Fluidyne Engineering Corp., Minneapolis, Minn  
**MHD AIR HEATER DEVELOPMENT TECHNOLOGY Technical Progress Report, 1 Apr. - 30 Jun. 1980**  
 Jul 1980 58 p refs  
 (Contract DE-AC01-80ET-15602) (DOE/ET-15602/T2) Avail. NTIS HC A04/MF A01

Technology development for the directly-fired high temperature air heater (HTAH) for MHD power plants is described. Three tasks are described: (1) Materials selection, evaluation, and development. The objective of this task is to continue development of ceramic materials technology for the directly fired HTAH, including compilation of materials data, materials selection for testing and design studies, materials property determination. (2) Operability, performance, and materials testing. The objectives are to demonstrate the technical feasibility of operating a directly fired HTAH (including both the heater matrix and valves), to continue obtaining information on life and corrosion resistance of HTAH materials, and to obtain design information for full scale studies and future design work. (3) Full scale design concepts.

DOE

**N81-20901#** Los Alamos Scientific Lab., N. Mex. Laser Fusion Program Sect  
**INERTIAL FUSION PROGRAM Progress Report, 1 Jul. - 31 Dec. 1978**

Roger B Perkins and Frederick Skoberne, comp Nov 1980  
135 p refs  
(Contract W-7405-eng-36)  
(LA-7755-PR) Avail. NTIS HC A07/MF A01

Progress in the development of high energy short pulse CO<sub>2</sub> laser systems for fusion research is reported. Improvements to a two-beam system, Gemini, are outlined and experimental results discussed. An eight-beam system, Helios, was fired successfully on target for the first time, and became the world's most powerful gas laser for laser fusion studies. Work on Antares, a 100 to 200 TW target irradiation system, is summarized. A baseline design for automatic centering of laser beams onto the various relay mirrors and the optical design of the Antares front end are discussed. The results of various fusion reactor studies are summarized, as well as investigations of synthetic-fuel production through application of fusion energy to hydrogen production by thermochemical water splitting. Studies on increased efficiency of energy extraction in CO<sub>2</sub> lasers and on lifetimes of cryogenic pellets in a reactor environment are summarized, as well as the results of studies on pellet injection, tracking, and beam synchronization. DOE

N81-20858# Garrett Corp., Phoenix, Ariz. Turbine Engine Co.  
**ANALYTICAL DESIGN OF AN ADVANCED RADIAL TURBINE** Final Report, 1 Feb. 1979 - 1 Aug. 1980  
Gerald D. Large, David G. Finger, and Charles G. Linder Feb. 1981 155 p refs  
(Contracts DEN3-108; DE-AI01-77CS-51040)  
(NASA-CR-165170; DOE/NASA/O106-1; Rept-31-1653) Avail:  
NTIS HC A08/MF A01 CSCL 13F

The aerodynamic and mechanical potential of a single stage ceramic radial inflow turbine was evaluated for a high temperature single stage automotive engine. The aerodynamic analysis utilizes a turbine system optimization technique to evaluate both radial and nonradial rotor blading. Selected turbine rotor configurations were evaluated mechanically with three dimensional finite element techniques. Results indicate that exceptionally high rotor tip speeds (2300 ft/sec) and performance potential are feasible with radial bladed rotors if the projected ceramic material properties are realized. Nonradial rotors reduced tip speed requirements (at constant turbine efficiency) but resulted in a lower cumulative probability of success due to higher blade and disk stresses. R.C.T.

N81-21080# AiResearch Mfg Co., Phoenix, Ariz.  
**REGENERATIVE ENGINE ANALYSIS PROGRAM (REAP)** Final Report, Oct. 1979 - May 1980  
R W Heldenbrand and W S Miller Jan 1981 143 p  
(Contract DAAK51-79-C-0057, DA Proj 1L1-82209-AH-78)  
(AD-A096113, Rept-21-3688, USAAVRADCOTR-81-D-2)  
Avail NTIS HC A07/MF A01 CSCL 21/5

This report presents the results of a 7-month program to conduct a preliminary design analysis of a 500-SHP fuel-efficient regenerative turboshaft engine and to identify promising heat exchanger concepts for such engines. A technology level consistent with that available in a 1980 demonstrator engine is assumed. Ninety engine/heat exchanger configuration and cycle combinations were examined. These included variations of compressor stage configuration, compressor pressure ratio, turbine design point inlet temperature, heat exchanger effectiveness, and heat-exchanger pressure loss. These engine combinations were evaluated and screened on the basis of fuel economy, weight and cost, and several promising configurations were chosen for more detailed analysis. The most promising of these was selected for preliminary design. The study results indicate that an engine configuration with a cycle pressure ratio of 10.1, a turbine temperature of 2300 F, and a heat exchanger with an effectiveness of 0.70 is most suitable for the 1980 environment. However, with fuel costs projected to increase, the analyses indicate that a tubular heat exchanger with an effectiveness approaching 0.80 would be more attractive. GRA

N81-21207# Northwestern Univ., Evanston, Ill.  
**BASIC RESEARCH ON CERAMIC MATERIALS FOR**

**ENERGY STORAGE AND CONVERSION SYSTEMS** Progress Report, 1 Dec. 1979 - 30 Nov. 1980  
D H Whitmore Dec 1980 64 p refs  
(Contract DE-AS02-76ER-02564)  
(COO-2564-8) Avail. NTIS HC A04/MF A01

Appropriate experimental probes are utilized for measuring the movement of ionic and electronic charge carriers in ceramic materials suitable for solid electrolyte and electrode applications in high performance, secondary battery, and fuel cell systems. Special emphasis is placed on developing (1) a better understanding of the effects of structure, impurities, and composition on charge carrier transport mechanisms in such materials, and (2) detailed knowledge of the kinetics and mechanisms in such materials, and (2) detailed knowledge of the kinetics and mechanism of reactions occurring (on a microscopic scale) at the electrode-electrolyte interfaces of energy storage and conversion systems. DOE

N81-21298# New Mexico Univ., Albuquerque Coll of Engineering  
**VARIABLE SPEED CONSTANT FREQUENCY CONSTANT VOLTAGE ALTERNATOR** Annual Report  
W W Grannemann, C E Yang, and P H Seo Jul 1980 41 p refs  
(Contract DE-AC01-79ET-29246)  
(DOE/ET-29246-T1, EE-266(80)DOE-808-1) Avail NTIS HC A03/MF A01

A test alternator was operated with digital control of its output frequency for variable shaft speed. The machine is a two pole alternator with power removed through slip rings. The output frequency of the alternator is controlled by rotating the field by stepping through sixteen coils around the rotor. Usually four coils are active at one time. The rotating field in the stationary coils of the stator is controlled by microcircuits. The control circuits are constructed with available low cost, low power integrated circuits (ICS). The test results from the first test alternator indicate the feasibility of using this type of alternator to convert available wind power directly to usable 60 hertz power. DOE

N81-21308# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (West Germany) Inst fuer Technische Physik  
**CONSTRUCTION AND PROPERTIES OF A QUADRUPOLE MASS SPECTROMETER DEVICE, DEVELOPED FOR THE INVESTIGATION OF A THERMIONIC BARIUM-CESIUM-DIODE VAPOR ATMOSPHERE** Ph.D. Thesis - Stuttgart Univ.  
Dieter Mahr Mar 1979 110 p refs in GERMAN, ENGLISH summary Report will also be announced as translation (ESA-TT-701)  
(DFVLR-FB-79-39) Avail NTIS HC A08/MF A01

Construction and operation characteristics of a thermionic converter, incorporating a measurement system which measures diode power output and simultaneously spectrographically analyzes the mixed vapor Ba Cs atmosphere of the thermionic diode are described. Results of measurement analysis of current voltage characteristics of the diode and of respective vapor phase, gas composition in the diode quantitatively show the reciprocal action of the vapor components in a mixed vapor system. Using this data, the atmospheric composition for optimum performance in terms of power output of the thermionic diode can be calculated. Author (ESA)

N81-21533# Mathtech, Inc., Arlington, Va.  
**STUDY OF FUEL CELL ON-SITE, INTEGRATED ENERGY SYSTEMS IN RESIDENTIAL/COMMERCIAL APPLICATIONS** Final Report  
R A Wakefield, S Karamchetty, R H Rand, W S Ku, and V Tekumalla Oct 1980 310 p refs  
(Contracts DEN3-89, DE-AI03-79ET-11272)  
(NASA-CR-165144, DOE/NASA-0089-80/1, E-FC-002) Avail NTIS HC A14/MF A01 CSCL 10A

Three building applications were selected for a detailed study: a low rise apartment building, a retail store, and a hospital.

## 05 ENERGY CONSERVATION

Building design data were then specified for each application, based on the design and construction of typical, actual buildings. Finally, a computerized building loads analysis program was used to estimate hourly and use load profiles for each building. Conventional and fuel cell based energy systems were designed and simulated for each building in each location. Based on the results of a computer simulation of each energy system, leveled annual costs and annual energy consumptions were calculated for all systems. T M

**N81-21536\*** Energy Research Corp., Danbury, Conn.  
**TECHNOLOGY DEVELOPMENT FOR PHOSPHORIC ACID FUEL CELL POWERPLANT, PHASE 2 Quarterly Report**  
Larry Christner Mar 1980 74 p  
(Contracts DEN3-87; DE-AI03-79ET-11272)  
(NASA-CR-165317; DOE/NASA/0067-79-3, ERC-18, QR-6)  
Avail. NTIS HC A04/MF A01 CSCL 10A

The technology development for materials, cells, and reformers for on site integrated energy systems is described. The carbonization of 25 cu cm, 350 cu cm, and 1200 cu cm cell test hardware was accomplished and the performance of 25 cu cm fuel cells was improved. Electrochemical corrosion rates of graphite/phenolic resin composites in phosphoric acid were determined. Three cells (5 in by 15 in stacks) were operated for longer than 7000 hours. Specified endurance stacks completed a total of 4000 hours. An electrically heated reformer was tested and is to provide hydrogen for 23 cell fuel cell stack. R C T

**N81-21537\*** National Aeronautics and Space Administration  
Lewis Research Center, Cleveland, Ohio  
**THE NASA-LERC WIND TURBINE SOUND PREDICTION CODE**  
Larry A Viterna 1981 10 p refs Presented at Second DOE/NASA Wind Turbine Dyn Workshop, Cleveland, 24-26 Feb 1981  
(Contract DE-AI01-76ET-20366)  
(NASA-TM-81737, DOE/NASA/20366-1, E-808) Avail NTIS HC A02/MF A01 CSCL 10B

Development of the wind turbine sound prediction code began as part of an effort to understand and reduce the noise generated by Mod-1. Tone sound levels predicted with this code are in good agreement with measured data taken in the vicinity Mod-1 wind turbine (less than 2 rotor diameters). Comparison in the far field indicates that propagation effects due to terrain and atmospheric conditions may amplify the actual sound levels by 6 dB. Parametric analysis using the code shows that the predominant contributors to Mod-1 rotor noise are (1) the velocity deficit in the wake of the support tower, (2) the high rotor speed, and (3) off-optimum operation. S F

**N81-21538\*** United Technologies Research Center East Hartford, Conn.  
**APPLICATIONS STUDY OF ADVANCED POWER GENERATION SYSTEMS UTILIZING COAL-DERIVED FUELS, VOLUME 1: EXECUTIVE SUMMARY Final Report**  
Fred L Robson Mar 1981 21 p  
(Contract NAS8-33996)  
(NASA-CR-161691, R81-9955343-9-Vol-1) Avail NTIS HC A02/MF A01 CSCL 10B

The technology status of phosphoric acid and molten carbon fuel cells, combined gas and steam turbine cycles, and magnetohydrodynamic energy conversion systems was assessed and the power performance of these systems when operating with medium-Btu fuel gas whether delivered by pipeline to the power plant or in an integrated mode in which the coal gasification process and power system are closely coupled as an overall power plant was evaluated. Commercially available combined-cycle gas turbine systems can reach projected required performance levels for advanced systems using currently available technology. The phosphoric acid fuel cell appears to be the next most likely candidate for commercialization. On pipeline delivery, the systems efficiency ranges from 40.9% for the phosphoric acid fuel cell to 63% for the molten carbonate fuel cell system. The efficiencies of the integrated power plants vary from approximately 39-40% for the combined cycle to 46-47% for the molten carbonate fuel cell systems. Conventional coal-fired

steam stations with flue-gas desulfurization have only 33-35% efficiency. A R H

**N81-21539\*** United Technologies Research Center, East Hartford, Conn.  
**APPLICATIONS STUDY OF ADVANCED POWER GENERATION SYSTEMS UTILIZING COAL-DERIVED FUELS, VOLUME 2 Final Report**  
Fred L Robson Mar 1981 402 p refs  
(Contract NAS8-33996)  
(NASA-CR-161692, R81-9955343-9-Vol-2) Avail NTIS HC A16/MF A01 CSCL 10B

Technology readiness and development trends are discussed for three advanced power generation systems combined cycle gas turbine, fuel cells, and magnetohydrodynamics. Power plants using these technologies are described and their performance either utilizing a medium-Btu coal derived fuel supplied by pipeline from a large central coal gasification facility or integrated with a gasification facility for supplying medium-Btu fuel gas is assessed. A R H

**N81-21547\*** Energy Research Corp., Danbury, Conn.  
**TECHNOLOGY DEVELOPMENT FOR PHOSPHORIC ACID FUEL CELL POWERPLANT (PHASE 2) Quarterly Report**  
Larry Christner Dec 1979 52 p refs  
(Contracts DEN3-87, DE-AI03-79ET-11272)  
(NASA-CR-165316, DOE/NASA/0067-79/2, QR-5) Avail NTIS HC A04/MF A01 CSCL 10A

The status of technology for the manufacturing and testing of 1200 sq cm cell materials, components, and stacks for on-site integrated energy systems is assessed. Topics covered include: (1) preparation of thin layers of silicon carbide, (2) definition and control schemes for volume changes in phosphoric acid fuel cells, (3) preparation of low resin content graphite phenolic resin composites, (4) chemical corrosion of graphite-phenolic resin composites in hot phosphoric acid, (5) analysis of electrical resistance of composite materials for fuel cells, and (6) fuel cell performance and testing. A R H

**N81-21548\*** Energy Research Corp., Danbury, Conn.  
**TECHNOLOGY DEVELOPMENT FOR PHOSPHORIC ACID FUEL CELL POWERPLANT (PHASE 2) Quarterly Report**  
Larry Christner Mar 1980 75 p refs  
(Contracts DEN3-87, DE-AI03-79ET-11272)  
(NASA-CR-165317, DOE/NASA/0067-79/3, QR-6) Avail NTIS HC A04/MF A01 CSCL 10A

Progress is reported in the development of technology for materials, cell components, and reformers for on-site integrated energy systems. Carbonization of 25 sq cm, 350 sq cm, and 1200 sq cm cell test hardware was accomplished. The performance of 25 sq cm fuel cells was improved by using this material. Electrochemical corrosion rates of graphite phenolic resin composites in phosphoric acid were determined. Three cell, 5 in by 15 in stacks operated for more than 7,000 hours. Specified endurance stacks completed 4,000 hours. A electrically heated reformer to provide hydrogen for a 23 cell fuel cell stack was tested. A R H

**N81-21551\*** Styrelsen for Teknisk Utveckling, Stockholm (Sweden)  
**ENERGY PRODUCTION FROM WASTE HEAT BY MEANS OF ELASTOMERS OR MEMORY METALS**  
Lars Ljung May 1980 49 p refs In SWEDISH  
(STU-79-6394) Avail NTIS HC A03/MF A01

Calculation of the energy of an ideal heat engine for a flow between waste water and cooling water was made. Also the Brayton, Carnot and Rankine cycles were computed as well as the processes with nitinol or elastomers as converters. It was shown that half the energy can be recovered by a nitinol heat engine which is comparable to or has better efficiency than the Rankine cycle. The memory metal makes better use of the temperature difference than the Rankine cycle. Elastomers or Gadolinium may be used to utilize energy at low waste heat temperatures. DOE



**N81-21552#** Automation Industries, Inc., Silver Spring, Md  
Vitro Labs Div

**SOLAR ENERGY SYSTEM PERFORMANCE EVALUATION:  
MOULDER CORPORATION, WEST GREENWOOD, INDIANA**

Progress Report, Oct. 1979 - Apr. 1980

C Y Whitehead 1980 74 p refs

(Contract DE-AC01-79CS-30027)

(SOLAR/1001-80/14) Avail NTIS HC A04/MF A01

The performance of a single-family home which has 704 sq ft of air, flat-plate collectors and an 850 cu ft rock bin buried under the house is discussed. The system was designed to contribute 84% of the space heating and 100% of the water heating. Actual contributions were 17% of the hot water load and 21% of the space heating load. Problems with the systems are described. DOE

**N81-21572#** Los Alamos Scientific Lab., N Mex  
**PROSPECTS OF FUEL CELLS WITH ALKALINE, SOLID-POLYMER, AND SUPERACID ELECTROLYTES AS POWER SOURCES FOR ELECTRIC VEHICLES**

S. Srinivasan 1981 38 p refs Presented at the Elec and Hybrid Vehicle Advanced Technol Seminar, Pasadena, Calif., 8-9 Dec 1980. Submitted for publication

(Contract W-7405-eng-38)

(LA-UR-81-293, CONF-801242-1)

Avail NTIS

HC A03/MF A01

The state of the art and expected progress with fuel cells using alternatives to phosphoric acid as the electrolyte, that is, alkaline, solid polymer, and superacid electrolytes is reviewed. Alkaline fuel cells are appealing because of the good performance at less than 1000 C and potential for finding nonnoble metal catalysts, but are handicapped by the fact that pure hydrogen will have to be stored and used as the fuel. The solid polymer electrolyte fuel cell has the best prospect for attaining the highest power densities, which are important from the point of view of reducing cost, weight, and volume of the power plant. However, this type of fuel cell uses an expensive electrolyte membrane and has a difficult water management problem. Enthusiasm is growing for the development of fuel cells using organic superacids as the electrolyte. The bulk of the studies to date are with aqueous trifluoromethanesulfonic acid. Electrode kinetics of the oxygen reduction action are sufficiently enhanced in the superacids as compared with phosphoric acid. The noble metal content of the electrodes can be minimized and perhaps eliminated in fuel cells with such electrolytes. DOE

**N81-21578#** Midwest Research Inst., Golden, Colo Solar Energy Research Inst

**WIND ENERGY SYSTEMS INFORMATION USER STUDY**

W W Belaw, B L Wood, T L Marie, and C L Reinhardt

Jan 1981 278 p refs

(Contracts DE-AC02-77CH-00178, EG-77-C-01-4042)

(SERI/TR-751-749) Avail NTIS HC A13/MF A01

The results of a series of telephone interviews with potential users of information on wind energy conversion are described. These interviews, part of a larger study covering nine different solar technologies, attempted to identify the type of information each distinctive group of information users needed, and the best way of getting information to that group. Groups studied include, wind energy conversion system researchers, wind energy conversion system manufacturer representatives, wind energy conversion system distributors, wind turbine engineers, utility representatives, educators, county agents and extension service agents, and wind turbine owners. DOE

**N81-21581#** Advanced Mechanical Technology, Inc., Newton, Mass

**DESIGN AND DEVELOPMENT OF STIRLING ENGINES FOR STATIONARY POWER GENERATION APPLICATIONS IN THE 500 TO 3000 HORSEPOWER RANGE, VOLUME 1**

Mark Schuetz, Joseph Gerstmann, Lawrence Hoagland, Walter Syniuta, Rolf Knsher, and Cyril Randall 15 Sep 1980 294 p refs

(Contract DE-AC02-79ET-15207)

(DOE/ET-15207/T2-Vol-1) Avail NTIS HC A13/MF A01

The conceptual design and associated cost estimates of a stationary Stirling engine capable of being fueled by a variety of heat sources are discussed with emphasis on coal firing. The development and evaluation of conceptual designs are separated into two broad categories: the A designs which represent the present state-of-the-art and which are demonstrable by 1985 with minimum technical risk, and the B designs which involve advanced technology and therefore would require significant research and development prior to demonstration and commercialization, but which may ultimately offer advantages in terms of lower cost, better performance, or higher reliability. DOE

**N81-21582#** Aerojet Energy Conservation Co., Sacramento, Calif  
**IMPROVED LIQUID/SOLIDS HANDLING MODULE Final Report, 1 Sep. 1979 - 31 Oct. 1980**

L K West 1980 65 p refs

(Contract DE-AC03-79ET-27193)

(DOE/ET-27193/T1, FR-2321 01)

Avail NTIS

HC A04/MF A01

A Mobile Liquid/Solids handling (L/S) unit was constructed that is the active element for a low cost Advanced Primary Geothermal Heat Exchanger (APEX), presently under development. The L/S system incorporates two alternating hydrocyclone-accumulator tank combinations and an injection pump. Sand particles are injected into the main flow and then separated and recirculated at capture efficiencies of greater than 99%. The system was tested at varying flowrates, solids concentrations, and particle sizes to determine an optimum operating point. DOE

**N81-21582#** Rosenblatt (M) and Son, Inc., New York  
**PRELIMINARY DESIGNS FOR MODULAR OTEC PLAT-FORMS' STATION-KEEPING SUBSYSTEMS, VOLUME 3 Final Report**

29 Feb. 1980 176 p refs

(Contracts DE-AI01-77ET-20398; EG-77-A-29-1078)

(DOE/NOAA/OTEC-30-Vol-3, MRS-Rept-804206) Avail. NTIS

HC A09/MF A01

The basic design assumptions, the technical approach followed, and the results of design iterations, reliability and performance analyses are given. The summary cost estimates for each of the alternative SKSS concepts considered are given, and a time schedule for the recommended concept is provided. The effects of varying some of the important parameters used in SKSS design on the performance and cost of the mooring system are investigated and results presented. The tests required and other developmental recommendations in order to verify and confirm the basic design assumptions are discussed. DOE

**N81-21612#** Argonne National Lab., Ill

**STARFIRE: A COMMERCIAL TOKAMAK FUSION POWER PLANT STUDY, VOLUME 2**

Sep 1980 863 p refs Prepared in cooperation with McDonnell Douglas Astronautics Co., St. Louis, General Atomic Co., and Parsons (Ralph M.) Co., Los Angeles

(Contract W-31-109-eng-38)

(ANL/FPP-80-1-Vol-2) Avail NTIS HC A99/MF A01

The construction of the plant and the balance of the plant design are discussed. Radioactivity, heat transport and energy conversion, tritium systems, cryogenics, and instrumentation and control equipment are also discussed. The maintenance and operation of the plant are described. TM

**N81-21626#** Atomic Energy Commission Research Establishment, Riso (Denmark) Engineering Dept

**INVESTIGATIONS OF STRUCTURAL DYNAMICS ON THE GEDSER WTG AND ON NEW DANISH WIND TURBINES**

P Lundsager and C J Christensen Dec 1978 57 p refs Presented at 1st Meeting of Experts on Struc Dyn/IEA

Implementary Agreement for Cooperation in the Develop of Large Scale Wind Energy Conversion Systems, Munich Oct 1978

(RISOE-M-2146, ISBN-87-550-0695-7 ISSN-0418-6435)

Avail NTIS HC A04/MF A01

Structural dynamic analyses are reviewed for an existing wind turbine and two prototypes. The upwind located rotors

## 05 ENERGY CONSERVATION

have an inner part with a tubular steel beam and glass reinforced plastic (GRP) shells and outer part of a spun GRP main spar with GRP shells. Results from a conventional beam model are presented. Structural and electrical output data from the operating turbine are summarized. A comparison of the spectrum of the electrical power output and a power spectrum of the torque in the induction generator shaft is made with a mathematical model of the system. Author (ESA)

**N81-21629#** Texas A&M Univ., College Station. Dept of Chemistry  
**METAL CHELATE CATALYSTS FOR FUEL CELLS Annual Report**

Minoru Tsutsui, Ronald Darby, Ralph White, Gilbert Albello, Paul Deininger, and J. Bellieu. Aug 1980. 28 p  
(Contract GRI-6014-363-0174)  
(PB81-132953, GRI-79/0059) Avail NTIS  
HC A03/MF A01 CSCL 10B

An aromatic dialdehyde, 9,9-dimethyl-4,5-xanthene-dicarboxaldehyde, suitable for the synthesis of a stacked polymer of meso-tetraphenyl-porphyrin was synthesized in high yield. From this, a dimer was formed. The cobalt complex of this dimer, along with metal complexes of polymers of phthalocyanine and TAA were tested for catalytic activity for the reduction of oxygen. The stacked dimer of TPP and the sheet polymer of TPP exhibited greater catalytic activity as the cobalt complexes than all other compounds tested with the exception of CoTAA. GRA

**N81-21632#** Rensselaer Polytechnic Inst., Troy, N. Y. Dept of Mechanical Engineering

**AERODYNAMIC CHARACTERISTICS OF THE TARP (TOROIDAL ACCELERATOR ROTOR PLATFORM) WIND ENERGY CONVERSION SYSTEM Final Report, 1978 - 1979**

Robert E. Duffy, Chris Jaran, and Charles Ungermann. Feb 1980. 72 p refs  
(PB81-140675, NYSERDA-80-7) Avail NTIS  
HC A04/MF A01 CSCL 10A

Augmented wind energy conversion systems (WECS) are designed to increase the ambient wind velocity at the turbine blades. The Toroidal Accelerator Rotor Platform (TARP) is an augmenting structure for use with horizontal axis WECS. Its shape resembles that of a horizontally oriented wheel rim and is intended to be built into or retrofitted onto structures built for other purposes, which could increase the use of WECS in urban areas. Variations of the basic TARP structure, about three feet in diameter, were tested in a wind tunnel to determine the optimum design. The model system produced up to 4.5 times the power which the rotor and generator extracted without the TARP. GRA

**N81-21634#** New York Univ., N. Y. Dept of Applied Science

**THE LEBOST WIND TURBINE EXPERIMENTAL PROGRAM Progress Report, Sep. 1978 - May 1980**

G. Miller, M. Hoffert, B. Rugg, and D. Corren. May 1980. 55 p refs  
(PB81-141467, NYSERDA-80-16) Avail NTIS  
HC A04/MF A01 CSCL 10A

The Leboast Wind Turbine is unique in two respects: it consists of a vertical axis turbine which is encased in a perforated hemispherical shroud which acts to focus or concentrate ambient wind energy onto the turbine blades, and the turbine's shaft is directly coupled to a water twister/heat brake assembly which heats water via direct mechanical agitation. In other words, the turbine can be used to heat water without electrical interface. Results of an experimental field test/evaluation of a 20 foot diameter leboast turbine are reported. GRA

**N81-21635#** Aeronautical Research Inst. of Sweden, Stockholm  
**THE VELOCITY INDUCED BY THE WAKE OF A WIND TURBINE IN A SHEAR LAYER, INCLUDING GROUND EFFECT**

Bo C. A. Johansson. Jun 1980. 43 p  
(PB81-142184, FFA-133) Avail NTIS HC A03/MF A01 CSCL 10A

A theory is developed for the calculation of the velocity field induced by the wake of a horizontal axis wind turbine in a wind shear layer and in the vicinity of a plane ground surface, when the force distribution of the turbine is known. The turbine is approximated by a disk area of continuous distributions of thrust and force parallel to the disk plane. Its wake is represented by a semi-infinite cylinder of distributed vorticity. A numerical example is calculated. The theory is based upon assumptions strictly valid only for small perturbations of the undisturbed flow. However, the results may have a wider range of applicability. GRA

**N81-21916#** Ohio State Univ., Columbus  
**PRELIMINARY DESIGN PROCEDURE FOR HIGH POWER DENSITY MHD GENERATORS Final Report, Jun. - Aug. 1978**

Pau-Chang Lu. Wright-Patterson AFB, Ohio. AFWAL Dec 1980. 37 p refs. Sponsored by AF  
(AD-A096144, AFWAL-TR-80-2077) Avail NTIS  
HC A03/MF A01 CSCL 10/2

The steps to be taken in the preliminary design of a high power density, segmented Faraday or diagonal, open-cycle MHD generator are formalized. The recommended design procedure starts with the optimum choice of the combustion chamber pressure. The optimization is based on a semi-empirical expression of the effective power density, developed by Smith and Nichols. As a result of this optimization, a rough estimate of the realizable power density is made, which yields the order of magnitude of the transverse dimension keeping the length-to-diameter ratio around 10 for the desired power output. It is then recommended that the area variation and length be calculated on the basis of an isothermal core flow. This preliminary shape of the duct will serve as the base on which alterations can be made by a computer to accommodate wall effects in detailed design stage that will follow the preliminary consideration. An alternate route for the preliminary design is provided by using scaling laws. Starting with a well-designed generator which is demonstrably high in power density, dynamically similar units can be produced using these laws. The laws are developed following the modern procedure of ordering. Numerical examples are provided to illustrate the procedure. GRA

**N81-21919#** McElroy (Ralph) Co., Austin, Tex.  
**MAX PLANCK INSTITUTE FOR PLASMA PHYSICS**

Brigitte Rothlein and Uwe Schumacher. Aug 1980. 114 p. Transl. into ENGLISH of "Max-Planck-Gesellschaft zur Foerderung der Wissenschaften Berichte und Mitteilungen". Max Planck Inst. for Plasma Physics, West Germany, 1977. Prepared for LASL (Contract W-7405-eng-36)  
(LA-tr-80-25) Avail NTIS HC A06/MF A01

Some insight is provided on the various problems that are encountered on the road towards development of a fusion reactor. Several important experimental systems are described as well as solutions to the difficult physical and technical problems. RCT

**N81-21920#** Gilbert/Commonwealth, Reading, Pa.  
**OXYGEN-ENRICHED AIR PRODUCTION FOR MHD POWER PLANTS**

May 1980. 46 p refs  
(Contracts DE-AC01-77ET-11058, ET-78-C-01-2683)  
(DOE/ET-11058/T4) Avail NTIS HC A03/MF A01

An analysis of several of the cryogenic air separation process cycle variations and compression schemes designed to minimize net system power requirements for supplying pressurized, oxygen-enriched air to the combustor of a 2000 MWt (coal input) baseload MHD power plant is presented. DOE

## 06

# ENERGY TRANSPORT, TRANSMISSION, AND DISTRIBUTION

Includes transport of fuels by pipelines, tubes, etc., microwave power transmission, and superconducting power transmission

**A81-21295**      **Excitation of a superconducting strip resonator by a system of point Josephson contacts.** S. I. Zub (Akademila Nauk Ukrainskoi SSR, Fiziko-Tekhnicheskii Institut Nizkikh Temperatur, Kharkov, Ukrainian SSR) (*Zhurnal Tekhnicheskoi Fiziki*, vol. 50, Apr 1980, p. 854-857.) *Soviet Physics - Technical Physics*, vol. 25, Apr 1980, p. 512-514. Translation.

The amplitudes of oscillations generated by a system of spot contacts in a strip resonator, the shape of the current-voltage curve, and the emitted power are studied as a function of the resonator and contact system parameters. It is shown that the effective excitation of a superconducting strip resonator by a system of Josephson point contacts is possible within a range of well defined relations between the parameters of the resonator and the contact system. The conditions for optimum excitation are formulated      V L

**A81-24831 \***      **SPS design with solid-state transmitter.** M. Ettenberg (RCA David Sarnoff Research Center, Princeton, N.J.). *Space Solar Power Review*, vol. 1, no. 4, 1980, p. 345-349. Contract No. NAS9-15755

The replacement of the klystrons in the microwave transmitter in the SPS leads to major redesign considerations. Several curves are presented which show the interrelations of the major design features, the power level and the transmitting and receiving dimensions.

(Author)

**A81-24832**      **Workshop on the microwave power transmission system for the solar power satellite - Review panel report.** J. W. Freeman and W. L. Wilson (Rice University, Houston, Tex.). *Space Solar Power Review*, vol. 1, no. 4, 1980, p. 361-371.

**A81-25011**      **An assessment of the use of chemical reaction systems for thermal energy transport.** H. T. Chen, J. C. Hsu, W. R. Mounce (Gilbert Associates, Inc., Reading, Pa.), and F. D. Nankani (Ecolaire, Inc., Malvern, Pa.). In *Alternative energy sources II*, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2. Washington, D. C., Hemisphere Publishing Corp., 1981, p. 553-565. Research sponsored by the Electric Power Research Institute and U.S. Department of Energy

A means of transporting thermal energy by employing waste heat to drive a reversible reaction in the endothermic direction is described. Most promising among the chemical combinations available for this effect is the Benzene/Cyclohexane system, whose reaction products would be transported via pipeline to another location where the reversible reaction would be conducted to release the exothermic heat of reaction for its intended application. These reaction products are then returned to the heat source by means of another pipeline, thereby completing the cycle. Details on the conceptual design are presented together with life cycle cost analysis and possible market potential      O.C

**A81-30109 #**      **Energy transport system optimization for distributed networks of solar collectors.** J. S. Barnhart (Battelle Pacific Northwest Laboratories, Richland, Wash.). *American Society of Mechanical Engineers, Energy-Sources Technology Conference and Exhibition, Houston, Tex., Jan 18-22, 1981, Paper 81-SOL-1* 8 p. 10 refs. Members, \$2.00, nonmembers, \$4.00. Research supported by the U.S. Department of Energy

A computer program, ETRANS, was developed for optimizing the piping network associated with distributed networks of solar collectors. ETRANS employs frequently cited field layouts for dish and trough collectors. Using discrete piping component sizes, ETRANS determines realistic estimates of operating expenses and capital item costs. This paper describes the field layouts employed, the system performance calculations, and the costing methodology. Also included are results of preliminary simulations of dish and trough collector fields over a range of sizes and operating parameters (Author)

**N81-16533\*#**      **National Aeronautics and Space Administration Lyndon B. Johnson Space Center, Houston, Tex. SOLAR POWER SATELLITE MICROWAVE TRANSMISSION AND RECEPTION** R. H. Dietz. Dec 1980. 271 p. refs. Workshop held in Houston, Tex., 15-18 Jan 1980. (NASA-CP-2141, S-503) Avail. NTIS HC A16/MF A01 CSCL 10A

Numerous analytical and experimental investigations related to SPS microwave power transmission and reception are reported. Aspects discussed include system performance, phase control, power amplifiers, radiating elements, rectenna, solid state configurations, and planned program activities.

**N81-16535\*#**      **Boeing Aerospace Co., Seattle, Wash. SOLAR POWER SATELLITE MICROWAVE POWER TRANSMISSION SYSTEM DESCRIPTION EXECUTIVE SUMMARY** Gordon R. Woodcock. In *NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception*. Dec 1980. p. 18-27. Avail. NTIS HC A16/MF A01 CSCL 10A

The history of the concept of microwave power beaming to Earth is reviewed with emphasis on transmission frequency selection. Constraints on the system power level results from (1) required rejection of waste heat resulting from inefficiencies in the cover conversion of dc electric power to microwave power, (2) the rf power intensity in the ionosphere, and (3) the effect of sidelobe level on aperture illumination factors. Transmitter arrangement, the power distribution system, attitude control, subarrays, waveguides, and alignment are discussed      A R H

**N81-16536\*#**      **Raytheon Co., Lexington, Mass. INITIAL MPTS STUDY RESULTS: DESIGN CONSIDERATIONS AND ISSUES**

Owen E. Maynard. In *NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception*. Dec 1980. p. 28-32. Avail. NTIS HC A16/MF A01 CSCL 10A

One of the key issues identified during investigations of microwave power transmission systems from 1965 to 1976 was the need to assure that the billions of diodes on ground-based rectennas are sufficiently reliable to support long life times of approximately 30 years. Major systems studies conducted focused on waveguides, radio frequency interference and biological considerations, the relationship between performance, weight, and cost, risk assessment, crossed field directional amplifier noise, a 48 kW klystron, effects of the environment on propagation and phase control, rectenna technology, a rationale for the ground power density region, alternate technologies for orbital assembly, ionospheric effects and phase control, and reception conversion (rf to dc collector/converter)      A R H

**N81-16537\*#**      **Boeing Aerospace Co., Seattle, Wash. SPS LARGE ARRAY SIMULATION** S. Rathjen, B. R. Sperber, and E. J. Nalos. In *NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception*. Dec 1980. p. 33-42.

Avail. NTIS HC A16/MF A01 CSCL 10A

Three types of computer simulations were developed to study the SPS microwave power transmission system (MPTS). The radially symmetric array simulation is low cost and is utilized to investigate general overall characteristics of the spacenna at the array level only. 'Tiltman', a subarray level simulation program, is used to study the effects of system errors which modify the

## 06 ENERGY TRANSPORT, TRANSMISSION, AND DISTRIBUTION

far-field pattern. The most recently designed program, 'Modmain,' takes the detail of simulation down to the RF module level and so to date is the closest numerical model of the reference design. A R H

**N81-16543\*** Lockheed Engineering and Management Services Co., Inc., Houston, Tex  
**DESIGN AND BREADBOARD EVALUATION OF THE SPS REFERENCE PHASE CONTROL SYSTEM CONCEPT**  
P M Hopkins and V R Rao /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 119-128 refs

(Contract NAS9-15800)  
Avail NTIS HC A16/MF A01 CSCL 10A

The total breadboard system includes one pilot transmitter, one pilot receiver, nine phase distribution units, and two power transponders. With this complement of equipment, segments of a typical phase distribution system can be assembled to facilitate the evaluation of significant system parameters. The achievable accuracy of a large phase distribution system, the sensitivity of the system to parameter variations, and the limitations of commercially available components in such applications were determined. T M

**N81-16544\*** LinCom Corp., Los Angeles, Calif  
**COHERENT MULTIPLE TONE TECHNIQUE FOR GROUND BASED SPS CONTROL**  
C M Chie /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1981 p 129-138 refs  
(Contract NAS9-15782)  
Avail NTIS HC A16/MF A01

The control system achieves beam forming by adjusting the phases of the individual transmitters onboard the solar power satellite. To specify the correct amount of adjustments, the phases of the power beams from each individual transmitter arriving at the rectenna center are measured, the appropriate corrections determined, and then relayed to the satellite. The functional operation of the ground based phase control concept is summarized. The key issues examined were measurement waveform design and selection, phase measurement pilot reference design and selection, uplink phase corrections command link format and design, and system synchronization techniques. T M

**N81-16545\*** Novar Electronics Corp., Barberton, Ohio  
**AN INTERFEROMETER-BASED PHASE CONTROL SYSTEM**  
James H Ott and James S Rice /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1981 p 139-140 refs

Avail NTIS HC A16/MF A01 CSCL 10A

A system for focusing and pointing the SPS power beam is discussed. The system is ground based and closed loop. One receiving antenna is required on earth. A conventional uplinked data channel transmits an 8-bit phase error correction back to the SPS for sequential calibration of each power module. Beam pointing resolution is better than 140 meters at the rectenna. T M

**N81-16546\*** Novar Electronics Corp., Barberton, Ohio.  
**A SONIC SATELLITE POWER SYSTEM MICROWAVE POWER TRANSMISSION SIMULATION**  
James H Ott and James S Rice /in NASA Johnson Space Center Solar Power Microwave Transmission and Reception Dec 1981 p 141-143 refs

Avail NTIS HC A16/MF A01 CSCL 10A

A simulator is described which generates and transmits a beam of audible sound energy mathematically similar to the SPS power beam. The simulator provides a laboratory means for analysis of ground based closed loop SPS phase control and of ionospheric effects on the SPS microwave power beam.

Author

**N81-16547\*** Boeing Aerospace Co., Seattle, Wash  
**SPS PHASE CONTROL STUDIES**  
W W Lund, B R Sperber, and G R Woodcock /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 144-153

Avail NTIS HC A16/MF A01 CSCL 10A

To properly point and form the satellite microwave power beam, the outputs of the power amplifiers in the transmitting array must be phased in a specific and coherent fashion. A retrodirective CW phase conjugating system using a spread spectrum uplink signal and a reference phase signal that is distributed via fiber optics, was selected as the control system for SPS. The design details are presented and applications of the system are discussed. T M

**N81-16548\*** Boeing Aerospace Co., Seattle, Wash  
**SPS FIBER OPTIC LINK ASSESSMENT**  
T O Lindsay and E J Nalos /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1981 p 154-158

Avail NTIS HC A16/MF A01 CSCL 10A

Fiber optic technology was tentatively selected in the SPS baseline design to transmit a stable phase reference throughout microwave array. Over a hundred thousand microwave modules are electronically steered by the phase reference signal to form the power beam at the ground receiving station. The initially selected IF distribution frequency of the phase reference signal was at 980 MHz or a submultiple of it. Fiber optics offers some significant advantages in view of the SPS application. Optical transmission is highly immune to EMI/RFI, which is expected to be severe when considering the low distribution power. In addition, there are savings in both mass, physical size, and potentially in cost. T M

**N81-16549\*** Rockwell International Corp., Pittsburgh, Pa  
**IONOSPHERIC EFFECTS IN ACTIVE RETRODIRECTIVE ARRAY AND MITIGATING SYSTEM DESIGN**  
A K Nandi and C Y Tomita /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 159-168 refs

Avail NTIS HC A16/MF A01 CSCL 10A

The operation of an active retrodirective array (ARA) in an ionospheric environment (that is either stationary or slowly-varying) was examined. The restrictions imposed on the pilot signal structure as a result of such operation were analyzed. A 3 tone pilot beam system was defined which first estimates the total electron content along paths of interest and then utilizes this information to aid the phase conjugator so that correct beam pointing can be achieved. T M

**N81-16550\*** Boeing Aerospace Co., Seattle, Wash  
**HIGH EFFICIENCY SPS KLYSTRON DESIGN**  
E. J Nalos /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 175-184

Avail NTIS HC A16/MF A01

The most likely compact configuration to realize both high efficiency and high gain (approx 40 dB) is a 5-6 cavity design focused by an electromagnet. The basic klystron efficiency cannot be expected to exceed 70-75% without collector depression. It was estimated that the net benefit of a 5 stage collector over a 2 stage collector is between 1.5 and 3.5 kW per tube. A modulating anode is incorporated in the design to enable rapid shutoff of the beam current in case the rf drive should be removed. T M

**N81-16551\*** Varian Associates, Palo Alto, Calif  
**HIGH EFFICIENCY KLYSTRON FOR THE SPS APPLICATION**  
A D LaRue /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 185-205 refs  
Avail NTIS HC A16/MF A01 CSCL 10A

The enhancement of klystron efficiency through the use of collector depression, that is by recovering energy from the spent electron beam after microwave amplification, was investigated. Design considerations included noise, harmonics, cooling, and service life. The mod anode, to be employed for beam control, and the depressed collector, used in spent electron beam energy recovery, are described. T M

**N81-16552\*** National Aeronautics and Space Administration  
Lewis Research Center, Cleveland, Ohio

**ANALYTICAL INVESTIGATION OF EFFICIENCY AND PERFORMANCE LIMITS IN KLYSTRON AMPLIFIERS USING MULTIDIMENSIONAL COMPUTER PROGRAMS; MULTI-STAGE DEPRESSED COLLECTORS; AND THERMIONIC CATHODE LIFE STUDIES**

H G Kosmahl / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 206-213 refs

Avail NTIS HC A16/MF A01 CSCL 10A

An extensive parametric investigation was performed of the extraction of energy in output gaps of klystron amplifiers, using 3-D computer programs. Due to complexity of the program which used a hydrodynamic, axially and radially deformable disk ring model and the resulting long computing time, the investigation was limited to the output gap, by far the most important and difficult part of the klystron interaction. Results show that, for a confined flow focused beam throughout the penultimate cavity, radial velocities remain very small and the beam is highly laminar. It was, therefore, concluded that possible errors resulting from treating only the output cavity in 3-D would remain small. T M

**N81-16553\*** Raytheon Co., Lexington, Mass

**THE ADAPTING OF THE CROSSED-FIELD DIRECTIONAL AMPLIFIER TO THE REQUIREMENTS OF THE SPS Progress Report**

William C Brown / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 214-222 refs

Avail NTIS HC A16/MF A01 CSCL 10A

Progress was reviewed with special emphasis upon recent developments in controlling the phase and amplitude of the microwave power output, and a perceived architecture for its placement in the subarray. Development in the critical pivotal areas of noise, potential cathode life, and efficiency are reported. T M

**N81-16554\*** Boeing Aerospace Co., Seattle, Wash

**REFERENCE SYSTEM DESCRIPTION**

C D Lunden, W W Lund, and E J Nalos / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 227-234

Avail NTIS HC A16/MF A01 CSCL 10A

Several candidate antenna configurations are evaluated in terms of weight, efficiency, and structural rigidity. Particular emphasis is given to the waveguide slot array and its application to solar power satellites SPS. The electronic aspects of an SPS specific waveguide slot array are defined. R C T

**N81-16562\*** Jet Propulsion Lab., California Inst of Tech., Pasadena  
Telecommunications Science and Engineering Div

**RECTENNA ARRAY MEASUREMENT RESULTS**

Richard M Dickinson / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 307-318 refs

Avail NTIS HC A16/MF A01 CSCL 10A

The measured performance characteristics of a rectenna array are reviewed and compared to the performance of a single element. It is shown that the performance may be extrapolated from the individual element to that of the collection of elements. Techniques for current and voltage combining are demonstrated. The array performance as a function of various operating parameters is characterized and techniques for overvoltage protection and

automatic fault clearing in the array are demonstrated. A method for detecting failed elements also exists. Instrumentation for deriving performance effectiveness is described. Measured harmonic radiation patterns and fundamental frequency scattered patterns for a low level illumination rectenna array are presented. M G

**N81-16563\*** National Aeronautics and Space Administration  
Marshall Space Flight Center, Huntsville, Ala

**MICROWAVE POWER TRANSMISSION SYSTEM WORKSHOP, SESSION ON SOLID STATE**

Woolsey Fennell / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 323-327

Avail NTIS HC A16/MF A01 CSCL 10A

The development of solid state technology for solar power satellite systems is briefly addressed. The economic advantages of solid state based systems are listed along with some conclusions and issues regarding specific design concepts. M G

**N81-16564\*** Boeing Aerospace Co., Seattle, Wash

**MODIFIED REFERENCE SPS WITH SOLID STATE TRANSMITTING ANTENNA**

G R Woodcock and B R Sperber / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 328-337

Avail NTIS HC A16/MF A01 CSCL 10A

The development of solid state microwave power amplifiers for a solar power satellite transmitting antenna is discussed. State-of-the-art power-added efficiency, gain, and single device power of various microwave solid state devices are compared. The GaAs field effect transistors and the Si-bipolar transistors appear potentially feasible for solar power satellite use. The integration of solid state devices into antenna array elements is examined and issues concerning antenna integration and consequent satellite configurations are examined. M G

**N81-16565\*** Boeing Aerospace Co., Seattle, Wash

**SPS SOLID STATE ANTENNA POWER COMBINER**

G W Fitzsimmons / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 338-347

Avail NTIS HC A16/MF A01 CSCL 10A

A concept for a solar power satellite antenna power combiner which utilizes solid state dc-rf converters is described. To avoid the power combining losses associated with circuit hybrids it is proposed that the power from multiple solid state amplifiers be combined by direct coupling of each amplifier's output to the radiating antenna structure. The selected power-combining antenna consists of a printed (metalized) microstrip circuit on a ceramic type dielectric substrate which is backed by a shallow lightweight aluminum cavity which sums the power of four microwave sources. The antenna behaves like two one-half wavelength slot-line antennas coupled together via their common cavity structure. A significant feature of the antenna configuration selected is that the radiated energy is summed to yield a single radiated output phase which represents the average insertion phase of the four power amplifiers. This energy may be sampled and, by comparison with the input signal, one can phase error correct to maintain the insertion phase of all solid state power combining modules at exactly the same value. This insures that the insertion phase of each SPS power combining antenna module is identical. An experiment verification program is described. M G

**N81-16566\*** Rockwell International Corp., Pittsburgh, Pa

**SOLID STATE SYSTEMS CONCEPTS**

I K Schroeder / In NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 348-357

Avail NTIS HC A16/MF A01 CSCL 10A

Two prototype solid state phased array systems concepts for potential use in the Solar Power Satellite are described, the end-mounted and the sandwich systems. In both concepts, the beam is centered on the rectenna by means of phase conjugation.

## 06 ENERGY TRANSPORT, TRANSMISSION, AND DISTRIBUTION

of a pilot signal emanating from the ground. In the end-mounted system 36-watt amplifiers are mounted on the ground-plane, whereas in the sandwich the amplifiers are elevated to the dipoles, and their waste heat is dissipated by beryllium oxide discs. The feed lines are underneath the ground-plane, and a coaxial transmission line is carried all the way to the amplifier input. Also discussed is solid state amplifier development. M G

### **N81-16567\*# RCA Corp., Princeton, N J SOLID STATE DEVICE TECHNOLOGY FOR SOLAR POWER SATELLITE**

David G Weir /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 358-366

Avail: NTIS HC A16/MF A01 CSCL 10A

The feasibility of using solid state elements in the solar power satellite transmitter system is addressed. Recommendations are given concerning device types, the antenna modules, and the overall antenna system. The development of a solid state amplifier based on GaAs field effect transistor devices is also described. M G

### **N81-16568\*# Raytheon Co., Waltham, Mass Equipment Div.**

#### **SOLID STATE SANDWICH CONCEPT: DESIGNS, CONSIDERATIONS AND ISSUES Progress Report**

Owen E Maynard /in NASA Johnson Space Center Solar Power Satellite Microwave Transmission and Reception Dec 1980 p 367-372

Avail: NTIS HCA16/MFA01 CSCL 10A

Progress in analysis and design of solid state approaches to the solar power satellite microwave power transmission system is reviewed with special emphasis on the Sandwich concept and the issues of maintenance of low junction temperatures for amplifiers to assure acceptable lifetime. Ten specific issues or considerations are discussed and their resolution or status is presented. Author

### **N81-16584\*# National Aeronautics and Space Administration Marshall Space Flight Center, Huntsville, Ala**

#### **DEVELOPMENT AND TESTING OF HEAT TRANSPORT FLUIDS FOR USE IN ACTIVE SOLAR HEATING AND COOLING SYSTEMS Final Report**

John C Parker Jan 1981 43 p Sponsored in cooperation with DOE Prepared in part by Houston Chemical Corp., Corpus Christi, Tex

(Contract NAS8-32255)

(NASA-TM-82395) Avail: NTIS HC A03/MF A01 CSCL 10B

Work on heat transport fluids for use with active solar heating and cooling systems is described. Program objectives and how they were accomplished including problems encountered during testing are discussed. S F

### **N81-17288# McMullen (John J.) Associates, Inc., New York, NY**

#### **NATIONAL PETROLEUM RESERVE - ALASKA: MARINE TRANSPORTATION SYSTEM ANALYSIS Final Report**

M D MacPherson Oct 1980 486 p refs

(Contract DO-A01-78-00-3082; MA Proj 2791-4072)

(PB81-105041, Rept-2791/4072-F, MA-RD-940-81013) Avail: NTIS HC A21/MF A01 CSCL 21D

The analysis provides the transportation cost for icebreaking and ice strengthened surface tankers and LNG carriers over a range of ship sizes and propulsion power levels and for submersible tankers for each of a number of routes from four loading ports in the Arctic to discharge ports on the East and Gulf Coasts of the United States. The report includes discussions of the technical factors related to Arctic ship construction and operation, ice technology, and the environmental and institutional factors which must be included in an evaluation of an Arctic marine transportation system. GRA

### **N81-17289# McMullen (John J.) Associates, Inc., New York, N.Y.**

#### **NATIONAL PETROLEUM RESERVE - ALASKA: MARINE TRANSPORTATION SYSTEM ANALYSIS. EXECUTIVE SUMMARY**

M. D. Macpherson Oct. 1980 25 p

(Contract DO-A01-78-00-3082; MA Proj. 2791-4072)

(PB81-105033; MA-RD-940-81012) Avail. NTIS

HC A02/MF A01 CSCL 21D

The analysis provides the transportation costs for icebreaking and ice-strengthened surface tankers and LNG carriers over a range of ship sizes and propulsion power levels and for submersible tankers for each of a number of routes from four loading ports in the Arctic to discharge ports on the East and Gulf Coasts of the United States. The technical factors related to Arctic ship construction and operation, ice technology, and the environmental and institutional factors which must be included in an evaluation of an Arctic marine transportation system are discussed. GRA

### **N81-17290# Katzen (Raphael) Associates, Cincinnati, Ohio FARM AND COOPERATIVE ALCOHOL PLANT STUDY: TECHNICAL AND ECONOMIC ASSESSMENT AS A COMMERCIAL VENTURE**

Oct 1980 241 p

(Contract NAFC-T-16076548)

(PB81-112641, NAFC-80-08) Avail: NTIS HC A11/MF A01 CSCL 21D

The production of motor fuel grade (MFG) ethanol in small plants was evaluated. Several parameters were explored as follows: six agricultural locations, three plant sizes of 90,000, 300,000, and 900,000 gallons per year, five feedstocks, ethanol proof levels of 190 and 199; and by-product distillers grains either as whole stillage or prepared by various degrees of drying. Plants were assumed to operate only 6000 hours per year (sugar beets only 3600 hours) because of limitations of time (or beet feedstock). Locally, available boiler fuels were chosen. Simplified processing was identified so as to be realistically within the time and experience available to a farmer operator. GRA

### **N81-18962# California Univ., Livermore Lawrence Livermore Lab**

#### **INDUCTIVE ENERGY TRANSFER IN TRANSPORTATION**

Carl E Walter and John D Salisbury 8 Nov 1980 31 p refs Presented at the 4th UMTA R and D Conf., Norfolk, Va., 21 Nov 1980

(Contract W-7405-eng-48)

(UCRL-85141, CONF-801162-1) Avail. NTIS

HC A03/MF A01

The use of inductive energy transfer system in transportation systems is reviewed. An inductive energy transfer system has an energy source consisting of insulated electrical conductors placed beneath the surface of a roadway, aligned with the direction of travel and fed a relatively high alternating current. A vehicle, e.g., car, bus, or rail car, is equipped with a coil suitably wrapped around magnetic material and suspended beneath the vehicle a short distance from the road surface. The ac in the energy source produces an alternating magnetic field which couples inductively with the power pickup coil under the vehicle and results in vehicle propulsion. Investigations of this energy source for transportation in the US have considered the effect of its use on petroleum fuel consumption, system design and operation factors, adaptability to city and highway transportation, vehicle performance, and assessment of the application of this system to automobiles carrying auxiliary battery power equipment. These studies are briefly described. DOE

### **N81-19459\*# National Aeronautics and Space Administration Lewis Research Center, Cleveland, Ohio**

#### **ADVANCED CONTINUOUSLY VARIABLE TRANSMISSIONS FOR ELECTRIC AND HYBRID VEHICLES**

Stuart H Loewenthal 1980 29 p refs Presented at Electric and Hybrid Vehicle Advanced Vehicle Seminar, Pasadena, Calif., 8-9 Dec 1980

(Contract DE-AI01-77CS-51044)

(NASA-TM-81718, DOE/NASA/51044-17 E-752) Avail: NTIS HC A03/MF A01 CSCL 13F

A brief survey of past and present continuously variable transmissions (CVT) which are potentially suitable for application

with electric and hybrid vehicles is presented. Discussion of general transmission requirements and benefits attainable with a CVT for electric vehicle use is given. The arrangement and function of several specific CVT concepts are cited along with their current development status. Lastly, the results of preliminary design studies conducted under a NASA contract for DOE on four CVT concepts for use in advanced electric vehicles are reviewed.

Author

**N81-19602#** Rice Univ., Houston, Tex  
**SATELLITE POWER SYSTEM (SPS). RECTENNA SITING: AVAILABILITY AND DISTRIBUTION OF NOMINALLY ELIGIBLE SITES**

Nov 1980 283 p refs  
 (Contract DE-AC01-78ER-10041)

(DOE/ER-10041/T10) Avail: NTIS HC A13/MF A01

Siting of 60 ground receiving stations (rectennas) for the SPS may pose a problem due to the large area per rectenna (15,000 hectares, 38,000 acres) and numerous siting constraints. This study analyzes areas potentially eligible for rectenna sites by mapping, at a national scale, those conditions which would preclude rectenna construction. These exclusion variables which reflect restricted lands, topography, safety, national policy and electromagnetic (microwave) effects, were computer encoded and tabulated. Subsequent analysis of the nine electric power planning regions that make up the contiguous states indicate an apparently adequate number of nominally eligible sites in all regions in comparison to projected electrical generation.

DOE

**N81-20328\*#** Novar Electronics Corp., Barberton, Ohio  
**A THEORETICAL STUDY OF MICROWAVE BEAM ABSORPTION BY A RECTENNA. Final Report**

James H. Ott, James S. Rice, and Donald C. Thorn 14 Jan 1981 133 p refs

(Contract NAS9-16055)

(NASA-CR-160921) Avail: NTIS HC A07/MF A01 CSCL 20N

The theoretical operational parameters for the workable satellite power system were examined. The system requirements for efficient transmission and reception of an environmentally benign microwave beam were determined.

**N81-20329\*#** Novar Electronics Corp., Barberton, Ohio  
**A THEORETICAL STUDY OF MICROWAVE BEAM ABSORPTION BY A RECTENNA. INTRODUCTION**

In its A Theoret Study of Microwave Beam Absorption by a Rectenna 14 Jan 1981 p 1-36 refs

Avail: NTIS HC A07/MF A01 CSCL 20N

The conditions required for a large rectenna array (i.e., reference design) to absorb nearly 100% of transmitted energy were studied. Design parameters including element spacing, and the manner in which these affect scatter were formulated. Amplitudes and directions of scatter and development of strategies for mitigation were also investigated. The effects on rectenna behavior of external factors such as weather and aircraft overflights were determined.

RCT

**N81-20335\*#** Novar Electronics Corp., Barberton, Ohio  
**TROPOSPHERIC/IONOSPHERIC TRANSMISSION TESTS**  
 In its A Theoret Study of Microwave Beam Absorption by a Rectenna 14 Jan 1981 p 111-118

Avail: NTIS HC A07/MF A01 CSCL 20N

Four tests are described which are designed to evaluate the magnitude, type, and frequency of occurrence of amplitude and phase variations in the solar power satellite power (SPS) beam as seen by the rectenna. Particular attention is given to the degree of deviation in the propagation observed under two conditions unique to the SPS: monochromaticity, and smallness of the effective aperture of individual rectenna element dipoles.

RCT

**N81-20495\*#** Jet Propulsion Lab., California Inst of Tech., Pasadena

**CRITICAL PARAMETERS FOR COARSE COAL UNDERGROUND SLURRY HAULAGE SYSTEMS**

David P. Maynard 15 Feb 1981 53 p refs

(Contracts NAS7-100, DE-AI01-76ET-12548)

(NASA-CR-164075, JPL-Pub-81-11, DOE/ET-12548/4) Avail: NTIS HC A04/MF A01 CSCL 08I

Factors are identified which must be considered in meeting the requirements of a transportation system for conveying, in a pipeline, the coal mined by a continuous mining machine to a storage location near the mine entrance or to a coal preparation plant located near the surface. For successful operation, the slurry haulage system should be designed to operate in the turbulent flow regime at a flow rate at least 30% greater than the deposition velocity (slurry flow rate at which the solid particles tend to settle in the pipe). The capacity of the haulage system should be compatible with the projected coal output. Particle size, solid concentration, density, and viscosity of the suspension are of importance as well as the selection of the pumps, pipes, and valves. The parameters with the greatest effect on system performance are flow velocity, pressure, coal particle size, and solids concentration.

ARH

**Page Intentionally Left Blank**



## ENERGY STORAGE

Includes flywheels, heat storage, underground air storage, compressed air, storage batteries, and electric hybrid vehicles

**A81-19897 #** Efficiency of energy storage in photochemical electron transfer reactions (Effektivnost' zapasaniia energii v foto-khimicheskikh reaktsiakh perenosa elektrona). V E Korobov and A. K. Chibisov (Akademiia Nauk SSSR, Institut Geokhimi i Analiticheskoi Khimii, Moscow, USSR). *Akademiia Nauk SSSR, Doklady*, vol 255, no 3, 1980, p 634-637. 6 refs. In Russian.

The present work analyzes the efficiency of energy storage in the products (states) of photochemical reactions involving electron transfers. Attention is given to a reversible photochemical reaction where electron transfer occurs between an excited donor and an acceptor in a liquid (polar) solution. Optimal conditions for energy storage are derived for potential use in solar energy conversion and storage applications. T.M.

**A81-20491** Use of the ATOP system in the control of an off-peak storage device. C B Winn and K Robinson (Colorado State University, Fort Collins, Colo.). In: Conference on Decision and Control, and Symposium on Adaptive Processes, 18th, Fort Lauderdale, Fla., December 12-14, 1979, Proceedings. Volume 2. Piscataway, N.J., Institute of Electrical and Electronics Engineers, Inc., 1979, p 911-916. 7 refs. Contract No. EG-77-S-02-4519.

An off-peak heat storage device has been installed in Colorado State University Solar House I. The device may be charged with heat during the off-peak hours (10 pm to 6 am) and the heat may then be utilized as required in order to satisfy the building heating requirements that are not satisfied by the solar system. A methodology for determining the amount of heat required to be stored and for determining an optimal charging sequence is presented in this paper. Quantitative results obtained during the past heating season (1978-79) are also presented. (Author)

**A81-21114 #** Enhanced heat conduction in phase-change thermal energy storage devices. R H Henze (Spectrum Development Laboratories, Inc., Costa Mesa, Calif.) and J A C Humphrey (California, University, Berkeley, Calif.). *American Society of Mechanical Engineers, Winter Annual Meeting, Chicago, Ill., Nov 16-21, 1980, Paper 80-WA/HT-45*. 12 p. 25 refs. Members, \$2.00, non-members, \$4.00. Research supported by the University of California.

Phase-change energy storage devices have an inherent disadvantage due to the insulating properties of the phase-change materials (PCMs) used. Such systems are difficult to analyze theoretically due to the nonlinearities of the moving liquid-solid interface and the presence of natural convection as shown by several recent numerical and experimental investigations. Previous work has been unsuccessful in predicting the performance of phase-change devices in the presence of fins and natural convection. This study presents a simplified numerical model based on a quasi-linear, transient, thin fin equation, which predicts the fraction of melted PCM, and the shape of the liquid-solid interface as a function of time with sufficient accuracy for engineering purposes. Experimental results are compared in dimensionless form with model predictions, and show fairly good agreement. To achieve high heat transfer rates with a fixed amount of PCM and metal fin material, the model indicates that melting the PCM in a pure conduction mode with closely spaced thin fins is preferable to melting PCM with thicker fins spaced further apart, even in the presence of natural convection. (Author)

**A81-21391** Thermal energy storage and regeneration. F W Schmidt (Pennsylvania State University, University Park, Pa.) and A. J. Willmott (York, University, Heslington, England). Washington,

D C, Hemisphere Publishing Corp., 1981. 368 p. 132 refs. \$35.50.

The book examines the heat storage medium as a solid through whose channels or pores passes the heat-transporting fluid, usually a gas. The 'single blow problem' where the gas passes through heat-storing packing in one direction is analyzed, followed by consideration of thermal regenerators, heat storage exchangers, and packed beds. Finally, correlations are made between the estimates of the heat transfer coefficients and the pressure drop in storage units. Topics covered include finite conductivity models, parallel-flow regenerators, counterflow regenerators, and heat storage design optimization. A T.

**A81-21740** Prediction model for fatigue crack growth in windmill structures. R W Finger (Boeing Engineering Co., Seattle, Wash.). In: Effect of load spectrum variables on fatigue crack initiation and propagation, Proceedings of the Symposium, San Francisco, Calif., May 21, 1979. Philadelphia, Pa., American Society for Testing and Materials, 1980, p 185-199, Discussion, p 199-204. 7 refs.

A spectrum load test program was conducted with uniaxially loaded surface flaw specimens to produce data on the effects of differences in load spectra on crack growth behavior to provide the 30-yr life for the Boeing Mod II windmill. Four load spectra were tested applicable to Grade A ASTM steels used in parent and weld metal stress relieved structures. The stress relieved components require an analysis of tensile loads only, since the negative minimum stress/maximum stress (R) ratios were considered the same as the R ratios of zero. A T.

**A81-23439** An evaluation of superconducting magnetic energy storage. B M Winer and J Nicol (Arthur D Little, Inc., Cambridge, Mass.). *Applied Superconductivity Conference, Santa Fe, N Mex., Sept 29-Oct 2, 1980.* IEEE Transactions on Magnetics, vol MAG-17, Jan 1981, p 336-339. 5 refs. U.S. Department of Energy Contract No. 31-109-38-4914.

A Superconducting Magnetic Energy Storage (SMES) system will accept and regenerate ac electrical energy very efficiently. It can therefore compete economically with alternative advanced storage technologies if (1) the unit's cost and efficiency are within the presently expected ranges, and (2) the unit is sized so as to perform the same task as the alternatives and no more. Present conceptual SMES designs are unlikely to meet the electric utilities' needs for reliability, maintainability and system protection, and the environmental impact of the magnetic field may be large. Consequently, the uncertainties associated with the costs of an acceptable SMES system are large. Their reduction should be the principal goal of future component and system research. (Author)

**A81-23440** Superconductive energy storage for diurnal use by electric utilities. R. W. Boom (Wisconsin, University, Madison, Wis.). *Applied Superconductivity Conference, Santa Fe, N Mex., Sept. 29-Oct 2, 1980.* IEEE Transactions on Magnetics, vol. MAG-17, Jan 1981, p 340-343. 9 refs. Research supported by the Wisconsin Electric Utility Research Foundation, Contract No. DE-AC02-76ET-26602.

A summary report of a five-year study of superconductive energy storage for electric utility systems is presented. Conceptual designs over that period have all been for one layer solenoids of aluminum-NbTi composite conductors cooled to 1.8 K in superfluid helium. The solenoids are mounted underground in bedrock in one or more tunnels. The two preferred designs in 1980 are a 15 tunnel solenoid arranged in a circular pattern and a large radius single tunnel solenoid. The electrical energy storage efficiency in all cases is 95 to 96%. (Author)

**A81-23450** Design of the BPA superconducting 30 MJ energy storage coil. E Hoffmann, J. Alcorn, W. Chen, Y-H Hsu, J Purcell (General Atomic Co., San Diego, Calif.), and R. Schermer (General Atomic Co., San Diego, Calif., California, University, Los Alamos, N Mex.). *Applied Superconductivity Conference, Santa Fe,*

## 07 ENERGY STORAGE

*N Mex*, Sept 29-Oct 2, 1980) *IEEE Transactions on Magnetics*, vol MAG-17, Jan 1981, p 521-524 DOE Order 4-X9-6722H-1

The design of a superconducting magnetic energy storage coil is presented. The purpose of this coil is to stabilize low frequency power oscillations in long high voltage ac power lines. The practical application for this specific coil will be the installation in the Pacific intertie between Washington State and Los Angeles, California. The guiding principles of the design are performance, fabrication economy and reliability (Author)

**A81-24995 Physical and chemical processes for latent heat storage at low temperatures** F Reiter (Commission of the European Communities, Joint Research Centre, Ispra, Italy) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla, December 10-13, 1979 Volume 1* Washington, D C., Hemisphere Publishing Corp., 1981, p 341-365 17 refs

**A81-24996 PCM thermal energy storage in cylindrical containers of various configurations** A S Mujumdar, F A Ashraf, A S Menon, and M E Weber (McGill University, Sainte-Anne de Bellevue, Quebec, Canada) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla, December 10-13, 1979 Volume 1* Washington, D C., Hemisphere Publishing Corp., 1981, p 367-382 12 refs

Experimental measurements are reported for the time variation of surface-averaged rate of heat storage during melting in single, thin-walled cylindrical containers of copper filled with a commercially available paraffin wax. For the wax used the enthalpy-temperature curve was obtained using a differential scanning calorimeter according to the ASTM method. Three lengths and three equivalent diameters of plain circular, plain square and internally partitioned cylinders were studied for their heat storage characteristics. The heat transfer measurements revealed the importance of natural convection during melting. The effects of cylinder geometry and temperature of the external fluid on instantaneous and integral heat storage rate were examined experimentally (Author)

**A81-24997 A cycle life tester for the long-term stability of phase change materials for thermal energy storage.** A Grandbois, J Sangster, and J R Paris (Ecole Polytechnique, Montreal, Canada) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 1* Washington, D C., Hemisphere Publishing Corp., 1981, p 383-388 15 refs

Testing of the long-term stability of large quantities of a phase-change material, intended for low potential thermal storage of solar energy, was conducted on an accelerated freeze-thaw cycle apparatus with microcomputer monitoring. Such testing is considered essential for the selection of optimal substances among a wide variety of candidates O C

**A81-25002 High temperature storage for a wind energy system** R Ramshaw and D Bowman (Waterloo, University, Waterloo, Ontario, Canada) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 1* Washington, D C., Hemisphere Publishing Corp., 1981, p 453-458

**A81-25003 Assessment of high-head turbomachinery for underground pumped hydroelectric storage plants** S W Tam, A A Frigo, and C A Blomquist (Argonne National Laboratory, Argonne, Ill) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 1* Washington, D C., Hemisphere Publishing Corp., 1981, p 459-474 9 refs. Research supported by the U S Department of Energy

Underground pumped hydroelectric storage (UPHS) plants equipped with advanced reversible pump turbines for operating heads

from 500 to 1500 m are discussed in terms of cost efficiency. It is found that the use of advanced machinery shifts the minimum UPHS plant cost to the head range 1200-1500 m. The interactive effects of pump-turbine efficiencies and charge/discharge ratios are examined. It is shown that under certain conditions, a pump-turbine option with a higher charge-discharge ratio at the expense of somewhat lower operating efficiency may be desirable V L

**A81-25019 Ammoniated salt heat pump.** W R Haas, F J Jaeger, and T J Giordano (Martin Marietta Aerospace, Denver, Colo.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 2* Washington, D C., Hemisphere Publishing Corp., 1981, p 651-663

A thermochemical heat pump/energy storage system using liquid ammoniate salts is described. The system, which can be used for space heating or cooling, provides energy storage for both functions. The bulk of the energy is stored as chemical energy and thus can be stored indefinitely. The system is well suited to use with a solar energy source or industrial waste heat. Several liquid ammoniates are identified and the critical properties of three of the most promising are presented. Results of small scale (5000 Btu) system tests are discussed and a design concept for a prototype system is given. This system represents a significant improvement over the system using solid ammoniates investigated previously because of the increase in heat transfer rates (5 to 60 Btu/hr sq ft F) and the resulting reduction in heat exchanger size. As a result the concept shows promise of being cost competitive with conventional systems (Author)

**A81-25035 A 'two-tank' seasonal storage concept for solar space heating of buildings** B K Cha, D W Connor, and R O Mueller (Argonne National Laboratory, Argonne, Ill) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 2* Washington, D C., Hemisphere Publishing Corp., 1981, p 851-863 7 refs. Research supported by the U S Department of Energy

This paper presents an analysis of a novel 'two-tank' water storage system, consisting of a large primary water tank for seasonal storage of solar energy plus a much smaller secondary water tank for storage of solar energy collected during the heating season. The system offers the advantages of high collection efficiency during the early stages of the heating season, a period when the temperature of the primary tank is generally high. By preferentially drawing energy from the small secondary tank to meet load, its temperature can be kept well below that of the larger primary tank, thereby providing a lower-temperature source for collector inlet fluid. The resulting improvement in annual system efficiency through the addition of a small secondary tank is found to be substantial - for the site considered in the paper (Madison, Wisconsin), the relative percentage gain in annual performance is in the range of 10 to 20%. A simple computer model permits accurate hour-by-hour transient simulation of thermal performance over a yearly cycle. The paper presents results of detailed simulations of collectors and storage sizing and design trade-offs for solar energy systems supplying 90% to 100% of annual heating load requirements (Author)

**A81-25322 Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode** V Koudelka, J Malik (Pražská Akumulátorka, Mladá Boleslav, Czechoslovakia), J Mrha, I Krejčí (Československá Akademie Ved, Ústav Fyzikální Chemie a Elektrochemie, Prague, Czechoslovakia), and M Spínka (Vysoké Učení Technické, Brno, Czechoslovakia) *Journal of Power Sources*, vol 6, Apr 1981, p 161-169 11 refs

**A81-25323 Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance.** D H Fritts (USAF, Aero Propulsion Laboratory,

Wright-Patterson AFB, Ohio) *Journal of Power Sources*, vol. 6, Apr 1981, p 171-184 8 refs USAF-supported research

The performance of nickel battery electrodes was investigated in respect of sintered nickel plaque mechanical characteristics. It was found that plaque fatigue, sensitivity, and hardness directly affect nickel electrode performance. In addition, wide variations in these parameters was found in various manufactured plaques. It is concluded that quality control procedures should include testing for fatigue and hardness. Recommended procedures for performing these tests are presented. (Author)

**A81-25565** **Electrochemical power sources: Primary and secondary batteries** Edited by M Barak Stevenage, Herts, England, Peter Peregrinus, Ltd (IEE Energy Series 1), 1980 512 p \$53

The development of voltaic cells is reviewed, and the basic thermodynamic and kinetic principles underlying the conversion of chemical to electrical energy are outlined. The most popular types of primary batteries for civilian use are discussed including the neutral air-depolarized, Leclanche, and alkaline manganese batteries as well as the mercury/zinc and silver/zinc button cell assemblies. The two basic groups of rechargeable storage batteries are described, and cells operating at ambient temperatures with an inorganic electrolyte are surveyed. Molten salt electrolytes and solid ion-permeable diaphragms in high-temperature cells are also considered. L S

**A81-25566** **Alkaline storage batteries.** U Falk (NIFE Jungner AB, Oskarshamn, Sweden) In *Electrochemical power sources: Primary and secondary batteries* Stevenage, Herts, England, Peter Peregrinus, Ltd, 1980, p 325-402 74 refs

Alkaline storage batteries are characterized in terms of their reaction mechanisms, manufacturing processes, performance characteristics, and applications. The batteries discussed include the nickel/cadmium pocket type cell, the nickel cadmium sintered plate cell, the nickel/iron battery, the silver/zinc and silver/cadmium assemblies, and the nickel/zinc battery. The basic technical data for the alkaline systems are provided along with 1978 estimates of worldwide battery production. L S

**A81-25567** **High temperature batteries** J L Sudworth In *Electrochemical power sources: Primary and secondary batteries* Stevenage, Herts, England, Peter Peregrinus, Ltd, 1980, p 403-463 91 refs

Molten salt electrolyte cells with lithium as the negative electrode and solid electrolyte cells with sodium as the negative electrode are described with attention to cell design and performance. The thermal management of the cells is reviewed, and a comparison of the battery systems is provided. Emphasis is given to the discussion of the lithium-aluminum/iron sulfide cell and the sodium/sulfur cell with beta alumina electrolyte. L S

**A81-25568** **Room temperature cells with solid electrolytes.** T Dickinson (Newcastle-upon-Tyne, University, Newcastle-upon-Tyne, England) In *Electrochemical power sources: Primary and secondary batteries* Stevenage, Herts, England, Peter Peregrinus, Ltd, 1980, p 464-481 46 refs

Solid-state room-temperature primary cell systems with cationic conductor electrolytes are reviewed. Silver ion, copper ion, proton, sodium ion, fluoride ion, and lithium ion conductor cell systems are discussed with attention to the electrolytes and power sources. The advantages of solid-state systems include durability, the ability to operate over wide temperature ranges, ease of miniaturization, and long shelf and operating lives. L S

**A81-25603** **Flat-plate tubular TP lead-acid traction battery for electric vehicles.** P Ruetschi (Leclanché, S A, Yverdon, Switzerland) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 187-189

**A81-25604** **An automobile manufacturer and his electric vehicle** M Sugitani (Daihatsu Motor Co., Ltd, Ikeda, Osaka, Japan)

In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 206-208

A new engine-electric hybrid system is reviewed. In the system, the revolutions and torque of the drive train are picked up as electrical signals, and are compared with the electrical signals from the accelerator pedal. The computer then calculates the most suitable driving conditions and gives operational commands to the engine and/or the electrical motors. The output power from the engine and/or electrical motors is converted to an electrical signal, and returns to the computer as a feedback signal for correcting operational commands. L S

**A81-25605** **GE's electric powered automobile** R H Guess (General Electric Co., Schenectady, N Y) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 210-212

The Centennial Electric all-electric subcompact vehicle is described. A series dc motor, front mounted in the vehicle, drives the front wheels using a fixed-ratio transmission. Speed is controlled up to 3000 rpm at 30 miles per hour by a thyristor controller which adjusts the voltage applied to the armature of the motor and limits battery current to 360 amperes. Higher speed up to 60 miles per hour is obtained by connecting a resistor in parallel with the field for field weakening. The estimated life-cycle cost of the vehicle for its projected 10 year life is less than 18 cents per mile in 1979 dollars. L S

**A81-25606** **Recent developments in secondary batteries for use in electric vehicles** B W Burrows (Gould Laboratories, Rolling Meadows, Ill) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 220-222

The status of the Department of Energy's electric vehicle battery program is reviewed. The near-term, ambient temperature batteries discussed include the lead-acid, nickel-zinc, and nickel-iron batteries. The advanced batteries such as the lithium-metal sulfide and sodium-sulfur batteries are seen as longer-term, potentially low-cost alternatives that will have substantially higher performance than the near-term batteries. The performance goals of the battery program to be achieved by 1985 are listed. L S

**A81-25607** **Zinc-bromine batteries for energy storage** J E Oxley (Gould Laboratories, Rolling Meadows, Ill) In *Progress in batteries and solar cells* Volume 3 Cleveland, Ohio, JEC Press, Inc., 1980, p 223-226

The development of the zinc-bromine battery system for energy storage in utility load-leveling and solar energy applications is examined. The electrode reactions and the problem of self-discharge in the zinc-bromine system are reviewed. The advantages of employing a flowing electrolyte system with external storage of the bulk of the reactants are noted, and the main components of the Gould zinc-bromine battery are schematized. The major efforts in the Gould program to date have been devoted to the development of a basic understanding of the cell electrochemistry, the selection and characterization of cost-effective materials of construction, and engineering scale-up. L S

**A81-26012** **Gas turbine combustor liner durability - The hot streak problem.** G J Sturgess (United Technologies Corp., Pratt and Whitney Aircraft Group, East Hartford, Conn.) In *Gas turbine combustor design problems* Washington, D C, Hemisphere Publishing Corp., 1980, p 133-148, Discussion, p 148-150 11 refs

Predictions of gas turbine combustor liner temperatures minimize durability difficulties and provide hot-section life evaluations to determine maintenance costs. The combustor liner is cooled by interior injection equipment whose design requires the knowledge of film effectiveness and wall temperature boundary conditions. Practical combustor test results do not agree with the predictions because

## 07 ENERGY STORAGE

of the inadequate modeling of flow processes in the composter, three-dimensional modeling of flows will be needed to solve the hot-streak problem  
A T

**A81-25613** Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte W Borger, D Kunze, and H S Panesar (Varta Batterie AG, Kelkheim, West Germany). In *Progress in batteries and solar cells Volume 3* Cleveland, Ohio, JEC Press, Inc., 1980, p 251-253 5 refs Bundesministerium für Forschung und Technologie Contract No ET-4155-A, Commission of the European Communities Grant No 244-77-EED

Fabrication procedures for LiAl/FeS cells with molten salt electrolyte are discussed with a view toward developing manufacturing methods which do not require high purity inert gas atmospheres Charged negative electrodes are produced from lithium foil protected by aluminum foil and porous aluminum sheets by pressing a sandwich-layered structure of these materials under normal atmospheric conditions These electrodes were used in engineering scale cells (100 Ah) together with positive electrodes prepared from FeS and KCl The fabrication of the electrodes and cell assembly were performed at 298 K and 40% relative humidity A comparison of the cell built by the above procedure with one of the same type manufactured under pure argon shows that fabrication in air does not affect cell performance  
L S

**A81-25614** Energy analysis of high temperature batteries. M Matsunaga (Kyushu Institute of Technology, Kita-Kyushu, Japan), Y Ito, and S Yoshizawa (Kyoto University, Kyoto, Japan). In *Progress in batteries and solar cells Volume 3*

Cleveland, Ohio, JEC Press, Inc., 1980, p 254-259. 12 refs.

An analysis of the energy balance in high temperature batteries for energy storage is presented in terms of the supply and demand curves of electrical power Two self-heating systems and a heat reservoir which utilizes the heat of fusion are discussed The self-heating systems are subject to the limitations of charge and discharge current densities, and excessive temperature variations A constant temperature operation with a heat reservoir is found to be preferable with respect to temperature control and energy efficiency  
L S

**A81-25615** A preliminary investigation of an Al/FeS<sub>2</sub> secondary cell. N Koura, T Inoue, and S Takahashi (Tokyo Science University, Noda, Chiba, Japan) In *Progress in batteries and solar cells Volume 3* Cleveland, Ohio, JEC Press, Inc., 1980, p 260-262 7 refs

An investigation is presented of an advanced secondary candidate Al/FeS<sub>2</sub> cell for load leveling and electric vehicle applications The cell is operated in a molten salt (AlCl<sub>3</sub>-NaCl system) electrolyte, or an AlCl<sub>3</sub>-organic solvent electrolyte Coulombic efficiencies were nearly 100%, and the discharge curve showed two plateaus, one at 0.9 V, and one at 0.6 V The low operating temperature of the cell lessens material corrosion problems, and cell materials are inexpensive A schematic diagram of the experimental cell and discharge curves at various temperatures are provided  
L S

**A81-25616** Sealed nickel-cadmium batteries for memory backup H Hashimoto and K Nakatani (Sanyo Electric Co., Ltd., Sumoto, Hyogo, Japan) In *Progress in batteries and solar cells Volume 3* Cleveland, Ohio, JEC Press, Inc., 1980, p 263-265

The development of a specialized Cadnica battery that is float-charged when power is being supplied, and powers a memory circuit the moment power fails in order to protect data is reported The battery is designed, with low recharge and discharge power and outlasts conventional batteries The design eliminates liquid leakage, so that the battery may be directly mounted on a printed circuit board Self-discharge is less than with other batteries, so that it may preserve computer memory circuits for a considerable time  
O C

**A81-25618** A new airborne nickel cadmium battery concept R Bonnaterre and E Leocard (Societe des Accumulateurs

Fixes et de Traction, Romainville, Seine-Saint-Denis, France) In *Progress in batteries and solar cells Volume 3* Cleveland, Ohio, JEC Press, Inc., 1980, p 270-273 Research supported by the Direction Technique des Constructions Aeronautiques and Ministry of Defence of England

A new battery design with increased power-to-weight and energy-to-weight ratios as a result of improvements in the volumetric efficiency of its elements is disclosed Research work culminating in the design, encompassed electrode thickness and separation optimization, ionic permeability for hydroxide ions through a separator and impermeability to oxygen transfer between electrodes, better mechanical and thermal behavior of the separator material, and extended electrolyte volume to reduce the frequency of maintenance operations Such batteries supply a number of aircraft on-board devices that are indispensable to the aircraft in case of main generator failure  
O C

**A81-25837** Mathematical modeling of the lithium-aluminum, iron sulfide battery I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics. R Pollard and J Newman (California, University, Berkeley, Calif) *Electrochemical Society, Journal*, vol 128, Mar 1981, p 491-507 52 refs Contract No W-7405-eng-48

A mathematical model of the LiAl/LiCl, KCl/FeS high temperature battery is presented The model considers a whole prismatic cell which consists of negative electrode, separator, electrolyte reservoir, and positive electrode Physical phenomena described are ohmic potential drop and diffusion potential in the electrolyte, changes in porosity and electrolyte composition due to electrochemical reactions, local reaction rates, and diffusion, convection and migration of electrolyte In addition, the analysis includes finite matrix conductivities, variable physical properties and the possibility of specific simultaneous reactions in the positive electrode The theoretical results show many of the trends in behavior observed experimentally  
D K

**A81-26858** Energy transfer in a system of superconductive magnets. M Masuda, T Shintomi, and K Asaji (National Laboratory for High Energy Physics, Ibaraki, Japan) In *Advances in cryogenic engineering Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979* New York, Plenum Press, 1980, p 61-68

The paper describes a technique useful for superconductive energy storage, namely energy transfer between two superconducting coils, one of which is the storage coil and the other the accelerator magnet or the poloidal coil in a tokamak An experiment involving two coils each storing 100 kJ has shown that not only is it possible to transfer pulsed energy from one coil to the other but also to allow a surge of energy to flow back and forth between the two superconducting coils It is shown that the decay of the total energy in the system is caused by the losses of the thyristor, lead wires, and the commutation capacitors, except for the protection resistor loss  
P T H

**A81-26861** Shape optimization study for a three-tunnel superconductive energy storage magnet M N El-Derini (Petroleum and Minerals University, Dhahran, Saudi Arabia) and R W Boom (Wisconsin, University, Madison, Wis) In *Advances in cryogenic engineering Volume 25 - Proceedings of the Cryogenic Engineering Conference, Madison, Wis., August 21-24, 1979* New York, Plenum Press, 1980, p 114-119 Research supported by the U.S. Department of Energy, Wisconsin Electric Utilities Foundation, and NSF

A broad study for a three tunnel solenoid has been performed to determine the best shape of a segmented solenoid which minimizes the axial forces and shear stresses It is shown that the constant-field C-shaped magnet is a good solution for the shear stress and axial

force problems. In addition, the constant-field C has the advantages of the constant-field solenoid, i.e., it utilizes the superconductor more effectively and does not have the end-field problem. Another important advantage is that tunnel excavation is relatively simpler.

P T H

**A81-27232** System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications. A R Millner (MIT, Lexington, Mass.) and T Dinwoodie (MIT, Cambridge, Mass.) In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1018-1024. Research sponsored by the U.S. Department of Energy.

MIT Lincoln Laboratory is developing a flywheel interface and storage system for use with photovoltaic power sources. Test data on the performance of components built to investigate the feasibility of such a system, and the results of economic studies of the system showing user-worth analysis and manufacturing-cost estimates, are presented. The system has magnetic bearings, a maximum-power-point tracker, dc input, and cycloconverter output from an ironless-armature motor-generator. (Author)

**A81-27233** Energy storage in grid-connected applications. G J Jones (Sandia Laboratories, Albuquerque, N. Mex.). In Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record. New York, Institute of Electrical and Electronics Engineers, Inc., 1980, p. 1025-1028. 6 refs. Research supported by the U.S. Department of Energy.

While energy storage is usually an option when designing any photovoltaic system, in grid-connected applications the decision for or against on-site storage is based on operational considerations. If the photovoltaic system has the option of returning energy to the utility grid for credit, then the question of storage is determined by the capital cost of storage and its efficiency versus the 'cost' of sellback in terms of lost energy. The present paper analyzes this situation, as well as time-of-day pricing, in detail to determine the allowable lifecycle cost of storage in each of the possible operating modes. (Author)

**A81-29257** Storage of cold water in aquifers. R R Davison, W B Harris, and D L Reddell (Texas A & M University, College Station, Tex.). (American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov 25-29, 1979) AIChE Symposium Series, vol 76, no. 198, 1980, p. 34-40. 7 refs. Research supported by the Texas A & M University and U.S. Department of Energy.

**A81-29260** Heat exchanger for in-ground heat storage. O J Svec and J H L Palmer (National Research Council, Ottawa, Canada). (American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov 25-29, 1979) AIChE Symposium Series, vol 76, no. 198, 1980, p. 56-61. 9 refs.

**A81-29266** Electrical energy storage via high efficiency-cost effective hydrogen/halogen regenerative fuel cell systems. J F McElroy and G G Patwa (General Electric Co., Wilmington, Mass.). (American Institute of Chemical Engineers, Annual Meeting, 72nd, San Francisco, Calif., Nov 25-29, 1979) AIChE Symposium Series, vol 76, no. 198, 1980, p. 123-128. 6 refs.

Preliminary design concepts are considered in which a solid polymer electrolyte electrochemical cell will operate as (1) a halogen acid electrolyzer during the charging mode, to generate hydrogen and the (either Cl<sub>2</sub> or Br<sub>2</sub>) halogen, and (2) as a hydrogen/halogen fuel cell during discharge. Electric-to-electric conversion efficiencies of 85% are possible for such cycles, whose hydrogen may be stored in a metal hydride bed while the halogen is kept in tanks in liquid form.

It is concluded in view of the \$41/kW-hr capital cost projections of an economic analysis for near-term components technology, and safety and reliability analyses, that the hydrogen/bromine cycle has great potential in load-leveling applications. O C

**A81-30158** # Complex computation of flywheel power systems for flight vehicles (Kompleksnyi raschet makhovichnykh energosistem letatel'nykh apparatov). N F Sviridenko. *Samoletostroenie - Tekhnika Vozdushnogo Flota*, no. 47, 1980, p. 37-41. 5 refs. In Russian.

A theoretical analysis is presented of the operation of a power system consisting of a flywheel, and a stable-frequency current generator of stepless transmission design. A complex computation method is developed for the determination of the load and kinematic characteristics of the stepless transmission, and the moment of inertia of the flywheel, the method ascertains whether the system meets energy consumption requirements. P T H

**N81-16523#** Texas A&M Univ., College Station. **HEAT TRANSPORT IN GROUNDWATER SYSTEMS. VOLUME 2: LABORATORY MODEL Progress Report, 1 Jul. 1976 - 31 Dec. 1978**

David Bryan Reed and Donald L Reddell. Aug 1980. 168 p. refs. 2 Vol. (Contracts DI-14-34-0001-7091, DI-14-34-0001-7092, DI-14-34-0001-8046) (PB81-104135, TR-104-Vol-2; W80-06700-Vol-2, OWRT-A-039-TEX(2)-Vol-2) Avail NTIS HC A08/MF A01 CSCI 08H

A laboratory model tank (1.8288 m in deep, 0.2 radian sector, with 7.01 m in the radial direction) was constructed to simulate injection of hot water (heated from solar collectors) into a confined aquifer. Temperature and pressure were taken to monitor the hot water front as it moved through the model. Temperatures were measured at 6 different radial distances from the well and 7 vertical heights above the bottom of the flow layer. Four runs were made with water supplied to the tank at constant temperature and flow rate, one in which no heat transfer occurred and hydraulic conductivity was measured, three in which heat transfer was monitored. For the latter runs, hydraulic conductivity increased as aquifer temperature increased. Injection rates were only indirectly related to thermal efficiency. GRA

**N81-16591#** Argonne National Lab., Ill. Advanced Battery Projects Dept. **LITHIUM/IRON SULFIDE BATTERIES FOR ELECTRIC-VEHICLE PROPULSION AND OTHER APPLICATIONS Progress Report, Oct. 1979 - Mar. 1980** D L Barney, R K Steunenberg, A A Chlenskaskas, E C Gay, J E Battles, W E Miller, D R Vissers, and H Shimotake. Aug 1980. 105 p. refs. (ANL-80-49) Avail NTIS HC A06/MF A01

Research and development activities on lithium/iron sulfide batteries are described. Although the major emphasis is currently on batteries for electric vehicle propulsion, stationary energy storage applications are also under investigation. The individual battery cells, which operate at 400-500 C, are of a vertically oriented, prismatic design with two or more positive electrodes of FeS or FeS<sub>2</sub>, facing negative electrodes of lithium aluminum or lithium silicon alloy, and molten LiCl-KCl electrolyte. Effects of design modifications on cell performance and post test examinations of cells are included. Efforts to develop high reliability cells having boron nitride felt separators are described. S F

**N81-16599#** Battelle Pacific Northwest Labs., Richland, Wash. **LABORATORY STUDIES OF HARD ROCK FOR CAES** Arlo F Fossum. Oct 1980. 7 p. (Contract DE-AC06-76RL-01830) (PNL-SA-8971) Avail NTIS HC A02/MF A01

The properties of hard rock specimens, from formations suitable for compressed air energy storage (CAES) that are subject to the conditions envisioned for a CAES cavern, were investigated by means of laboratory testing. It was concluded that although

## 07 ENERGY STORAGE

the compressive and tensile strengths are adversely influenced by a CAES cavern environment, the reduced failure strength of hard rocks is sufficiently high to indicate that a CAES plant could be operated satisfactorily LFM

### **N81-16600# Battelle Pacific Northwest Labs., Richland, Wash COMPRESSED AIR ENERGY STORAGE TECHNOLOGY PROGRAM OVERVIEW**

W V Loscutt and L D Kannberg Oct 1980 6 p refs  
(Contract DE-AC06-76RL-01830)  
(PNL-SA-8988) Avail NTIS HC A02/MF A01

Studies were conducted to develop stability criteria for long-term operation of large underground reservoirs used for compressed air storage and to develop new concepts that will require little or no petroleum fuels for operation. Major accomplishments during FY-80 are presented, and future activities required to meet objectives are identified LFM

### **N81-17590# Little (Arthur D.), Inc., Cambridge, Mass CAPITAL COST ESTIMATES OF SELECTED ADVANCED THERMAL ENERGY STORAGE TECHNOLOGIES Final Report**

W Thompson Lawrence Jun 1980 284 p  
(Contract W-31-109-eng-38)  
(ANL/SPG-11) Avail NTIS HC A13/MF A01

A method for evaluating the first cost of diverse advanced thermal energy storage (TES) concepts on a common basis is presented. For a total sample of at least 20 baseline and advanced TES technologies, the methodology developed was to be applied in the calculation of actual cost and performance measures. Work on the development of TES focused on 5 types of applications areas: electric power generation, with solar input in which TES is used to store energy for use during cloudy periods or at night, conventional fuel fired electric power generation, in which TES is used to improve load factors, cyclic losses, in which TES is used to reduce losses that occur when devices start and stop, batch losses, in which TES is used to recover waste heat, and source/sink mismatch, in which TES is used to increase the efficiency of processes that are dependent upon ambient temperatures DOE

### **N81-17591# Acres American, Inc., Columbia, Md ADIABATIC COMPRESSED AIR ENERGY STORAGE IN HARD ROCK**

C L Driggs Oct 1980 29 p refs Presented at the DOE Thermal-Mech Energy Storage Ann Contractors Rev Meeting Prepared for Pacific Northwest Lab., Richland, Wash  
(Contract DE-AC06-76RL-01830)  
(PNL-SA-9010) Avail NTIS HC A03/MF A01

Findings are discussed of a conceptual design study performed which examined pure adiabatic CAES cycles operating in the temperature range of 700 to 900 F. The project involved an investigation of the technical and economic feasibility of using commercially available technology to construct a plant DOE

### **N81-17602# Battelle Pacific Northwest Labs., Richland, Wash SEASONAL THERMAL ENERGY STORAGE PROGRAM**

James E Minor 1980 48 p refs  
(Contract DE-AC06-76RL-01830)  
(PNL-SA-9030) Avail: NTIS HC A03/MF A01

Seasonal thermal energy storage technology is described. Demonstration programs involving aquifers, environmental effects studies, legal aspects, economics, numerical simulation, and field testing are discussed DOE

### **N81-17607# Brown, Boveri und Cie, AG., Heidelberg (West Germany). Zentrales Forschungslabor DEVELOPMENT OF SODIUM/SULFUR BATTERIES Final Report**

Roland Bauer, Wilfried Fischer, Wilhelm Haer, Bernd Hartmann, Herbert Kleinschmager, Henner Meinhold, and Gert Weddigen Bonn Bundesministerium fuer Forschung und Technologie Dec 1980 125 p refs In GERMAN, ENGLISH summary Sponsored by Bundesministerium fuer Forschung und Technologie (BMFT-FB-T-79-60, ISSN-0340-7808) Avail NTIS

HC A06/MF A01, Fachinformationszentrum, Karlsruhe, West Germany DM 26.05

The principle of an Na/S storage battery was defined, problems were identified and solved, and a 10 kW hr experimental battery was built and successfully tested. In particular the beta-alumina solid electrolyte was optimized with respect to electrical conductivity and lifetime. Furthermore, the sulfur electrode with respect to sulfur utilization and the cathode current collector case with respect to corrosion resistance were also optimized. Cells used in the experimental battery (80 to 90 W hr/kg depending on charge/discharge time) were cycled up to 350 times. Capacity declines 3 to 30% during this time, the rate being dependent on casing material. The results obtained with single cells. Extrapolation of the experimental results permits the conclusion that the properties necessary for application can be achieved. The energy density of cells optimized with respect to weight is shown to be 165 W hr/kg. However, problems in achieving higher energy density, longer lifetime, and better thermal insulation still exist Author (ESA)

### **N81-17618# Swedish Council for Building Research, Stockholm THERMOCHEMICAL ENERGY STORAGE: PROCEEDINGS FROM THE INTERNATIONAL SEMINAR ON THERMOCHEMICAL ENERGY STORAGE**

Gunnar Wettermark 1980 420 p refs Seminar held at Stockholm, 7-9 Jan 1980. Sponsored in part by Swedish National Board for Technical Development, Swedish National Board for Energy Source Development and Royal Swedish Academy of Engineering Sciences (PB81-114324, ISBN-91-540-3301-2, IVA-MEDDELANDE-229) Avail NTIS HC A18/MF A01 CSCL 10C

Energy storage problems are explored. Tomorrow's energy sources will provide a continuous flow of energy. Matching supply and demand will necessitate a wide range of storage capabilities. For storing heat thermochemical and economic solutions may take advantage of the various options inherent in this kind of storage, namely heat pumping, transport of heat and direct conversion to other desired forms of energy such as electricity and mechanical work. There is a need to regularly summarize the knowledge and research in the field of thermochemical energy storage in different parts of the world GRA

### **N81-17961# Army Mobility Equipment Research and Development Command, Fort Belvoir, Va VERIFICATION TEST OF JET INDUSTRIES ELECTRA- VAN 1000P**

Edward J Dowgiallo, Jr., Ivan R Snellings, and William H Blake Oct 1980 32 p  
(Contract EC-77-A-31-1042)  
(AD-A093738, MERADCOM-2311) Avail NTIS  
HC A03/MF A01 CSCL 13/6

The Electra-Van 1000P is a Chrysler Corp pickup truck which has been converted to an electric vehicle. It was tested as part of a Department of Energy demonstration program. The Electra-Van 1000P performance test results are presented. The 1000P is powered by 24 6 volt lead acid batteries through an SCR Controller to a 37-hp electric motor. It has a manual 4 speed transmission and front disc and rear drum brakes. It does not have regenerative braking GRA

### **N81-17963# California Univ., Livermore Lawrence Livermore Lab EVALUATION OF A HYBRID FLYWHEEL/BATTERY PRO- PULSION SYSTEM FOR ELECTRIC VEHICLES**

E P Cornell, F G Turnbull, and T M Barlow 16 Oct 1980 9 p refs Prepared in cooperation with GE Co., Schenectady, NY (Contract W-7405-eng-48)

(UCRL-15259) Avail NTIS HC A02/MF A01

The system consists of a steel flywheel coupled to a high-speed inductor motor/alternator fed by a load-commutated inverter/rectifier which does not utilize a shaft position sensor for inverter control. Computer control is used to provide component as well as overall system control and data acquisition. This flywheel

energy storage system was laboratory tested over the SAE J227a Schedules D, C, and B driving cycles, using a laboratory simulation of an electric vehicle drive. Results show that maximum benefit occurs on the Schedule D cycle for which the overall system was optimized. From these tests, recommendations for additional improvements to this propulsion system are presented. DOE

**N81-18485** Purdue Univ., Lafayette, Ind  
**MATHEMATICAL PROGRAMMING APPLIED TO POWER SYSTEMS EXPANSION PLANNING WITH PUMPED STORAGE** Ph.D. Thesis  
Enayat Ibrahim Hafez 1980 165 p  
Avail: Univ Microfilms Order No 8102661

Power systems expansion planning problem may be decomposed into three separate sub problems, generation, transmission, and distribution planning. Essentially it is the capability expansion problem versus dispatching problem. The sub problem of generation expansion planning (capacity expansion planning) that can use pumped hydroelectric storage is discussed. The sub problem of capacity expansion planning can be completely solved without considering the transmission and distribution sub problems. A multipurpose hydrostorage (conventional and pumped hydroplants) was considered which is to meet the needs of irrigation, flood control, and recreation. A linear programming (LP) formulation was developed for power systems expansion planning which incorporates the pumped hydro along with the conventional power plants (hydro, nuclear, thermal, etc.). The pumped hydro will be expected to meet peak demands. The size of the LP model is reduced using the Z substitute method which results in a reduction of computational time.

Dissert Abstr

**N81-18486** Alabama Univ., University  
**HIGH TEMPERATURE THERMAL ENERGY STORAGE IN AQUIFERS WITH A SOLAR POWER PLANT APPLICATION** Ph.D. Thesis  
Jasem Mohammad Al-Ansari 1980 205 p  
Avail: Univ Microfilms Order No 8100557

In this system, energy injection and withdrawal are accomplished by reversing flow through a system of wells connecting the aquifer to the surface. Each well contains a submerged pumping system and controls. Two computer programs have been developed for the proposed system. The first program computes the location of a fluid particle as it moves between the injection well and the withdrawal well for a given period of time. The second program computes the rate of heat transfer within the storage system during injection and withdrawal periods. The thermal energy storage system is analyzed in conjunction with a solar power plant system. The storage system provides energy during nighttime bad weather, and winter low insolation periods. The power plant system consists of a Rankine steam cycle, a two dimensional concentrating solar collector system, and the aquifer thermal energy storage system. The per kilowatt solar plant capital cost is approximately \$10,000/kW. The storage system is only \$40/kW of 0.4 percent of capital cost.

Dissert Abstr

**N81-18509** Mississippi State Univ., Mississippi State Dept of Mechanical Engineering  
**DEVELOPMENT OF A SYSTEM FOR OFF-PEAK ELECTRICAL ENERGY USE BY AIR CONDITIONERS AND HEAT PUMPS**  
Lynn D Russell May 1980 61 p refs  
(TVA-EDT-122, MSSU-EIRS-MS-80-1) Avail NTIS  
HC A04/MF A01

Investigation and evaluation of several alternatives for load management for the TVA system are described. Specific data for the TVA system load characteristics were studied to determine the typical peak and off peak periods for the system. The alternative systems investigated for load management included gaseous energy storage, phase change materials energy storage, zeolite energy storage, variable speed controllers for compressors, and weather sensitive controllers. After investigating these alternatives, system design criteria were established, then, the gaseous and PCM energy storage systems were analyzed. The system design criteria include economic assessment of all alternatives. Handbook

data were developed for economic assessment. A liquid/PCM energy storage system was judged feasible. DOE

**N81-18631** Sargent and Lundy, Engineers, Chicago, Ill  
**COMPRESSED AIR ENERGY STORAGE: PRELIMINARY DESIGN AND SITE DEVELOPMENT PROGRAM IN AN AQUIFER, TASK 2. VOLUME 2: CHARACTERIZE AND EXPLORE POTENTIAL SITES AND PREPARE RESEARCH AND DEVELOPMENT PLAN**  
Dec 1980 431 p refs Sponsored in part by Electric Power Research Inst  
(Contracts DE-AC02-78ET-29232, ET-78-C-01-2159)  
(DOE/ET-29232/T1-Vol-2) Avail NTIS HCA19/MFA01

The characteristics of sites in Indiana and Illinois which are being investigated as potential sites for compressed air energy storage power plants are documented. These characteristics include geological considerations, economic factors, and environmental considerations. Extensive data are presented for 14 specific sites and a relative rating on the desirability of each site is derived. DOE

**N81-19575** Naval Research Lab., Washington, D C  
**PULSED HIGH VOLTAGE AND HIGH CURRENT OUTPUTS FROM HOMOPOLAR ENERGY STORAGE SYSTEM** Interim Report  
R D Ford, D Jenkins, W H Lupton, and J M Vitkovitsky  
4 Feb 1981 16 p refs  
(RRO110941)  
(AD-A094910, NRL-MR-4433) Avail NTIS  
HC A02/MF A01 CSCL 10/2

Large energy storage capability of inertial inductive systems provides an attractive option for satisfying the pulse power requirements associated with such applications as plasma confinement and heating, electromagnetic projectile acceleration and with production of intense radiation. These applications require high rate of energy delivery to the load at specific current and voltage levels. In conjunction with self-excited homopolar generator current source, an opening technology has been developed to provide up to 1 MJ output pulses, alternately, at hundreds of kilovolts or at megampere levels. The overall system efficiency, which depends sensitively on the load requirements, was measured over a range from 10% to more than 90% for different pulser load circuit arrangements. GRA

**N81-19580** Air Force Inst of Tech., Wright-Patterson AFB, Ohio School of Engineering  
**COMPUTER SIMULATION OF SOLAR AIR HEATING SYSTEMS USING ROCK BED THERMAL STORAGE UNITS** M.S. Thesis  
Daniel Bartholomew Fant Dec 1980 144 p refs  
(AD-A094771, AFIT/GAE/AA/80D-4) Avail NTIS  
HC A07/MF A01 CSCL 09/2

This thesis is concerned with the analysis and design of solar air heating systems utilizing rock beds as thermal storage units. A computer simulation model capable of estimating the response of both the solar collector and the rock bed is described. Differential equations describing the rock bed were approximated in a finite-difference form and solved numerically on a digital computer. The temperature of both the solid (rock) and the fluid (air) is determined as a function of time and distance along the bed. The simulation required both charging and discharging of the rock bed for time-varying inlet fluid temperatures. The numerical method used to solve the rock bed equations proved to be stable and convergent and showed satisfactory agreement in comparison to an analytical solution for constant-inlet air temperature. A cost analysis was also incorporated within this program, by varying the collector area one could determine the optimum collector size for maximum savings. Pressure drop relationships for flat-plate collectors, duct work and packed beds were used to determine operating costs. The particular air system tested proved to be cost effective when compared with natural gas fuel costs for an economic term of 20 years. GRA

**N81-19588** Public Service Co of Indiana, Plainfield  
**COMPRESSED AIR ENERGY STORAGE: PRELIMINARY DESIGN AND SITE DEVELOPMENT PROGRAM IN AN**

## 07 ENERGY STORAGE

### AQUIFER. TASK 1: ESTABLISH FACILITY DESIGN CRITERIA AND UTILITY BENEFITS

Oct 1980 390 p Sponsored in part by EPRI  
(Contracts DE-AC02-78ET-29232, ET-76-C-01-2159)  
(DOE/ET-29232/T2) Avail NTIS HC A17/MF A01

Compressed air energy storage (CAES) stores mechanical energy in the form of compressed air during off-peak hours, using power supplied by a large, high efficiency baseload power plant. At times of high electrical demand, the compressed air is drawn from storage and is heated in a combustor by the burning of fuel oil, after which the air is expanded in a turbine. Essentially all of the turbine output can be applied to the generation of electricity, unlike a conventional gas turbine which expends approximately two-thirds of the turbine shaft power in driving the air compressor. The separation of the compression and generation modes in the system results in increased net generation and greater premium fuel economy. Work performed in establishing facility design criteria for a CAES system with aquifer storage includes determination of initial design bases, preliminary analysis of the CAES system, development of data for site-specific analysis of the CAES system, detailed analysis of the CAES system for three selected heat cycles, CAES power plant design, and an economic analysis of CAES. DOE

**N81-19806#** California Univ., Berkeley Lawrence Berkeley Lab Earth Sciences Div

### AQUIFER THERMAL ENERGY STORAGE: A SURVEY

Chin Fu Tsang, Deborah Hopkins, and Goeran Hellstroem Jan 1980 49 p refs

(Contract W-7405-eng-48)

(LBL-10441) Avail NTIS HC A03/MF A01

The technical, economic, and environmental aspects of aquifers storage were investigated. The state of the art of various projects associated with aquifer storage technology were surveyed with emphasis on three broad categories: field experiments, feasibility studies, and theoretical and modeling studies. RCT

**N81-19833#** Rocketdyne, Canoga Park, Calif

### THERMAL STABILITY TESTS OF HEAT TRANSFER FLUIDS FOR TRANSFER AND STORAGE OF THERMAL ENERGY

G R Schneider Dec 1980 142 p refs Prepared in cooperation with McDonnell Douglas Astronautics Corp., Huntington Beach, Calif

(Contracts E4-76-C-03-1108, DE-AC03-76ET-20417)

(DOE/ET-20417/4, MDC-G9331) Avail NTIS HC A07/MF A01

Laboratory tests were conducted to evaluate the high temperature (288 to 343 C) thermal stability, material compatibility, and surface fouling of selected commercial heat transfer fluids for a sensible heat thermal energy storage system to be used with a solar thermal electrical power generation plant. The tests provided information on the rate of fluid replenishment required, the change of viscosity, the composition of lost products, and the rate of fouling of heat transfer surfaces as a function of temperature and time. Determinations were made of the effect of the presence of materials likely to be used in the energy storage subsystem on these properties. DOE

### N81-19843# Swedish Council for Building Research, Stockholm CONTINUOUS HEAT SOURCE MODEL FOR GROUND HEAT STORAGE

Johan Claesson and Mats Johansson 1980 32 p refs

(PB81-122889, ISBN-91-540-3323-3, D34-1980) Avail NTIS HC A03/MF A01 CSCL 13B

The ground volume is penetrated by a duct system for injection and extraction of heat. The heat transfer properties between the ground and such a system is here characterized by a heat transfer length. The heat exchange between the soil and the ducts is represented by a heat source/sink distribution in the storage region. GRA

### N81-19644# Swedish Council for Building Research, Stockholm SWEDISH ENERGY STORAGE PROJECTS 1979: RESEARCH-DEVELOPMENT-FULL-SCALE EXPERIMENTS SUPPORTED BY GOVERNMENTAL ORGANIZATIONS

Stellan Atterkvist 1980 144 p refs

(PB81-122947, ISBN-91-540-3257-1, D19-1980) Avail NTIS HC A07/MF A01 CSCL 10C

The material contains 94 projects. Projects included general studies and comparisons of storage methods, sensible storage in water, sensible storage in ground and rock, sensible storage in parts of building structures, latent storage, thermochemical storage, batteries, storage of hydrogen. GRA

### N81-19969# Air Force Academy, Colo Dept of Physics THE USAF ACADEMY FLYWHEEL-ELECTRIC CAR Final Technical Report, 31 May 1979 - 31 Dec. 1980

Robert G Schwein, Jr Dec 1980 36 p

(AF Proj 2303)

(AD-A095130, FJSRL-TR-80-0025, FTR-2) Avail NTIS HC A03/MF A01 CSCL 13/6

This is the second and final report on the USAF Academy Flywheel-Electric Car. The car is an operational test vehicle, not a prototype for a commercial car. It weighs 3100 pounds, carries 4 passengers, and cruises at 40 miles per hour for about 100 miles before recharging. Technical details are presented that will provide guidance to the reader who wishes to construct a similar vehicle. GRA

**N81-19970#** Air Force Inst of Tech., Wright-Patterson AFB, Ohio School of Engineering

### ELECTRIC VEHICLE SIMULATION FOR DESIGN OPTIMIZATION M.S. Thesis

Kenneth A Stafford Dec 1980 118 p refs

(AD-A094734, AFIT/GAE/AA/80D-19) Avail NTIS HC A06/MF A01 CSCL 13/6

Currently available electric passenger vehicles have revealed a lack of design sophistication that has highlighted the need for an accurate method of forecasting performance. An electric vehicle computer simulation program was developed to satisfy that need. The approach was to establish a very comprehensive and flexible vehicle model and simulate its operation on a realistic driving cycle. The driving cycle selected was the Federal Urban Driving Sequence. A thorough vehicle model was established that incorporates aerodynamic drag, rolling resistance, both rotational and translational inertial effects, and component by component dynamic power train efficiencies. Battery discharge performance is tracked by a fractional-utilization algorithm with corrections for short-term discharge effects. The simulation compares required power obtained from the driving cycle speed schedule and vehicle model characteristics with the available power at the motor for each time increment of the driving cycle to compute battery fraction used and deviation from the speed schedule when available power is insufficient. These results of the simulation can be used to evaluate an existing vehicle's performance, or, if desired, to develop vehicle parameters to obtain a specified performance level. GRA

**N81-20561#** Department of Energy, Washington, D C

### THE 1980 FLYWHEEL TECHNOLOGY SYMPOSIUM

1980 470 p refs Symp held at Scottsdale, Ariz., Oct 1980

Sponsored in part by ASME

(Contract W-7405-eng-48)

(CONF-801022) Avail NTIS HC A20/MF A01

Forty-eight papers were presented at the meeting and are included in the proceedings. A separate abstract was prepared for each of 45 papers. Three papers were previously processed for EDB. DOE

**N81-20575#** United Technologies Corp., South Windsor, Conn Power Systems Div

### EVALUATION OF BATTERY CONVERTERS BASED ON 4.8-MW FUEL CELL DEMONSTRATOR INVERTER Final Report

Oct 1980 184 p refs

(Contract DE-AC01-76ET-26961)

(DOE/RA-26961/01) Avail NTIS HC A09/MF A01

The use of existing self-commutated converter technology with modification for use in battery energy storage systems was evaluated. The program consists of three parts: evaluation of the cost and performance of a self-commutated converter modified to maintain production commonality between battery and fuel cell power conditioners, demonstration of the principal characteristics.



tics required for the battery application in MW-scale hardware, and investigation of the technical requirements of operation isolated from the utility system. A power-conditioning system consisting of a self-commutated converter augmented with a phase-controlled rectifier was selected and a preliminary design prepared. A principal factor in this selection was production commonality with the fuel cell inverter system. Additional types of augmentation, and the use of a self-commutated converter system without augmentation, were also considered. A survey of advanced battery manufacturers was used to establish the dc interface characteristics. DOE

**N81-20591#** Gould, Inc., Rolling Meadows, Ill  
**DEVELOPMENT OF ZINC-BROMINE BATTERIES FOR UTILITY ENERGY STORAGE** Annual Report, 1 Sep. 1978 - 31 Aug. 1979

Ronald A. Putt, Alan J. Attia, Po-Yen Lu, and James H. Heyland  
May 1980 161 p refs. Sponsored in part by Electric Power Research Inst.

(Contracts DE-AC02-78ET-29345, EW-78-C-02-4984, EPRI Proj. RP635-2)

(DOE/ET-29345/21, AR-1) Avail NTIS HC A08/MF A01

Development work on the Zn/Br battery is reported. A major improvement was the use of a bipolar cell design, this design is superior with respect to cost, performance, and simplicity. A cost and design study for an 80 kWh module resulted in a cost estimate of \$54/kWh (1979\$) for purchased materials and components, on the basis of 2500 MWh of annual production. A cell submodule (nominal 2 kWh) of full sized electrodes (1 sq ft) accrued over 200 continuous cycles in a hands off, automatic routine with efficiencies in the range of 53 to 56 percent. Initial testing of a full sized 8 kWh submodule demonstrated energy efficiencies of 65 to 67 percent. DOE

**N81-21359#** Alabama Univ., Huntsville Kenneth F. Johnson  
Environmental and Energy Center

**CHANGE-OF-PACE ELECTRIC AUTOMOBILE USER DEMONSTRATION (COMCAR 2) Final Report**

K. E. Johnson Nov 1980 75 p

(Contract EC-77-X-01-3559)

(DOE/TIC-11373) Avail NTIS HC A04/MF A01

A present technology electric car was tested under conditions which were as close as possible to real life conditions as opposed to the laboratory conditions encountered on the dynamometer or the test track. The test program was conducted over several months, so that the data would realistically reflect the performance characteristics of the car under urban driving conditions. In addition to demonstrating the change of pace, the ComCar 2 project was expected to make contributions toward product improvement. Engineering evaluations of car components were performed in close cooperation with the manufacturer, in an effort to help solve several technical problems which were encountered. Information was obtained and is presented on vehicle performance, operating costs, drivers' responses to electric vehicles, and the support structures need to operate and maintain electric vehicles. DOE

**N81-21495#** Electrochem Industries, Inc., Clarence, NY  
**PERFORMANCE AND SAFETY CHARACTERISTICS OF LI/BCX AND L/CSC SYSTEMS**

Robert M. Murphy / In NASA Goddard Space Flight Center  
The 1980 Goddard Space Flight Center Battery Workshop Mar 1981 p 23-30

Avail NTIS HC A19/MF A01 CSCL 10C

The performance and safety characteristics of the lithium BMX and lithium CSC battery system are discussed. A comparison is made between the two systems with respect to open circuit voltage, energy density, and operating temperature. RCT

**N81-21505#** Hughes Aircraft Co., Los Angeles, Calif  
**HIGH ENERGY DENSITY BATTERIES FOR SATELLITE APPLICATIONS**

Lynn Marcoux and R. Marsh (Air Force Aero Propulsion Lab., Wright-Patterson AFB, Ohio) / In NASA Goddard Space Flight

Center The 1980 Goddard Space Flight Center Battery Workshop Mar 1981 p 143-154

12-44)

Avail NTIS HC A19/MF A01 CSCL 10C

The performance requirements of high-energy batteries for terrestrial applications were examined to establish whether or not these systems showed any promise in aerospace applications. The technology assessment is reported and consists of a battery technology evaluation, preliminary engineering studies, and system selection. Major candidate systems are compared and a program schedule is provided. TM

**N81-21509#** MPD Technology Corp., Wyckoff, N.J.

**THE CMG NICKEL ELECTRODE**

Robert A. DePaul and Ian Gutridge / In NASA Goddard Space Flight Center The 1980 Goddard Space Flight Center Battery Workshop Mar 1981 p 183-195

Avail NTIS HC A19/MF A01 CSCL 10C

The development and design of the Controlled Microgeometry electrode are described. Advantages of the electrode over others in existence include a higher number of ampere hours per kilogram and the ability to make them over a wide range of thicknesses. The parameters that control the performance of the electrode can be individually controlled over a wide range. Therefore, the electrode may be designed to give the optimum performance for a given duty cycle. TM

**N81-21510#** Naval Surface Weapons Center, White Oak, Md  
**LIGHTWEIGHT COMPOSITE CADMIUM ELECTRODES**

R. A. Sutula and W. Ferrando / In NASA Goddard Space Flight Center The 1980 Goddard Space Flight Center Battery Workshop Mar 1981 p 197-205

Avail NTIS HC A19/MF A01 CSCL 10C

The design and fabrication of the electrodes are discussed. The electrode efficiency of different impregnations of plaques is reported. The chemical impregnation for commercial use has the lowest efficiency, and for aerospace application it has higher efficiency. The electrochemically impregnated electrode is the most efficient. TM

**N81-21512#** Hughes Research Labs., Malibu, Calif

**PBI TREATED POLYPROPYLENE BATTERY SEPARATOR**

Scott A. Veryzwylt / In NASA Goddard Space Flight Center The 1980 Goddard Space Flight Center Battery Workshop Mar 1981 p 217-223

Avail NTIS HC A19/MF A01 CSCL 10C

A generalized procedure for fabricating the separator is described. Some of the desired properties considered in fabricating the separator material for nickel-cadmium cells were good mechanical strength, good chemical stability, good wettability to the electrolyte, high electrolyte retention, and gas passage. TM

**N81-21526#** RCA Labs., Princeton, N.J.

**RCA SATCOM IN-ORBIT EXPERIENCE**

David Stewart / In NASA Goddard Space Flight Center The 1980 Goddard Space Flight Center Battery Workshop Mar 1981 p 379-384

Avail NTIS HC A19/MF A01 CSCL 10C

The F1 and F2 spacecraft battery systems are described. Battery reconditioning and discharge are discussed and graphically illustrated. Current sharing as a measure of battery performance is also plotted. E.D.K.

**N81-21586#** EIC, Inc., Newton, Mass.

**LOW TEMPERATURE ALKALI METAL-SULFUR BATTERIES**

Final Report, 1 Dec. 1974 - 30 Nov. 1978

S. B. Brummer, R. D. Rauh, K. M. Abraham, F. W. Dampier, V. Subrahmanyam, G. F. Pearson, J. K. Surprenant, and J. M. Buzby  
Mar 1980 128 p refs.

(Contracts DE-AC02-78ET-25003, EY-78-C-02-2520)

(COO-2520-7) Avail NTIS HC A07/MF A01

Work on the development of rechargeable, ambient-temperature Li-sulfur and Li-metal sulfide batteries is reported. The Li-S system has the cathode material dissolved in the electrolyte, as Li<sub>2</sub>S sub n Tetrahydrofuran, 1M LiAsF<sub>6</sub>, is one

## 07 ENERGY STORAGE

of the more attractive electrolytes discovered for this cell, since it can dissolve up to approx 10M S as  $\text{Li}_2\text{Sn}$ . Despite the oxidative nature of the electrolyte, Li is stable in it and can be electrodeposited from it on battery charge DOE

**NS1-21587#** General Electric Co., Santa Barbara, Calif. Center for Advanced Studies

### **GUIDELINES FOR CONCEPTUAL DESIGN AND EVALUATION OF AQUIFER THERMAL ENERGY STORAGE**

C F Meyer and W Hanz Columbus, Ohio Battelle Memorial Inst Oct 1980 249 p refs

(Contract DE-AC06-76RL-01830)

(PNL-3581) Avail NTIS HC A11/MF A01

Guidelines are presented for use as a tool by those considering application of aquifer thermal energy storage (ATES) technology. The guidelines assist utilities, municipalities, industries, and other entities in the conceptual design and evaluation of systems employing ATES. The potential benefits of ATES are described, an overview is presented of the technology and its applications, and rules of thumb are provided for quickly judging whether a proposed project has sufficient promise to warrant detailed conceptual design and evaluation. The characteristics of sources and end uses of heat and chill which are seasonally mismatched and may benefit from ATES are discussed. Storage and transport subsystems and their expected performance and cost are described. A methodology is presented for conceptual design of an ATES system and evaluation of its technical and economic feasibility in terms of energy conservation, cost savings, fuel substitution, improved dependability of supply, and abatement of pollution. DOE

**A81-21701** Summer Computer Simulation Conference, Toronto, Canada, July 16-18, 1979, Proceedings. Conference sponsored by AGU, AIAA, AMS, BMES, IMACS, IEEE, ISA, SCS, and SHARE Montvale, N J, AFIPS Press, 1980 997 p \$30

Topics discussed include simulation methodology, hybrid systems, simulation credibility and validation, system engineering, and simulation for training. Particular attention is given to simulation in the chemical sciences, the physical sciences, the environmental sciences, biomedical systems, the managerial and social sciences, and energy B J

**A81-21730** Effect of load spectrum variables on fatigue crack initiation and propagation, Proceedings of the Symposium, San Francisco, Calif., May 21, 1979. Symposium sponsored by the American Society for Testing and Materials. Edited by D. F. Bryan (Boeing Wichita Co., Wichita, Kan.) and J. M. Potter (USAF, Flight Dynamics Laboratory, Wright-Patterson AFB, Ohio). Philadelphia, Pa., American Society for Testing and Materials (ASTM Special Technical Publication, No. 714), 1980 244 p \$27

The symposium focused on load spectra of engineering structures, gas turbines, windmill structures, analytical and experimental fatigue and fracture data, the effects of spectrum editing, time dependent changes in material characteristics, compression loads, and gust alleviation. Topics include 7XXX Al alloy fatigue crack growth resistance under constant amplitude and spectrum loading, crack retardation resulting from the load sequencing characteristic of military gas turbine operation, and the effects of fighter attack spectrum on crack growth A T

**A81-22208** Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings. Volumes 1 & 2. Conference sponsored by ACM, AIIE, IEEE, NBS, ORSA, SCS, and TIMS. Edited by H. J. Highland (New York, State University, Farmingdale, N Y.), M. G. Spiegel (Federal Computer Performance Evaluation and Simulation Center, Washington, D C.), and R. Shannon (Alabama, University, Huntsville, Ala.). New York, Institute of Electrical and Electronics Engineers, Inc., 1979 Vol. 1, 350 p, vol. 2, 341 p. Price of two volumes, \$40.50

Consideration is given to such topics as experimental design in computer simulation, computer-aided digital autopilot design and analysis, simulation of passive solar systems, simulation of an advanced inertial stabilization concept, and simulation in project management. Factor screening methods in computer simulation experiments, a simulation model for network routing, and simulation of merge junctions in a dynamically entrained automated guideway transit system are also examined B.J

**A81-22757 \* #** Space construction technology needs. L. M. Jenkins (NASA, Johnson Space Center, Program Development Office, Houston, Tex.) American Institute of Aeronautics and Astronautics, Conference on Large Space Platforms Toward Permanent Manned Occupancy of Space, 2nd, San Diego, Calif., Feb. 2-4, 1981, Paper 81-0442 5 p 9 refs

Space construction systems made feasible by an operational Space Shuttle are discussed with a view toward assembly, installation and construction support equipment. The level of construction capability will be reflected in the number of launches to accomplish a certain mission, either in terms of the mission time line or on the density of packaging in the Orbiter payload bay. It is noted that the development of construction support equipment in zero-gravity simulations should be the most productive initial activity. Crew

EVA's, as well as the beam builder, cherrypicker and power distribution buses are covered in detail L S

**A81-22877** Systems engineering - Fundamental limits and future prospects. A. P. Sage (Virginia, University, Charlottesville, Va.) IEEE, Proceedings, vol. 69, Feb. 1981, p. 158-166 8 refs

Presently perceived fundamental limits in systems engineering are described along with contemporary and projected future efforts to reach, circumvent, or ameliorate the effects of these limits. To present an overall view of the many frontiers being explored and extended in the realm of systems, man and cybernetics, a set of twenty-five objectives for systems engineering in the 1980's is first described. This is followed by a summary description of systems engineering. The paper continues with a discussion of limits associated with modeling, human and behavioral factors, and utility and value measurement. It concludes with examples of how these limits affect the design of planning and decision support systems, and energy policy analysis using technology forecasting and assessment (Author)

**A81-23496** The absorption process for heating, cooling and energy storage - An historical survey. H. Bjurström and W. Raldow (Kungl. Tekniska Högskolan, Stockholm, Sweden). International Journal of Energy Research, vol. 5, Jan-Mar. 1981, p. 43-59 132 refs. Research supported by the Styrelsen for Teknisk Utveckling

A historical overview of the absorption process is given and a wide range of applications, from household refrigerators and air conditioners to topping processes in power plants, are surveyed in historical perspective. The production of mechanical energy and open systems are also included. The current development of the absorption process is sketched out and special attention is given to the aspects of thermal energy storage D K

**A81-25004** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2 - Solar Energy 2. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.). Washington, D.C., Hemisphere Publishing Corp., 1981 529 p. Price of nine volumes, \$595

The conference focused on heat transfer and energy transport, water heating, heat pumps, heating and cooling, and various applications of alternative energy sources. Papers are presented on the numerical resolution of the heat transfer equations in a latent heat solar energy storage system, the series solar heat pumps and energy conservation, solar air conditioning with solid absorbents and earth cooling, and the use of solar energy in multi-storied buildings V.L

**A81-25040** Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3 - Solar energy 3. Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami, University, Coral Gables, Fla.). Washington, D.C., Hemisphere Publishing Corp., 1981 507 p. Price of nine volumes, \$595

The book examines the topics of distillation, thermal power, direct electrical conversion, and solar energy economics and planning. Several papers are presented on the subjects of thin film photovoltaic solar energy conversion, the solar thermionic power plant, the construction cost of thermal storage for solar systems, and the thermodynamic method for the quantitative treatment of conduction electrons L S

**A81-25048** Combined solar and fossil fuel systems for electric power generation. K. W. Li (North Dakota State University, Fargo, N. Dak.) and J. Cashman (Charles T. Main, Inc., Boston, Mass.). In Alternative energy sources II, Proceedings of the Second

## 08 GENERAL

Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 3 Washington, D.C., Hemisphere Publishing Corp., 1981, p 1123-1130

The paper is intended to present a parametric study for the combined solar and fossil fuel system for electric power generation. The combined system is so designed that the solar energy will be utilized to a maximum extent at the time when the solar energy is available. The balance of energy requirement is met by burning fossil fuels such as coal, oil and natural gas. The basic system arrangement is the partial heating of feedwater by solar energy. The study includes an identification of major parameters affecting the solar energy utilization as a supplementary fuel for electric power generation. In addition a break-even cost analysis is made. (Author)

**A81-25065** **Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 4 - Indirect solar energy.** Conference supported by the International Association for Hydrogen Energy, IAEA, ISES, Florida International University, and University of Miami. Edited by T. N. Veziroglu (Miami University, Coral Gables, Fla.) Washington, D.C., Hemisphere Publishing Corp., 1981. 425 p. Price of nine volumes, \$595.

This volume gives consideration to the topics of wood energy, wind turbines and siting, wind power generation, wave and current energy, tide energy and ocean thermal energy. Particular attention is given to the performance analysis of vertical axis wind turbines, estimating wind potential for small scale energy generation, and the effects of wind integration with conventional electrical generating systems. The development of tidal power in Korea, the design of the OTEC Seacoast Test Facility at Keahole Point, Hawaii, and wind energy utilization possibilities in Turkey are reviewed. L.S.

**A81-25165** **Energy accounting for solar and alternative energy sources.** W D Devine, Jr (Oak Ridge Associated Universities, Inc., Oak Ridge, Tenn.) In *Alternative energy sources II, Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979 Volume 9* Washington, D.C., Hemisphere Publishing Corp., 1981, p 3815-3844. 14 refs.

Shortcomings in energy data collection, display and accounting practices are of minor consequence in an economy of today in which most end use services are provided via fossil fuels and electricity. However, the emergence of a variety of alternative technologies that might be used to provide these services suggests that present accounting practices be reexamined and a more appropriate system devised. The paper proposes an energy accounting framework based upon the actual services provided to end users. An energy service is a measure of the service actually provided to ultimate consumers by their own use of energy, quantified, for example, using units of work or of heat at various temperatures. Fifteen categories of energy service are described and some of their characteristics are identified. The proposed energy accounting framework consists of two matrices - an energy service matrix and an energy carrier matrix. The energy service matrix displays quantities of energy carriers used to provide energy services. The energy carrier matrix displays quantities of energy carriers used to produce and distribute energy carriers to ultimate consumers. (Author)

**A81-25601** **Progress in batteries and solar cells. Volume 3.** Edited by A. Kozawa, K V Kordes (Graz, Technische Universität, Graz, Austria), E Voss (Varta Batterie AG, Kelkheim, West Germany), H Ogawa (Matsushita Electric Industrial Co., Ltd., Osaka, Japan), H Ikeda (Sanyo Electric Co., Ltd., Kobe, Japan), J P Gabano (Société des Accumulateurs Fixes et de Traction, Romainville, Seine-Saint-Denis, France), H M Joseph (Union Carbide Corp., Battery Products Div., New York, N.Y.), K Fueki (Tokyo, University, Tokyo, Japan), Y Uetani (Hitachi Maxell Co., Osaka, Japan), and T Shirogami (Toshiba Corp., Toshiba Research and Development Center, Kawasaki, Japan) Cleveland, Ohio, JEC Press, Inc., 1980 356 p \$48

A technology yearbook is presented summarizing the progress made in battery, solar cell, and energy-related research. Raw materials, components, manufacturing processes, and machinery are reviewed. Research papers and patents are included along with reports on new devices and equipment. While the emphasis is on the translation of Japanese, German and French information into English, major developments in the US and USSR are also covered. L.S.

**A81-25610** **Major electrochemical developments related to the energy problem.** E. Yeager (Case Western Reserve University, Cleveland, Ohio) In *Progress in batteries and solar cells Volume 3.* Cleveland, Ohio, JEC Press, Inc., 1980, p 242-244.

The ways in which electrochemistry can help to lessen dependence upon and make more effective use of hydrocarbon fuels are surveyed. Primary and storage battery systems for electrochemically powered vehicles are examined. Hydrogen-air fuel cells offer promise for vehicle propulsion if a reasonable means of storing H<sub>2</sub> can be developed, perhaps in the form of a metal hydride. Electric utility applications discussed include battery systems for peak shaving and load leveling, H<sub>2</sub> phosphoric acid on-site fuel cells, and the combination of coal gasification and fuel cells in a large (over 500 MW) central electronic power station. Systems for the photoelectrochemical generation of electricity are also reviewed. L.S.

**A81-26476** **Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979.** Conference sponsored by Bond voor Materialenkennis, CEC, Metals Society, et al. Edited by I Kirman (Inco Europe, Ltd., London, England), J B Marriott, M Merz (Commission of the European Communities, Joint Research Centre, Petten, Netherlands), P R Sahm (Aachen, Technische Hochschule, Aachen, West Germany), and D P Whittle (California, University, Berkeley, Calif.) London, Metals Society, 1980 1088 p. In English and French \$35

Studies presented in this volume deal with the mechanical properties and corrosive behavior of metal alloys in aggressive high temperature environments. Emphasis is placed on iron, nickel, and cobalt base alloys used, or potentially of use, in high-temperature industrial applications, including petrochemical and coal gasification processes, nuclear process heat, and high-temperature power plants. V.L.

**A81-27301** **Wind engineering, Proceedings of the Fifth International Conference, Colorado State University, Fort Collins, Colo., July 8-14, 1979. Volumes 1 & 2.** Conference sponsored by NSF, Exxon Research and Engineering Co., U.S. Nuclear Regulatory Commission, et al. Edited by J E Cermak (Colorado State University, Fort Collins, Colo.) Oxford, Pergamon Press, Ltd., 1980 Vol 1, 673 p., vol 2, 803 p. Price of two volumes, \$200

The conference focused on social and economic impact of wind storms, wind characteristics, local wind environments, wind loading, dynamic responses of tall buildings and towers, physical and mathematical modeling, and wind engineering applications. Papers included an assessment of potential cyclone damage to dwellings in Australia, vertical coherence in the atmospheric boundary layer, wind-induced heat loss from buildings, wind loads on building frames, and vortex shedding from circular cylinders in turbulent flow. Also, topics analyzed involved drifting snow similitude-drift deposit rate correlation, wind tunnel investigation of the dispersion of chemical vapors emitted from marine chemical carriers, and aerodynamics of heliostats for solar power plant applications. A.T.

**A81-29251** **Fundamentals and applications of solar energy, Proceedings of the Seventy-Second Annual Meeting, San Francisco, Calif., November 25-29, 1979.** Meeting sponsored by the American Institute of Chemical Engineers. Edited by I H Farag (New Hampshire, University, Durham, N.H.) and S S Melsheimer

(Clemson University, Clemson, S C ) *AICHE Symposium Series*, vol 76, no 198, 1980 177 p

Topics discussed include the design and analysis of parabolic, concentrating solar collectors, thermal energy storage in underground and phase change material systems, and the design and operational characteristics of solar heating systems. Also considered are concentrating collector, cooling and energy storage devices for photovoltaic systems, and the derivation of fuels from biomass sources O C

**A81-29688** The boundless dimension - Space flight Volume 1 - Prospects and problems (Die grenzenlose Dimension - Raumfahrt. Volume 1 - Chancen und Probleme). H O Ruppe (Munich, Technische Universität, Munich, West Germany) Dusseldorf, Econ Verlag GmbH, 1980 736 p In German \$19 50

A review of the history and the state of the art of space flight is given. The first section examines the early history of space flight up to 1979 which was made possible by scientific developments in physics, communications technology, thermodynamics, space mechanics and many other disciplines. Projected developments of the next 20 years are covered in the second section, especially the NASA Space Shuttle, Skylab, and advances in payload and propulsion systems. The third section presents speculative trends in propulsion and space travel advances for the next century. Proposed propulsion systems based on nuclear energy and other power mechanisms are discussed along with prospects for energy production in space, such as energy satellites. The problems and prospects of space settlement and interstellar flight are also detailed. The fourth section examines the costs of space flight and makes a plea for the long-term benefits to be had from a generous investment, not only in military terms but in terms of research in astronomy and in terms of economic benefits from satellite mapping of resources and land use D K

**N81-16773#** National Technical Information Service, Springfield, Va

**A DIRECTORY OF COMPUTER SOFTWARE APPLICATIONS: ENERGY** Progress Report, Feb. 1977 - Apr. 1980

Apr 1980 305 p  
(PB80-105497, NTIS/SA-80/01) Avail NTIS  
HC \$30 00/MF \$30 00 CSCL 09B

Computer programs and/or documentation developed for a variety of applications to the field of energy are cited. The computer software includes applications to solar, geothermal and nuclear energy, petroleum and natural resources, batteries, electrohydrodynamics and magnetohydrodynamic generators, and hydroelectric power production. Examples of software use include simulation and modeling, calculations of future energy requirements, calculations of conservation measures and computations of economic considerations of energy systems GRA

**N81-17986#** National Aeronautics and Space Administration Marshall Space Flight Center, Huntsville, Ala

**THE MARSHALL CENTER: ITS PLACE IN NASA**

[1981] 31 p refs  
(NASA-TM-82254) Avail. NTIS HC A03/MF A01 CSCL 05A

The organizational structure and facilities available at the Marshall Space Flight Center are described and the role of the Center in NASA program management is demonstrated in a review of the Center's past history and current development projects. Particular attention is given to space shuttle and the space transportation system, the preparation of experiments and management of Spacelab missions, and the development of the space telescope. Energy related activities discussed include the automatic guidance and control of the longwall shearing machine for coal extraction, systems for the solar heating and cooling of buildings, and the design of the solar power satellite. Products developed by Center personnel highlighted include the power factor controller to reduce electrical consumption by motors and the image enhancement process being used to restore early historical photographs. A free flying solar power source to increase mission duration of the orbiter and its payloads, techniques for the orbital assembly of large space structures, facilities for materials processing in space, the orbit transfer vehicle, solar

electric propulsion systems, and the preparation of science and applications payloads are also described A R H

**N81-18940#** Strasbourg Univ (France)

**GENERAL REFLECTIONS ON THE THEME OF INNOVATIONS**

Nicholas Georgescu-Roegen In *ESA Econ. Effects on Space and Other Adv Technol Sep 1980 p 47-51 refs*

Avail NTIS HC A12/MF A01

Technological innovation or 'exosomatic mutation' is analyzed in a historical context. The difficulties of recognizing future trends with special reference to the energy crisis are discussed. The steam engine rescued man from a crisis similar to the present one. The breeder reactor is mentioned as an invention of the same importance. Author (ESA)

**N81-18955#** Commission of the European Communities, Brussels (Belgium) Forecasting and Assessment in Science and Technology

**EUROPE IN FACE OF THE FUTURE [L'EUROPE FACE AUX FUTURS]**

Michel Godet In *ESA Econ Effects of Space and Other Adv Technol Sep 1980 p 191-197 refs* In FRENCH

Avail NTIS HC A12/MF A01

Trends toward increased productivity and increased energy costs are examined and the social and economic impact on Europe is analyzed. Present limitations in forecasting, the price of energy and its relation to new development, unemployment as a consequence of automation, the relative position of developed and underdeveloped countries, and the desirability of social and economic policies are discussed. Author (ESA)

**N81-19174#** National Aeronautics and Space Administration Marshall Space Flight Center, Huntsville, Ala

**SPACE PLATFORM REFERENCE MISSION STUDIES OVERVIEW**

James K Harrison In *NASA Langley Research Center Large Space Systems Technol, 1980, Vol 1 Feb 1981 p 129-132*

Avail NTIS HC A19/MF A01 CSCL 22B

The design requirements for three major space platform systems are identified. The three were the Science and Applications Space Platform (SASP), the Geostationary Platform (GSP), and the Satellite Power System (SPS). Because the SASP and GSP were assumed to require no advanced technology for their development an advanced version of each was selected on which to base the design requirements. The SPS represented the opposite development state hence a nearer term test article was selected on which to base the requirements. The development period for these missions is estimated M G

**N81-19611#** Argonne National Lab, Ill Energy and Environmental Systems Div

**EMPLOYMENT IMPACTS OF SELECTED SOLAR AND CONVENTIONAL ENERGY SYSTEMS: A FRAMEWORK FOR COMPARISONS AND PRELIMINARY FINDINGS**

Kenneth K Smeltzer Jan 1980 37 p refs

(Contract W-31-109-eng-38)

(ANL/EES-TM-116) Avail NTIS HC A02/MF A01

Preliminary comprehensive analyses of quantitative and qualitative employment effects of selected solar and conventional energy systems are presented. A framework is proposed for analyzing the direct, indirect, induced, displacement, disposable income, and qualitative employment effects of alternative energy systems. The analyses examine current research findings on these effects for a variety of solar and conventional energy sources and compare expected employment impacts. In general, solar energy systems have higher direct and indirect employment requirements than do conventional energy systems. In addition, employment displaced from conventional sources and employment effects due to changes in consumers' disposable income are highly significant variables in net employment comparisons. Analyses of the size and location of projected energy developments suggest that dispersed solar energy systems have a more beneficial

## 08 GENERAL

impact on host communities than do large conventional facilities, regardless of the relative magnitude of employment per unit of energy output DOE

**N81-20004#** Technical Research Centre of Finland, Espoo  
**[APPLIED RESEARCH ACTIVITIES FOR 1979] Annual Report**  
1980 26 p Original contains color illustrations  
Avail NTIS HC A03/MF A01

Work in building construction, city planning, materials development and processing; energy technology, and information technologies is reviewed. Structural stress from ice loads, building design, reactor safety, the use of peat in power plants, and the industrial use of enzymes are mentioned Author (ESA)

**N81-21007#** National Bureau of Standards, Washington, D C  
**DIMENSIONS/NBS, VOLUME 64, NO. 8, OCTOBER 1980 Monthly Report, October 1980**  
Oct. 1980 32 p refs  
(PB81-133654, NBS/DIM-64/8) Avail NTIS  
HC A03/MF A01 CSCL 148

Short summaries of major technical developments, highlights of work in progress and major speeches and statements by Bureau management are presented as well as a listing of NBS publications. Articles in this issue are: A Look at Federal Office Automation, S Radack, Safer Practice Makes Perfect, K Kuo, Electrical Wiring Staying on the Safe Side, G Porter, I-C Test Structures for Random Faults, M Baum, Temperature Reference Materials Available, SRM, Degradation of Solar Absorber Coatings, L Masters; Test of Radiation Exposure Calculation for Reactor Pressure Vessels, E. McGarry GRA

**N81-21680#** Department of Energy, Washington, D C Assistant Secretary for Conservation and Solar Energy  
**ALTERNATE SOURCES OF ENERGY**  
1980 155 p Presented at the Alternate Sources of Energy Conf., New York, 29 Sep 1980  
(CONF-8009109) Avail NTIS HC A08/MF A01

Eleven papers are included. A separate abstract was prepared for each for Energy Research Abstracts (ERA), seven were selected for Energy Abstracts for Policy Analysis DOE

**N81-21633#** Federal Lab Consortium, Washington, D C  
**THE ENERGY LINK CATALOG VOLUME 2: ENERGY RESOURCE CATALOG**  
P Thomas Stiko Feb 1980 136 p Prepared in cooperation with San Diego Science and Technology Action Center, Calif and Naval Weapons Center, China Lake Calif  
(Grant NSF ISP-78-22221)  
(PB81-140824, NSF/RA-800264, LLL-MISC-138-2) Avail  
NTIS HC A07/MF A01 CSCL 10A

The Energy Link Project, through the development of a simplified resource/technology locator system, has improved the accessibility and usability of resources from the Federal Laboratory system in the energy field. This locator system was designed from the point of view of local government management. This orientation allows the user to identify his needs and then retrieve the resources applicable to alternative solutions from the Federal Laboratory system. Instructions are provided on how to use the catalog and obtain publications. Entries are categorized and include title, abstract, contact, and availability GRA

**N81-21645#** Argonne National Lab., Ill Materials Science Div  
**STATE-OF-THE-ART REVIEW OF MATERIALS-RELATED PROBLEMS IN FLUE GAS DESULFURIZATION SYSTEMS**  
P S Maiya Oct 1980 45 p refs  
(Contract W-31-109-eng-38)  
(ANL-80-59) Avail NTIS HC A03/MF A01

The chemical and mechanical environments to which the structural components used in flue gas desulfurization (FGD) are exposed are discussed. Information pertinent to various FGD processes currently in use are reviewed with particular emphasis on lime/limestone scrubbing technology, so that the materials problems and processing variables encountered in FGD systems can be better defined and appreciated. The report also describes

the materials currently used and their performance to date in existing wet scrubbers. With more extensive use of coal and flue gas scrubbers by utilities and other segments of private industry, a better understanding of the material failure mechanisms, performance limitations, and potential problem areas is required for the design of more reliable and cost effective FGD systems. To meet the above objectives, a materials evaluation program is proposed DOE

**N81-21949\*#** National Aeronautics and Space Administration  
Marshall Space Flight Center, Huntsville, Ala  
**RESEARCH AND TECHNOLOGY: ANNUAL REPORT Annual Report**  
1980 62 p  
(NASA-TM-82314) Avail NTIS HC A04/MF A01 CSCL 05B

Activity conducted in the following areas is highlighted: space sciences, space transportation systems, space and energy technology, and space terrestrial applications A R H

**N81-21960#** Logistics Management Inst., Washington, D C  
**DEFENSE ENERGY INFORMATION SYSTEM (DEIS): DEIS-80 SYSTEM DESIGN SPECIFICATION Final Report**  
Joan Lengel Aug 1980 177 p  
(Contract MDA903-77-C-0370)  
(AD-A098263, LMI-ML917) Avail NTIS HC A09/MF A01 CSCL 05/1

The Defense Energy Information System (DEIS) is a worldwide, automated, energy management information system. It provides data on petroleum products used as mobility fuels by the military departments as well as most energy sources used for utility services at DoD installations. DEIS consists of two related information systems. DEIS 1 reports the disposition and consumption of petroleum products, notably aviation gasoline, jet fuels, motor gasoline, distillate and residual oils within DoD. DEIS II reports the consumption of utility energy, such as electricity, natural gas, purchased steam/hot water, fuel oil and coal. It reports the consumption and generation of energy from renewable sources. This document presents the System Design Specification for the enhanced DEIS (DEIS 80). As specified, DEIS 80 improves the utility of the existing system by including additional data, supporting management queries of the DEIS 80 data bases on-line, and providing the capability for automated data analysis. This system design specification serves as the guide for the computer programming of DEIS 80. It adheres to the requirement for system specification in the 'Automated Data Systems Documentation Standards' GRA

**N81-21975#** National Oceanic and Atmospheric Administration, Boulder, Colo Environmental Research Labs  
**SCIENTIFIC AND TECHNICAL PUBLICATIONS OF THE ENVIRONMENTAL RESEARCH LABORATORIES' FISCAL YEAR 1978 Bibliography, 1 Oct. 1977 - 30 Sep. 1978**  
Jun 1980 48 p  
(PB81-141301, NOAA-80110406) Avail NTIS  
HC A03/MF A01 CSCL 05B


Approximately 675 citations in environmental research are presented. Topics covered include investigation of ocean processes and their interactions with the atmosphere, studies of the ocean environment as it is affected by waste disposal and development of energy resources, fundamental studies of the upper atmosphere and space environments, lower atmosphere research on the weather and climates, research on tsunamis, severe local storms, and hurricanes, studies of weather modification, and the environmental effects of global pollution or similar influences on ecology, and development of equipment, instruments, systems, and facilities for these programs. Publications from research contracts and work done by cooperating institutes, and international aid programs are included GRA

# SUBJECT INDEX

ENERGY/A Continuing Bibliography (Issue 30)

JULY 1981

## Typical Subject Index Listing

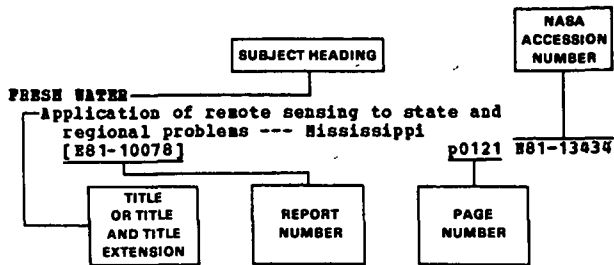

The subject heading is a key to the subject content of the document. The title or title and title extension provides the user with a brief description of the subject matter. The report number helps to indicate the type of document cited (e.g. NASA report translation, NASA contractor report). The page and accession numbers are located beneath and to the right of the title. Under any subject heading the accession numbers are arranged in sequence with the AIAA accession numbers appearing first.

## A

### ABLATION

Nonlinear evolution of ablation-driven Rayleigh-Taylor instability --- behavior of laser fusion targets  
p0332 A81-21466

### ABSORPTION COOLING

Capacity modulation of solar-fired absorption chillers with single and multi-temperature energizing sources  
p0210 A81-20493

Solar air conditioning in a hot arid climate  
p0226 A81-25027

Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems  
p0226 A81-25028

CSU Solar House 3 solar heating and cooling system performance  
[DOE/CS-30122/T1] p0272 A81-19587

### ABSORPTIVITY

Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells  
p0241 A81-27183

### ABUNDANCE

The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 A81-16612

### AC GENERATORS

Flux pump excited brushless alternator  
p0334 A81-23436

Superconducting generators - Economics, technical considerations and ancillary technology  
p0335 A81-23466

Small scale power generation utilizing wave energy  
p0339 A81-25080

Variable speed constant frequency constant voltage alternator --- converting wind power to usable 60 hertz power  
[DOE/ET-29246-T1] p0361 A81-21298

### ACCELERATED LIFE TESTS

Degradation of ITO/p-Si solar cells --- Indium Tin Oxide  
p0248 A81-27257

### ACCEPTABILITY

Social acceptability of Satellite Power Systems (SPS). The near term outlook  
[DOE/EE-10072/1] p0200 A81-19603

### ACCIDENT INVESTIGATION

Contribution of activation products to fusion accident risk. I - A preliminary investigation  
p0336 A81-23712

### ACCUMULATORS

Improved liquid/solids handling module --- Geothermal energy conversion  
[DOE/ET-27193/T1] p0363 A81-21582

### ACID RAIN

Acid rain: The impact of local sources  
[DOE/ETC-14787/103] p0197 A81-16573

### ACIDITY

Characteristics of acidic electrolyte hydrogen-air fuel batteries (3)  
[UCRL-TRANS-11655] p0358 A81-19604

### ACOUSTIC MEASUREMENTS

An acoustic measurement of boiling instabilities in a solar receiver  
[SAND-80-2409] p0284 A81-21621

### ACOUSTIC PROPERTIES

Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit  
[EPRI-CS-1444-VOL-4] p0351 A81-16602

### ADDITIVES

Cost effective, high throughput, junction formation techniques using spray-on dopants  
p0245 A81-27220

### ADIABATIC CONDITIONS

Adiabatic compressed air energy storage in hard rock  
[FNL-SA-9010] p0376 A81-17591

### ADIRONDACK MOUNTAINS (NY)

Acid rain: The impact of local sources  
[DOE/ETC-14787/103] p0197 A81-18573

### ADSORPTION

Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys  
p0290 A81-25500

Hydrogen-methane separation processes and related phenomena  
[DOE/ETC-14386/106] p0321 A81-21153

### ADSORPTIVITY

Hydrogen-methane separation processes and related phenomena  
[DOE/ETC-14386/106] p0321 A81-21153

### AERODYNAMIC CHARACTERISTICS

Performance assessment of a Flettner wind turbine  
p0327 A81-20025

Wind-turbine aerodynamics  
p0335 A81-23696

The aerodynamics of heliostats for solar power plant applications  
p0253 A81-27310

The aerodynamic analysis of a 10 kW horizontal-axis windmill  
p0354 A81-18484

Aerodynamic characteristics of the TARP (Toroidal Accelerator Rotor Platform) wind energy conversion system  
[PB81-140675] p0364 A81-21632

### AERODYNAMIC DRAG

Aerodynamic analysis of propeller-type windmills with helical trailing vortices  
p0355 A81-18565

### AERODYNAMIC LOADS

The aerodynamics of heliostats for solar power plant applications  
p0253 A81-27310

### AERODYNAMICS

Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base  
[AD-A094226] p0196 A81-18050

# AEROELASTICITY

# SUBJECT INDEX

A look at NASA's Aircraft Energy Efficiency program  
[PSAD-80-50] p0201 N81-20077

**AEROELASTICITY**  
Aeroelastic stability and response analysis of  
large horizontal-axis wind turbines p0335 A81-23697  
Aeroelastic stability of wind turbine rotors  
p0345 A81-26975

**AEROSOLS**  
Cloud modification by man-made pollutants -  
Effects of a coal-fired power plant on cloud  
drop spectra p0188 A81-28478  
Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study p0201 N81-19674  
[PB81-121147]

**AEROSPACE ENGINEERING**  
The Marshall Center: Its place in NASA  
[NASA-TM-82254] p0383 N81-17958  
Research and Technology: Annual report  
[NASA-TM-82314] p0384 N81-21949

**AEROSPACE TECHNOLOGY TRANSFER**  
Example of a favorable policy for space technology  
transfer to other fields p0198 N81-18951

**AEROTHERMODYNAMICS**  
On the magnetoaerothermal instability  
[AIAA PAPER 81-0248] p0330 A81-20698

**AGGLOMERATION**  
Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project  
p0298 A81-25113  
High-temperature high-pressure particulate removal  
in coal gasification p0308 N81-17642  
[PB81-113664]

**AGRICULTURE**  
Geothermal energy and biofuel production in  
agriculture p0297 A81-25093  
Constraints to bio-energy development  
[LA-UR-80-3387] p0191 N81-16604  
Farm and cooperative alcohol plant study:  
Technical and economic assessment as a  
commercial venture p0306 N81-17290  
[PB81-112641]  
Energy from biological processes. Volume 3:  
Appendixes. Part B: Agriculture,  
unconventional crops, and selected biomass wastes  
[PB81-134785] p0323 N81-21235  
Production of a raw material for energy production  
in agriculture p0324 N81-21550  
[DFE-31]  
Micro-level land use impacts of bioconversion  
[LA-8599-T] p0325 N81-21616

**AIR**  
Performance of air collector house heating systems  
with rock bed storage --- solar heating p0277 N81-20553

**AIR BREATHING ENGINES**  
A new breed of an air breathing engine p0347 A81-29070

**AIR CONDITIONING**  
Solar air conditioning with solid absorbents and  
earth cooling p0226 A81-25025  
Solar air conditioning in a hot arid  
climate p0226 A81-25027  
Storage of cold water in aquifers p0375 A81-29257  
Analysis of field test data on residential heating  
and cooling p0204 N81-21561  
[EPRI-BA-1649]

**AIR CONDITIONING EQUIPMENT**  
Solar-powered saline sorbent-solution heat  
pump/storage system p0224 A81-25001  
Development of a system for off-peak electrical  
energy use by air conditioners and heat pumps  
[TVA-EDT-122] p0377 N81-18509  
Appliance energy efficiency in new home construction  
[DOE/CS-23999/T1] p0200 N81-19608  
Regional analysis of residential/commercial gas  
demand p0206 N81-21631  
[PB81-134496]

**AIR COOLING**  
Transpiration air cooled turbine blade - a  
technology for future generation aircraft and  
industrial gas turbine engines using coal or  
coal derived fuels p0347 A81-29115

**AIR CURRENTS**  
Wind-tunnel simulation of the flow over hills and  
complex terrain --- for wind energy conversion  
applications p0295 A81-23693

**AIR FLOW**  
Analytical predictions of liquid and air  
photovoltaic/thermal flat-plate collector  
performance p0212 A81-21131  
[ASME PAPER 80-WA/SOL-3]

**AIR POLLUTION**  
Characterization of sulfate emissions from  
nonutility boilers firing low-S residual oils in  
New York City p0186 A81-23073  
Utilization of cascade impactors in hot waste gas  
from an oil firing installation p0186 A81-23416  
Sulfur pollution from coal combustion - Effect of  
the mineral components of coal on the thermal  
stabilities of sulfated ash and calcium sulfate  
p0186 A81-24622  
Cloud modification by man-made pollutants -  
Effects of a coal-fired power plant on cloud  
drop spectra p0188 A81-26478  
Sulphur removal potential of American coals as a  
determinant of sulphur dioxide emissions from  
coal-fired power plants p0188 A81-28993  
Informational report: 1979 progress of the  
Chemical Characterization Panel of the  
composition of diesel exhaust project and  
results of particulate extraction round-robin  
[PB81-114670] p0195 N81-17636  
Acid rain: The impact of local sources  
[DOE/HETC-14787/103] p0197 N81-18573  
Alternative fuels utilization and the automotive  
emission certification process p0316 N81-19336  
[DOE/CS-56051/T1]  
Local air quality constraints on energy growth,  
1985-1990 p0201 N81-19653  
[ANL/EES-TM-114]  
Air pollution control technology for municipal  
solid waste-to-energy conversion facilities:  
Capabilities and research needs p0201 N81-19655  
[DOE/EV-0115]  
Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study p0201 N81-19674  
[PB81-121147]  
Fuel cycle analysis for fossil energy systems:  
Coal combustion p0205 N81-21606  
[ORNL-5661]

**AIR QUALITY**  
Environment, health, socioeconomic and  
environmental control technology executive summary  
[DOE/TIC-11308] p0197 N81-18575  
Local air quality constraints on energy growth,  
1985-1990 p0201 N81-19653  
[ANL/EES-TM-114]  
Environmental development plan: Coal liquefaction  
[DOE/EDP-0044] p0206 N81-21641

**AIR TRAFFIC CONTROL**  
Integration of fuel conservative procedures in the  
high density terminal area p0185 A81-20468

**AIR TRAFFIC CONTROLLERS (PERSONNEL)**  
Integration of fuel conservative procedures in the  
high density terminal area p0185 A81-20468

**AIR WATER INTERACTIONS**  
Scientific and Technical Publications of the  
'Environmental Research Laboratories' fiscal year  
1978 p0384 N81-21975  
[PB81-141301]

**AIRBORNE EQUIPMENT**  
A new airborne nickel cadmium battery concept  
p0374 A81-25618

**AIRCRAFT DESIGN**  
Engine cycle selection for advanced technology  
engine studies p0349 A81-30084  
[ASME PAPER 81-GT-191]



- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base [AD-A094226] p0196 881-18050
- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report [AD-A094225] p0196 881-18051
- AIRCRAFT ENGINES**
- High power silver zinc and thermal batteries for missiles and aviation applications p0373 881-25612
- Problems and promises in gas turbine combustor design development p0343 881-26007
- A new breed of an air breathing engine p0347 881-29070
- Transpiration air cooled turbine blade - A technology for future generation aircraft and industrial gas turbine engines using coal or coal derived fuels p0347 881-29115
- Engine cycle selection for advanced technology engine studies [ASME PAPER 81-GT-191] p0349 881-30084
- Cooled radial in-flow turbines for advanced gas turbine engines [ASME PAPER 81-GT-213] p0350 881-30102
- Light aircraft engines, the potential and problems for use of automotive fuels. Phase 1: Literature search [AD-A094154] p0308 881-18057
- AIRCRAFT EQUIPMENT**
- Complex computation of flywheel power systems for flight vehicles p0375 881-30158
- AIRCRAFT FUEL SYSTEMS**
- A look at NASA's Aircraft Energy Efficiency program [PSAD-80-50] p0201 881-20077
- AIRCRAFT FUELS**
- Integration of fuel conservative procedures in the high density terminal area p0185 881-20468
- A UK view on future fuels --- for aircraft [ASME PAPER 81-GT-87] p0304 881-29994
- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base [AD-A094226] p0196 881-18050
- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report [AD-A094225] p0196 881-18051
- Light aircraft engines, the potential and problems for use of automotive fuels. Phase 1: Literature search [AD-A094154] p0308 881-18057
- An evaluation of NASA's program for improving aircraft fuel efficiency [NASA-CR-164015] p0198 881-19110
- AIRCRAFT INDUSTRY**
- A look at NASA's Aircraft Energy Efficiency program [PSAD-80-50] p0201 881-20077
- AIRCRAFT STRUCTURES**
- Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979 p0381 881-21730
- AIRPORTS**
- The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport p0232 881-27091
- ALASKA**
- National petroleum reserve - Alaska: Marine transportation system analysis [PB81-105041] p0368 881-17288
- National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary [PB81-105033] p0368 881-17289
- Assessment of methane hydrates --- permafrost zone of Alaska and deep sediments in oceans [PB81-113300] p0307 881-17510
- Alaska: A guide to geothermal energy development [DOE/ET-28476/T12] p0318 881-19597
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis [DOE/EV-73002/1-VOL-1] p0205 881-21595
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 2: Hydroelectric development [DOE/EV-73002/1-VOL-2] p0205 881-21596
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update [DOE/EV-73002/1-VOL-3] p0205 881-21597
- ALCOHOLS**
- Future of alcohol fuels programs in Brasil p0299 881-25121
- Alcohols as auxiliary fuels for diesel engines p0299 881-25122
- Modified Brayton cycles utilizing alcohol fuels [ASME PAPER 81-GT-103] p0348 881-30009
- Farm and cooperative alcohol plant study: Technical and economic assessment as a commercial venture [PB81-112641] p0306 881-17290
- Comparisons of gasohol and gasoline in laboratory and field trials [CONF-801030-3] p0312 881-18237
- Internal combustion engines for alcohol motor fuels: A compilation of background technical information [DOE/AF-0001] p0313 881-18398
- Development of sweet sorghum as an energy crop. Volume 3: Integration concepts [BHI-2054-VOL-3] p0316 881-19334
- Alternative fuels utilization and the automotive emission certification process [DOE/CS-56051/T1] p0316 881-19336
- Biomass energy systems program summary. Information current as of September 30, 1979 [DOE/CS-21059/01] p0317 881-19337
- Energy balances in the production and end-use of alcohols derived from biomass [PB81-125585] p0317 881-19342
- Office of alcohol fuels program plan, FY 1981 [DOE/AF-10001/T2] p0319 881-20293
- ALGAE**
- A solar biotechnology based on microalgae p0218 881-23015
- Marine biomass: Algae as source of energy [NE/BIO-80/12] p0320 881-20581
- ALKALINE BATTERIES**
- Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode p0372 881-25322
- Alkaline storage batteries p0373 881-25566
- ALKALINE EARTH COMPOUNDS**
- Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates p0287 881-25143
- ALKENES**
- Energy and materials flows in the production of olefins and their derivatives [ANL/CNSV-9] p0203 881-21161
- ALKYLATION**
- Coal transformation chemistry --- alkylation in liquid ammonia [DOE/PC-30088/1] p0316 881-19328
- ALLOYS**
- Hydrogen in thin film hydriding alloys p0289 881-25155
- ALPHANUMERIC CHARACTERS**
- Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data [CONF-8010106-3] p0305 881-16315
- ALTERNATIVES**
- Alternate sources of energy [CONF-8009109] p0384 881-21580
- ALUMINUM**
- Extraction of oxygen and metals from lunar ores p0222 881-24827
- A preliminary investigation of an Al/FeS<sub>2</sub> secondary cell p0374 881-25615

## ALUMINUM ALLOYS

## SUBJECT INDEX

Mathematical modeling of the lithium-aluminum,  
iron sulfide battery. I - Galvanostatic  
discharge behavior. II - The influence of  
relaxation time on the charging characteristics  
p0374 A81-25837

## ALUMINUM ALLOYS

Hydrogen storage in aluminium-substituted TiFe  
compounds  
p0287 A81-24560

The performance of MCral alloys in complex coal  
conversion atmospheres  
p0302 A81-26492

Description and thermal performance of corrugated  
solar collectors --- made of extruded aluminum  
p0266 A81-18504

## ALUMINUM ANTIMONIDES

Low bandgap /0.7 to 1.1 eV/ solar cells in the  
GaAlSb/GaSb system  
p0235 A81-27119

## ALUMINUM COATINGS

CO-sputtered doped amorphous silicon as a  
photovoltaic material  
p0249 A81-27264

## ALUMINUM COMPOUNDS

Low cost fabrication methods for LiAl/iron sulfide  
cells with molten salt electrolyte  
p0374 A81-25613

## ALUMINUM GALLIUM ARSENIDES

Recent progress in the development of the cascade  
solar cell  
p0235 A81-27118

Low bandgap /0.7 to 1.1 eV/ solar cells in the  
GaAlSb/GaSb system  
p0235 A81-27119

Concepts for GaAs//AlGa/As solar cells with  
valley-transferred electrons for voltage and  
efficiency enhancement  
p0238 A81-27154

A monolithic series-connected  
Al/.93/Ga/.07/As/GaAs solar cell array  
p0239 A81-27158

Deep-level defects and recombination parameters in  
proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239

High temperature properties of GaAlAs/GaAs  
heteroface solar cells  
p0247 A81-27242

High efficiency 1.43 and 1.69 eV band gap  
Ga/1-x/Al/x/As-GaAs solar cells for multicolour  
applications  
p0255 A81-28958

Study of process technology for GaAlAs/GaAs  
heteroface solar cells  
p0261 A81-17544

Results of the Air Force high efficiency cascaded  
multiple bandgap solar cell programs  
p0261 A81-17548

AlGaAs-GaAs cascade solar cell  
p0261 A81-17550

Fabrication of AlGaAs/GaAs cascade solar cell by LPE  
p0262 A81-17551

OM-VPE grown materials for high efficiency solar  
cells  
p0262 A81-17552

GaAs(GaAl) as solar cells to be used under  
concentrated solar light condition  
[EUR-6934-EN]  
p0274 A81-19625

## AMBIENT TEMPERATURE

Use of the ATOP system in the control of an  
off-peak storage device --- Ambient temperature  
Observer/Predictor in heating system  
p0371 A81-20491

## AMERICAN INDIANS

The Indian Lands Study: An example of the  
application of geographic research to the  
analysis of complex energy and environmental  
policy issues --- strip mining and oil  
exploration effects on tribal culture and  
economics  
p0189 A81-16510

## AMMONIA

Indirect conversion of coal to methanol and  
gasoline: Product price vs product slate  
[CONF-801142-3]  
p0311 A81-18228

Environmental consideration for TVA's ammonia from  
coal project  
[CONF-8004137-1]  
p0203 A81-21216

## AMMONIUM COMPOUNDS

Ammoniated salt heat pump --- using solar energy  
or industrial waste energy for space heating and  
cooling  
p0372 A81-25019

## AMORPHOUS MATERIALS

CO-sputtered doped amorphous silicon as a  
photovoltaic material  
p0249 A81-27264

The retardation of crystallization of CVD  
amorphous silicon and the study of its  
structural and optical properties  
p0280 A81-20912

## AMORPHOUS SEMICONDUCTORS

An overview of amorphous silicon solar-cell  
development  
p0234 A81-27111

Progress toward large area amorphous silicon solar  
cells  
p0240 A81-27167

Short circuit currents and collection efficiencies  
in a-SiHx solar cells  
p0246 A81-27235

Design of monolithic, multiple-gap, amorphous  
Si-Ge solar cells  
p0247 A81-27236

Proposed design of a-Si:H solar cells using  
ultrathin active layer to increase conversion  
efficiency  
p0247 A81-27237

Optimum design and device physics of the  
horizontally multilayered high voltage solar  
cells produced by plasma deposited amorphous  
silicon  
p0247 A81-27238

Development of amorphous silicon cells  
p0249 A81-27262

Photovoltaic behavior of amorphous silicon-based  
alloys  
p0249 A81-27263

Optical absorption by gap states in amorphous  
silicon  
p0249 A81-27265

Determination of amorphous silicon solar cell  
barrier properties by measurement of  
differential current-voltage characteristics  
p0249 A81-27266

Plasma-assisted CVD of fluorinated, hydrogenated  
amorphous silicon  
[SBEI/TR-8041-2-T1]  
p0274 A81-19629

Fabrication of amorphous silicon solar cells,  
using an industrial process --- based on a  
nitride plasma reactor  
[LEP-80.638.SMB-689-A]  
p0280 A81-26602

Amorphous thin films for solar-cell applications  
[SBEI/PR-0-8254-F]  
p0283 A81-21591

## AMPLIFIER DESIGN

Satellite Power System (SPS) magnetron tube  
assessment study  
[NASA-CR-3383]  
p0368 A81-18490

## AMPLIFIERS

High efficiency SPS klystron design  
p0366 A81-16550

High efficiency klystron for the SPS application  
p0366 A81-16551

Analytical investigation of efficiency and  
performance limits in klystron amplifiers using  
multidimensional computer programs; multi-stage  
depressed collectors; and thermionic cathode  
life studies  
p0367 A81-16552

## ANAEROBES

The development of biogas technology in India  
p0298 A81-25117

## ANNEALING

Low-cost ion implantation and annealing technology  
for solar cells  
p0244 A81-27201

Radiation damage annealing mechanisms and possible  
low temperature annealing in silicon solar cells  
p0244 A81-27207

Simultaneous radiation damage and annealing of  
GaAs solar cells  
p0247 A81-27240

Silicon solar cell design for medium concentration  
applications  
p0270 A81-18564

# SUBJECT INDEX

# ASSESSMENTS

## ANNUAL VARIATIONS

- A 'two-tank' seasonal storage concept for solar space heating of buildings p0372 A81-25035
- An algorithm for calculating monthly-average radiation on inclined surfaces p0253 A81-27555
- Performance of active solar domestic hot water heating systems [SOLAR/0024-80/41] p0281 A81-21556

## ANODES

- Anode plasma behavior in a magnetically insulated ion diode p0344 A81-26571

## ANTENNA ARRAYS

- Reference System Description p0367 A81-16554
- Rectenna array measurement results --- Satellite power transmission and reception p0367 A81-16562

## ANTENNA DESIGN

- Initial MPTS study results: Design considerations and issues p0365 A81-16536
- Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 A81-18493

## ANTENNA RADIATION PATTERNS

- SPS large array simulation --- spacetennas p0365 A81-16537

## ANTIMONY

- Silicon solar cells realized by laser induced diffusion of deposited antimony p0244 A81-27202

## ANTIOXIDANTS

- Solar Energy Program: Protective solar collector systems from corrosion [NP-25154] p0264 A81-17605

## ANTIREFLECTION COATINGS

- Titanium dioxide antireflection coating for silicon solar cells by spray deposition p0209 A81-19766
  - Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells p0217 A81-22872
  - Method for evaluation of antireflection coatings p0221 A81-24804
  - Wide band wide angle reflection-reducing coatings for silicon cells p0221 A81-24807
  - A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings p0243 A81-27194
  - High performance BSP silicon solar cell with fire through contacts printed on AR coating --- Back Surface Field p0243 A81-27198
  - Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project [NASA-CR-164134] p0281 A81-21546
- ## APPALACHIAN MOUNTAINS (NORTH AMERICA)
- Evaluating the environmental effects of past and present surface mining - A remote sensing applied research review p0186 A81-23555

## AQUICULTURE

- Combined aquatic-terrestrial biomass systems p0304 A81-29267
- Energy from biological processes. Volume 3: Appendixes. Part B: Agriculture, unconventional crops, and selected biomass wastes [PB81-134785] p0323 A81-21235

## AQUIFERS

- Thermal energy storage in aquifers for a solar power plant p0224 A81-24992
- Storage of cold water in aquifers p0375 A81-29257
- Heat transport in groundwater systems. Volume 2: Laboratory model. [PB81-104135] p0375 A81-16523
- High temperature thermal energy storage in aquifers with a solar power plant application p0377 A81-18486

- Compressed air energy storage: Preliminary design and site development program in an aquifer, task 2. Volume 2: Characterize and explore potential sites and prepare research and development plan [DOE/ET-29232/T1-VOL-2] p0377 A81-18531
- Analysis of geopressured aquifers [PB81-123416] p0317 A81-19553
- Compressed air energy storage: Preliminary design and site development program in an aquifer. Task 1: Establish facility design criteria and utility benefits [DOE/ET-29232/T2] p0377 A81-19586
- Aquifer thermal energy storage: A survey [LBL-10441] p0378 A81-19606
- Energy out of groundwater [NE/HETV-80/9] p0320 A81-20565
- Guidelines for conceptual design and evaluation of aquifer thermal energy storage [PHL-3581] p0380 A81-21587

## ARC HEATING

- Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays [NASA-CR-163943] p0260 A81-17525

## ARC WELDING

- Highly efficient welding power supply [DOE/CS-40023/T2] p0199 A81-19404

## ARCHITECTURE

- Passive and hybrid solar manufactured housing and buildings [DOE/CS-30384/1] p0263 A81-17592
- Passive and hybrid solar manufactured housing and buildings [DOE/CS-30371/1] p0267 A81-18515
- Residential solar design review: A manual on community architectural controls and solar energy use [PB81-128605] p0275 A81-19648
- Improved data and procedures needed for development and implementation of building energy performance standards [PB81-138422] p0206 A81-21630

## ARCTIC REGIONS

- Assessment of methane hydrates --- permafrost zone of Alaska and deep sediments in oceans [PB81-113300] p0307 A81-17510

## ARGON PLASMA

- Optical spectrum of a closed cycle MHD generator plasma p0333 A81-23063

## ARGUS PROJECT

- Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory p0294 A81-22511

## ARID LANDS

- Solar air conditioning in a hot arid climate p0226 A81-25027

## ARIZONA

- Hullico Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980 [SOLAR/1043-80/14] p0281 A81-21553

## ARKANSAS

- Heat-flow measurements in the state of Arkansas [LA-8569-MS] p0324 A81-21573

## ARRAYS

- Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980 [SOLAR/1014-80/14] p0281 A81-21557
- Photovoltaic concentrator array production process study. Volume 2: Study results [SAND-79-7055/2] p0282 A81-21574

## ASHES

- Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project p0298 A81-25113

- Coal gasifier wall protection system [PB81-141921] p0323 A81-21237

## ASPHALTENES

- Hydrogen bonding in asphaltenes and coal liquids [DOE/PC-30252/T1] p0318 A81-20227

## ASSESSMENTS

- Research in the geosciences related to resource assessment [DOE/IR-10119/T1] p0313 A81-18476

# ASTRONAUTICS

# SUBJECT INDEX

## ASTRONAUTICS

The boundless dimension - Space flight. Volume 1 -  
Prospects and problems --- German book  
p0383 A81-29688

## ATMOSPHERIC CIRCULATION

Wind-tunnel simulation of the flow over hills and  
complex terrain --- for wind energy conversion  
applications  
p0295 A81-23693

## ATMOSPHERIC COMPOSITION

Response of the global climate to changes in  
atmospheric chemical composition due to fossil  
fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 A81-21101  
Effects of carbon dioxide buildup in the atmosphere  
[GPO-62-841] p0191 A81-16626

## ATMOSPHERIC EFFECTS

An assessment of the atmospheric effects of a  
Satellite Power System  
p0187 A81-25053  
The performance of MCrAl alloys in complex coal  
conversion atmospheres  
p0302 A81-26492  
Scientific and Technical Publications of the  
Environmental Research Laboratories' fiscal year  
1978  
[PB81-141301] p0384 A81-21975

## ATMOSPHERIC HEATING

Response of the global climate to changes in  
atmospheric chemical composition due to fossil  
fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 A81-21101

## ATMOSPHERIC MODELS

Solar input and solar data computation for the  
engineering of solar systems - Transients'  
simulation  
p0250 A81-27274

## ATOMIZERS

Combustion of coal suspension fuels using air  
atomizers  
p0299 A81-25129

## ATOMIZING

AGT-1500 combustor and fuel effects modeling  
[AD-A092255] p0350 A81-16061

## ATS 6

Summary results of the ATS-6 solar cell flight  
experiment  
p0244 A81-27209

## ATTITUDE CONTROL

Satellite Power System (SPS) concept definition  
study (Exhibit D). Volume 2:  
Systems/subsystems analyses  
[NASA-CR-3393] p0280 A81-21491

## AUSTENITIC STAINLESS STEELS

A comparison of thermal performance of austenitic  
stainless steel solar absorber plates coloured  
by chemical and thermal oxidation techniques  
p0215 A81-21956

## AUTOMATED GUIDEWAY TRANSIT VEHICLES

Inductive energy transfer in transportation  
[UCRL-85141] p0368 A81-18962

## AUTOMATIC CONTROL

The characteristics of two, simple, automatic  
speed-control devices for horizontal axis  
wind-turbines  
p0338 A81-25070

## AUTOMATIC FLIGHT CONTROL

Operational energy conservation strategies in  
commercial aviation  
p0185 A81-20465

## AUTOMATION

An outlook for automated CIS solar cell factory  
p0246 A81-27228

## AUTOMOBILE ENGINES

The rotating traction drive  
[ASME PAPER 80-GT-99] p0332 A81-21163  
Thermodynamic calculations for Otto cycle engines  
using methanol as a fuel  
p0342 A81-25123  
Automotive dual-mode hydrogen generation system  
p0288 A81-25147  
Liquid nitrogen as an energy source for an  
automotive vehicle  
p0345 A81-26881  
Ultra-lean combustion at high inlet temperatures  
[ASME PAPER 81-GT-44] p0347 A81-29958  
IIT GT601 - A new approach to vehicular gas  
turbine power unit design  
[ASME PAPER 81-GT-152] p0349 A81-30051

Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106  
Advanced propulsion system concept for hybrid  
vehicles  
[NASA-CR-159772] p0198 A81-18935  
Analytical design of an advanced radial turbine  
--- automobile engines  
[NASA-CR-165170] p0361 A81-20958

## AUTOMOBILE FUELS

Perspectives for metal hydride technology  
p0285 A81-21504  
Motor fuels from coal - Technology and economics  
p0293 A81-22275  
Alcohols as auxiliary fuels for diesel engines  
p0299 A81-25122  
Thermodynamic calculations for Otto cycle engines  
using methanol as a fuel  
p0342 A81-25123  
Ethanol from municipal cellulosic wastes  
p0299 A81-25124  
Liquid hydrogen as an automotive fuel  
p0290 A81-26880  
Motor fuels and chemicals from coal via the Sasol  
Synthol route  
p0303 A81-28994

Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106  
Methanol - The efficient conversion of valueless  
fuels into a versatile fuel and chemical feedstock  
[ASME PAPER 81-PID-1] p0305 A81-30110  
A liquid-hydrogen-fueled buick  
[LA-8605-MS] p0291 A81-16483

Light aircraft engines, the potential and problems  
for use of automotive fuels. Phase 1:  
Literature search  
[AD-A094154] p0308 A81-18057  
Fleet trails using methanol/gasoline blends  
[CONF-801030-4] p0311 A81-18230  
Comparisons of gasohol and gasoline in laboratory  
and field trials  
[CONF-801030-3] p0312 A81-18237  
Internal combustion engines for alcohol motor  
fuels: A compilation of background technical  
information  
[DOE/AF-0001] p0313 A81-18398

## AUTOMOBILES

Support for the analytical tools for automotive  
fuel economy activities  
[PB81-109555] p0192 A81-17445  
Automotive fuel economy program  
[DOT-HS-805-279] p0195 A81-17959  
Generator gas operation of motor vehicles  
[DOE-TR-219] p0310 A81-18224  
Alternative fuels utilization and the automotive  
emission certification process  
[DOE/CS-56051/T1] p0316 A81-19336  
Automotive technology development program  
[DOE/CS-0069/1] p0356 A81-19464  
Electric vehicle simulation for design optimization  
[AD-A094734] p0378 A81-19970  
Liquid-hydrogen automotive onboard storage and  
servicing system project  
[LA-UR-80-3491] p0291 A81-19971

## AUXILIARY POWER SOURCES

A new airborne nickel cadmium battery concept  
p0374 A81-25618

## AVAILABILITY

Gasification combined cycle B&A assessment  
p0295 A81-24265

## AXES OF ROTATION

A new concept in horizontal axis wind turbine rotors  
p0338 A81-25071

## AXIAL FLOW TURBINES

Comparison of the HTTT reheat-gas-turbine combined  
cycle with the HTTT nonreheat gas-turbine  
combined cycle --- High-Temperature Turbine  
Technology  
[ASME PAPER 81-GT-69] p0348 A81-29978  
Proceedings of the Vertical Axis Wind Turbine  
(VAVT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 A81-18550

**B**

**BACTERIA**

Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research p0288 A81-25152

**BALLOON FLIGHT**

Results of the 1980 NASA/JPL balloon flight solar cell calibration program [NASA-CR-164078] p0277 N81-20548

**BAND STRUCTURE OF SOLIDS**

Comparison of solar cell performance to calculations using different energy band-gap narrowing models p0217 A81-22861

Low bandgap /0.7 to 1.1 eV/ solar cells in the GaInAsSb/GaSb system p0235 A81-27119

The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells p0251 A81-27283

**BARRIER LAYERS**

The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states p0215 A81-22155

**BATTERY CHARGERS**

Change-of-pace electric automobile user demonstration (COMCAR 2) [DOE/ET-11373] p0379 N81-21359

**BEAM INJECTION**

Synthetic fuel production in a particle-beam driven fusion reactor p0297 A81-25107

**BEAMS (RADIATION)**

A theoretical study of microwave beam absorption by a rectenna, introduction --- solar power satellites p0369 N81-20329

Tropospheric/ionospheric transmission tests p0369 N81-20335

**BELGIUM**

Economic aspects of coal gasification and liquefaction in Belgium p0300 A81-25136

**BENZENE**

An assessment of the use of chemical reaction systems for thermal energy transport p0365 A81-25011

**BIBLIOGRAPHIES**

Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base [PB81-800021] p0352 N81-16615

Technology assessments in transportation: Survey of recent literature --- and bibliography [ANL/CHSV/TN-44] p0192 N81-16958

Energy: Solar energy programme of the Commission of the European Communities [EUR-6959-EN] p0263 N81-17593

Energy policy and research planning. Citations from the MITS data base [PB81-800112] p0195 N81-17620

Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base [AD-A094226] p0196 N81-18050

Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region [DOE/ET-28392/T2] p0315 N81-18547

The Energy Link catalog. Volume 2: Energy resource catalog --- bibliographies [PB81-140824] p0384 N81-21633

Scientific and Technical Publications of the Environmental Research Laboratories' fiscal year 1978 [PB81-141301] p0384 N81-21975

**BINARY FLUIDS**

Improved liquid/solids handling module --- Geothermal energy conversion [DOE/ET-27193/T1] p0363 N81-21582

**BINARY MIXTURES**

Coal-oil mixtures - Their technical and commercial status p0300 A81-25133

**BIOCONVERSION**

Constraints to bio-energy development [LA-UR-80-3387] p0191 N81-16604

Utilization of geothermal energy for methane production for J. A. Albertson Land and Cattle Company [DOE/ET-27230/T2] p0316 N81-19333

Biosources digest, a journal on biomass utilization, volume 2, number 3, July 1980 [PB81-123952] p0317 N81-19340

Energy from biological processes. Volume 3: Appendixes. Part C: Selected conversion technologies and end use [PB81-134793] p0323 N81-21236

Micro-level land use impacts of bioconversion [LA-8599-T] p0325 N81-21616

**BIOLOGICAL EFFECTS**

Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite p0289 A81-25153

Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study [UCLA-12/1268] p0197 N81-18576

A comparison of environmental issues related to development of small hydropower resources at new versus existing sites [CONF-801210-13] p0197 N81-18577

**BIOMASS**

Combustion, pyrolysis, gasification, and liquefaction of biomass [SRR/EP-622-893] p0307 N81-17601

Fuel alcohol extraction technology commercialization conference [CONF-801212] p0311 N81-18233

Military wastes-to-energy applications p0314 N81-18483

Development of sweet sorghum as an energy crop. Volume 3: Integration concepts [BML-2054-VOL-3] p0316 N81-19334

Biosources digest, a journal on biomass utilization, volume 2, number 3, July 1980 [PB81-123952] p0317 N81-19340

**BIOMASS ENERGY PRODUCTION**

Liquefaction of biomass as a source of fuels or chemicals p0294 A81-22350

A solar biotechnology based on microalgae p0218 A81-23015

Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion p0296 A81-24427

Geothermal energy and biofuel production in agriculture p0297 A81-25093

The development of biogas technology in India p0298 A81-25117

Gasification of biomass as a source of synfuels for developing countries p0298 A81-25118

Future of alcohol fuels programs in Brasil p0299 A81-25121

Production of hydrogen from carbonaceous materials p0288 A81-25146

Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research p0288 A81-25152

Albany biomass-to-oil project p0301 A81-25562

Conversion of cellulosic wastes to liquid fuels p0302 A81-25564

Alcohols as fuels - The global picture p0303 A81-27572

Combined aquatic-terrestrial biomass systems p0304 A81-29267

Engine fuels from biomass [ASME PAPER 81-DGP-4] p0305 A81-30116

Energy from biomass: The simplex process for the gasification of coal and forest pulp [PB81-110512] p0305 A81-16324

Constraints to bio-energy development [LA-UR-80-3387] p0191 N81-16604

- Pyrolytic oils: Characterization and data development for continuous processing  
[PB81-110959] p0306 N81-17294
- Marine Biomass Program  
[PB81-113185] p0307 N81-17297
- Military wastes-to-energy applications  
[AD-A093042] p0193 N81-17578
- Energy: Solar energy programme of the Commission of the European Communities  
[EUR-6959-EN] p0263 N81-17593
- Combustion, pyrolysis, gasification, and liquefaction of biomass  
[SEBI/TP-622-893] p0307 N81-17601
- Comments on long-term aspects of renewable versus nonrenewable resource substitution  
[CONF-801158-1] p0313 N81-18477
- Research and evaluation of biomass resources/conversion/utilization systems (market/experimental analysis for development of a data base for a fuels from biomass model. Volume 1: Biomass allocation model  
[DOE/ET-20611/14] p0315 N81-18553
- Ethanol: A brief economic evaluation  
[DOE/ET-27256/T7] p0316 N81-19331
- Utilization of geothermal energy for methane production for J. A. Albertson Land and Cattle Company  
[DOE/ET-27230/T2] p0316 N81-19333
- Biomass energy systems program summary. Information current as of September 30, 1979  
[DOE/CS-21059/01] p0317 N81-19337
- Energy balances in the production and end-use of alcohols derived from biomass  
[PB81-125585] p0317 N81-19342
- Conversion of cellulosic wastes to liquid fuels  
[COO-2982-57] p0320 N81-20306
- Marine biomass: Algae as source of energy  
[NE/EIO-80/12] p0320 N81-20581
- Energy from biological processes. Volume 2: Technical and environmental analyses  
[PB81-134769] p0323 N81-21233
- Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 N81-21234
- Energy from biological processes. Volume 3: Appendixes. Part B: Agriculture, unconventional crops, and selected biomass wastes  
[PB81-134785] p0323 N81-21235
- Energy from biological processes. Volume 3: Appendixes. Part C: Selected conversion technologies and end use  
[PB81-134793] p0323 N81-21236
- Production of a raw material for energy production in agriculture  
[DPF-31] p0324 N81-21550
- Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day  
[PNL-3695-APP-B] p0324 N81-21604
- Micro-level land use impacts of bioconversion  
[LA-8559-T] p0325 N81-21616
- BIOTECHNOLOGY**
- A solar biotechnology based on microalgae  
p0218 N81-23015
- Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 N81-25153
- BITUMENS**
- Classification of bituminous coals - Application of the technique of optimal sections in coal classification  
p0293 N81-19847
- Pricetown I - In-situ coal conversion field test for bituminous coals  
p0298 N81-25111
- The role of high-Btu coal gasification technology  
p0298 N81-25112
- Fluid bed hydrogenation of agglomerating bituminous coals  
p0298 N81-25115
- Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T2] p0305 N81-16318
- Observations on test stockpiles of dried lignite and subbituminous coals  
[DOE/GFETC/RI-80/5] p0321 N81-21217
- BLANKETS (FUSION REACTORS)**
- Overview of nonelectrical applications of fusion  
p0341 N81-25104
- BLOCK DIAGRAMS**
- A new formal graphic language for the representation of complex energy distribution systems  
p0225 N81-25010
- BLUEPRINTS**
- Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30371/1] p0267 N81-18515
- BOILERS**
- Heat transfer in slagging MHD radiant boilers  
[AIAA PAPER 81-0316] p0330 N81-20747
- Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City  
p0186 N81-23073
- Solar installation for process steam generation for a refinery  
p0227 N81-25038
- Bed expansion and attrition studies in a coal-fired fluidized bed  
p0299 N81-25128
- Economics and concepts of industrial coal fluidized bed combustion in Brazil  
p0300 N81-25135
- Performance calculations for 1000 MWe MHD/steam power plants  
[NASA-TN-81667] p0351 N81-16570
- Regional conversion to coal  
[FE-2468-63] p0314 N81-18517
- Cost-performance comparison of water-steam receivers for solar central electric power plants  
[SAND-80-8245] p0273 N81-19615
- BOROSILICATE GLASS**
- Development of a combined photovoltaic/thermal linear receiver for a parabolic trough concentrator  
[SAND-80-7138] p0272 N81-19595
- BOUNDARY LAYER EQUATIONS**
- Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills  
p0227 N81-25041
- BOUNDARY LAYER FLOW**
- Preliminary results of analytical modeling of subsonic MHD diffusers  
[AIAA PAPER 81-0177] p0329 N81-20652
- BOUNDARY VALUE PROBLEMS**
- An optimal control approach to energy minimization in electric vehicles --- boundary value methods  
[BEPT-109] p0201 N81-19972
- BRAYTON CYCLE**
- Modified Brayton cycles utilizing alcohol fuels  
[ASME PAPER 81-GT-103] p0348 N81-30009
- Energy production from waste heat by means of elastomers or memory metals  
[STU-79-6394] p0362 N81-21551
- Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PNL-3533-VOL-1] p0283 N81-21605
- BRAZIL**
- Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goias - Brazil  
p0295 N81-23630
- Future of alcohol fuels programs in Brazil  
p0299 N81-25121
- Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany  
[BEPT-FB-T-79-94] p0264 N81-17609
- BREADBOARD MODELS**
- Design and breadboard evaluation of the SPS reference phase control system concept  
p0366 N81-16543
- BREEDER REACTORS**
- An economics method for symbiotic fusion-fission electricity generation systems  
p0336 N81-23716
- The fusion-supported decentralized nuclear energy system  
p0337 N81-23848

- Concept evaluation of nuclear fusion driven  
sybiotic energy systems p0341 A81-25102
- BRINES**  
Use of weighted brines in recovery of geothermal  
energy from hot, dry rock p0303 A81-26928
- Improved liquid/solids handling module ---  
Geothermal energy conversion p0363 A81-21582  
[DOE/ET-27193/T1]
- Synopses of R and D in geothermal-geochemical  
engineering at the Lawrence Livermore National  
Laboratory, 1976 - 1980 p0324 A81-21615  
[UCID-18863]
- BROMIDES**  
Design improvements in LiBr absorption chillers  
for solar applications p0253 A81-27558
- BROMINE**  
Development of zinc-bromine batteries for utility  
energy storage p0379 A81-20591  
[DOE/ET-29345/21]
- BUMPY TORUSES**  
Trends and developments in magnetic confinement  
fusion reactor concepts p0336 A81-23711
- BUOYS**  
Investigation of dynamics of a waterwave power plant  
p0333 A81-22176
- BURNING RATE**  
Rate coefficients of combustion/fuel conversion  
reactions by high-temperature photochemistry  
[COO-4169-5] p0314 A81-18525
- BUTANES**  
Combustion of methanol and liquefied butane in a  
gas turbine combustor p0348 A81-29963  
[ASME PAPER 81-GT-50]
- BY-PRODUCTS**  
Coal gasification systems engineering and  
analysis. Appendix B: Medium B+U gas design  
[NASA-CR-161656] p0309 A81-18215
- Coal gasification systems engineering and  
analysis. Appendix C: Alternate product  
facility designs p0309 A81-18216  
[NASA-CR-161657]
- Coal gasification systems engineering and  
analysis. Appendix D: Cost and economic studies  
[NASA-CR-161658] p0310 A81-18217
- C**
- CADMIUM**  
Lightweight composite cadmium electrodes p0379 A81-21510
- CADMIUM COMPOUNDS**  
The CdS<sub>1-x</sub>Se<sub>2x</sub> thin films for solar cell applications  
[DOE/ET-23007/4] p0270 A81-18561
- CADMIUM SELLLENIDES**  
Diffusion length measurements in CdS and CdSe  
Schottky barrier junctions p0209 A81-19698
- Temperature dependence for the power  
outputs of n-CdSe liquid junction cells p0222 A81-24823
- The CdSe thin-film solar cell p0240 A81-27168
- CADMIUM SULFIDES**  
Diffusion length measurements in CdS and CdSe  
Schottky barrier junctions p0209 A81-19698
- The controlling influence of the Cu<sub>2</sub>S optical  
absorption coefficient on the short-circuit  
currents of Cu<sub>2</sub>S/CdS solar cells p0209 A81-20007
- Cu<sub>x</sub>/S/Cd<sub>y</sub>/Zn<sub>1-y</sub>/S and Cu<sub>x</sub>/S/Cd<sub>y</sub>/Zn<sub>1-y</sub>/S, CdS  
thin film solar cells using chemically sprayed  
films p0229 A81-26355
- Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110
- A low-cost manufacturing process for thin-film  
solar cells p0235 A81-27121
- An investigation of the Cu<sub>x</sub>/S-CdS structure for  
photovoltaic conversion using an Al film vacuum  
deposited process p0241 A81-27178
- A microstructural study of the heterojunction  
materials of the CdS-Cu<sub>2</sub>S solar cell p0241 A81-27179
- Growth and evaluation of CdS and /CdZn/S films for  
the fabrication of high performance photovoltaic  
devices p0241 A81-27180
- Cu<sub>2</sub>S-CdS sprayed solar cells p0241 A81-27181
- The role of deep levels in controlling the  
photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction  
p0241 A81-27182
- Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar  
cell with an interdigitated grid p0242 A81-27185
- Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit  
voltage and low reflection losses p0253 A81-27299
- Indium phosphide/cadmium sulfide thin-film solar  
cells p0268 A81-18533  
[SERI/TR-8170-1-T2]
- Development of copper sulfide/cadmium sulfide thin  
film solar cells p0269 A81-18559  
[SERI/PR-8143-1-T2]
- CADMIUM TELLURIDES**  
Thin film polycrystalline solar cells prepared by  
electrodeposition p0237 A81-27142
- ZnO films and ZnO/CdTe heterojunctions prepared  
using spray pyrolysis p0240 A81-27169
- Emerging materials for solar cell applications:  
Electrodeposited CdTe p0269 A81-18555  
[SERI/PR-9152-1-T1]
- Low cost sprayed CdTe solar cell research  
[DSE-4042-T34] p0275 A81-19631
- Low cost, sprayed CdTe solar cell research  
[SERI/PR-8104-3-T2] p0279 A81-20585
- CALIBRATING**  
Design of self-calibrating controllers for  
heliostats in a solar power plant p0211 A81-21030
- A simplified non-linear model leading to full  
range valid calibration test of thermal solar  
collectors through simple experimental procedure  
p0217 A81-23009
- The correction for spectral mismatch effects on  
the calibration of a solar cell when using a  
solar simulator p0276 A81-20546  
[NASA-CR-164074]
- Results of the 1980 NASA/JPL balloon flight solar  
cell calibration program p0277 A81-20548  
[NASA-CR-164078]
- CALIFORNIA**  
Acid rain: The impact of local sources  
[DOE/NETC-14787/103] p0197 A81-18573
- Solar-heated hot water instrumentation project for  
EPRI headquarters complex, Palo Alto, California  
[EPRI-RH-1654] p0275 A81-19630
- CANADA**  
Study of the potential for cogeneration in Canada:  
Industrial steam turbines. Volume 1: Main report  
[NP-25187-VOL-1] p0203 A81-26563
- CANCER**  
Biological exposure sensors in coal conversion  
technologies p0192 A81-17410  
[CONF-801143-1]
- CAPACITORS**  
Highly efficient welding power supply  
[DCE/CS-40023/T2] p0199 A81-19404
- CARBIDES**  
Interaction in Si<sub>3</sub>N<sub>4</sub>-C and BN-C systems under  
conditions of radiation heating p0210 A81-20906
- CARBON**  
Charge exchange and energy loss of carbon ions in  
air-plasma channels --- in inertial fusion reactor  
p0344 A81-26570
- Contiguous capillary coating of silicon on porous  
carbon substrates p0236 A81-27129
- Physical and chemical characterization of E.A.D.  
silicon films. p0249 A81-27260
- Optimization of carbon-supported platinum  
catalysts for fuel cell electrodes  
[AD-A094714] p0357 A81-19579

# CARBON DIOXIDE

# SUBJECT INDEX

## CARBON DIOXIDE

- The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant [BNL-51279] p0192 N81-16631
- CARBON DIOXIDE CONCENTRATION**
  - Effects of carbon dioxide buildup in the atmosphere [GPO-62-841] p0191 N81-16626
- CARBON DIOXIDE LASERS**
  - Inertial fusion program [LA-7755-PB] p0360 N81-20901
  - Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase 0: Proof of concept experiment [NASA-CR-164137] p0291 N81-21210
- CARBON MONOXIDE**
  - Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165179] p0352 N81-17527
  - Carbon monoxide: Resource of the future [BNL-28576] p0307 N81-17603
- CARBONACEOUS MATERIALS**
  - Production of hydrogen from carbonaceous materials p0288 N81-25146
  - Solar gasification of carbonaceous materials [UCRL-53063] p0272 N81-19605
- CARBONATES**
  - Fuel cell support studies: On-site molten carbonate systems [PB81-113672] p0353 N81-17619
- CARBOT CYCLE**
  - Energy production from waste heat by means of elastomers or memory metals [STU-79-6394] p0362 N81-21551
- CARRIER DENSITY (SOLID STATE)**
  - Theory of photo induced open circuit voltage decay in a solar cell p0216 N81-22200
  - Inclusion of degeneracy in the analysis of heavily doped regions in silicon solar cells and other semiconductor devices p0221 N81-24810
  - Ultra high speed growth of silicon ribbons for solar cells p0231 N81-27081
  - Designing practical silicon solar cells approaching the 'limit conversion efficiency' p0239 N81-27159
  - Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells p0241 N81-27183
- CARRIER MOBILITY**
  - Collection efficiency of low-mobility solar cells p0230 N81-27010
  - Amorphous thin films for solar-cell applications [SERI/PR-0-8254-F] p0283 N81-21591
- CARRIER TRANSPORT (SOLID STATE)**
  - Diffusion length measurements in CdS and CdSe Schottky barrier junctions p0209 N81-19698
  - Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells p0216 N81-22198
  - Transport properties in 100 mm CZ silicon --- Czochralski p0234 N81-27115
  - Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells p0236 N81-27130
  - Designing practical silicon solar cells approaching the 'limit conversion efficiency' p0239 N81-27159
  - Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells p0251 N81-27282
- CASSEGRAIN OPTICS**
  - Design requirements for high-efficiency high concentration ratio space solar cells p0263 N81-17575
- CASTING**
  - A silicon sheet casting experiment --- for solar cell water production p0231 N81-27082
  - Growth structure of cast silicon and related photovoltaic properties of solar cells p0245 N81-27214

## CATALOGS (PUBLICATIONS)

- Coal gasification systems engineering and analysis. Appendix A: Coal gasification catalog [NASA-CR-161655] p0309 N81-18214
- The Energy Link catalog. Volume 2: Energy resource catalog --- bibliographies [PB81-140824] p0384 N81-21633
- CATALYSIS**
  - Development of catalysts for coal conversion [PB81-111395] p0307 N81-17296
  - Catalytic combustion of synthetic fuels [DOE/PC-30220/T1] p0321 N81-21154
  - Catalytic effects in coal gasification [SAND-80-2151] p0322 N81-21231
- CATALYSTS**
  - Effects of pore diameter and catalyst loading in hydroliquefaction of coal with CoO/MoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> catalysts p0293 N81-22274
  - Evaluation of coal conversion catalysts [PB81-111387] p0306 N81-17291
  - Development of catalysts for coal conversion [PB81-111395] p0307 N81-17296
  - Metal chelate catalysts for fuel cells [PB81-132953] p0364 N81-21629
- CATALYTIC ACTIVITY**
  - Catalytic cracking of hydrotreated coal liquids and related polycyclic naphthenes and naphthenoaromatics p0308 N81-18118
  - Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes [FE-2315-55] p0311 N81-18231
  - Cell module and fuel conditioner [NASA-CR-165189] p0354 N81-18494
  - Coal transformation chemistry --- alkylation in liquid ammonia [DOE/PC-30088/1] p0316 N81-19328
  - Applied research and evaluation of process concepts for liquefaction and gasification of western coals [DOE/ET-10527/T1] p0319 N81-20292
  - Cryogenic methane separation/catalytic hydrogasification process analysis [DOE/ET-10325/T3] p0321 N81-21218
- CATHODES**
  - The oxygen electrode - A major problem in energy conversion p0342 N81-25608
- CAVES**
  - Laboratory studies of hard rock for CAES [PNL-SA-8971] p0375 N81-16599
  - Compressed Air Energy Storage Technology Program overview [PNL-SA-8988] p0376 N81-16600
- CAVITY RESONATORS**
  - High efficiency SPS klystron design p0366 N81-16550
- CELL ANODES**
  - Electrochemistry of oxygen p0343 N81-25609
  - Electrodes and diaphragms for fuel cells [BNFT-FB-T-79-140] p0359 N81-19639
- CELL CATHODES**
  - Electrochemistry of oxygen p0343 N81-25609
  - Electrodes and diaphragms for fuel cells [BNFT-FB-T-79-140] p0359 N81-19639
- CELLULOSE**
  - Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion p0296 N81-24427
  - Ethanol from municipal cellulosic wastes p0299 N81-25124
  - Technology for powdered fuel preparation from solid waste p0301 N81-25559
  - Conversion of cellulosic wastes to liquid fuels p0302 N81-25564
  - Conversion of cellulosic wastes to liquid fuels [COO-2982-57] p0320 N81-20306
- CENTRIFUGAL PUMPS**
  - Pump heat loss test report --- solar collector systems [SAND-80-2526] p0273 N81-19614



**CENTRIFUGES**

The Cyclocentrifuge - An advanced gas/solids separator for coal conversion processes  
[AIAA PAPER 81-0395] p0293 A81-20804

**CERAMIC COATINGS**

Optimum performance of thermal trap collectors p0220 A81-24432

Ceramic heat pipe development  
[DOE/TIC-11389] p0205 A81-21611

**CERAMICS**

Continuous coating of silicon-on-ceramic p0231 A81-27083

Design analysis of high-efficiency low-stress ceramic gas turbines  
[ASME PAPER 81-GT-130] p0349 A81-30034

Economic application, design analysis, and material availability for ceramic heat exchangers  
[ORNL/TM-7580] p0196 A81-18528

MHD air heater development technology  
[DOE/ET-15602/T2] p0360 A81-20590

Basic research on ceramic materials for energy storage and conversion systems  
[COO-2564-6] p0361 A81-21207

Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase 0: Proof of concept experiment  
[NASA-CR-164137] p0291 A81-21210

**CERTIFICATION**

Support for the analytical tools for automotive fuel economy activities  
[PB81-109555] p0192 A81-17445

**CESIUM DIODES**

Improved thermionic energy converters  
[NASA-CASE-LEW-12443-1] p0357 A81-19561

Construction and properties of a quadrupole mass spectrometer device, developed for the investigation of a thermionic barium-cesium-diode vapor atmosphere  
[DFVLR-FB-79-39] p0361 A81-21308

**CESIUM PLASMA**

Optical spectrum of a closed cycle MHD generator plasma p0333 A81-23063

**CHALCOGENIDES**

Chalcogenide-glass solar cells  
[DOE/ET-23043/T1] p0284 A81-21608

**CHANNEL FLOW**

Three-dimensional analysis of MHD generators - Development of electrical solution  
[AIAA PAPER 81-0175] p0329 A81-20650

On the magnetoacoustic instability  
[AIAA PAPER 81-0248] p0330 A81-20698

Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips p0337 A81-23747

**CHARCOAL**

Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project p0298 A81-25113

**CHARGE CARRIERS**

Basic research on ceramic materials for energy storage and conversion systems  
[COO-2564-6] p0361 A81-21207

**CHARGE EFFICIENCY**

Solar Maximum Mission (SMM) in-flight performance p0281 A81-21523

**CHARGE EXCHANGE**

Charge exchange and energy loss of carbon ions in air-plasma channels --- in inertial fusion reactor p0344 A81-26570

**CHELATES**

Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 A81-21629

**CHEMICAL ANALYSIS**

Informational report: 1979 progress of the Chemical Characterization Panel of the composition of diesel exhaust project and results of particulate extraction round-robin  
[PB81-114670] p0195 A81-17636

A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 A81-17644

**CHEMICAL AUXILIARY POWER UNITS**

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245] p0354 A81-18496

**CHEMICAL COMPOSITION**

Cu/z/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements p0241 A81-27184

Catalytic effects in coal gasification  
[SAND-80-2151] p0322 A81-21231

**CHEMICAL ENERGY**

Direct conversion of chemical energy to electrical energy p0337 A81-23901

**CHEMICAL ENGINEERING**

Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings p0303 A81-28992

**CHEMICAL FUELS**

Overall efficiencies for conversion of solar energy to a chemical fuel p0288 A81-25148

**CHEMICAL LASERS**

Modeling of a solar-pumped iodine laser p0221 A81-24618

**CHEMICAL REACTIONS**

Interaction in Si3N4-C and BN-C systems under conditions of radiation heating p0210 A81-20906

Gasoline from alcohols p0297 A81-24900

Physical and chemical processes for latent heat storage at low temperatures p0372 A81-24995

An assessment of the use of chemical reaction systems for thermal energy transport p0365 A81-25011

Enhancement of low grade heat via the HYSOS chemical heat pump --- Hydride Conversion and Storage System p0225 A81-25018

Coal liquefaction: The chemistry and technology of thermal processes --- Book p0304 A81-29692

Upgrading of coal liquids: Upgrading distillates from coal liquefaction  
[FE-2566-42] p0310 A81-18226

Indirect conversion of coal to methanol and gasoline: Product price vs product slate  
[CONF-801142-3] p0311 A81-18228

Biomass energy systems program summary. Information current as of September 30, 1979  
[DOE/CS-21059/01] p0317 A81-19337

**CHEMICAL REACTORS**

High temperature solar reactors for hydrogen production p0286 A81-24557

Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase 0: Proof of concept experiment  
[NASA-CR-164137] p0291 A81-21210

Economic comparison of molten carbonate fuel cells and gas turbines in coal gasification based power plants  
[EPRI-AP-1543] p0322 A81-21229

Coal gasifier wall protection system  
[PB81-141921] p0323 A81-21237

**CHILE**

Application of aerial remote sensing to the study of geothermal resources in the desertic north of Chile and environmental pollution in Santiago, Chile p0294 A81-23590

**CHINA**

Solar energy research and applications in China p0219 A81-23703

**CHLORIDES**

POCl3 gettering of titanium, molybdenum and iron-contaminated silicon solar cells p0245 A81-27216

**CHLOROBENZENES**

An evaluation of polycyclic aromatic hydrocarbons from processed oil shales p0308 A81-18104

**CHLOROBENZENES**

An evaluation of polycyclic aromatic hydrocarbons from processed oil shales p0308 A81-18104

## CHLOROPHYLLS

### CHLOROPHYLLS

Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage

p0288 A81-25151

Chlorophyll sensitized solar photovoltaic cell with cuprous iodide electrode

p0254 A81-28936

### CHLOROPLASTS

Solar energy conversion by chloroplast photoelectrochemical cells

p0216 A81-22349

### CHROMATOGRAPHY

An evaluation of polycyclic aromatic hydrocarbons from processed oil shales

p0308 A81-18104

Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments

p0309 A81-18211

### CHROMITES

Thin film electrochromic materials for energy efficient windows

[LBL-10862] p0197 A81-18549

### CIRCUIT RELIABILITY

Circuit design considerations for photovoltaic modules and systems

p0238 A81-27153

### CITIES

Foresight. Volume 2: Energy conservation in cities [GPO-47-454]

p0190 A81-16527

### CIVIL AVIATION

Operational energy conservation strategies in commercial aviation

p0185 A81-20465

### CLASSIFICATIONS

Classification of bituminous coals - Application of the technique of optimal sections in coal classification

p0293 A81-19847

### CLATHRATES

Some long-term energy options [LA-8628-HS]

p0200 A81-19596

### CLEAN ENERGY

Contribution of ocean thermal energy conversion to world energy needs

p0333 A81-22900

Design and efficiency estimation of a thermochemical system of hydrogen production

p0285 A81-23531

Solar standards and testing activities in developed and developing countries

p0229 A81-25096

The role of high-Btu coal gasification technology

p0298 A81-25112

The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources

p0342 A81-25131

An environmental appraisal of tidal power stations: With particular reference to the Severn barrage --- Book

p0187 A81-26196

Low cost structures for photovoltaic arrays

p0248 A81-27248

Decentralized energy studies: Compendium of international studies and research [SERI/RR-744-451]

p0193 A81-17582

Fossil energy program [ORNL-5702]

p0317 A81-19588

### CLEANERES

The Cyclocentrifuge - An advanced gas/solids separator for coal conversion processes

[AIAA PAPER 81-0395] p0293 A81-20804

### CLIMATE

October 1980 environmental data for sites in the National Solar Data Network

[SOLAR/0010-80/10] p0279 A81-20588

### CLIMATOLOGY

Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning

[ASME PAPER 80-WA/HT-3] p0185 A81-21101

### CLOSED CYCLES

Operational, control and protective system transient analyses of the closed-cycle GT-HTGR power plant --- Gas Turbine High Temperature Gas-cooled Reactor

[ASME PAPER 80-WA/GT-1] p0331 A81-21096

## SUBJECT INDEX

The nuclear closed-cycle gas turbine /HTGR-GT/ -

Dry cooled commercial power plant studies

[ASME PAPER 80-GT-82] p0332 A81-21162

Coal-fired heaters for CCGT cogeneration service

--- Closed-Cycle Gas Turbine

[ASME PAPER 81-GT-212] p0350 A81-30101

Closed-cycle helium gas turbine for solar tower power plant

p0353 A81-18247

Disk MHD generator study

[NASA-CR-159872] p0354 A81-18491

### CLOUD PHYSICS

Cloud modification by man-made pollutants -

Effects of a coal-fired power plant on cloud drop spectra

p0188 A81-28478

### COAL

A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program

[PB81-111593] p0306 A81-17287

A statistical study of coal sulfur variability and related factors

[PB81-111585] p0195 A81-17644

Optical diagnostic measurements of coal slag parameters in combustion MHD systems

p0353 A81-18153

Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes

[FE-2315-55] p0311 A81-18231

Hydrocarbonization research: Completion report

[ORNL/TN-6693] p0311 A81-18232

Studies of the mechanism of coal hydrogenation by electron spin resonance

[DOE/PC-30072/T2] p0313 A81-18241

Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts

[EPRI-CS-1517-VOL-5] p0319 A81-20302

Critical parameters for coarse coal underground slurry haulage systems

[JPL-PUB-81-11] p0369 A81-20495

Hydrogen-methane separation processes and related phenomena

[DOE/BETC-14386/106] p0321 A81-21153

Observations on test stockpiles of dried lignite and subbituminous coals

[DOE/GPETC/RI-80/5] p0321 A81-21217

Investigation of the liquefaction of partially dried and oxidized coals

[EPRI-AP-1625] p0321 A81-21222

Western Coal Survey: A survey of coal mining capacity in the west

[DOE/EA-0045/1] p0323 A81-21464

### COAL DERIVED GASES

Applications study of advanced power generation systems utilizing coal-derived fuels. Volume 1: Executive summary

[NASA-CR-161691] p0362 A81-21538

Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2

[NASA-CR-161692] p0362 A81-21539

### COAL DERIVED LIQUIDS

Motor fuels from coal - Technology and economics

p0293 A81-22275

Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal

p0341 A81-25119

Production of liquid fuels with a high-temperature gas-cooled reactor

p0298 A81-25120

Combustion of coal-derived liquids and shale oil in gas turbine combustors

p0343 A81-26016

Motor fuels and chemicals from coal via the Sasol Synthol route

p0303 A81-28994

The SRC-II process --- Solvent Refined Coal

p0304 A81-28997

Exxon donor solvent liquefaction process

p0304 A81-28998

Synfuels from coal

p0304 A81-29682

Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies

[FE-1743-80-VOL-1] p0316 A81-19335

## SUBJECT INDEX

## COAL GASIFICATION

- Hydrogen bonding in asphaltenes and coal liquids  
[DOE/PC-30252/T1] p0318 N81-20227
- COAL GASIFICATION**
- The Cycloentrifuge - An advanced gas/solids separator for coal conversion processes  
[AIAA PAPER 81-0395] p0293 A81-20804
- Magnetohydrodynamic generator of electrical energy using gasification products of lignite coal  
p0331 A81-21065
- Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3  
p0293 A81-22278
- Thermodynamic calculations for coal gasification processes  
p0294 A81-22849
- Coal gasification for hydrogen manufacturing  
p0286 A81-24018
- Gasification combined cycle R&A assessment  
p0295 A81-24265
- Overview of nonelectrical applications of fusion  
p0341 A81-25104
- Pricetown I - In-situ coal conversion field test for bituminous coals  
p0298 A81-25111
- The role of high-Btu coal gasification technology  
p0298 A81-25112
- Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project  
p0298 A81-25113
- Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas  
p0298 A81-25114
- Fluid bed hydrogenation of agglomerating bituminous coals  
p0298 A81-25115
- Economic aspects of coal gasification and liquefaction in Belgium  
p0300 A81-25136
- Coal conversion /combustion and gasification/  
p0302 A81-26477
- Corrosion of alloys at high temperature in coal gasification environments  
p0302 A81-26491
- The performance of MCral alloys in complex coal conversion atmospheres  
p0302 A81-26492
- Motor fuels and chemicals from coal via the Sasol Synthol route  
p0303 A81-28994
- Development of the Shell-Koppers coal gasification process  
p0303 A81-28995
- Development of liquefaction and gasification in the Federal Republic of Germany  
p0304 A81-28996
- Production of fuels from high temperature solar thermal systems - Economic analysis  
p0256 A81-29268
- Synfuels from coal  
p0304 A81-29682
- Gas turbine materials evaluation program utilizing coal derived gaseous fuel  
[ASME PAPER 81-GT-65] p0348 A81-29975
- A baseload gas turbine to meet utility requirements for reliability and availability  
[ASME PAPER 81-GT-127] p0349 A81-30031
- Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[CONP-8010106-7] p0189 N81-16314
- Sampling and instrumentation for fluidized-bed combustion  
[ANL/CEH/FE-80-2] p0305 N81-16317
- Energy from biomass: The simplex process for the gasification of coal and forest pulp  
[PB81-110512] p0305 N81-16324
- Evaluation of coal conversion catalysts  
[PB81-111387] p0306 N81-17291
- Rapid-rate bituminous coal gasification --- laminar flow and particle trajectories  
[PB81-114290] p0306 N81-17293
- Development of catalysts for coal conversion  
[PB81-111395] p0307 N81-17296
- Environmental impact assessment guidelines for new source coal gasification facilities  
[PB81-114555] p0195 N81-17635
- High-temperature high-pressure particulate removal in coal gasification  
[PB81-113664] p0308 N81-17642
- Coal gasification systems engineering and analysis. Volume 1: Executive summary  
[NASA-CR-161653] p0309 N81-18212
- Coal gasification systems engineering and analysis, volume 2  
[NASA-CR-161654] p0309 N81-18213
- Coal gasification systems engineering and analysis. Appendix A: Coal gasification catalog  
[NASA-CR-161655] p0309 N81-18214
- Coal gasification systems engineering and analysis. Appendix B: Medium B+U gas design  
[NASA-CR-161656] p0309 N81-18215
- Coal gasification systems engineering and analysis. Appendix C: Alternate product facility designs  
[NASA-CR-161657] p0309 N81-18216
- Coal gasification systems engineering and analysis. Appendix D: Cost and economic studies  
[NASA-CR-161658] p0310 N81-18217
- Coal gasification systems engineering and analysis. Appendix E: Cost estimation and economic evaluation methodology  
[NASA-CR-161659] p0310 N81-18218
- Coal gasification systems engineering and analysis. Appendix F: Critical technology items/issues  
[NASA-CR-161660] p0310 N81-18219
- Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation  
[NASA-CR-161661] p0310 N81-18220
- Coal gasification systems engineering and analysis. Appendix H: Work breakdown structure  
[NASA-CR-161662] p0310 N81-18221
- Gasification and desulfurization of coal by injection into molten metals  
[STU-78-4560] p0310 N81-18223
- Solar coal gasification: Plant design and economics  
[UCRL-84610] p0265 N81-18225
- Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 N81-18232
- Energy balances in the production and end-use of methanol derived from coal  
[DOE/FE-70151/T4] p0312 N81-18234
- Computer modeling of coal gasification reactors, year 4  
[FE-1770-66] p0312 N81-18235
- Coal Hydrogasification process development. volume 1: Coal studies  
[FE-3125-24-VOL-1] p0312 N81-18238
- Coal Hydrogasification process development. volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 N81-18239
- Solids circulation around a jet in a fluidized bed gasifier  
[DOE/ET-12229/T1] p0313 N81-18343
- Preparation of a coal conversion systems technical data book  
[FE-2286-48] p0315 N81-19327
- Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data  
[ORNL/TM-7525] p0316 N81-19332
- Applied research and evaluation of process concepts for liquefaction and gasification of western coals  
[DOE/ET-10527/T1] p0319 N81-20292
- Molten salt coal gasification process development unit, phase 1. Volume 1: PDU operations  
[DOE/ET-10296/66-VOL-1] p0319 N81-20296
- Coal conversion 1979 technical report  
[DOE/FE-0010] p0319 N81-20297
- Coal hydrogasification process development  
[DOE/ET-10328/27] p0319 N81-20304
- Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[ORNL/TM-7428] p0320 N81-20305
- Solar coal gasification  
[DOE/TIC-11384] p0279 N81-20587
- Environmental consideration for TVA's ammonia from coal project  
[CONP-8004137-1] p0203 N81-21216
- Cryogenic methane separation/catalytic hydrogasification process analysis  
[DOE/ET-10325/T3] p0321 N81-21218

- Economic comparison of molten carbonate fuel cells and gas turbines in coal gasification based power plants  
[EPRI-AP-1543] p0322 N81-21229
- Catalytic effects in coal gasification  
[SAND-80-2151] p0322 N81-21231
- Coal gasifier wall protection system  
[PB81-141921] p0323 N81-21237
- Monitoring temperatures in coal conversion and combustion processes via ultrasound  
[ANL-FE-49622-TM09] p0325 N81-21875
- COAL LIQUEFACTION**
- Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size  
p0293 A81-22273
- Effects of pore diameter and catalyst loading in hydroliquefaction of coal with CoO/MoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> catalysts  
p0293 A81-22274
- Motor fuels from coal - Technology and economics  
p0293 A81-22275
- Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions  
p0294 A81-23495
- Hydrogen requirements in shale oil and synthetic crude from coal  
p0295 A81-24020
- Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal  
p0341 A81-25119
- Production of liquid fuels with a high-temperature gas-cooled reactor  
p0298 A81-25120
- Economic aspects of coal gasification and liquefaction in Belgium  
p0300 A81-25136
- Development of liquefaction and gasification in the Federal Republic of Germany  
p0304 A81-28996
- Exxon donor solvent liquefaction process  
p0304 A81-28998
- A new route to liquid fuels from coal  
p0304 A81-28999
- Synfuels from coal  
p0304 A81-29682
- Coal liquefaction: The chemistry and technology of thermal processes --- Book  
p0304 A81-29692
- Sampling and instrumentation for fluidized-bed combustion  
[ANL/CBN/FE-80-2] p0305 N81-16317
- Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T2] p0305 N81-16318
- Proceedings: EPA/Industry Forum on Coal-Liquefaction  
[PB81-113052] p0195 N81-17645
- Catalytic cracking of hydrotreated coal liquids and related polycyclic naphthenes and naphthenoaromatics  
p0308 N81-18118
- Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments  
p0309 N81-18211
- Upgrading of coal liquids: Upgrading distillates from coal liquefaction  
[FE-2566-42] p0310 N81-18226
- Phase equilibrium in coal liquefaction processes  
[EPRI-AP-1593] p0311 N81-18227
- Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 N81-18232
- Coal Hydrogasification process development. volume 1: Coal studies  
[FE-3125-24-VOL-1] p0312 N81-18238
- Coal Hydrogasification process development. volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 N81-18239
- EDS coal liquefaction process development, phase 4-5 --- donor solvent technique  
[FE-2893-53] p0312 N81-18240
- Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T1] p0315 N81-19258
- Preparation of a coal conversion systems technical data book  
[FE-2286-48] p0315 N81-19327
- Coal transformation chemistry --- alkylation in liquid ammonia  
[DOE/PC-30088/1] p0316 N81-19328
- Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies  
[FE-1743-80-VOL-1] p0316 N81-19335
- Applied research and evaluation of process concepts for liquefaction and gasification of western coals  
[DOE/ET-10527/T1] p0319 N81-20292
- Coal conversion 1979 technical report  
[DOE/FE-0010] p0319 N81-20297
- Stress corrosion studies in solvent refined coal liquefaction pilot plants  
[ORNL/TM-7513] p0321 N81-21179
- Investigation of the liquefaction of partially dried and oxidized coals  
[EPRI-AP-1625] p0321 N81-21222
- Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664] p0322 N81-21223
- Materials technology for coal-conversion processes  
[ANL-80-93] p0322 N81-21228
- Liquefying coal for future energy needs  
[PB81-135956] p0322 N81-21232
- Environmental development plan: Coal liquefaction  
[DOE/EDP-0044] p0206 N81-21641
- Monitoring temperatures in coal conversion and combustion processes via ultrasound  
[ANL-FE-49622-TM09] p0325 N81-21875
- COAL UTILIZATION**
- Classification of bituminous coals - Application of the technique of optimal sections in coal classification  
p0293 A81-19847
- Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes  
[AIAA PAPER 81-0030] p0328 A81-20550
- A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions  
[AIAA PAPER 81-0031] p0328 A81-20551
- Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant  
[AIAA PAPER 81-0110] p0328 A81-20602
- Utilization of staged combustion for controlling NO<sub>x</sub>/emissions from a test facility simulating a coal-fired MHD power plant  
[AIAA PAPER 81-0101] p0328 A81-20603
- Electrical effects of coal slag in a diffuse mode MHD generator  
[AIAA PAPER 81-0176] p0329 A81-20651
- Power conditioning and control requirements of coal fired MHD generators  
[AIAA PAPER 81-0246] p0330 A81-20696
- Pressurized fluidized bed - A technology for combined cycle power generation  
[AIAA PAPER 81-0392] p0330 A81-20802
- A preliminary investigation into the characteristics of a Rijke Tube pulsating combustor  
[AIAA PAPER 81-0411] p0293 A81-26815
- Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator  
p0332 A81-21494
- Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility  
p0334 A81-23451
- Sulfur pollution from coal combustion - Effect of the mineral components of coal on the thermal stabilities of sulfated ash and calcium sulfate  
p0186 A81-24622
- Alternative energy sources II: Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7 - Hydrocarbon conversion  
p0297 A81-25109
- Coal conservation and stabilization during storage  
p0299 A81-25126
- Advanced synfuels production/power systems utilizing laser particulate control  
p0299 A81-25127

# SUBJECT INDEX

# COLLIMATION

Bed expansion and attrition studies in a coal-fired fluidized bed p0299 A81-25128

Combustion of coal suspension fuels using air atomizers p0299 A81-25129

Fluidized bed combustion of coal p0299 A81-25130

Coal-oil mixtures - Their technical and commercial status p0300 A81-25133

The economics of advanced technologies for electricity generation from coal p0300 A81-25134

Economics and concepts of industrial coal fluidized bed combustion in Brazil p0300 A81-25135

Production of hydrogen from carbonaceous materials p0288 A81-25146

The Ames Resource Recovery facility p0301 A81-25558

Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute p0345 A81-26854

Solid-fuel combustion in fluidized beds --- Russian book p0303 A81-27539

Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra p0188 A81-28478

Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings p0303 A81-28992

Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants p0188 A81-28993

The SRC-II process --- Solvent Refined Coal p0304 A81-28997

Coal-fired heaters for CCGT cogeneration service --- Closed-Cycle Gas Turbine [ASME PAPER 81-GT-212] p0350 A81-30101

Resource recovery from coal residues [CONF-801104-8] p0305 A81-16322

Regional price targets appropriate for advanced coal extraction [NASA-CR-163896] p0189 A81-16513

Advanced Cogeneration Technology Economic Optimization Study (ACTEOS) [NASA-CR-163887] p0306 A81-16573

The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant [BNL-51279] p0192 A81-16631

Development of catalysts for coal conversion [PB81-111395] p0307 A81-17296

Biological exposure sensors in coal conversion technologies [CONF-801143-1] p0192, A81-17410

Carbon monoxide: Resource of the future [BNL-28576] p0307 A81-17603

The detection of trace element species in solvent refined coal p0308 A81-18117

Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments p0309 A81-18211

Indirect conversion of coal to methanol and gasoline: Product price vs product slate [CONF-801142-3] p0311 A81-18228

Energy balances in the production and end-use of methanol derived from coal [DOE/ET-70151/T4] p0312 A81-18234

Use of coal injection and oxygen in a blast furnace to produce fuel gas [IDO-10089] p0312 A81-18236

Regional conversion to coal [FE-2468-63] p0314 A81-18517

Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range [DOE/ET-15208/1] p0355 A81-18562

Acid rain: The impact of local sources [DOE/ETC-14787/103] p0197 A81-18573

Investigation of swirling flow mixing for application in an MHD pulverized coal combustor using isothermal modeling [DOE/ET-10815/39] p0356 A81-19266

Efficient ultrasonic grinding: A new technology for micron-sized coal [DOE/ER-10466/T1] p0315 A81-19317

Fossil energy program [ORNL-5702] p0317 A81-19588

Review of fusion synfuels [BNL-28627] p0291 A81-20300

Flash pyrolysis and hydrolysis of coal [BNL-28577] p0319 A81-20301

Coal hydrogasification process development [DOE/ET-10328/27] p0319 A81-20304

Hydrogen-methane separation processes and related phenomena [DOE/ETC-14386/106] p0321 A81-21153

Comparative analysis of coal use options for reducing the dependence of utilities on imported oil [DOE/EA-12301-T1] p0322 A81-21230

Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis [DOE/EV-73002/1-VOL-1] p0205 A81-21595

Fuel cycle analysis for fossil energy systems: Coal combustion [ORNL-5661] p0205 A81-21606

Performance profiles of major energy producers [DOE/EIA-0206/78] p0324 A81-21610

**COALESCING**  
Coalescence/dispersion modeling of gas turbine combustors p0344 A81-26018

**COASTAL WATER**  
Korea tidal power and beyond p0340 A81-25084

**COASTS**  
Alternative energy facility siting policies for urban coastal areas: Executive summary of findings and policy recommendations [DOE/EV-01528/T1] p0204 A81-21559

**COATING**  
Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project [NASA-CR-164134] p0281 A81-21546

**COATINGS**  
Coatings with induced transmission p0211 A81-20973

Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating [LA-UR-80-2930] p0280 A81-20936

**COGENERATION**  
More on dual purpose solar-electric power plants p0227 A81-25045

Coal-fired heaters for CCGT cogeneration service --- Closed-Cycle Gas Turbine [ASME PAPER 81-GT-212] p0350 A81-30101

Advanced Cogeneration Technology Economic Optimization Study (ACTEOS) [NASA-CR-163887] p0306 A81-16573

Characterization of solid waste conversion and cogeneration systems [DOE/EV-0105] p0307 A81-17585

Fuel cell support studies: On-site molten carbonate systems [PB81-113672] p0353 A81-17619

Gallium arsenide photovoltaic dense array for concentrator applications [SAND-78-7056] p0267 A81-18530

Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1 [NASA-CR-164051] p0202 A81-20538

Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 1: Main report [EP-25187-VOL-1] p0203 A81-20563

**COLD WATER**  
OTEC cold water pipe design for problems caused by vortex-excited oscillations p0347 A81-29200

Storage of cold water in aquifers p0375 A81-29257

**COLLIMATION**  
Design and breadboard evaluation of the SPS reference phase control system concept p0366 A81-16543

Coherent multiple tone technique for ground based  
SPS control p0366 N81-16544

SPS phase control studies p0366 N81-16547

SPS fiber optic link assessment p0366 N81-16548

Ionospheric effects in active retrodirective array  
and mitigating system design p0366 N81-16549

The adapting of the crossed-field directional  
amplifier to the requirements of the SPS p0367 N81-16553

COLORADO

Municipal geothermal heat utilization plan for  
Glenwood Springs, Colorado p0324 N81-21585  
[DOE/ID-12049-3]

COMBUSTION

Combustion, pyrolysis, gasification, and  
liquefaction of biomass p0307 N81-17601  
[SERI/TP-622-893]

Initiation of detonation in unconfined natural  
gas-air clouds p0308 N81-18149  
[PB81-113292]

Optical diagnostic measurements of coal slag  
parameters in combustion MHD systems p0353 N81-18153

Rate coefficients of combustion/fuel conversion  
reactions by high-temperature photochemistry p0314 N81-18525  
[COO-4169-5]

COMBUSTION CHAMBERS

A preliminary investigation into the  
characteristics of a Rijke Tube pulsating  
combustor p0293 A81-20815  
[AIAA PAPER 81-0411]

Gas turbine combustor design problems --- Book p0343 A81-26006

Problems and promises in gas turbine combustor  
design development p0343 A81-26007

Problems due to multifuel operation of gas turbine  
combustors p0343 A81-26009

Coalescence/dispersion modeling of gas turbine  
combustors p0344 A81-26018

Combustion of methanol and liquefied butane in a  
gas turbine combustor p0348 A81-29963  
[ASME PAPER 81-GT-50]

Low NO<sub>x</sub>/ combustion systems for burning heavy  
residual fuels and high-fuel-bound nitrogen fuels p0348 A81-30014  
[ASME PAPER 81-GT-109]

Evaluation of advanced combustors for dry NO<sub>x</sub>/  
suppression with nitrogen bearing fuels in  
utility and industrial gas turbines p0349 A81-30029  
[ASME PAPER 81-GT-125]

Evaluation of concepts for controlling exhaust  
emissions from minimally processed petroleum and  
synthetic fuels p0188 A81-30056  
[ASME PAPER 81-GT-157]

Two-stage combustion for reducing pollutant  
emissions from gas turbine combustors p0350 N81-16056  
[NASA-CR-163877]

AGT-1500 combustor and fuel effects modeling p0350 N81-16061  
[AD-A092255]

Gas turbine combustor performance on synthetic  
fuels, volume 1 p0356 N81-19259  
[EPRI-AP-1623-VOL-1]

Investigation of swirling flow mixing for  
application in an MHD pulverized coal combustor  
using isothermal modeling p0356 N81-19266  
[DOE/ET-10815/39]

Monitoring temperatures in coal conversion and  
combustion processes via ultrasound p0325 N81-21875  
[ANL-FE-49622-TH09]

COMBUSTION CONTROL

Low NO<sub>x</sub>/ combustion systems for burning heavy  
residual fuels and high-fuel-bound nitrogen fuels p0348 A81-30014  
[ASME PAPER 81-GT-109]

COMBUSTION EFFICIENCY

Fluidized bed combustion of coal p0299 A81-25130

An evaluation of NASA's program for improving  
aircraft fuel efficiency p0198 N81-19110  
[NASA-CR-164015]

Coal gasifier wall protection system p0323 N81-21237  
[PB81-141921]

COMBUSTION PRODUCTS

Magnetohydrodynamic generator of electrical energy  
using gasification products of lignite coal p0331 A81-21065

Sulfur pollution from coal combustion - Effect of  
the mineral components of coal on the thermal  
stabilities of sulfated ash and calcium sulfate p0186 A81-24622

Thermodynamic and thermophysical properties of  
combustion products. Volume 10 - Fuels that are  
in current use, in the research stage, and  
considered a possibility. Part 2 -  
Multicomponent fuel compositions /Handbook/  
Resource recovery from coal residues p0302 A81-26195  
[CONF-801104-8]

A manual for the use of electrostatic  
precipitators to collect fly ash particles p0305 N81-16322  
[PB81-112757]

Acid rain: The impact of local sources p0308 N81-17640  
[DOE/ETC-14787/103]

Lubricants for combating effects of high-sulfur fuel p0197 N81-18573  
[AD-A094900]

Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study p0315 N81-19312  
[PB81-121147]

Comparison of gas phase hydrocarbon emissions from  
light-duty gasoline vehicles and light-duty  
vehicles equipped with diesel engines p0201 N81-19674  
[PB81-122996]

COMBUSTION STABILITY

Light aircraft engines, the potential and problems  
for use of automotive fuels. Phase 1:  
Literature search p0203 N81-20620  
[AD-A094154]

CONNERCE

Energy: Economic activity and energy demand; link  
to energy flow. Example: France p0308 N81-18057  
[EUR-6773-EN]

COMMERCIAL AIRCRAFT

Operational energy conservation strategies in  
commercial aviation p0185 A81-20465

COMMERCIAL ENERGY

The nuclear closed-cycle gas turbine /ETCR-GT/-  
Dry cooled commercial power plant studies p0332 A81-21162  
[ASME PAPER 80-GT-82]

The development of advanced structural materials  
for fusion power p0333 A81-22659

The construction cost of thermal storage for solar  
systems p0229 A81-25062

Hot Dry Rock Geothermal Energy Development Program p0297 A81-25091

Coal-oil mixtures - Their technical and commercial  
status p0300 A81-25133

Commercialization potential of the China Lake  
trash-to-gasoline process p0301 A81-25560

Application analysis of photovoltaic systems for  
service/commercial/institutional and industrial  
sectors p0233 A81-27106

The economics of photovoltaics in the commercial,  
institutional, and industrial sectors p0233 A81-27107

Construction and startup performance of the  
Miamishburg salt-gradient solar pond p0253 A81-27552

Development of liquefaction and gasification in  
the Federal Republic of Germany p0304 A81-28996

Possible application of electromagnetic guns to  
impact fusion --- to the generation of electric  
power p0353 N81-17910  
[LA-UR-80-3137]

Environmental and safety issues of the fusion fuel  
cycle p0353 N81-17911  
[CONF-801011-66]

Study of fuel cell on-site, integrated energy  
systems in residential/commercial applications p0361 N81-21533  
[NASA-CR-165144]

STARFIRE: A commercial Tokamak fusion power plant  
study, volume 2 p0363 N81-21612  
[ANL/FPP-80-1-VOL-2]

- Regional analysis of residential/commercial gas demand  
[PB81-134496] p0206 N81-21631
- Environmental data for sites in the National Solar Data Network, January 1981  
[SOLAR/0010-81/01] p0284 N81-21710
- COMMINUTION**  
Municipal solid waste comminution by steam explosion  
p0301 A81-25561
- COMMUNITIES**  
Community energy auditing: Experience with the comprehensive community energy management program  
[ANL/CHSV/TM-43] p0193 N81-17588
- COMPARISON**  
Effects of accounting rules on utility choices of energy technologies in the United States  
[IASA-RN-80-27] p0204 N81-21490
- COMPATIBILITY**  
Compatibility of BSE and BSP solar cell technology --- Back Surface Reflector and Back Surface Field  
p0232 A81-27093
- COMPONENT RELIABILITY**  
Program plan for reliability and maintainability in active solar heating and cooling systems  
[DOE/CS-36010/01] p0264 N81-17596
- Design study of a kinematic Stirling engine for dispersed solar electric power systems  
[NASA-CR-159588] p0265 N81-18492
- Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells  
[NASA-CR-164012] p0271 N81-19568
- Development of high-temperature turbine subsystem technology to a technology readiness status, phase 2  
[FE-1806-96] p0360 N81-20440
- Handbook of experiences in the design and installation of solar heating and cooling systems  
[DOE/CS-32224/T1] p0282 N81-21566
- Interim performance criteria for photovoltaic energy systems  
[SERI/TR-742-654] p0282 N81-21577
- COMPOSITE MATERIALS**  
Lightweight composite cadmium electrodes  
p0379 N81-21510
- COMPRESSED AIR**  
Some new conceptions in the approach to harnessing tidal energy  
p0339 A81-25082
- The utilization of the free and at present dissipated gravitational force inherent in tidal motion by conversion to electrical energy, using compressed air as the active intermediary  
p0339 A81-25083
- Laboratory studies of hard rock for CAES  
[PHL-SA-8971] p0375 N81-16599
- Compressed Air Energy Storage Technology Program overview  
[PHL-SA-8988] p0376 N81-16600
- Adiabatic compressed air energy storage in hard rock  
[PHL-SA-9010] p0376 N81-17591
- Compressed air energy storage: Preliminary design and site development program in an aquifer, task 2. Volume 2: Characterize and explore potential sites and prepare research and development plan  
[DOE/ET-29232/T1-VOL-2] p0377 N81-18531
- Compressed air energy storage: Preliminary design and site development program in an aquifer. Task 1: Establish facility design criteria and utility benefits  
[DOE/ET-29232/T2] p0377 N81-19586
- COMPRESSED GAS**  
Efficiency of hydrogen compression by means of hydrides  
p0289 A81-25157
- COMPRESSING**  
Thermodynamic calculations for Otto cycle engines using methanol as a fuel  
p0342 A81-25123
- COMPRESSION LOADS**  
Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode  
p0372 A81-25322
- COMPUTATIONAL FLUID DYNAMICS**  
Dynamic behavior of a natural circulation loop for a solar collector  
p0256 A81-29261
- COMPUTER PROGRAMMING**  
Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data  
[CONF-8010106-3] p0305 N81-16315
- COMPUTER PROGRAMS**  
SOLCEL II - An improved photovoltaic system analysis computer program  
p0250 A81-27272
- Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies  
p0367 N81-16552
- A directory of computer software applications: Energy  
[PB80-105497] p0383 N81-16773
- A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program  
[PB81-111593] p0306 N81-17287
- Geothermal reservoir engineering computer code comparison and validation using the GEONZ simulator program  
[DOE/SF-11450/1] p0314 N81-18478
- High temperature thermal energy storage in aquifers with a solar power plant application  
p0377 N81-18486
- Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5] p0200 N81-19599
- Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain  
[PB81-123861] p0200 N81-19645
- Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 N81-19646
- Two-dimensional MHD generator model  
[ANL/MHD-80-11] p0359 N81-19932
- The NASA-LeRC wind turbine sound prediction code  
[NASA-TM-81737] p0362 N81-21537
- Line-Focus Solar Central Power System, phase 1. Volume 3: Appendices  
[DOE/ET-20550/2-VOL-3] p0283 N81-21600
- Geothermal energy enhancement by thermal fracture  
[LA-8428] p0325 N81-21623
- COMPUTER STORAGE DEVICES**  
Sealed nickel-cadmium batteries for memory backup  
p0374 A81-25616
- COMPUTER SYSTEMS PROGRAMS**  
A directory of computer software applications: Energy  
[PB80-105497] p0383 N81-16773
- COMPUTER TECHNIQUES**  
Computer modeling of coal gasification reactors, year 4  
[FE-1770-66] p0312 N81-18235
- COMPUTERIZED DESIGN**  
Two-dimensional analysis of the interdigitated back-contact solar cell  
p0216 A81-22197
- Circuit design considerations for photovoltaic modules and systems  
p0238 A81-27153
- Designing practical silicon solar cells approaching the 'limit conversion efficiency'  
p0239 A81-27159
- AlGaAs-GaAs cascade solar cell  
p0261 N81-17550
- Preliminary design procedure for high power density MHD generators  
[AD-A096144] p0364 N81-21916
- COMPUTERIZED SIMULATION**  
The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc --- for MHD generator flows  
[AIAA PAP88-81-0173] p0329 A81-20649
- An energy used model of the residential sector  
p0185 A81-21022

# CONCENTRATORS

# SUBJECT INDEX

- Performance of solar collectors - An evaluation of standard ratings  
[ASME PAPER 80-WA/SOL-1] p0211 A81-21129  
Summer Computer Simulation Conference, Toronto, Canada, July 16-18, 1979, Proceedings p0381 A81-21701  
Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings. Volumes 1 & 2 p0381 A81-22208  
FREEHEAT - A passive solar system simulation program p0216 A81-22212  
Thermodynamic calculations for coal gasification processes p0294 A81-22849  
Solar energy market penetration models - Science or number mysticism p0218 A81-23026  
Integration of wind power into Australian electricity grids without storage - A computer simulation p0334 A81-23068  
A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet p0334 A81-23447  
A simulated comparison of the useful energy gain in fixed and tracking flat plate and evacuated tube collectors p0222 A81-24978  
A simple method for computing the dynamic response of passive solar buildings to design weather conditions p0226 A81-25029  
Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model p0232 A81-27099  
Simulation of the performance of a 100-kW-peak photovoltaic system p0233 A81-27108  
Two modified single diode models for simulating solar cells with distributed series resistance p0239 A81-27161  
SOLCEL II - An improved photovoltaic system analysis computer program p0250 A81-27272  
SPS large array simulation --- spacetennas p0365 A81-16537  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C [DOE/CS-20060/5120-VOL-1] p0192 A81-17394  
Computer modeling of high-efficiency solar cells p0260 A81-17537  
Geothermal reservoir engineering computer code comparison and validation using the GEONZ simulator program p0314 A81-18478  
Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant [DOE/CS-56604/T1] p0355 A81-18546  
Silicon solar cell design for medium concentration applications p0270 A81-18564  
Thermal performance predictions of flat-plate solar collector air heaters p0270 A81-18566  
Computer simulation of solar air heating systems using rock bed thermal storage units [AD-A094771] p0377 A81-19580  
Electric vehicle simulation for design optimization [AD-A094734] p0378 A81-19970  
System modeling using THERSYS computer simulation --- solar heating p0277 A81-20555
- CONCENTRATORS**  
Heliostats and concentrators with variable reflecting-surface geometry p0211 A81-20908  
Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems p0215 A81-21954  
A Fresnel-Winston tandem concentrator system p0218 A81-23497  
Optical analysis of point focus parabolic radiation concentrators p0219 A81-24332  
Solar image characteristics of concentrators p0223 A81-24986
- Development and study of a flat mirror multivalent concentrator p0223 A81-24988  
Investigations on the prediction of thermal performance of compound parabolic concentrators p0223 A81-24989  
Performance test of a non-parabolic asymmetrical solar concentrator p0230 A81-26473  
The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport p0232 A81-27091  
High efficiency silicon concentrator cells p0236 A81-27132  
Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis p0238 A81-27146  
Thick film conductive ink contacts for concentrator cells p0238 A81-27155  
Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing p0238 A81-27156  
Optimization of a photovoltaic receiver for a parabolic trough concentrator p0242 A81-27187  
Parabolic troughs concentrators photovoltaic module p0242 A81-27188  
Low-cost, high-performance, point-focus concentrator array design p0242 A81-27189  
Efficiency and stability of experimental fluorescent planar concentrators /FPC/ p0242 A81-27190  
Design and operation of the Solarex two-axis tracking linear concentrating collector system p0243 A81-27193  
Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280  
Design and performance of a concentrating solar collector p0255 A81-29253  
Concentrating solar collectors for thermal and photovoltaic application p0256 A81-29256  
Dish Stirling solar receiver program [NASA-CR-163889] p0257 A81-16574  
Design, fabrication, and performance of a 20 percent efficient silicon solar cell [SAND-80-2225] p0258 A81-16592  
Solar energy receiver for a Stirling engine [NASA-CASE-WFO-14619-1] p0259 A81-17518  
Design requirements for high-efficiency high concentration ratio space solar cells p0263 A81-17575  
Advanced solar collectors (concentrating troughs) --- paraboloid mirrors, mathematical models p0267 A81-18505  
Gallium arsenide photovoltaic dense array for concentrator applications [SAND-78-7056] p0267 A81-18530  
Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator [NASA-CR-164038] p0271 A81-19567  
Advanced solar concentrator mass production, operation, and maintenance cost assessment [NASA-CR-164039] p0271 A81-19571  
Development of a combined photovoltaic/thermal linear receiver for a parabolic trough concentrator [SAND-80-7138] p0272 A81-19595  
Near-term implementation of projection cost reductions for photovoltaic concentrator array [SAND-80-7073] p0274 A81-19628  
Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 A81-20572  
Solar collector foundation designs [SAND-80-7070] p0279 A81-20582  
The 10-kilowatt photovoltaic concentrator array fabrication [SAND-80-7062] p0279 A81-20599



- Photovoltaic concentrator array production process study. Volume 2: Study results  
[SAND-79-7055/2] p0282 N81-21574
- The 10 kilowatt photovoltaic concentrator system as installed at Sandia Laboratories, 1979  
[SAND-80-7063] p0283 N81-21601
- CONCRETE**  
The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building p0224 N81-24999
- CONDUCTING FLUIDS**  
Liquid metal MHD generators with shunt layer p0327 N81-19812  
Theory of a conducting MHD motor with a free field p0331 N81-21062
- CONDUCTIVE HEAT TRANSFER**  
Enhanced heat conduction in phase-change thermal energy storage devices  
[ASME PAPER 80-WA/HT-45] p0371 N81-21114  
Thermal techniques for characterizing magma body geometries --- geothermal energy resources p0296 N81-24303  
Numerical resolution of the heat transfer equations in a latent heat solar energy storage system p0224 N81-25005  
Heat exchanger for in-ground heat storage p0375 N81-29260  
Thermal processes in flat plate solar collectors --- conduction, convective radiative heat transfer p0266 N81-18503  
Surface-heating greenhouses with waste heated water [DOE/E5-10107/T1] p0200 N81-19620
- CONFERENCES**  
Summer Computer Simulation Conference, Toronto, Canada, July 16-18, 1979, Proceedings p0381 N81-21701  
Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979 p0381 N81-21730  
Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings. Volumes 1 & 2 p0381 N81-22208  
Applied Superconductivity Conference, Santa Fe, N. Mex., September 29-October 2, 1980, Proceedings p0334 N81-23426  
Hydrogen: Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979 p0285 N81-24012  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1 - Solar energy p0222 N81-24976  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2 - Solar Energy 2 p0381 N81-25004  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3 - Solar energy 3 p0381 N81-25040  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 4 - Indirect solar energy p0382 N81-25065  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5 - Geothermal power/energy program p0187 N81-25088  
Alternative energy source II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 6 - Nuclear energy p0340 N81-25099  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7 - Hydrocarbon conversion p0297 N81-25109
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 8 - Hydrogen energy p0287 N81-25137  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 9 - Conservation, economics, and policy; Index p0187 N81-25161  
Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979 p0382 N81-26476  
Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, University of Wisconsin, Madison, Wis., August 21-24, 1979 p0344 N81-26851  
Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record p0230 N81-27076  
Wind engineering; Proceedings of the Fifth International Conference, Colorado State University, Fort Collins, Colo., July 8-14, 1979. Volumes 1 & 2 p0382 N81-27301  
Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings p0303 N81-28992  
Fundamentals and applications of solar energy; Proceedings of the Seventy-Second Annual Meeting, San Francisco, Calif., November 25-29, 1979 p0382 N81-29251  
Solar Power Satellite Microwave Transmission and Reception [NASA-CP-2141] p0365 N81-16533  
Space Photovoltaic Research and Technology 1980. High Efficiency, Radiation Damage and Blanket Technology [NASA-CP-2169] p0260 N81-17531  
Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage [PB81-114324] p0376 N81-17618  
Proceedings: EPA/Industry Forum on Coal-Liquefaction [PB81-113052] p0195 N81-17645  
Heat exchange and solar energy, volume 1 --- conference proceedings, Rhode-Saint-Genese, Belgium, 18 Jan. - 1 Feb. 1980 [VKI-LS-1980-2-VOL-1] p0266 N81-18499  
Long-Range Environmental Outlook [PB81-114977] p0198 N81-18580  
Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IEA, research and development WECS, annex one, subtask A1 --- conference, Stockholm 1980 [FFA-TN-BU-2218] p0359 N81-19636  
Heat exchange and solar energy, volume 2 --- conference proceedings, Rhode Saint Genese, Belgium [VKI-LS-1980-2-VOL-2] p0277 N81-20549  
Photovoltaic concentrator technology development project [SAND-80-2373] p0282 N81-21571
- CONGRESSIONAL REPORTS**  
October report on the current fuel situation from the Energy Information Administration [GPO-60-871] p0189 N81-16311  
National Academy of Sciences report: Energy in transition, 1985-2010 [GPO-61-647] p0189 N81-16524  
Wind energy systems act of 1980 [H-REPT-96-1217] p0190 N81-16525  
Poresight. Volume 2: Energy conservation in cities [GPO-47-454] p0190 N81-16527  
A framework for developing a national energy conservation program [EHD-79-76] p0190 N81-16531  
How the petroleum refining industry approaches energy conservation. A case study [EHD-80-55] p0190 N81-16532  
Energy in transition, 1985-2010 [GPO-63-171] p0190 N81-16585

# CONSTRUCTION

# SUBJECT INDEX

Effects of carbon dioxide buildup in the atmosphere  
[GPO-62-841] p0191 N81-16626  
Fusion energy research, development, and  
demonstration act of 1980  
[H-BEPT-96-1096] p0352 N81-16898  
Municipal solid waste to energy act of 1979  
[GPO-60-684] p0192 N81-16956  
Report to the Congress on ocean pollution and  
offshore development  
[PB81-118333] p0195 N81-17630  
A look at NASA's Aircraft Energy Efficiency program  
[PSAD-80-50] p0201 N81-20077

## CONSTRUCTION

The construction cost of thermal storage for solar  
systems p0229 A81-25062  
Passive and hybrid solar manufactured housing and  
buildings  
[DOE/CS-30384/1] p0263 N81-17592  
Passive and hybrid solar manufactured housing and  
buildings  
[DOE/CS-30371/1] p0267 N81-18515  
A comparison of environmental issues related to  
development of small hydropower resources at new  
versus existing sites  
[CONF-801210-13] p0197 N81-18577  
A reference building approach to building energy  
performance standards for single-family residences  
[PB81-135642] p0201 N81-20318  
STARFIRE: A commercial Tokamak fusion power plant  
study, volume 2  
[ANL/PPP-80-1-VOL-2] p0363 N81-21612  
Improved data and procedures needed for  
development and implementation of building  
energy performance standards  
[PB81-138422] p0206 N81-21630  
CONTACT RESISTANCE  
Polka Dot Solar Cell p0238 A81-27157  
Screenable silver and base metal solar cell contacts  
p0243 A81-27195

## CONTAMINANTS

Photovoltaic module soiling studies, May 1978 -  
October 1980  
[DOE/JPL-1012-49] p0258 N81-16580  
Report to the Congress on ocean pollution and  
offshore development  
[PB81-118333] p0195 N81-17630

## CONTAMINATION

Physical and chemical characterization of R.A.D.  
silicon films p0249 A81-27260  
Methodology to evaluate the potential for ground  
water contamination from geothermal fluid releases  
[PB81-111114] p0195 N81-17641  
CONTINENTAL SHELVES  
A bottom fixed OTEC plant on the edge of a  
continental /or island/ shelf p0340 A81-25086

## CONTINGENCY

Energy emergency contingency plan  
[PB81-128704] p0203 N81-20604

## CONTROL EQUIPMENT

Power conditioning and control requirements of  
coal fired MHD generators  
[AIAA PAPER 81-0246] p0330 A81-20696  
Experimental comparison of control strategies for  
solar energy systems incorporating dual storage  
tanks p0253 A81-27556

## CONTROL SIMULATION

Dynamic modeling and experimental simulation of  
active solar energy systems for the evaluation  
of control strategies  
[ASME PAPER 80-WA/SOL-14] p0213 A81-21139

## CONTROL THEORY

A review of the application of modern control  
theory to solar energy systems p0210 A81-20490  
Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG). Volume 2, appendix A: Selected DSG  
technologies and their general control  
requirements  
[NASA-CR-164052] p0202 N81-20539

## CONTROLLED ATMOSPHERES

Development of an improved degree-day concept by  
analysis of historical weather data for  
predicting energy requirements of buildings  
p0198 N81-18620

## CONTROLLED FUSION

Trends and developments in magnetic confinement  
fusion reactor concepts p0336 A81-23711  
Preliminary skyshine calculations for the Poloidal  
Diverter Tokamak Experiment --- for plasma  
impurities control p0336 A81-23713  
The future of fusion power comes into focus  
p0341 A81-25101  
Overview of nonelectrical applications of fusion  
p0341 A81-25104

## CONTROLLERS

Design of self-calibrating controllers for  
heliostats in a solar power plant p0211 A81-21030  
Dynamic modeling and experimental simulation of  
active solar energy systems for the evaluation  
of control strategies  
[ASME PAPER 80-WA/SOL-14] p0213 A81-21139  
Frequency response analysis of fluid control  
systems for parabolic-trough solar  
collectors [ASME PAPER 80-WA/SOL-15] p0213 A81-21140

## CONVECTIVE FLOW

Modeling and analysis of an all-fiberglass flat  
plate solar collector  
[ASME PAPER 80-WA/SOL-4] p0212 A81-21132  
A natural convection solar house system --- air  
heating p0267 N81-18506

## CONVECTIVE HEAT TRANSFER

Heat transfer in slagging MHD radiant boilers  
[AIAA PAPER 81-0316] p0330 A81-20747  
Analysis by real-time holographic interferometry  
of heat transfer at the surface of cold solar  
collectors p0216 A81-22695  
Natural convection heat leak in supercritical  
hydrogen tanks p0290 A81-26872  
Digital holographic interferometry of convective  
heat transport p0254 A81-28737  
Thermal processes in flat plate solar collectors  
--- conduction, convective radiative heat transfer  
p0266 N81-18503  
Geothermal energy enhancement by thermal fracture  
[LA-8428] p0325 N81-21623

## COOLANTS

Bi-coolant flat plate solar collector p0226 A81-25023  
Surface-heating greenhouses with waste heated water  
[DOE/R5-10107/T1] p0200 N81-19620  
Energy production from waste heat by means of  
elastomers or memory metals p0362 N81-21551

## COOLING FINS

Optimization of fin and tube parameters in a  
flat-plate collector p0209 A81-19849  
Optimization of fin and tube parameters in a  
flat-plate collector p0255 A81-29032

## COOLING SYSTEMS

Analysis and design of hybrid double-absorption  
cooling systems for low grade thermal energy  
applications  
[ASME PAPER 80-WA/HT-44] p0211 A81-21113  
Experimental apparatus for cooling of photovoltaic  
cells at high concentration p0218 A81-23011  
The absorption process for heating, cooling and  
energy storage - An historical survey p0381 A81-23496  
Solar air conditioning with solid absorbents and  
earth cooling p0226 A81-25025  
An unconventional wind machine p0338 A81-25072  
Cryogenic aspects of the UTSI-CFFF superconducting  
dipole magnet for MHD research p0345 A81-26855

# SUBJECT INDEX

# COST ANALYSIS

Cells and modules for linear P.V. concentrator systems with forced cooling p0242 A81-27186

Active and passive cooling for concentrating photovoltaic arrays p0243 A81-27192

Active cooling system alternatives for concentrating photovoltaic systems p0256 A81-29265

**COPLANARITY**

High efficiency ultrathin coplanar back contact cells p0232 A81-27092

**COPPER**

A base-metal conductor system for silicon solar cells p0243 A81-27196

**COPPER OXIDES**

Heterojunction solar cells on cuprous oxide p0221 A81-24809

Cuprous oxide MIS solar cells p0237 A81-27139

Investigation of Cu<sub>2</sub>O solar cells p0237 A81-27140

**COPPER SULFIDES**

The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells p0209 A81-20007

Cu<sub>x</sub>/S/Cd/Y/Zn/1-Y/S and Cu<sub>x</sub>/S/Cd/Y/Zn/1-Y/S, CdS thin film solar cells using chemically sprayed films p0229 A81-26355

Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110

A low-cost manufacturing process for thin-film solar cells p0235 A81-27121

An investigation of the Cu<sub>x</sub>/S-CdS structure for photovoltaic conversion using an Al film vacuum deposited process p0241 A81-27178

A microstructural study of the heterojunction materials of the CdS-Cu<sub>2</sub>S solar cell p0241 A81-27179

Cu<sub>2</sub>S-CdS sprayed solar cells p0241 A81-27181

The role of deep levels in controlling the photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction p0241 A81-27182

Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells p0241 A81-27183

Cu<sub>x</sub>/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements p0241 A81-27184

Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar cell with an interdigitated grid p0242 A81-27185

Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses p0253 A81-27299

Theoretical advantages of pn/+/-type Cu<sub>2</sub>S-ZnO solar cell p0346 A81-28395

Development of copper sulfide/cadmium sulfide thin film solar cells [SEHI/PR-8143-1-T2] p0269 A81-18559

**CORN**

Farm and Cooperative alcohol plant study: Technical and economic assessment as a commercial venture [PB81-112641] p0306 A81-17290

Ethanol: A brief economic evaluation [DOE/ET-27256/T7] p0316 A81-19331

**CORRECTION**

The correction for spectral mismatch effects on the calibration of a solar cell when using a solar simulator [NASA-CR-164074] p0276 A81-20546

**CORROSION PREVENTION**

Suppression of stream condensate corrosion at Wairakei Geothermal Project p0294 A81-22774

Solar Energy Program: Protective solar collector systems from corrosion [WP-25154] p0264 A81-17605

**CORROSION RESISTANCE**

Non-corrosive, two-reaction, low temperature T/C cycles p0287 A81-25144

The performance of MCrAl alloys in complex coal conversion atmospheres p0302 A81-26492

Development of simplified process for environmentally resistant cells [NASA-CR-163884] p0257 A81-16575

Development and testing of heat transport fluids for use in active solar heating and cooling systems [NASA-TM-82395] p0368 A81-16584

Improved PCG-1 cell technology [EPRI-EH-1566] p0351 A81-16598

Ocean Thermal Energy Conversion Power System Development: PSD-I, phase 2 [DOE/ET-21039/1] p0353 A81-17594

**CORROSION TESTS**

Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator p0332 A81-21494

Corrosion of alloys at high temperature in coal gasification environments p0302 A81-26491

**CORRUGATED PLATES**

Description and thermal performance of corrugated solar collectors --- made of extruded aluminum p0266 A81-18504

**COST ANALYSIS**

An energy used model of the residential sector p0185 A81-21022

An economics method for symbiotic fusion-fission electricity generation systems p0336 A81-23716

Solar satellites - The trillion dollar question p0219 A81-23724

Combined solar and fossil fuel systems for electric power generation p0381 A81-25048

An analysis of macroeconomic effects of increased market penetration by solar energy technologies p0229 A81-25060

Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices p0187 A81-25061

The construction cost of thermal storage for solar systems p0229 A81-25062

Domestic solar water preheating versus solar water heating: An economic evaluation p0229 A81-25064

Economics and concepts of industrial coal fluidized bed combustion in Brazil p0300 A81-25135

Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications p0344 A81-26853

The economics of photovoltaics in the commercial, institutional, and industrial sectors p0233 A81-27107

Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis p0238 A81-27146

Energy analysis of four geothermal technologies p0346 A81-29031

Optimization of fin and tube parameters in a flat-plate collector p0255 A81-29032

Regional price targets appropriate for advanced coal extraction [NASA-CR-163896] p0189 A81-16513

Environmental influences in the simulation of a solar space heating system [AD-A092436] p0190 A81-16587

Operational analysis of open-cycle MHD [EPRI-AP-1463] p0352 A81-16909

GAAS workshop report p0261 A81-17547

Cost-energy dynamics: An engineering-economic basis for industrial energy conservation policies [ORAU/IEA-80-12 (M)] p0193 A81-17583

Evaluation of a two-phase turbine for solar electric power generation [DOE/ET-20431/T1] p0263 A81-17587

## COST EFFECTIVENESS

## SUBJECT INDEX

- Survey of EPA facilities for solar thermal energy applications  
[NASA-CR-162469] p0265 N81-17617
- Coal gasification systems engineering and analysis, volume 2  
[NASA-CR-161654] p0309 N81-18213
- Indirect conversion of coal to methanol and gasoline: Product price vs product slate  
[CONF-801142-3] p0311 N81-18228
- Solar power satellite system sizing tradeoffs  
[NASA-TP-1804] p0265 N81-18493
- The environmental assessment of a contemporary coal mining system  
[NASA-CR-163974] p0197 N81-18571
- Development of sweet sorghum as an energy crop. Volume 3: Integration concepts  
[BRI-2054-VOL-3] p0316 N81-19334
- Optimization of distribution transformer efficiency characteristics  
[DOE/ET-29298/T1] p0356 N81-19402
- The US Air Force Academy solar energy research project summary report  
[AD-A094802] p0199 N81-19576
- Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report  
[RFP-3007-VOL-2] p0357 N81-19581
- Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings  
[ANL/EES-TM-116] p0383 N81-19611
- Cost-performance comparison of water-steam receivers for solar central electric power plants  
[SAND-80-8245] p0273 N81-19615
- Project SAGE: Solar assisted gas energy  
[DOE/TIC-11105] p0274 N81-19624
- Hot water from the Sun: A consumer guide to solar water heating  
[PB81-128597] p0275 N81-19647
- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications  
[NASA-TP-1811] p0276 N81-20173
- Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts  
[BPR-1517-VOL-5] p0319 N81-20302
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 6, part 1: Cost and programmatic  
[NASA-CR-33397] p0276 N81-20537
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 5, appendix D: Cost-benefit considerations for providing dispersed storage and generation for electric utilities  
[NASA-CR-164053] p0202 N81-20542
- A method to tune the various components of a solar heating system --- economic factors and cost analysis  
p0277 N81-20552
- Solar collector foundation designs  
[SAND-80-7070] p0279 N81-20582
- Effects of accounting rules on utility choices of energy technologies in the United States  
[IIASA-BR-80-27] p0204 N81-21490
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 4, Part 2: Cost and programmatic appendix  
[NASA-CR-33398] p0280 N81-21492
- COST EFFECTIVENESS**
- Optimization of fin and tube parameters in a flat-plate collector  
p0209 N81-19849
- The rebirth of the Rankine cycle  
p0327 N81-20225
- Thermal storage requirements for parabolic dish solar power plants  
[ASME PAPER 80-WA/SOL-21] p0213 N81-21145
- Comparison of commercial and do-it-yourself solar collectors  
p0219 N81-23704
- Development status of the Steam-Iron Process for hydrogen production  
p0287 N81-25142
- A study of a commercial MHD power plant scheme  
p0342 N81-25381
- Eco-Fuel and the Bridgeport facility  
p0301 N81-25556
- Energy efficiency of electrified passenger railway in the Canadian context  
p0187 N81-25800
- Wind energy - A utility perspective  
p0187 N81-26371
- Minimizing end shadowing effects on parabolic concentrator arrays  
p0242 N81-27191
- Active and passive cooling for concentrating photovoltaic arrays  
p0243 N81-27192
- The U.S. National Photovoltaic Program  
p0188 N81-27212
- Low cost processes for fabricating silicon solar cells  
p0245 N81-27218
- Cost effective, high throughput, junction formation techniques using spray-on dopants  
p0245 N81-27220
- Energy storage in grid-connected applications  
p0375 N81-27233
- Simulation of a hybrid solar photovoltaic/solar thermal electric power system  
p0246 N81-27234
- Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions  
p0248 N81-27254
- Electrical energy storage via high efficiency-cost effective hydrogen/halogen regenerative fuel cell systems  
p0375 N81-29266
- Energy supply and demand properties from engineering process models  
[EPRI-BA-1568] p0191 N81-16603
- Comparative analysis of combined flat-plate PV/T collectors with separate PV/T collectors  
[SAND-80-1494] p0259 N81-16608
- Decentralized energy studies: Compendium of international studies and research  
[SERI/RR-744-451] p0193 N81-17582
- Terrestrial photovoltaic system analysis  
[AD-A094827] p0272 N81-19578
- Small wind systems technology assessment. State of the art and near term goals  
[RFP-3136/3533/80/18] p0358 N81-19600
- State-of-the-art review of materials-related problems in flue gas desulfurization systems  
[ANL-80-59] p0384 N81-21645
- COST ESTIMATES**
- The economics of hydrogen production  
p0285 N81-24013
- An unconventional wind machine  
p0338 N81-25072
- Capital cost estimates of selected advanced thermal energy storage technologies  
[ANL/SPG-11] p0376 N81-17590
- Coal gasification systems engineering and analysis. Appendix D: Cost and economic studies  
[NASA-CR-161658] p0310 N81-18217
- Coal gasification systems engineering and analysis. Appendix E: Cost estimation and economic evaluation methodology  
[NASA-CR-161659] p0310 N81-18218
- Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation  
[NASA-CR-161661] p0310 N81-18220
- Advanced solar concentrator mass production, operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 N81-19571
- Satellite Power Systems (SPS) space transportation cost analysis and evaluation  
[NASA-CR-164020] p0273 N81-19610
- Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SERI/TR-351-461-VOL-1] p0273 N81-19618
- Mod 2 wind turbine development project  
[SERI/SP-732-728] p0358 N81-19619
- Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain  
[PB81-123861] p0200 N81-19645
- Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 N81-19646

# SUBJECT INDEX

# CRYSTAL GROWTH

- Liquefaction technology assessment. Phase 1:  
Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664] p0322 N81-21223
- Effects of accounting rules on utility choices of energy technologies in the United States  
[IIASA-RR-80-27] p0204 N81-21490
- Methodology for estimating future market values of solar thermal technologies  
[SAND-80-8248] p0284 N81-21617
- COST REDUCTION**
- Development trends for the mass production of low cost conductor-insulator-semiconductor /CIS/ solar cells  
p0228 A81-25051
- Solar thermionic power plant. II  
p0228 A81-25057
- Wind energy conversion in the MW range  
p0339 A81-25076
- Overview - Cost goals in the LSA project --- Low-cost Solar Array  
p0230 A81-27077
- Thick film conductive ink contacts for concentrator cells  
p0238 A81-27155
- The outlook for thin solar cells  
p0245 A81-27217
- Improved PCG-1 cell technology  
[EPRI-EM-1566] p0351 N81-16598
- Fuel cell support studies: On-site molten carbonate systems  
[PB81-113672] p0353 N81-17619
- Near-term implementation of projection cost reductions for photovoltaic concentrator array  
[SAND-80-7073] p0274 N81-19628
- COUPLED MODES**
- Effects of toroidal coupling on the stability of tearing modes  
p0332 A81-21480
- COUPLING CIRCUITS**
- Inductive energy transfer in transportation  
[UCRL-85141] p0368 N81-18962
- CRACK PROPAGATION**
- Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979  
p0381 A81-21730
- Prediction model for fatigue crack growth in windmill structures  
p0371 A81-21740
- CRACKING (FRACTURING)**
- MHD air heater development technology  
[DOE/ET-15602/T2] p0360 N81-20590
- CREEP PROPERTIES**
- Fatigue-creep lifetime analysis of four advanced central receiver concepts  
[SAND-80-8047] p0273 N81-19612
- CRITERIA**
- Criteria for evaluation of reflective surface for parabolic dish concentrators  
[NASA-CR-163898] p0258 N81-16581
- Interim performance criteria for photovoltaic energy systems  
[SERI/TR-742-654] p0282 N81-21577
- CROSS FLOW**
- OPEC cold water pipe design for problems caused by vortex-excited oscillations  
p0347 A81-29200
- CROSSED FIELD AMPLIFIERS**
- The adapting of the crossed-field directional amplifier to the requirements of the SPS  
p0367 N81-16553
- CRUCIBLES**
- Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible  
p0234 A81-27116
- CRUDE OIL**
- Hydrogen requirements in shale oil and synthetic crude from coal  
p0295 A81-24020
- October report on the current fuel situation from the Energy Information Administration  
[GPO-60-871] p0189 N81-16311
- How the petroleum refining industry approaches energy conservation. A case study  
[END-80-55] p0190 N81-16532
- The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 N81-16612
- National petroleum reserve - Alaska: Marine transportation system analysis  
[PB81-105041] p0368 N81-17288
- National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary  
[PB81-105033] p0368 N81-17289
- Strategic petroleum reserve data acquisition system  
[SAND-80-2143] p0317 N81-19539
- Distillate fuel-oil processing for phosphoric acid fuel cell power plants  
[DOE/ET-13323/2] p0358 N81-19583
- Environmental exposure and design criteria for offshore and gas structures  
[AD-A094651] p0201 N81-19652
- Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors  
p0318 N81-20202
- Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome  
[SAND-80-1323] p0324 N81-21468
- US energy consumption and supply  
[UCID-18856] p0204 N81-21565
- CRYOGENIC COOLING**
- Cryogenic aspects of the UTSI-CFFF superconducting dipole magnet for MHD research  
p0345 A81-26855
- Safety analysis of the UTSI-CFFF superconducting magnet  
p0345 A81-26856
- CRYOGENIC MAGNETS**
- Reliability of large superconducting magnets through design  
p0335 A81-23452
- Superconducting MHD magnet engineering program  
p0344 A81-26852
- CRYOGENICS**
- Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, University of Wisconsin, Madison, Wis., August 21-24, 1979  
p0344 A81-26851
- Engineering aspects of cryogenic laser-fusion targets  
p0345 A81-26857
- Cryogenic methane separation/catalytic hydrogasification process analysis  
[DOE/ET-10325/T3] p0321 N81-21218
- CRYOSTATS**
- Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854
- Safety analysis of the UTSI-CFFF superconducting magnet  
p0345 A81-26856
- CRYSTAL DEFECTS**
- The effects of intragrain defects on the local photoresponse of polycrystalline silicon solar cells  
p0221 A81-24805
- Chemical and structural defects in thin film polycrystalline silicon solar cells  
p0233 A81-27105
- Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study  
p0239 A81-27165
- DLTS spectra and defect effects on irradiated silicon solar cells --- Deep Level Transient Spectroscopy  
p0244 A81-27203
- CRYSTAL GROWTH**
- Ultra high speed growth of silicon ribbons for solar cells  
p0231 A81-27081
- Continuous coating of silicon-on-ceramic  
p0231 A81-27083
- Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study  
p0239 A81-27165

## CRYSTAL LATTICES

## SUBJECT INDEX

- Cu<sub>x</sub>/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements p0241 A81-27184
- Growth structure of cast silicon and related photovoltaic properties of solar cells p0245 A81-27214
- Physical and chemical characterization of R.A.D. silicon films p0249 A81-27260
- CRYSTAL LATTICES**
- Incorporation of superlattice crystal layers in multijunction solar cells p0261 N81-17549
- CRYSTAL STRUCTURE**
- Growth structure of cast silicon and related photovoltaic properties of solar cells p0245 A81-27214
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD p0261 N81-17543
- CRYSTALLIZATION**
- The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties p0280 N81-20912
- CRYSTALLOGRAPHY**
- Physical and chemical characterization of R.A.D. silicon films p0249 A81-27260
- Indium phosphide/cadmium sulfide thin-film solar cells [SERI/TR-8170-1-12] p0268 N81-18533
- CULTURE (SOCIAL SCIENCES)**
- Energy choices in a democratic society [PB81-114852] p0197 N81-18563
- CURRENT DENSITY**
- Electrical effects of coal slag in a diffuse mode MHD generator [AIAA PAPER 81-0176] p0329 A81-20651
- Electrode materials for coal-fired MHD generators [EPRI-AP-1562] p0355 N81-18536
- CURRENT REGULATORS**
- Performance of MHD generators with electrode current control [AIAA PAPER 81-0249] p0330 A81-20699
- CYANO COMPOUNDS**
- Merocyanine-dye photovoltaic cell on a plastic film p0220 A81-24444
- CYBERNETICS**
- Systems engineering - Fundamental limits and future prospects p0381 A81-22877
- CYCLOHEXANE**
- An assessment of the use of chemical reaction systems for thermal energy transport p0365 A81-25011
- CYLINDRICAL BODIES**
- Performance test of a non-parabolic asymmetrical solar concentrator p0230 A81-26473
- CYLINDRICAL SHELLS**
- PCM thermal energy storage in cylindrical containers of various configurations --- Phase Change Materials p0372 A81-24996
- CYTOLOGY**
- Biological exposure sensors in coal conversion technologies [CONF-801143-1] p0192 N81-17410
- CZOCHELSKI METHOD**
- Transport properties in 100 mm Cz silicon --- Czochralski p0234 A81-27115
- Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible p0234 A81-27116
- D**
- DATA ACQUISITION**
- The Solar-Meteorological Research Program for the South-Central U.S. [ASME PAPER 80-WA/SOL-24] p0213 A81-21148
- Energy accounting for solar and alternative energy sources p0382 A81-25165
- Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280
- Research in the geosciences related to resource assessment [DOE/IR-10119/T1] p0313 N81-18476
- Strategic petroleum reserve data acquisition system [SAND-80-2143] p0317 N81-19539
- DATA BASES**
- Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data [CONF-8010106-3] p0305 N81-16315
- A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program [PB81-111593] p0306 N81-17287
- End use energy consumption data base: Transportation sector [PB81-112203] p0194 N81-17610
- Research and evaluation of biomass resources/conversion/utilization systems (market/experimental analysis for development of a data base for a fuels from biomass model. Volume 1: Biomass allocation model [DOE/ET-20611/14] p0315 N81-18553
- DATA MANAGEMENT**
- Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UNO gasifier facility [CONF-8010106-7] p0189 N81-16314
- End use energy consumption data base: Transportation sector [PB81-112203] p0194 N81-17610
- Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TR-7525] p0316 N81-19332
- DATA PROCESSING**
- Investigative data analysis technique for MHD generators [AIAA PAPER 81-0174] p0329 A81-20653
- Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TR-7525] p0316 N81-19332
- Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UNO gasifier facility [ORNL/TR-7428] p0320 N81-20305
- DATA PROCESSING EQUIPMENT**
- Dimensions/NBS. Volume 64, no. 8, October 1980 [PB81-133654] p0384 N81-21007
- DATA REDUCTION**
- Analysis of data from the Gedser wind turbine: 1977 to 1979 [RISOE-M-2242] p0359 N81-19637
- DATA SYSTEMS**
- Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TR-7525] p0316 N81-19332
- DECISION MAKING**
- A framework for developing a national energy conservation program [RND-79-76] p0190 N81-16531
- DEFENSE PROGRAM**
- The development of synthetic fuels: Department of Defense logistics implications [AD-A095713] p0319 N81-20290
- DEFLECTION**
- Static deflection and eigenfrequency analysis of the Hibe wind turbine rotors. Theoretical background --- structural vibration [RISOE-M-2199] p0357 N81-19497
- DEGRADATION**
- Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells [NASA-CR-164012] p0271 N81-19568
- PBI treated polypropylene battery separator p0379 N81-21512
- DELAWARE**
- Wind energy resource atlas. Volume 5: The East Central region [PNL-3195-VOL-5] p0325 N81-21712
- DEMAND (ECONOMICS)**
- Regional price targets appropriate for advanced coal extraction [NASA-CR-163896] p0189 N81-16513

# SUBJECT INDEX

# DESULFURIZING

Energy supply and demand properties from engineering process models  
[EPRI-BA-1568] p0191 N81-16603

Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage  
[PB81-114324] p0376 N81-17618

Future US energy supply: Constraints by nonfuel mineral resources  
[ORNL-5656] p0204 N81-21467

**DENDRITIC CRYSTALS**  
Solar cells and modules from dendritic web silicon  
p0234 A81-27117

**DENMARK**  
Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-D-2242] p0359 N81-19637

**DENSE FLASHES**  
Voltage and current sensors for a high-density z-pinch experiment  
p0332 A81-21641

**DEPOSITS**  
Feat resources of North Carolina  
[DOE/ET-14693/T1] p0317 N81-19541

**DESALINIZATION**  
Solar desalination by freezing and distillation  
p0227 A81-25043

**DESIGN ANALYSIS**  
Off-design study of an open cycle MHD power plant with oxygen enrichment  
[AIAA PAPER 81-0319] p0330 A81-20748

Design procedure and application of solar-assisted series heat pump systems  
[ASME PAPER 80-WA/SOL-9] p0212 A81-21135

Design of the BPA superconducting 30 MJ energy storage coil  
p0371 A81-23450

A consideration of possible receiver designs for solar tower plants  
p0220 A81-24426

Optimum performance of thermal trap collectors  
p0220 A81-24432

Optimum cell size for concentrated-sunlight silicon solar cells  
p0221 A81-24802

Wide band wide angle reflection-reducing coatings for silicon cells  
p0221 A81-24807

Sensitivity analysis of a community solar system using annual cycle thermal energy storage  
p0224 A81-24998

Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills  
p0227 A81-25041

New solar still /the wiping spherical still/ - Design and experimentation  
p0227 A81-25042

Design and management for resource recovery. Volume 1 - Energy from waste --- Book  
p0300 A81-25551

Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854

Compatibility of BSR and BSF solar cell technology --- Back Surface Reflector and Back Surface Field  
p0232 A81-27093

A low-cost manufacturing process for thin-film solar cells  
p0235 A81-27121

Design of metallization for higher-efficiency solar cells  
p0237 A81-27137

Theoretical design considerations for back surface field solar cells  
p0239 A81-27160

Concentrator designs for space photovoltaic arrays  
p0250 A81-27271

The ecliptic-align v-grooved hyperjunction cell  
p0252 A81-27296

Overview of wind energy systems - Issues in development and application  
p0345 A81-27551

High-flux solar absorber concept for central receiver power plants  
p0253 A81-27557

Design improvements in LiBr absorption chillers for solar applications  
p0253 A81-27558

Design analysis of high-efficiency low-stress ceramic gas turbines  
[ASME PAPER 81-GT-130] p0349 A81-30034

A market research effort leading to the development of a high efficiency 10,000 shp gas turbine system  
[ASME PAPER 81-GT-190] p0349 A81-30083

Making windpower an important part of a national energy plan  
[ASME PAPER 81-PET-11] p0189 A81-30113

Reference System Description  
p0367 N81-16554

Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels  
[NASA-TN-81611] p0351 N81-16571

Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications  
[ANL-80-49] p0375 N81-16591

A conceptual design study of a high temperature solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523

Adiabatic compressed air energy storage in hard rock  
[PNL-SA-9010] p0376 N81-17591

Ocean Thermal Energy Conversion Power System Development: PSD-I, phase 2  
[DOE/ET-21039/1] p0353 N81-17594

Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation  
[NASA-CR-161661] p0310 N81-18220

Solar coal gasification: Plant design and economics  
[UCRL-84610] p0265 N81-18225

Economic application, design analysis, and material availability for ceramic heat exchangers  
[ORNL/TN-7580] p0196 N81-18528

Assessment of solar options for large power applications  
[PNL-SA-8968] p0268 N81-18542

Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5] p0200 N81-19599

Steam turbines for large power outputs  
p0360 N81-20427

Large wind energy converter: Growian 3 MW  
[NASA-TN-75404] p0360 N81-20543

Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 N81-21080

The CMG nickel electrode  
p0379 N81-21509

Preliminary designs for modular OTEC platforms' station-keeping subsystems, volume 3  
[DOE/NOAA/OTEC-30-VOL-3] p0363 N81-21592

Solar space and water heating system at Stanford University, Central Food Services Building  
[DOE/CS-31522/T1] p0283 N81-21603

**DESIGN TO COST**  
Energy storage in grid-connected applications  
p0375 A81-27233

Flat-plate photovoltaic array design optimization  
p0248 A81-27247

Photovoltaic system sizing analysis  
p0248 A81-27249

**DESORPTION**  
Hydrogen-methane separation processes and related phenomena  
[DOE/NETC-14386/106] p0321 N81-21153

**DESULFURIZING**  
Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City  
p0186 A81-23073

Hydrogen from fuel desulfurization  
p0286 A81-24023

Fluidized bed combustion of coal  
p0299 A81-25130

Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants  
p0188 A81-28993

Gasification and desulfurization of coal by injection into molten metals  
[STU-78-4560] p0310 N81-18223

Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts  
[EPRI-CS-1517-VOL-5] p0319 N81-20302

- State-of-the-art review of materials-related problems in flue gas desulfurization systems [ANL-80-59] p0384 N81-21645
- DETONATION**  
Initiation of detonation in unconfined natural gas-air clouds [PB81-113292] p0308 N81-18149
- DEUTERIUM PLASMA**  
Engineering aspects of cryogenic laser-fusion targets p0345 A81-26857
- DEVELOPING NATIONS**  
Gasification of biomass as a source of synfuels for developing countries p0298 A81-25118
- DEWATERING**  
The conversion of peat - Recent developments in simultaneous dewatering and hydrogenolysis p0298 A81-25116
- DIAPHRAGMS (MECHANICS)**  
Electrodes and diaphragms for fuel cells [BNFT-FB-T-79-140] p0359 N81-19639
- DIELECTRICS**  
Transparent heat mirrors - Influence of the materials on the optical characteristics p0215 A81-21939  
Improved performance from thin film dielectric wraparound solar cells p0233 A81-27100
- DIESEL ENGINES**  
Alcohols as auxiliary fuels for diesel engines p0299 A81-25122  
Automotive technology development program [DOE/CS-0069/1] p0356 N81-19464
- DIESEL FUELS**  
Informational report: 1979 progress of the Chemical Characterization Panel of the composition of diesel exhaust project and results of particulate extraction round-robin [PB81-114670] p0195 N81-17636  
Lubricants for combating effects of high-sulfur fuel [AD-A094900] p0315 N81-19312  
Aerosol formation from diesel exhaust and SO<sub>2</sub>, a chamber study [PB81-121147] p0201 N81-19674  
Comparison of gas phase hydrocarbon emissions from light-duty gasoline vehicles and light-duty vehicles equipped with diesel engines [PB81-122996] p0203 N81-20620  
Emissions and fuel economy of a Comprex Pressure Wave Supercharged Diesel [PB81-133399] p0204 N81-21371
- DIFFUSERS**  
Preliminary results of analytical modeling of subsonic MHD diffusers [AIAA PAPER 81-0177] p0329 A81-20652  
Flow field analysis and performance of wind turbines employing slotted diffusers p0345 A81-27553
- DIFFUSION**  
Solid source diffusion process for silicon solar cells p0243 A81-27199
- DIFFUSION ELECTRODES**  
Electrical effects of coal slag in a diffuse mode MHD generator [AIAA PAPER 81-0176] p0329 A81-20651
- DIGITAL TECHNIQUES**  
Digital holographic interferometry of convective heat transport p0254 A81-28737
- DIODES**  
Self-magnetically insulated ion diode --- as ion source for inertial confinement fusion p0344 A81-26552  
Anode plasma behavior in a magnetically insulated ion diode p0344 A81-26571
- DIRECT POWER GENERATORS**  
Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis p0347 A81-29243
- DIRECTIVITY**  
Ionospheric effects in active retrodirective array and mitigating system design p0366 N81-16549
- DIRT**  
Measuring dirt on photovoltaic modules, part 2 [COO-4094-86-PT-2] p0284 N81-21609
- DISPERSIONS**  
Coalescence/dispersion modeling of gas turbine combustors p0344 A81-26018
- DISTILLATION**  
Solar desalination by freezing and distillation p0227 A81-25043  
Distillate fuel-oil processing for phosphoric acid fuel cell power plants [DOE/ER-13323/2] p0358 N81-19583
- DISTILLATION EQUIPMENT**  
Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills p0227 A81-25041
- DISTRIBUTED PARAMETER SYSTEMS**  
Optimal and suboptimal control policies for a solar collector system p0211 A81-21029  
Energy transport system optimization for distributed networks of solar collectors [ASME PAPER 81-SOL-1] p0365 A81-30109
- DIURNAL VARIATIONS**  
Comparison of several models for long term monthly average daily insolation on horizontal surfaces and the estimation of horizontal surface insolation for 16 U. S. locations [ASME PAPER 80-WA/SOL-28] p0213 A81-21152  
Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq p0222 A81-24977
- DIVERTERS**  
Preliminary skyshine calculations for the Poloidal Diverter Tokamak Experiment --- for plasma impurities control p0336 A81-23713
- DOMES (GEOLOGY)**  
Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome [SAND-80-1323] p0324 N81-21468
- DOMESTIC ENERGY**  
Lifting hydro's potential p0335 A81-23515  
An investigation of wind-energy prospects in the Otago region of New Zealand p0295 A81-23692  
Tides and turbines p0336 A81-23719  
Domestic utilization of solar energy in the Michigan area p0226 A81-25034  
The DOE photovoltaic program - An overview p0228 A81-25055  
Domestic solar water preheating versus solar water heating An economic evaluation p0229 A81-25064  
In situ and modified in situ recovery of fossil fuels p0297 A81-25110  
Pricetown I - In-situ coal conversion field test for bituminous coals p0298 A81-25111  
The role of high-Btu coal gasification technology p0298 A81-25112  
Fluid bed hydrogenation of agglomerating bituminous coals p0298 A81-25115  
The development of biogas technology in India p0298 A81-25117  
Future of alcohol fuels programs in Brazil p0299 A81-25121  
An update in the 'development of alternate liquid fuels' p0299 A81-25125  
The U.S. National Photovoltaic Program p0188 A81-27212  
Synfuels from coal p0304 A81-29682  
Making windpower an important part of a national energy plan [ASME PAPER 81-PET-11] p0189 A81-30113  
A framework for developing a national energy conservation program [EMD-79-76] p0190 N81-16531  
Community energy auditing: Experience with the comprehensive community energy management program [ANL/CHSV/TH-43] p0193 N81-17588



# SUBJECT INDEX

# ECONOMIC ANALYSIS

Residential use of photovoltaics  
[DOE/ET-20279/109] p0264 N81-17604

Future US energy supply: Constraints by nonfuel  
mineral resources  
[ORNL-5656] p0204 N81-21467

Performance of active solar domestic hot water  
heating systems  
[SOLAR/0024-80/41] p0281 N81-21556

Solar space and water heating system at Stanford  
University, Central Food Services Building  
[DOE/CS-31522/T1] p0283 N81-21603

**DOPED CRYSTALS**

Inclusion of degeneracy in the analysis of heavily  
doped regions in silicon solar cells and other  
semiconductor devices  
p0221 N81-24810

Efficient Si solar cells by laser photochemical  
doping  
p0229 N81-25873

Dependence of efficiency of shallow junction  
silicon solar cells on substrate doping  
p0254 N81-28216

Applications of laser annealing and laser-induced  
diffusion to photovoltaic conversion  
[CONF-801153-1] p0258 N81-16594

**DOWNLINKING**

Ionospheric effects in active retrodirective array  
and mitigating system design  
p0366 N81-16549

**DRAINAGE**

The environmental assessment of a contemporary  
coal mining system  
[NASA-CR-163974] p0197 N81-18571

**DRILLING**

Environmental exposure and design criteria for  
offshore and gas structures  
[AD-A094651] p0201 N81-19652

Kilauea Iki lava lake experiment plans  
[SAND-80-1653] p0318 N81-19699

**DROP SIZE**

Cloud modification by man-made pollutants -  
Effects of a coal-fired power plant on cloud  
drop spectra  
p0188 N81-28478

**DRY HEAT**

Heat-flow measurements in the state of Arkansas  
[LA-8569-MS] p0324 N81-21573

**DRIING**

Observations on test stockpiles of dried lignite  
and subbituminous coals  
[DOE/GFETC/RI-80/5] p0321 N81-21217

**DRYING APPARATUS**

Solar energy assisted fluidized bed fruit drying  
p0227 N81-25037

**DUCT GEOMETRY**

Optimization of fin and tube parameters in a  
flat-plate collector  
p0209 N81-19849

**DUCTED BODIES**

Wave-energy extraction by a submerged cylindrical  
resonant duct  
p0303 N81-28680

**DUCTED FLOW**

Liquid metal MHD generators with shunt layer  
p0327 N81-19812

**DUCTS**

Analysis of residential duct losses  
[PB80-228000] p0191 N81-16614

**DUST**

Effects of dust on the performance of thermal and  
photovoltaic flat plate collectors in Saudi  
Arabia - Preliminary results  
p0223 N81-24985

**DYNAMIC CHARACTERISTICS**

Investigation of dynamics of a waterwave power plant  
p0333 N81-22176

**DYNAMIC LOADS**

On the dynamic optimal coupling of a solar cell  
array to a load and storage batteries  
p0229 N81-26372

Optimum operation of a combined system of a solar  
cell array and a dc motor  
p0229 N81-26374

**DYNAMIC MODELS**

Dynamic modeling and experimental simulation of  
active solar energy systems for the evaluation  
of control strategies  
[ASME PAPER 80-WA/SOL-14] p0213 N81-21139

Stability of large horizontal-axis axisymmetric  
wind turbines  
p0333 N81-22526

**DYNAMIC RESPONSE**

Dynamic response analysis of a solar powered  
heliotropic fluid-mechanical drive system  
p0223 N81-24990

A simple method for computing the dynamic response  
of passive solar buildings to design weather  
conditions  
p0226 N81-25029

Dynamic response of power generating wind turbines  
p0339 N81-25077

**DYNAMIC STRUCTURAL ANALYSIS**

VAUTDYN - A numerical package for the dynamic  
analysis of vertical axis wind turbines  
[ASME PAPER 80-WA/SOL-18] p0331 N81-21142

Aeroelastic stability and response analysis of  
large horizontal-axis wind turbines  
p0335 N81-23697

Wind machine fatigue analysis and life prediction  
[RFP-3135/3533/80/19] p0357 N81-19495

Investigations of structural dynamics on the  
Gedser WTG and on new Danish wind turbines  
[RISOE-M-2146] p0363 N81-21626

## E

**EARTH CRUST**

Calculations of the anomalies of the vertical  
temperature gradient using the horizontal  
temperature distribution  
p0293 N81-22207

**EARTH MOVEMENTS**

Scientific and Technical Publications of the  
Environmental Research Laboratories' fiscal year  
1978  
[FB81-141301] p0384 N81-21975

**EARTH OBSERVATIONS (FROM SPACE)**

Remote sensing techniques for identification and  
evaluation of geothermal areas  
p0294 N81-23587

**EARTH ORBITS**

Analysis of costs of gallium arsenide and silicon  
solar arrays for space power applications  
[NASA-TP-1811] p0276 N81-20173

**EARTH RESOURCES**

Utilization of biomass in the U.S. for the  
production of ethanol fuel as a gasoline  
replacement. I - Terrestrial resource potential.  
II - Energy requirements, with emphasis on  
lignocellulosic conversion  
p0296 N81-24427

National Academy of Sciences report: Energy in  
transition, 1985-2010  
[GPO-61-647] p0189 N81-16524

Energy in transition, 1985-2010  
[GPO-63-171] p0190 N81-16585

Energy, helium, and the future, 2  
[LA-UR-80-3342] p0191 N81-16605

Decentralized energy studies: Compendium of  
international studies and research  
[SERI/RR-744-451] p0193 N81-17582

Research in the geosciences related to resource  
assessment  
[DOE/IR-10119/T1] p0313 N81-18476

Comments on long-term aspects of renewable versus  
nonrenewable resource substitution  
[CONF-801158-1] p0313 N81-18477

**EARTH SURFACE**

Experimental study to define developments for  
terrestrial solar cell generators  
[BNFT-PB-T-79-143] p0279 N81-20600

**ECOLOGY**

Environmental assessment for the Satellite Power  
System concept development and evaluation  
program: Nonmicrowave health and ecological  
effects  
[DOE/EE-0089] p0205 N81-21613

**ECONOMETRICS**

Making geothermal power competitive  
p0340 N81-25092

**ECONOMIC ANALYSIS**

Thermal and economic assessment of ground-coupled  
storage for residential solar heat pump systems  
[ASME PAPER 80-WA/SOL-10] p0212 N81-21136

Economic analysis and optimization of solar  
residential space heating  
[ASME PAPER 80-WA/SOL-11] p0212 N81-21137

- Motor fuels from coal - Technology and economics  
p0293 A81-22275
- Solar energy market penetration models - Science  
or number mysticism  
p0218 A81-23026
- Superconducting generators - Economics, technical  
considerations and ancillary technology  
p0335 A81-23466
- Performance and economics analysis of several  
laser fusion breeder fueled electricity  
generation systems  
p0336 A81-23717
- The economics of hydrogen production  
p0285 A81-24013
- High temperature solar power tower plants -  
Concept considerations and operational criteria  
p0227 A81-25044
- An analysis of macroeconomic effects of increased  
market penetration by solar energy technologies  
p0229 A81-25060
- Residential passive solar systems - Regional  
sensitivity to system performance costs, and  
alternative prices  
p0187 A81-25061
- Solar energy for multi-residential water heating -  
An economic approach  
p0229 A81-25063
- The economics of advanced technologies for  
electricity generation from coal  
p0300 A81-25134
- Economic aspects of coal gasification and  
liquefaction in Belgium  
p0300 A81-25136
- An exergetic/energetic/economic analysis of three  
hydrogen production processes - Electrolysis,  
hybrid, and thermochemical  
p0287 A81-25140
- Eco-Fuel and the Bridgeport facility  
p0301 A81-25556
- The Niagara Falls resource recovery system  
p0301 A81-25557
- Wind energy - A utility perspective  
p0187 A81-26371
- Application analysis of photovoltaic systems for  
service/commercial/institutional and industrial  
sectors  
p0233 A81-27106
- The economics of photovoltaics in the commercial,  
institutional, and industrial sectors  
p0233 A81-27107
- Economic feasibility of photovoltaic energy systems  
p0246 A81-27229
- System design, test results, and economic analysis  
of a flywheel energy storage and conversion  
system for photovoltaic applications  
p0375 A81-27232
- Optimization of total annual energy output from  
constant/adjustable tilt solar PV arrays  
p0250 A81-27273
- Wind engineering; Proceedings of the Fifth  
International Conference, Colorado State  
University, Fort Collins, Colo., July 8-14,  
1979. Volumes 1 & 2  
p0382 A81-27301
- A primer on economic feasibility for direct-users  
p0346 A81-28550
- Production of fuels from high temperature solar  
thermal systems - Economic analysis  
p0256 A81-29268
- Economics of heavy fuels in gas turbines and  
combined cycles  
[ASME PAPER 81-GT-45]  
p0347 A81-29959
- IT1 GT601 - A new approach to vehicular gas  
turbine power unit design  
[ASME PAPER 81-GT-152]  
p0349 A81-30051
- Advanced Cogeneration Technology Economic  
Optimization Study (ACTEOS)  
[NASA-CR-163887]  
p0306 A81-16573
- Farm and cooperative alcohol plant study:  
Technical and economic assessment as a  
commercial venture  
[PB81-112641]  
p0306 A81-17290
- Hydrogasification of oil shale  
[PB81-114092]  
p0306 A81-17292
- Cost-energy dynamics: An engineering-economic  
basis for industrial energy conservation policies  
[ORAU/IRA-80-12(B)]  
p0193 A81-17583
- Energy/economic model analysis. Volume 1: Gas  
technology assessments using three energy  
supply/demand integrating models  
[PB81-114225]  
p0194 A81-17611
- Energy/economic model analysis. Volume 2:  
Evaluation of energy supply/demand integrating  
models  
[PB81-114233]  
p0194 A81-17612
- Energy/economic model analysis. Macroeconomic  
impacts of research and development in gas  
supply and end use technologies  
[PB81-114258]  
p0194 A81-17613
- Energy/economic model analysis. Time-stepped  
energy system optimization model  
[PB81-114241]  
p0194 A81-17615
- Energy/economic model analysis. Livermore energy  
policy model  
[PB81-114266]  
p0194 A81-17616
- Coal gasification systems engineering and  
analysis. Appendix E: Cost estimation and  
economic evaluation methodology  
[NASA-CR-161659]  
p0310 A81-18218
- Solar coal gasification: Plant design and economics  
[UCRL-84610]  
p0265 A81-18225
- Engineering and economic studies for direct  
applications of geothermal energy in an  
industrial park in Pahoa, Hawaii  
[DOE/ET-27233/T2]  
p0314 A81-18513
- Solar central receiver systems comparative economics  
[SERI/SP-633-637]  
p0267 A81-18523
- Economic application, design analysis, and  
material availability for ceramic heat exchangers  
[ORNL/TM-7580]  
p0196 A81-18528
- Assessment of solar options for large power  
applications  
[PNL-SA-8968]  
p0268 A81-18542
- Technical and economic feasibility of a Thermal  
Gradient Utilization Cycle (TGUC) power plant  
[DOE/CS-56604/T1]  
p0355 A81-18546
- Efficient ultrasonic grinding: A new technology  
for micron-sized coal  
[DOE/ER-10466/T1]  
p0315 A81-19317
- Process feasibility study in support of silicon  
material task 1  
[NASA-CR-164009]  
p0271 A81-19570
- Geothermal energy market study on the Atlantic  
Coastal Plain. Definition of markets for  
geothermal energy in the Northern Atlantic  
Coastal Plain  
[PB81-123861]  
p0200 A81-19645
- Geothermal energy market study on the Atlantic  
Coastal Plain. GRITS: A computer program for  
the economic evaluation of direct-use  
applications of geothermal energy  
[PB81-119786]  
p0201 A81-19646
- Engineering study of pelleting waste paper for  
energy recovery  
[NREEDC-53]  
p0320 A81-20562
- Study of the potential for cogeneration in Canada:  
Industrial steam turbines. Volume 2: Economic  
potential  
[NP-25187-VOL-2]  
p0360 A81-20564
- Liquefaction technology assessment. Phase 1:  
Indirect liquefaction of coal to methanol and  
gasoline using available technology  
[ORNL-5664]  
p0322 A81-21223
- Methanol production with elemental phosphorus  
byproduct gas: Technical and economic feasibility  
[PNL-3694]  
p0322 A81-21224
- Economic comparison of molten carbonate fuel cells  
and gas turbines in coal gasification based  
power plants  
[EPRI-AP-1543]  
p0322 A81-21229
- US energy consumption and supply  
[UCID-18856]  
p0204 A81-21565
- Municipal geothermal heat utilization plan for  
Glenwood Springs, Colorado  
[DOE/ID-12049-3]  
p0324 A81-21585
- ECONOMIC DEVELOPMENT**
- An evaluation of alternate energy sources for the  
Guyana energy crisis  
p0340 A81-25097
- Energy: Economic activity and energy demand; link  
to energy flow. Example: France  
[EUR-6773-EN]  
p0194 A81-17597
- Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11]  
p0318 A81-19598

# SUBJECT INDEX

# ELECTRIC ENERGY STORAGE

Alternative energy facility siting policies for urban coastal areas: Executive summary of findings and policy recommendations [DOE/EV-01528/T1] p0204 N81-21559

Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis [DOE/EV-73002/1-VOL-1] p0205 N81-21595

Performance profiles of major energy producers [DOE/EIA-0206/78] p0324 N81-21610

**ECONOMIC FACTORS**

Prospective energy sources and their comparison with current supplies p0185 A81-21063

A perspective on OTEC plants p0340 A81-25085

Fixed site hydrogen storage. II - Comparison of technologies and economics p0289 A81-25160

Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 9 - Conservation, economics, and policy; Index p0187 A81-25161

National Academy of Sciences report: Energy in transition, 1985-2010 [GPO-61-647] p0189 N81-16524

Energy in transition, 1985-2010 [GPO-63-171] p0190 N81-16585

Development of a system for off-peak electrical energy use by air conditioners and heat pumps [TVA-EDT-122] p0377 N81-18509

Reducing US oil vulnerability: Energy policy for the 1980's [DOE/EE-0021] p0196 N81-18524

Energy choices in a democratic society [PB81-114852] p0197 N81-18563

Fuel cells feasibility p0356 N81-18998

Alaska: A guide to geothermal energy development [DOE/ET-28476/T12] p0318 N81-19597

Thermomechanical solar power/electricity generation. Technico-economic problems and prospectives of development and application p0277 N81-20556

The a priori decision in solar energy and conservation economics p0278 N81-20558

A life-cycle model for solar heating system design and economic evaluation Michigan Economic Model for Solar Heating (MESM) p0278 N81-20559

The economics of residential energy efficiency [PNL-SA-8696] p0206 N81-21624

**ECONOMIC IMPACT**

A framework for developing a national energy conservation program [EHD-79-76] p0190 N81-16531

Development of sweet sorghum as an energy crop. Volume 3: Integration concepts [BHI-2054-VOL-3] p0316 N81-19334

Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings [AHL/EES-TM-116] p0383 N81-19611

**ECOSYSTEMS**

Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study [UCLA-12/1268] p0197 N81-18576

**EFFLUENTS**

Biological exposure sensors in coal conversion technologies [CONP-801143-1] p0192 N81-17410

Environmental impact assessment guidelines for new source coal gasification facilities [PB81-114555] p0195 N81-17635

Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain [E81-10119] p0323 N81-21423

**EIGENVALUES**

Stability of large horizontal-axis axisymmetric wind turbines p0333 A81-22526

**ELASTIC WAVES**

Emissions and fuel economy of a Comprex Pressure Wave Supercharged Diesel [PB81-133399] p0204 N81-21371

**ELASTOMERS**

Energy production from waste heat by means of elastomers or memory metals [STU-79-6394] p0362 N81-21551

**ELECTRIC AUTOMOBILES**

An automobile manufacturer and his electric vehicle p0373 A81-25604

GR's electric powered automobile p0373 A81-25605

Change-of-pace electric automobile user demonstration (COMCAR 2) [DOE/TIC-11373] p0379 N81-21359

**ELECTRIC BATTERIES**

Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance p0372 A81-25323

High temperature batteries p0373 A81-25567

Progress in batteries and solar cells. Volume 3 --- Book p0382 A81-25601

GE's electric powered automobile p0373 A81-25605

Recent developments in secondary batteries for use in electric vehicles p0373 A81-25606

The USAF Academy flywheel-electric car [AD-A095130] p0378 N81-19969

Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter [DOE/EA-26961/01] p0378 N81-26575

Development of zinc-bromine batteries for utility energy storage [DOE/ET-29345/21] p0379 N81-26591

High energy density batteries for satellite applications p0379 N81-21505

BCA Satcom in-orbit experience p0379 N81-21526

Construction of a photovoltaic power system at Natural Bridges National Monument [DOE/ET-20279/94] p0283 N81-21607

**ELECTRIC CONDUCTORS**

The HEWAC pilot line experience p0262 N81-17574

**ELECTRIC CONTACTS**

Two-dimensional analysis of the interdigitated back-contact solar cell p0216 A81-22197

Behavior of interdigitated back-contact solar cells p0231 A81-27086

A base-metal conductor system for silicon solar cells p0243 A81-27196

An all-plated, low cost contact system for silicon solar cells p0243 A81-27197

High performance BSP silicon solar cell with fire through contacts printed on AR coating --- Back Surface Field p0243 A81-27198

Nickel contacts for low cost solar cells p0245 A81-27223

MIS silicon grating solar cells on BSP substrates p0252 A81-27293

Coplanar back contacts for thin silicon solar cells [NASA-CR-165272] p0266 N81-18495

**ELECTRIC CURRENT**

Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model p0232 A81-27099

Investigation of Cu2O solar cells p0237 A81-27140

Recent progress in high-output-voltage silicon solar cells p0260 N81-17534

**ELECTRIC DISCHARGES**

Anode plasma behavior in a magnetically insulated ion diode p0344 A81-26571

**ELECTRIC ENERGY STORAGE**

Superconductive energy storage for diurnal use by electric utilities p0371 A81-23440

## ELECTRIC GENERATORS

## SUBJECT INDEX

- Energy transfer in a system of superconductive magnets p0374 A81-26858
- The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system p0238 A81-27152
- Optimisation of total annual energy output from constant/adjustable tilt solar PV arrays p0250 A81-27273
- Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCRL-15259] p0376 A81-17963
- Electrochemical photovoltaic cells [SERI/PR-9175-1-12] p0267 A81-18521
- ELECTRIC GENERATORS**
- HK-generators using the transition of a semiconductor material into a conducting state p0331 A81-21064
- Integration of wind power into Australian electricity grids without storage - A computer simulation p0334 A81-23068
- Performance and economics analysis of several laser fusion breeder fueled electricity generation systems p0336 A81-23717
- Direct conversion of chemical energy to electrical energy p0337 A81-23901
- Combined solar and fossil fuel systems for electric power generation p0381 A81-25048
- Solar energy power generators with advanced thermionic converters for spacecraft applications p0228 A81-25058
- Ecology problems associated with geothermal development in California [UCRL-83941-REV-1] p0192 A81-16635
- Fusion energy research, development, and demonstration act of 1980 [H-HEPT-96-1096] p0352 A81-16898
- Operational analysis of open-cycle MHD [EPRI-AP-1463] p0352 A81-16909
- Residential use of photovoltaics [DOE/ET-20279/109] p0264 A81-17604
- Environmental and safety issues of the fusion fuel cycle [CONF-801011-66] p0353 A81-17911
- Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range [DOE/ET-15208/1] p0355 A81-18562
- Wind power generation dynamic impacts on electric utility systems [EPRI-AP-1614] p0358 A81-19585
- Small wind systems technology assessment. State of the art and near term goals [RFP-3136/3533/80/18] p0358 A81-19600
- Dunlite model 81/002550 wind turbine generator [RFP-3149/3533/80/17] p0358 A81-19601
- Wind generator network methodology and analysis p0359 A81-20356
- Thermomechanical solar power/electricity generation. Technico-economic problems and perspectives of development and application p0277 A81-20556
- Applications study of advanced power generation systems utilizing coal-derived fuels. Volume 1: Executive summary [NASA-CR-161691] p0362 A81-21538
- Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2 [NASA-CR-161692] p0362 A81-21539
- ELECTRIC HYBRID VEHICLES**
- An automobile manufacturer and his electric vehicle p0373 A81-25604
- Advanced propulsion system concept for hybrid vehicles [NASA-CR-159772] p0198 A81-18935
- Advanced continuously variable transmissions for electric and hybrid vehicles [NASA-TN-81718] p0368 A81-19459
- ELECTRIC MOTOR VEHICLES**
- Flat-plate tubular TP lead-acid traction battery for electric vehicles p0373 A81-25603
- An automobile manufacturer and his electric vehicle p0373 A81-25604
- GE's electric powered automobile p0373 A81-25605
- Recent developments in secondary batteries for use in electric vehicles p0373 A81-25606
- Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics p0374 A81-25837
- Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications [AHL-80-49] p0375 A81-16591
- Verification test of jet industries Electra-Van 1000F [AD-A093738] p0376 A81-17961
- Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCRL-15259] p0376 A81-17963
- Fuel-cells for electric utility and transportation applications [BML-28696] p0354 A81-18518
- The USAF Academy flywheel-electric car [AD-A095130] p0378 A81-19969
- Electric vehicle simulation for design optimization [AD-A094734] p0378 A81-19970
- An optimal control approach to energy minimization in electric vehicles --- boundary value methods [HEPT-109] p0201 A81-19972
- Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles [LA-UR-81-293] p0363 A81-21572
- ELECTRIC MOTORS**
- Optimum operation of a combined system of a solar cell array and a dc motor p0229 A81-26374
- Classification and evaluation of electric motors and pumps [DOE/TIC-11339] p0199 A81-19463
- ELECTRIC NETWORKS**
- PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements p0250 A81-27275
- Transient processes and self-excited oscillations in the electrical circuit of an MHD generator p0346 A81-27968
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1 [NASA-CR-164051] p0202 A81-20538
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix E: State of the art, trends, and potential growth of selected DSG technologies [NASA-CR-164054] p0202 A81-20540
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 4, appendix C: Identification from utility visits of present and future approaches to integration of DSG into distribution networks [NASA-CR-164055] p0202 A81-20541
- ELECTRIC POTENTIAL**
- Approximate three-dimensional electric solution for a frame-type MHD generator p0327 A81-20022
- MHD electrode performance - Heat transfer and voltage drops [ASME PAPER 80-WA/HT-10] p0331 A81-21104
- Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips p0337 A81-23747
- Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses p0253 A81-27299
- BCA Satcom in-orbit experience p0379 A81-21526
- ELECTRIC POWER**
- A dish-Stirling solar-thermal power system p0217 A81-22897
- Contribution of ocean thermal energy conversion to world energy needs p0333 A81-22900
- Baking geothermal power competitive p0340 A81-25092

# SUBJECT INDEX

# ELECTRIC POWER PLANTS

- An environmental appraisal of tidal power stations: With particular reference to the Severn barrage --- Book p0187 A81-26196
- Active cooling system alternatives for concentrating photovoltaic systems p0256 A81-29265
- Electrical energy storage via high efficiency-cost effective hydrogen/halogen regenerative fuel cell systems p0375 A81-29266
- ELECTRIC POWER PLANTS**
- On the possible use of MHD generators in solar energy systems p0209 A81-19813
- Energy analysis of four geothermal technologies p0185 A81-19848
- Comparison of analytical and experimental studies of the NPDE MHD generator performance --- High Performance Demonstration Experiment [AIAA PAPER 81-0029] p0327 A81-20549
- Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes [AIAA PAPER 81-0030] p0328 A81-20550
- Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant [AIAA PAPER 81-0110] p0328 A81-20602
- Power conditioning and control requirements of coal fired MHD generators [AIAA PAPER 81-0246] p0330 A81-20696
- Pressurized fluidized bed - A technology for combined cycle power generation [AIAA PAPER 81-0392] p0330 A81-20802
- Status of commercial phosphoric acid fuel cell system development [AIAA PAPER 81-0396] p0330 A81-20805
- Binary Rankine-cycle engines for solar-thermal power systems [ASME PAPER 80-WA/SOL-19] p0332 A81-21143
- High temperature solar thermal technology [ASME PAPER 80-WA/SOL-20] p0213 A81-21144
- Thermal storage requirements for parabolic dish solar power plants [ASME PAPER 80-WA/SOL-21] p0213 A81-21145
- HGF-A wellhead generator feasibility project --- geothermal power plant in Hawaii p0333 A81-22775
- The photovoltaic-aeolian plant at Passo Mandrioli /Italy/ p0218 A81-23013
- Tides and turbines p0336 A81-23719
- A solar-pond power plant p0219 A81-24056
- A consideration of possible receiver designs for solar tower plants p0220 A81-24426
- Availability modeling methodology applied to solar power systems p0220 A81-24431
- Fluids for energy transport and conversion in solar power stations p0220 A81-24616
- The Philippines geothermal success story p0296 A81-24751
- Thermal storage cell for high temperature solar systems p0224 A81-24993
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3 - Solar energy 3 p0381 A81-25040
- High temperature solar power tower plants - Concept considerations and operational criteria p0227 A81-25044
- More on dual purpose solar-electric power plants p0227 A81-25045
- Solar thermionic power plant. II p0228 A81-25057
- An unconventional wind machine p0338 A81-25072
- Reliability, energy, and cost effects of wind integration with conventional electrical generating systems p0339 A81-25078
- Korea tidal power and beyond p0340 A81-25084
- A perspective on OTEC plants p0340 A81-25085
- A bottom fixed OTEC plant on the edge of a continental /or island/ shelf p0340 A81-25086
- Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants p0340 A81-25087
- The utilization of geothermal energy in the Philippines p0340 A81-25095
- Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal p0341 A81-25119
- The economics of advanced technologies for electricity generation from coal p0300 A81-25134
- Overall efficiencies for conversion of solar energy to a chemical fuel p0288 A81-25148
- A study of a commercial MHD power plant scheme p0342 A81-25381
- Wisconsin Electric's characterization of Americology's refuse-derived fuel p0301 A81-25555
- Solar perspectives - Solar pond power, the Israel-California connection p0230 A81-26402
- An investigation on Tehran municipal solid waste with the view of electricity generation p0302 A81-26474
- Use of weighted brines in recovery of geothermal energy from hot, dry rock p0303 A81-26928
- Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts p0232 A81-27090
- The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system p0238 A81-27152
- Parabolic troughs concentrators photovoltaic module p0242 A81-27188
- Economic feasibility of photovoltaic energy systems p0246 A81-27229
- Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234
- Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems p0247 A81-27244
- High-flux solar absorber concept for central receiver power plants p0253 A81-27557
- Energy analysis of four geothermal technologies p0346 A81-29031
- The state of solar technology p0255 A81-29196
- Osmo-power - Theory and performance of an osmo-power pilot plant p0347 A81-29199
- On the safety to solar electric power generation p0256 A81-29269
- Combined gas and steam cycle for a gas-cooled solar tower power plant [ASME PAPER 81-GT-102] p0348 A81-30008
- Small gas turbine with large parabolic dish collectors [ASME PAPER 81-GT-201] p0349 A81-30091
- Coal-fired heaters for CCGT cogeneration service --- Closed-Cycle Gas Turbine [ASME PAPER 81-GT-212] p0350 A81-30101
- Energy transport system optimization for distributed networks of solar collectors [ASME PAPER 81-SOL-1] p0365 A81-30109
- Overview of unconventional energy projects in the public power sector [ASME PAPER 81-DGP-1] p0189 A81-30118
- Performance calculations for 1000 MWe MHD/steam power plants [NASA-TN-81667] p0351 A81-16570
- Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels [NASA-TN-81611] p0351 A81-16571
- Improved PCG-1 cell technology [EPRI-EH-1566] p0351 A81-16598

## ELECTRIC POWER SUPPLIES

## SUBJECT INDEX

- Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit  
[EPRI-CS-1444-VOL-4] p0351 N81-16602
- The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant  
[BNL-51279] p0192 N81-16631
- Operational analysis of open-cycle MHD  
[EPRI-AP-1463] p0352 N81-16909
- Central station market development strategies for photovoltaics  
[NASA-CR-163947] p0193 N81-17520
- Coal gasification systems engineering and analysis. Volume 1: Executive summary  
[NASA-CR-161653] p0309 N81-18212
- Coal gasification systems engineering and analysis, volume 2  
[NASA-CR-161654] p0309 N81-18213
- Optimized design of total energy systems: The BTE project  
[CISE-1606] p0196 N81-18512
- Regional conversion to coal  
[FE-2468-63] p0314 N81-18517
- Solar central receiver systems comparative economics  
[SERI/SP-633-637] p0267 N81-18523
- Task report no. 3. Systems analysis of organic Rankine bottoming cycles  
[PSI-TR-245] p0354 N81-18529
- Compressed air energy storage: Preliminary design and site development program in an aquifer, task 2. Volume 2: Characterize and explore potential sites and prepare research and development plan  
[DOE/ET-29232/T1-VOL-2] p0377 N81-18531
- Assessment of solar options for large power applications  
[PHL-SA-8968] p0268 N81-18542
- Solar/hydro integration study  
[DOE/SP-10505/4] p0355 N81-18558
- Environment, health, socioeconomic and environmental control technology executive summary  
[DOE/TIC-11308] p0197 N81-18575
- High-reliability gas turbine combined-cycle development program, phase 1  
[EPRI-AP-1599-VOL-1] p0357 N81-19466
- Wind energy - how reliable  
[AD-A094988] p0317 N81-19563
- Compressed air energy storage: Preliminary design and site development program in an aquifer. Task 1: Establish facility design criteria and utility benefits  
[DOE/ET-29232/T2] p0377 N81-19586
- Cost-performance comparison of water-steam receivers for solar central electric power plants  
[SAND-80-8245] p0273 N81-19615
- Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SERI/TR-351-461-VOL-1] p0273 N81-19618
- High-reliability gas turbine combined-cycle development program, phase 1  
[EPRI-AP-1598] p0358 N81-19632
- A 10 kW small solar power station and operations optimization  
[BMFT-FB-T-79-139] p0275 N81-19638
- High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendixes  
[EPRI-AP-1599-VOL-2] p0360 N81-20434
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1  
[NASA-CR-164051] p0202 N81-20538
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix B: State of the art, trends, and potential growth of selected DSG technologies  
[NASA-CR-164054] p0202 N81-20540
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 4, appendix C: Identification from utility visits of present and future approaches to integration of DSG into distribution networks  
[NASA-CR-164055] p0202 N81-20541
- Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1] p0363 N81-21581
- Preliminary designs for modular OTEC platforms: station-keeping subsystems, volume 3  
[DCR/NOAA/OTEC-30-VOL-3] p0363 N81-21592
- Line-Focus Solar Central Power System, phase 1. Volume 1: Executive summary  
[DOE/ET-20550/2-VOL-1] p0283 N81-21598
- Line-Focus Solar Central Power System, phase 1. Volume 2: Text  
[DOE/ET-20550/2-VOL-2] p0283 N81-21599
- Line-Focus Solar Central Power System, phase 1. Volume 3: Appendices  
[DOE/ET-20550/2-VOL-3] p0283 N81-21600
- STARFIRE: A commercial Tokamak fusion power plant study, volume 2  
[ANL/PPP-80-1-VOL-2] p0363 N81-21612
- Management plan for fiscal year 1981: Environmental Control Technology Project geothermal development  
[UCID-18903] p0206 N81-21640
- Oxygen-enriched air production for MHD power plants  
[DOE/ET-11058/T4] p0364 N81-21920
- ELECTRIC POWER SUPPLIES**
- Progress in batteries and solar cells. Volume 3 --- Book p0382 N81-25601
- Flat-plate tubular TP lead-acid traction battery for electric vehicles p0373 N81-25603
- Energy analysis of high temperature batteries p0374 N81-25614
- A preliminary investigation of an Al/FeS<sub>2</sub> secondary cell p0374 N81-25615
- Sealed nickel-cadmium batteries for memory backup p0374 N81-25616
- A new airborne nickel cadmium battery concept p0374 N81-25618
- Complex computation of flywheel power systems for flight vehicles p0375 N81-30158
- Highly efficient welding power supply  
[DOE/CS-40023/T1] p0202 N81-20441
- Construction of a photovoltaic power system at Natural Bridges National Monument  
[DOE/ET-20279/94] p0283 N81-21607
- ELECTRIC POWER TRANSMISSION**
- Wind power generation dynamic impacts on electric utility systems  
[EPRI-AP-1614] p0358 N81-19585
- ELECTRIC PROPULSION**
- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications  
[NASA-TP-1811] p0276 N81-20173
- ELECTRIC PULSES**
- Pulsed self-excited MHD power generation at large energy densities p0327 N81-19814
- ELECTRIC WELDING**
- Highly efficient welding power supply  
[DOE/CS-40023/T1] p0202 N81-20441
- ELECTRICAL ENGINEERING**
- Superconducting MHD magnet engineering program p0344 N81-26852
- ELECTRICAL MEASUREMENT**
- MHD electrode performance - Heat transfer and voltage drops  
[ASME PAPER 80-WA/ET-10] p0331 N81-21104
- Voltage and current sensors for a high-density z-pinch experiment p0332 N81-21641
- Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics p0249 N81-27266
- Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells  
[NASA-CR-164012] p0271 N81-19568
- ELECTRICAL PROPERTIES**
- U-258 MHD generator performance  
[AIAA PAPER 81-0032] p0328 N81-20552
- The STD/MHD codes - Comparison of analyses with experiments at ARDC/HPDE, Reynolds Metal Co., and Hercules, Inc --- for MHD generator flows  
[AIAA PAPER 81-0173] p0329 N81-20649

# SUBJECT INDEX

# ELECTROLYSIS

Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips  
p0337 A81-23747

Electrode materials for coal-fired MHD generators  
[EPRI-AP-1562]  
p0355 A81-18536

**ELECTRICAL RESISTANCE**  
A low series resistance silicon photovoltaic cell for high intensity applications  
p0236 A81-27134

Effects of temperature variation in concentrator cell series resistance measurements  
p0237 A81-27138

Two modified single diode models for simulating solar cells with distributed series resistance  
p0239 A81-27161

**ELECTRICAL RESISTIVITY**  
Silicon solar cells with high open-circuit voltage  
p0232 A81-27089

**ELECTRICITY**  
Current and future industrial energy service characterizations, volume 1  
[SERI/TR-733-790-VOL-1]  
p0206 A81-21618

**ELECTRIFICATION**  
Energy efficiency of electrified passenger railway in the Canadian context  
p0187 A81-25800

**ELECTROCATALYSTS**  
Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes --- in fuel cells  
p0342 A81-25325

Development of advanced electrocatalysts for phosphoric acid fuel cells  
p0342 A81-25602

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165179]  
p0352 A81-17527

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245]  
p0354 A81-18496

Non-noble catalysts and catalyst supports for phosphoric acid fuel cells  
[NASA-CR-165221]  
p0354 A81-18497

Recent advances in the sciences of electrocatalysis  
[AD-A095095]  
p0356 A81-19257

Optimization of carbon-supported platinum catalysts for fuel cell electrodes  
[AD-A094714]  
p0357 A81-19579

Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles  
[LA-UR-81-293]  
p0363 A81-21572

**ELECTROCHEMICAL CELLS**  
Electrochemical semiconductor solar energy converters  
p0215 A81-21674

Electrochemical power sources: Primary and secondary batteries --- Book  
p0373 A81-25565

High temperature batteries  
p0373 A81-25567

Room temperature cells with solid electrolytes  
p0373 A81-25568

Zinc-bromine batteries for energy storage  
p0373 A81-25607

Electrochemistry of oxygen  
p0343 A81-25609

Major electrochemical developments related to the energy problem  
p0382 A81-25610

Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte  
p0343 A81-25611

Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications  
[ANL-80-49]  
p0375 A81-16591

Electrochemical photovoltaic cells  
[SERI/PR-9175-1-T2]  
p0267 A81-18521

Electrochemical photovoltaic cells  
[SERI/TR-8002-5-T1]  
p0272 A81-19582

Distillate fuel-oil processing for phosphoric acid fuel cell power plants  
[DOE/ET-13323/2]  
p0358 A81-19583

Performance and safety characteristics of Li/BCI and I/CSC systems  
p0379 A81-21495

Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides  
[IS-4759]  
p0283 A81-21583

# ELECTROCHEMICAL OXIDATION

A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques  
p0215 A81-21956

# ELECTROCHEMISTRY

Hydrogen/metal interactions with special reference to electrochemical approaches  
p0286 A81-24556

Recent advances in the sciences of electrocatalysis  
[AD-A095095]  
p0356 A81-19257

Survey of electrochemical production of inorganic compounds --- production of synthetic fuels  
[ANL/OEPH-80-3]  
p0318 A81-20226

Technology development for phosphoric acid fuel cell powerplant (phase 2)  
[NASA-CR-165316]  
p0362 A81-21547

# ELECTRODEPOSITION

Thin film polycrystalline solar cells prepared by electrodeposition  
p0237 A81-27142

Emerging materials for solar cell applications: Electrodeposited CdTe  
[SERI/PR-9152-1-T1]  
p0269 A81-18555

# ELECTRODES

On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution  
[ASME PAPER 80-WA/HT-11]  
p0331 A81-21105

Perspectives for metal hydride technology  
p0285 A81-21504

Electrochemical semiconductor solar energy converters  
p0215 A81-21674

Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes --- in fuel cells  
p0342 A81-25325

Electrode materials for coal-fired MHD generators  
[EPRI-AP-1562]  
p0355 A81-18536

Optimization of carbon-supported platinum catalysts for fuel cell electrodes  
[AD-A094714]  
p0357 A81-19579

Characteristics of acidic electrolyte hydrogen-air fuel batteries (3)  
[OERI-TRANS-11655]  
p0358 A81-19604

Optimization of transparent electrode for solar cells  
[SERI/PR-9318-1-T1]  
p0274 A81-19621

Basic research on ceramic materials for energy storage and conversion systems  
[CCO-2564-6]  
p0361 A81-21207

The CMG nickel electrode  
p0379 A81-21509

Lightweight composite cadmium electrodes  
p0379 A81-21510

# ELECTROLESS DEPOSITION

An all-plated, low cost contact system for silicon solar cells  
p0243 A81-27197

# ELECTROLYSIS

H<sub>2</sub> as an energy vector - Hydrogen production by the SLOFLUX electrolytic cell  
p0285 A81-23014

Production and application of electrolytic hydrogen - Present and future  
p0286 A81-24019

The sulfur-cycle hydrogen production process  
p0286 A81-24024

Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams  
p0286 A81-24559

Fusion reactors for hydrogen production via electrolysis  
p0287 A81-25139

An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical  
p0287 A81-25140

Thermochemical hydrogen production using sodium chloride  
p0288 A81-25145

Automotive dual-mode hydrogen generation system  
p0288 A81-25147

Pigmented tin oxide solar cell  
p0235 A81-27124

**HYDRE:** A Tokamak high temperature electrolysis system --- synfuel production  
[BNL-28679]  
p0352 A81-16908

## ELECTROLYTES

## SUBJECT INDEX

- Improvements in the electrolytic generation of hydrogen  
p0291 N81-20287
- High temperature water vapor electrolysis (HOT ELIY)  
--- for hydrogen production  
[BHFT-FB-T-80-051] p0292 N81-21627
- ELECTROLYTES**
- Fuel cells - A survey. I  
p0333 A81-22400
- Flash photolysis studies of the semiconductor/electrolyte interface  
p0265 N81-18114
- Characteristics of acidic electrolyte hydrogen-air fuel batteries (3)  
[UCBL-TRANS-11655] p0358 N81-19604
- Basic research on ceramic materials for energy storage and conversion systems  
[COO-2564-6] p0361 N81-21207
- Lightweight composite cadmium electrodes  
p0379 N81-21510
- Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles  
[LA-UR-81-293] p0363 N81-21572
- ELECTROLYTIC CELLS**
- H<sub>2</sub> as an energy vector - Hydrogen production by the ELOFLUX electrolytic cell  
p0285 A81-23014
- Cu/x/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements  
p0241 A81-27184
- Chlorophyll sensitized solar photovoltaic cell with cuprous iodide electrode  
p0254 A81-28936
- PBI treated polypropylene battery separator  
p0379 N81-21512
- ELECTROMAGNETIC COMPATIBILITY**
- Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic  
[DOE/ER-0096] p0207 N81-21642
- ELECTROMAGNETIC INTERACTIONS**
- Effects of a satellite power system on ground-based radio and radar astronomy  
p0216 A81-22838
- ELECTROMAGNETIC INTERFERENCE**
- SPS fiber optic link assessment  
p0366 N81-16548
- Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic  
[DOE/ER-0096] p0207 N81-21642
- ELECTROMAGNETIC MEASUREMENT**
- Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3  
p0293 A81-22278
- ELECTROMAGNETIC PROPULSION**
- Theory of a conducting MHD motor with a free field  
p0331 A81-21062
- ELECTROMAGNETIC PULSES**
- Pulsed high voltage and high current outputs from homopolar energy storage system  
[AD-A094910] p0377 N81-19575
- ELECTROMAGNETIC RADIATION**
- Solar input and solar data computation for the engineering of solar systems - Transients' simulation  
p0250 A81-27274
- ELECTROMOTIVE FORCES**
- A numerical study of the nonuniform loading of a segmented MHD channel  
p0346 A81-27967
- ELECTRON DENSITY (CONCENTRATION)**
- Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition  
p0346 A81-28217
- ELECTRON DIFFUSION**
- Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells  
p0216 A81-22198
- Variation of diffusion length of ribbon-Si solar cells with light intensity  
p0236 A81-27131
- ELECTRON IRRADIATION**
- DLTS spectra and defect effects on irradiated silicon solar cells --- Deep Level Transient Spectroscopy  
p0244 A81-27203
- GaAs shallow-homojunction solar cells  
p0247 A81-27243
- ELECTRON MICROSCOPY**
- HVEM in situ hydriding of hydrogen storage materials --- High Voltage Electron Microscope  
p0342 A81-25492
- ELECTRON PARAMAGNETIC RESONANCE**
- Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions  
p0294 A81-23495
- Studies of the mechanism of coal hydrogenation by electron spin resonance  
[DOE/PC-30072/T2] p0313 N81-18241
- ELECTRON PHOTON CASCADES**
- Cascade Solar Cell Workshop report  
p0262 A81-17553
- ELECTRON RECOMBINATION**
- Theoretical design considerations for back surface field solar cells  
p0239 A81-27160
- A new method of measuring diffusion length and surface recombination velocity --- for materials effects on solar cell efficiency  
p0239 A81-27164
- High efficiency silicon solar cells  
p0240 A81-27175
- ELECTRON SPECTROSCOPY**
- DLTS spectra and defect effects on irradiated silicon solar cells --- Deep Level Transient Spectroscopy  
p0244 A81-27203
- ELECTRON TRANSFER**
- Efficiency of energy storage in photochemical electron transfer reactions  
p0371 A81-19897
- Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T1] p0315 N81-19258
- ELECTRONIC CONTROL**
- Operational, control and protective system transient analyses of the closed-cycle GT-ET6R power plant --- Gas Turbine High Temperature Gas-cooled Reactor  
[ASME PAPER 80-WA/GT-1] p0331 A81-21096
- Thin film electrochromic materials for energy efficient windows  
[LBL-10862] p0197 N81-18549
- ELECTRONIC EQUIPMENT**
- The USAF Academy flywheel-electric car  
[AD-A095130] p0378 N81-19969
- ELECTRONIC MODULES**
- Circuit design considerations for photovoltaic modules and systems  
p0238 A81-27153
- Advanced module technique with thin solar cells  
p0248 A81-27251
- Influence of module requirements on flat plate module design evolution  
p0251 A81-27279
- ELECTROPLATING**
- An all-plated, low cost contact system for silicon solar cells  
p0243 A81-27197
- Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors  
[DOE/AL-04266/T1] p0268 N81-18537
- Terrestrial photovoltaic system analysis  
[AD-A094827] p0272 N81-19578
- ELECTROSTATIC BONDING**
- Development of glass encapsulation techniques for terrestrial photovoltaic arrays  
p0246 A81-27227
- Integral glass covering of spacecraft solar cells by electrostatic bonding  
p0250 A81-27269
- ELECTROSTATIC PRECIPITATORS**
- A manual for the use of electrostatic precipitators to collect fly ash particles  
[PB81-112757] p0308 N81-17640
- ELECTROSTATICS**
- Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells  
p0217 A81-22872



# SUBJECT INDEX

# ENERGY CONSUMPTION

## EMBRITTLEMENT

Technology for powdered fuel preparation from solid waste p0301 A81-25559

## EMERGENCIES

Energy emergency contingency plan [PB81-128704] p0203 N81-20604

## EMPLOYMENT

Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings [ANL/RES-TM-116] p0383 N81-19611

## ENCAPSULATING

Encapsulation of PV cells using silicone materials p0245 A81-27225  
An improved lamination technique for solar arrays p0245 A81-27226  
Development of glass encapsulation techniques for terrestrial photovoltaic arrays p0246 A81-27227

## ENERGY

Marine biomass: Algae as source of energy [NE/BIO-80/12] p0320 N81-20581

## ENERGY ABSORPTION

Wave-energy extraction by a submerged cylindrical resonant duct p0303 A81-28680  
Head-sea diffraction by a slender raft with application to wave-power absorption p0303 A81-28690

## ENERGY ABSORPTION FILMS

Energy: Solar energy programme of the Commission of the European Communities [EUR-6959-EN] p0263 N81-17593

## ENERGY CONSERVATION

Operational energy conservation strategies in commercial aviation p0185 A81-20465  
The series solar heat pump and energy conservation p0186 A81-25020  
Coal conservation and stabilization during storage p0299 A81-25126  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 9 - Conservation, economics, and policy; Index p0187 A81-25161  
Energy efficiency of electrified passenger railway in the Canadian context p0187 A81-25800  
Oil substitution and energy saving - A research and development strategy of the International Energy Agency /IEA/ p0188 A81-29195  
Energy conservation through process modification and control [ASME PAPER 81-PID-2] p0188 A81-30111  
Foresight. Volume 2: Energy conservation in cities [GPO-47-454] p0190 N81-16527  
A framework for developing a national energy conservation program [EMD-79-76] p0190 N81-16531  
How the petroleum refining industry approaches energy conservation. A case study [EMD-80-55] p0190 N81-16532  
Housing authority of Baltimore City-Public Housing Energy Workshop [NASA-TM-82050] p0190 N81-16569  
Performance of a solar-heated assembly building at Sandia National Laboratories [SAND-80-0599] p0258 N81-16593  
Residential energy efficiency standards study: Technical analysis [PB81-106981] p0191 N81-16611  
Analysis of residential duct losses [PB80-228000] p0191 N81-16614  
Technology assessments in transportation: Survey of recent literature --- and bibliography [ANL/CHSV/TM-44] p0192 N81-16958  
Support for the analytical tools for automotive fuel economy activities [PB81-109555] p0192 N81-17445  
Military wastes-to-energy applications [AD-A093042] p0193 N81-17578  
Cost-energy dynamics: An engineering-economic basis for industrial energy conservation policies [ORAU/IEA-80-12(8)] p0193 N81-17583  
Automotive fuel economy program [DOT-HS-805-279] p0195 N81-17959

Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base [AD-A094226] p0196 N81-18050  
Military wastes-to-energy applications p0314 N81-18483  
US Department of Energy thermal energy storage program [CONF-801154-1] p0196 N81-18510  
Optimized design of total energy systems: The BETE project [CISE-1606] p0196 N81-18512  
Development of economic house type based upon passive solar energy utilization and energy conservation for high density urban planning [DOE/ES-10104/1] p0196 N81-18514  
Economic application, design analysis, and material availability for ceramic heat exchangers [ORNL/TM-7580] p0196 N81-18528  
Thin film electrochromic materials for energy efficient windows [LBL-10862] p0197 N81-18549  
An evaluation of NASA's program for improving aircraft fuel efficiency [NASA-CR-164015] p0198 N81-19110  
Analysis of alternative strategies for energy conservation in new buildings [PBL-3309] p0199 N81-19353  
Development of a prototype heat engine for energy conservation [DOE/OR-06028/T6] p0199 N81-19589  
The a priori decision in solar energy and conservation economics p0278 N81-20558  
Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 1: Main report [NP-25187-VOL-1] p0203 N81-20563  
Development of method and equipment for energy recovery from the exhaust gases of the oil-fueled smelting and holding furnaces [STU-78-6895] p0203 N81-20573  
Energy emergency contingency plan [PB81-128704] p0203 N81-20604  
Solar space and water heating system at Stanford University, Central Food Services Building [DOE/CS-31522/T1] p0283 N81-21603  
The economics of residential energy efficiency [PBL-SA-8696] p0206 N81-21624  
Improved data and procedures needed for development and implementation of building energy performance standards [PB81-138422] p0206 N81-21630  
**ENERGY CONSUMPTION**  
An energy used model of the residential sector p0185 A81-21022  
Application analysis of photovoltaic systems for service/commercial/institutional and industrial sectors p0233 A81-27106  
Energy conservation through process modification and control [ASME PAPER 81-PID-2] p0188 A81-30111  
Energy supply and demand properties from engineering process models [EFRI-8A-1568] p0191 N81-16603  
Residential energy efficiency standards study: Technical analysis [PB81-106981] p0191 N81-16611  
Decentralized energy studies: Compendium of international studies and research [SERI/RR-744-451] p0193 N81-17582  
Energy: Economic activity and energy demand; link to energy flow. Example: France [EUR-6773-EN] p0194 N81-17597  
End use energy consumption data base: Transportation sector [PB81-112203] p0194 N81-17610  
Energy choices in a democratic society [PB81-114852] p0197 N81-18563  
Analysis of alternative strategies for energy conservation in new buildings [PBL-3309] p0199 N81-19353  
The US Air Force Academy solar energy research project summary report [AD-A094802] p0199 N81-19576  
Appliance energy efficiency in new home construction [DOE/CS-23999/T1] p0200 N81-15608

## ENERGY CONVERSION

## SUBJECT INDEX

- An optimal control approach to energy minimization in electric vehicles --- boundary value methods [REPT-103] p0201 N81-19972
- Energy and materials flows in the production of olefins and their derivatives [ANL/CNSV-9] p0203 N81-21161
- Future US energy supply: Constraints by nonfuel mineral resources [ORNL-5656] p0204 N81-21467
- Study of fuel cell on-site, integrated energy systems in residential/commercial applications [NASA-CR-165144] p0361 N81-21533
- Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation [SOLAR/2029-80/14] p0281 N81-21555
- US energy consumption and supply [UCID-18856] p0204 N81-21565
- Current and future industrial energy service characterizations, volume 1 [SERI/TR-733-790-VOL-1] p0206 N81-21618
- Survey of US industrial process heat usage distributions [SAND-80-8234] p0206 N81-21622
- Regional analysis of residential/commercial gas demand [PB81-134496] p0206 N81-21631
- ENERGY CONVERSION**
- Fuel cells - A survey. I p0333 A81-22400
- Direct conversion of chemical energy to electrical energy p0337 A81-23901
- Engineering development of a HICSOs chemical heat pump --- Hydride Conversion and Storage System p0287 A81-25017
- Metal hydrides in energy conversion systems p0342 A81-25480
- The oxygen electrode - A major problem in energy conversion p0342 A81-25608
- An investigation on Tehran municipal solid waste with the view of electricity generation p0302 A81-26474
- Rectenna system design --- energy conversion solar power satellites p0257 N81-16559
- Compressed Air Energy Storage Technology Program overview [PUL-SA-8988] p0376 N81-16600
- Pyrolytic oils: Characterization and data development for continuous processing [PB81-110959] p0306 N81-17294
- Development of catalysts for coal conversion [PB81-111395] p0307 N81-17296
- Decentralized energy studies: Compendium of international studies and research [SERI/RR-744-451] p0193 N81-17582
- Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage [PB81-114324] p0376 N81-17618
- Cell module and fuel conditioner [NASA-CR-165189] p0354 N81-18494
- Biosources digest, a journal on biomass utilization, volume 2, number 3, July 1980 [PB81-123952] p0317 N81-19340
- Energy balances in the production and end-use of alcohols derived from biomass [PB81-125585] p0317 N81-19342
- Cell module and fuel conditioner development [NASA-CR-165190] p0357 N81-19573
- Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs [DOE/EV-0115] p0201 N81-19655
- Thermionic Energy Conversion (TEC) topping thermoelectrics [NASA-TA-81677] p0359 N81-19920
- Coal conversion 1979 technical report [DOE/FE-0010] p0319 N81-20297
- Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter [DOE/EA-26961/01] p0378 N81-20575
- Basic research on ceramic materials for energy storage and conversion systems [COO-2564-6] p0361 N81-21207
- Energy from biological processes. Volume 2: Technical and environmental analyses [PB81-134769] p0323 N81-21233
- Technology development for phosphoric acid fuel cell powerplant (phase 2) [NASA-CR-165316] p0362 N81-21547
- Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148] p0282 N81-21575
- Wind energy systems information user study [SERI/TR-751-749] p0363 N81-21578
- Wind energy integration study [DOE/BP-10552/17] p0205 N81-21593
- Aerodynamic characteristics of the TARP (Toroidal Accelerator Rotor Platform) wind energy conversion system [PB81-140675] p0364 N81-21632
- The Leabost Wind Turbine experimental program [PB81-141467] p0364 N81-21634
- Environmental overview for the development of geothermal resources in the state of New Mexico [UCRI-15317] p0206 N81-21639
- ENERGY CONVERSION EFFICIENCY**
- New method for maximum power consideration in solar cells with and without resistive losses p0209 A81-19951
- Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells p0209 A81-20008
- Interactions of efficiency and material requirements for terrestrial silicon solar cells p0210 A81-20295
- Feasibility of the inflow disk generator for open-cycle MHD power generation [AIAA PAPER 81-0250] p0330 A81-20700
- Performance of solar collectors - An evaluation of standard ratings [ASME PAPER 80-WA/SOL-1] p0211 A81-21129
- Binary Rankine-cycle engines for solar-thermal power systems [ASME PAPER 80-WA/SOL-19] p0332 A81-21143
- Operational characterization of the solar-thermal power system near Willard, New Mexico [ASME PAPER 80-WA/SOL-39] p0214 A81-21159
- Electrochemical semiconductor solar energy converters p0215 A81-21674
- Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems p0215 A81-21954
- The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states p0215 A81-22155
- Two-dimensional analysis of the interdigitated back-contact solar cell p0216 A81-22197
- Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size p0293 A81-22273
- The potential for solar space heating in Scotland p0217 A81-22898
- The efficiency of conical pellets for laser fusion p0294 A81-23227
- Flux pump excited brushless alternator p0334 A81-23436
- A Fresnel-Winston tandem concentrator system p0218 A81-23497
- Design and efficiency estimation of a thermochemical system of hydrogen production p0285 A81-23531
- The solar pond - A collector and store of solar energy p0219 A81-23701
- Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination p0219 A81-23803
- Polycrystalline Zn3P2 Schottky barrier solar cells p0220 A81-24414
- Merocyanine-dye photovoltaic cell on a plastic film p0220 A81-24444
- High temperature solar reactors for hydrogen production p0286 A81-24557
- Performance calculation of a vertical-axis wind power converter p0337 A81-24617
- Theoretical efficiency of S/p+ -n/IS solar cells p0221 A81-24801

# SUBJECT INDEX

# ENERGY CONVERSION EFFICIENCY CONTD

- Optimum cell size for concentrated-sunlight silicon solar cells p0221 A81-24802
- Method for evaluation of antireflection coatings p0221 A81-24804
- Temperature dependence for the power outputs of n-CdSe liquid junction cells p0222 A81-24823
- The sea trial of the wave power generator 'Kaimai' p0338 A81-24975
- A simulated comparison of the useful energy gain in fixed and tracking flat plate and evacuated tube collectors p0222 A81-24978
- Investigations on the prediction of thermal performance of compound parabolic concentrators p0223 A81-24989
- Performance of a solar heating system on the LSU Field House determined from test data p0226 A81-25033
- Domestic utilization of solar energy in the Michigan area p0226 A81-25034
- Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy p0227 A81-25039
- New solar still /the wiping spherical still/ - Design and experimentation p0227 A81-25042
- Prospects for developing an efficient photoemissive solar cell p0228 A81-25049
- Solar thermionic power plant. II p0228 A81-25057
- Study of combined /photovoltaic-thermal/ solar energy systems p0228 A81-25059
- Wind energy conversion in the MW range p0339 A81-25076
- Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal p0341 A81-25119
- The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources p0342 A81-25131
- Fusion reactors for hydrogen production via electrolysis p0287 A81-25139
- Overall efficiencies for conversion of solar energy to a chemical fuel p0288 A81-25148
- A study of a commercial MHD power plant scheme p0342 A81-25381
- Energy efficiency of electrified passenger railway in the Canadian context p0187 A81-25800
- Dynamic matching of a solar-electrical /photovoltaic/ system - An estimation of the minimum requirements on the matching system p0229 A81-26373
- Optimum operation of a combined system of a solar cell array and a dc motor p0229 A81-26374
- Liquid nitrogen as an energy source for an automotive vehicle p0345 A81-26881
- 11.5% solar conversion efficiency in the photocathodically protected p-InP/V<sub>3</sub>+/V<sub>2</sub>+/HCl/C semiconductor liquid junction cell p0230 A81-27014
- Development of processes for the production of low cost silicon dendritic web for solar cells p0231 A81-27080
- Ultra high speed growth of silicon ribbons for solar cells p0231 A81-27081
- Continuous coating of silicon-on-ceramic p0231 A81-27083
- Substrate related problems in SBD solar cells --- Ribbon Against Drop p0231 A81-27084
- Epitaxial solar cells on metallurgical grade silicon substrates p0231 A81-27085
- Behavior of interdigitated back-contact solar cells p0231 A81-27086
- A two-dimensional model of an MIS inversion layer solar cell p0232 A81-27088
- Silicon solar cells with high open-circuit voltage p0232 A81-27089
- Compatibility of BSR and BSF solar cell technology --- Back Surface Reflector and Back Surface Field p0232 A81-27093
- High efficiency wraparound contact solar cells /HEWACS/ p0232 A81-27094
- New developments in vertical junction silicon solar cells p0232 A81-27095
- Improved performance from thin film dielectric wraparound solar cells p0233 A81-27100
- Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110
- An overview of amorphous silicon solar-cell development p0234 A81-27111
- Evaluation and optimization of silicon sheet solar cells p0234 A81-27114
- Transport properties in 100 nm CZ silicon --- Czochralski p0234 A81-27115
- Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible p0234 A81-27116
- Recent progress in the development of the cascade solar cell p0235 A81-27118
- Low bandgap /0.7 to 1.1 eV/ solar cells in the GaInSb/GaSb system p0235 A81-27119
- Performance losses in high-efficiency monolithic multijunction solar cells p0235 A81-27120
- Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 A81-27125
- Ion implanted grating type Si solar cells - Junction depth dependence p0235 A81-27126
- Design considerations for high efficiency polycrystalline silicon MIS solar cells p0236 A81-27127
- Vacuum deposited polycrystalline silicon solar cells for terrestrial use p0236 A81-27128
- High efficiency silicon concentrator cells p0236 A81-27132
- Characterization of p+/nn/+ BSF silicon concentrator solar cells --- Back Surface Field p0236 A81-27133
- A low series resistance silicon photovoltaic cell for high intensity applications p0236 A81-27134
- The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight p0237 A81-27135
- Effects of nonuniform illumination on the performance of silicon concentrator solar cells p0237 A81-27136
- Design of metallization for higher-efficiency solar cells p0237 A81-27137
- Investigation of Cu<sub>2</sub>O solar cells p0237 A81-27140
- The spectral irradiance of some solar simulators and its effect on cell measurements p0238 A81-27147
- The energy balance associated with the use of a maximum power tracer in a 100-W-peak power system p0238 A81-27152
- Concepts for GaAs/AlGaAs solar cells with valley-transferred electrons for voltage and efficiency enhancement p0238 A81-27154
- Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing p0238 A81-27156

# ENERGY CONVERSION EFFICIENCY CONTD

# SUBJECT INDEX

- Designing practical silicon solar cells  
approaching the 'limit conversion efficiency'  
p0239 A81-27159
- Theoretical design considerations for back surface  
field solar cells  
p0239 A81-27160
- Theoretical limit efficiency of direct gap solar  
cells  
p0239 A81-27162
- A new method of measuring diffusion length and  
surface recombination velocity --- for materials  
effects on solar cell efficiency  
p0239 A81-27164
- Majority carrier conduction effects in ITO/SIS  
solar cells --- Indium Titanium  
Oxide/Semiconductor-Insulator-Semiconductors  
p0239 A81-27166
- Progress toward large area amorphous silicon solar  
cells  
p0240 A81-27167
- The CdSe thin-film solar cell  
p0240 A81-27168
- ZnO films and ZnO/CdTe heterojunctions prepared  
using spray pyrolysis  
p0240 A81-27169
- Thin polycrystalline Zn3P2 films for photovoltaic  
cells  
p0240 A81-27170
- Indium phosphide films for photovoltaic devices  
p0240 A81-27173
- Space solar cells - High efficiency and radiation  
damage  
p0240 A81-27174
- High efficiency silicon solar cells  
p0240 A81-27175
- Review of physics underlying recent improvements  
in silicon solar-cell performance  
p0241 A81-27176
- Laser processing for high-efficiency silicon solar  
cells  
p0241 A81-27177
- Growth and evaluation of CdS and /CdZn/S films for  
the fabrication of high performance photovoltaic  
devices  
p0241 A81-27180
- Cu2S-CdS sprayed solar cells  
p0241 A81-27181
- Cells and modules for linear P.V. concentrator  
systems with forced cooling  
p0242 A81-27186
- Optimization of a photovoltaic receiver for a  
parabolic trough concentrator  
p0242 A81-27187
- Low-cost, high-performance, point-focus  
concentrator array design  
p0242 A81-27189
- Efficiency and stability of experimental  
fluorescent planar concentrators /FPC/  
p0242 A81-27190
- Minimizing end shadowing effects on parabolic  
concentrator arrays  
p0242 A81-27191
- Design and operation of the Solarex two-axis  
tracking linear concentrating collector system  
p0243 A81-27193
- Screenable silver and base metal solar cell contacts  
p0243 A81-27195
- High performance BSF silicon solar cell with fire  
through contacts printed on AR coating --- Back  
Surface Field  
p0243 A81-27198
- Silicon solar cells realized by laser induced  
diffusion of deposited antimony  
p0244 A81-27202
- Influence of processing on the electrical  
performance of proton irradiated silicon solar  
cells  
p0244 A81-27205
- The outlook for thin solar cells  
p0245 A81-27217
- Low cost processes for fabricating silicon solar  
cells  
p0245 A81-27218
- Encapsulation of PV cells using silicone materials  
p0245 A81-27225
- Development of glass encapsulation techniques for  
terrestrial photovoltaic arrays  
p0246 A81-27227
- Energy storage in grid-connected applications  
p0375 A81-27233
- Short circuit currents and collection efficiencies  
in a-SiHx solar cells  
p0246 A81-27235
- Design of monolithic, multiple-gap, amorphous  
Si-Ge solar cells  
p0247 A81-27236
- Proposed design of a-Si:H solar cells using  
ultrathin active layer to increase conversion  
efficiency  
p0247 A81-27237
- Optimum design and device physics of the  
horizontally multilayered high voltage solar  
cells produced by plasma deposited amorphous  
silicon  
p0247 A81-27238
- Design and qualification of BSE-solar cells for  
future solar arrays --- Back-Side-Reflection  
p0248 A81-27250
- Low-cost high-efficiency SnO2/n+/p Si heteroface  
solar cell fabricated by paint-on-diffusant method  
p0249 A81-27259
- Photovoltaic behavior of amorphous silicon-based  
alloys  
p0249 A81-27263
- High efficiency solar panel - Phase II  
p0250 A81-27270
- Optimisation of total annual energy output from  
constant/adjustable tilt solar PV arrays  
p0250 A81-27273
- Qualification test results for DOE solar  
photovoltaic flat panel procurement - PRDA 38  
p0251 A81-27278
- Efficient large-grained GaAs homojunction solar  
cells  
p0251 A81-27285
- Chemistry and preparation of III-V heterojunction  
solar cells  
p0252 A81-27288
- High efficiency MIS/inversion layer silicon solar  
cells  
p0252 A81-27290
- A 14 percent efficiency SnO/x-SiO2/n/Si solar cell  
p0252 A81-27294
- Semiconductor-insulator-semiconductor /SIS/ solar  
cells - Indium-tin-oxide on silicon  
p0252 A81-27295
- Second law analysis and synthesis of solar  
collector systems  
p0253 A81-27554
- Salt gradient solar pond with reflective bottom -  
Application to the 'saturated' pond  
p0254 A81-27570
- Dependence of efficiency of shallow junction  
silicon solar cells on substrate doping  
p0254 A81-27616
- Theoretical advantages of pn/+/-type Cu2S-ZnO  
solar cell  
p0346 A81-28395
- The possibilities of improving the efficiency of  
gas turbines  
p0346 A81-28614
- Theoretical analysis of simplified four wavelength  
division solar cell system  
p0254 A81-28926
- High efficiency 1.43 and 1.69 eV band gap  
Ga/1-x/Al/x/As-GaAs solar cells for multicolour  
applications  
p0255 A81-28958
- Optimization of fin and tube parameters in a  
flat-plate collector  
p0255 A81-29032
- Solid-state power conversion - A Fourier analysis  
approach to generalized transformer synthesis  
p0347 A81-29243
- Simplified methods for analyzing the performance  
of parabolic dish systems  
p0255 A81-29252
- Dynamic behavior of a natural circulation loop for  
a solar collector  
p0256 A81-29261
- Effect of zinc impurity on silicon solar-cell  
efficiency  
p0256 A81-29290
- Wellbore flow characteristics for optimal energy  
recovery from Gulf Coast geopressured geothermal  
sources  
[ASME PAPER 81-PET-18]  
p0350 A81-30112

## SUBJECT INDEX

## ENERGY POLICY

Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources [ASME PAPER 81-PET-5] p0350 A81-30114

Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels [NASA-TN-81611] p0351 A81-16571

Design, fabrication, test, qualification and price analysis for third generation design solar cell modules [NASA-CR-163917] p0257 A81-16576

Design, fabrication, and performance of a 20 percent efficient silicon solar cell [SAND-80-2225] p0258 A81-16592

Research on high efficiency cascade solar cells [SERI/PR-8136-T11] p0258 A81-16595

Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4745] p0259 A81-16606

Ultra headless hydro power [SLAC-PUB-2613] p0352 A81-16609

Development of a high efficiency thin silicon solar cell [NASA-CR-163931] p0259 A81-17522

NASA's high efficiency and radiation damage solar cell program p0260 A81-17532

Solar power R and D for Air Force space requirements p0260 A81-17533

Recent progress in high-output-voltage silicon solar cells p0260 A81-17534

Computer modeling of high-efficiency solar cells p0260 A81-17537

Status of Rockwell-ERC high efficiency solar cell programs p0261 A81-17546

Results of the Air Force high efficiency cascaded multiple bandgap solar cell programs p0261 A81-17548

AlGaAs-GaAs cascade solar cell p0261 A81-17550

Fabrication of AlGaAs/GaAs cascade solar cell by LPE p0262 A81-17551

OM-VPE grown materials for high efficiency solar cells p0262 A81-17552

Cascade Solar Cell Workshop report p0262 A81-17553

Silicon solar cell optimization [AD-A092908] p0263 A81-17579

Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 A81-18493

Regional conversion to coal [PE-2468-63] p0314 A81-18517

Some basic considerations and possible improvements on the solar pond [ANL-CT-80-23] p0268 A81-18540

Thin-film flat-plate solar collectors for low cost manufacture and installation [DNL-51124] p0269 A81-18545

Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant [DOE/CS-56604/T1] p0355 A81-18546

Midtemperature Solar Systems Test Facility Program for predicting thermal performance of line-focusing, concentrating solar collectors [SAND-80-1964] p0269 A81-18551

Fabrication and testing of MIS solar cells on a-Si:F:H [SERI/TR-8041-9-T1] p0269 A81-18552

Thin film polycrystalline silicon solar cells [SERI/PR-9192-1-T2] p0269 A81-18557

Solar/hydro integration study [DOE/SP-10505/4] p0355 A81-18558

Silicon solar cell design for medium concentration applications p0270 A81-18564

Optimization of distribution transformer efficiency characteristics [DOE/ET-29298/T1] p0356 A81-19402

Highly efficient welding power supply [DOE/CS-40023/T2] p0199 A81-19404

Classification and evaluation of electric motors and pumps [DOE/TIC-11339] p0199 A81-19463

Electrochemical photovoltaic cells [SERI/TR-8002-5-T1] p0272 A81-19582

Solar/performance goals for solar and ground-coupled heat pump systems [BNL-51259] p0273 A81-19609

Mod 2 wind turbine development project [SERI/SP-732-728] p0358 A81-19619

Analysis of data from the Gedser wind turbine: 1977 to 1979 [RISOR-M-2242] p0359 A81-19637

Thermionic Energy Conversion (TEC) topping thermoelectrics [NASA-TN-81677] p0359 A81-19920

Improvements in the electrolytic generation of hydrogen p0291 A81-20287

Review of fusion synfuels [BNL-28627] p0291 A81-20300

LSA field test [NASA-CR-164083] p0276 A81-20544

The 10-kilowatt photovoltaic concentrator array fabrication [SAND-80-7062] p0279 A81-20599

Lightweight composite cadmium electrodes p0379 A81-21510

Applications study of advanced power generation systems utilizing coal-derived fuels. Volume 1: Executive summary [NASA-CR-161691] p0362 A81-21538

Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2 [NASA-CR-161692] p0362 A81-21539

Amorphous thin films for solar-cell applications [SERI/PR-0-8254-F] p0283 A81-21591

Chalcogenide-glass solar cells [DOE/ET-23043/T1] p0284 A81-21608

Measuring dirt on photovoltaic modules, part 2 [COO-4094-86-PT-2] p0284 A81-21609

**ENERGY DISSIPATION**

The utilization of the free and at present dissipated gravitational force inherent in tidal motion by conversion to electrical energy, using compressed air as the active intermediary p0339 A81-25083

Charge exchange and energy loss of carbon ions in air-plasma channels --- in inertial fusion reactor p0344 A81-26570

A numerical approach for the prediction of the front losses of a flat-plate solar collector p0255 A81-29255

Analysis of residential duct losses [PB80-228000] p0191 A81-16614

Pump heat loss test report --- solar collector systems [SAND-80-2526] p0273 A81-19614

**ENERGY GAPS (SOLID STATE)**

Comparison of solar cell performance to calculations using different energy band-gap narrowing models p0217 A81-22861

Low bandgap /0.7 to 1.1 eV/ solar cells in the GaInAsSb/GaSb system p0235 A81-27119

Theoretical limit efficiency of direct gap solar cells p0239 A81-27162

Design of monolithic, multiple-gap, amorphous Si-Ge solar cells p0247 A81-27236

Optical absorption by gap states in amorphous silicon p0249 A81-27265

High efficiency 1.43 and 1.69 eV band gap Ga<sub>1-x</sub>Al<sub>x</sub>As-GaAs solar cells for multicolour applications p0255 A81-28958

**ENERGY POLICY**

Energy analysis of four geothermal technologies p0185 A81-19848

Status of commercial phosphoric acid fuel cell system development [AIAA PAPER 81-0396] p0330 A81-20805

Large wind-turbine projects in the United States wind energy program p0335 A81-23694

The DOE photovoltaic program - An overview p0228 A81-25055

- Alternative energy sources II; Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 5 -  
Geothermal power/energy program p0187 A81-25088
- Hot Dry Rock Geothermal Energy Development Program  
p0297 A81-25091
- Indian energy sources in 1980's p0187 A81-25098
- Alternative energy sources II; Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 9 -  
Conservation, economics, and policy; Index  
p0187 A81-25161
- The U.S. National Photovoltaic Program p0188 A81-27212
- Oil substitution and energy saving - A research  
and development strategy of the International  
Energy Agency /IEA/ p0188 A81-29195
- Energy conservation through process modification  
and control p0188 A81-30111
- [ASME PAPER 81-PID-2] p0188 A81-30111
- Making windpower an important part of a national  
energy plan p0189 A81-30113
- [ASME PAPER 81-PET-11] p0189 A81-30113
- Overview of unconventional energy projects in the  
public power sector p0189 A81-30118
- [ASME PAPER 81-DGP-1] p0189 A81-30118
- October report on the current fuel situation from  
the Energy Information Administration p0189 A81-16311
- [GPO-60-871] p0189 A81-16311
- The Indian Lands Study: An example of the  
application of geographic research to the  
analysis of complex energy and environmental  
policy issues --- strip mining and oil  
exploration effects on tribal culture and  
economics p0189 A81-16510
- National Academy of Sciences report: Energy in  
transition, 1985-2010 p0189 A81-16524
- [GPO-61-647] p0189 A81-16524
- Wind energy systems act of 1980 p0190 A81-16525
- [R-EEET-96-1217] p0190 A81-16525
- Foresight. Volume 2: Energy conservation in cities  
[GPO-47-454] p0190 A81-16527
- Solar power satellite system p0190 A81-16530
- [NASA-CASE-HQS-10949-1] p0190 A81-16530
- A framework for developing a national energy  
conservation program p0190 A81-16531
- [EMD-79-76] p0190 A81-16531
- Design and breadboard evaluation of the SPS  
reference phase control system concept p0366 A81-16543
- Coherent multiple tone technique for ground based  
SPS control p0366 A81-16544
- An interferometer-based phase control system  
p0366 A81-16545
- A sonic satellite power system microwave power  
transmission simulation p0366 A81-16546
- SPS phase control studies p0366 A81-16547
- SPS fiber optic link assessment p0366 A81-16548
- Ionospheric effects in active retrodirective array  
and mitigating system design p0366 A81-16549
- High efficiency SPS klystron design p0366 A81-16550
- High efficiency klystron for the SPS  
application p0366 A81-16551
- Analytical investigation of efficiency and  
performance limits in klystron amplifiers using  
multidimensional computer programs; multi-stage  
depressed collectors; and thermionic cathode  
life studies p0367 A81-16552
- The adapting of the crossed-field directional  
amplifier to the requirements of the SPS  
p0367 A81-16553
- Housing authority of Baltimore City-Public Housing  
Energy Workshop p0190 A81-16569
- [NASA-TM-82050] p0190 A81-16569
- Off-design analysis of a gas turbine  
powerplant augmented by steam injection using  
various fuels p0351 A81-16571
- [NASA-TM-81611] p0351 A81-16571
- Dish Stirling solar receiver program  
[NASA-CR-163889] p0257 A81-16574
- Criteria for evaluation of reflective surface for  
parabolic dish concentrators p0258 A81-16581
- [NASA-CR-163898] p0258 A81-16581
- Energy in transition, 1985-2010 p0190 A81-16585
- [GPO-63-171] p0190 A81-16585
- Environmental influences in the simulation of a  
solar space heating system p0190 A81-16587
- [AD-A092436] p0190 A81-16587
- Laboratory studies of hard rock for CAES  
[PHL-SA-8971] p0375 A81-16599
- Compressed Air Energy Storage Technology Program  
overview p0376 A81-16600
- [PHL-SA-8988] p0376 A81-16600
- Energy, helium, and the future, 2 p0191 A81-16605
- [LA-UR-80-3342] p0191 A81-16605
- Ultra headless hydro power p0352 A81-16609
- [SLAC-PUB-2613] p0352 A81-16609
- The NBS Energy Model Assessment project: Summary  
and overview p0191 A81-16612
- [PB81-105082] p0191 A81-16612
- Analysis of residential duct losses p0191 A81-16614
- [PB80-228000] p0191 A81-16614
- Municipal solid waste to energy act of 1979  
[GPO-60-684] p0192 A81-16956
- Hydrogasification of oil shale p0306 A81-17292
- [PB81-114092] p0306 A81-17292
- Pyrolytic oils: Characterization and data  
development for continuous processing p0306 A81-17294
- [PB81-110959] p0306 A81-17294
- Obtaining improved products from the organic  
fraction of municipal solid waste p0307 A81-17295
- [PB81-110918] p0307 A81-17295
- Development of catalysts for coal conversion  
[PB81-111395] p0307 A81-17296
- Marine Biomass Program p0307 A81-17297
- [PB81-113185] p0307 A81-17297
- Solar energy receiver for a Stirling  
engine p0259 A81-17518
- [NASA-CASE-NPO-14619-1] p0259 A81-17518
- Central station market development strategies for  
photovoltaics p0193 A81-17520
- [NASA-CR-163947] p0193 A81-17520
- Automated array assembly task development of  
low-cost polysilicon solar cells p0259 A81-17521
- [NASA-CR-163939] p0259 A81-17521
- A conceptual design study of a high temperature  
solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 A81-17523
- Low cost solar array project silicon materials  
task. Development of a process for high  
capacity arc heater production of silicon for  
solar arrays p0260 A81-17525
- [NASA-CR-163943] p0260 A81-17525
- The development and utilization of solar  
photovoltaic cells: An assessment of the  
potential for a new energy technology p0193 A81-17526
- [NASA-TM-58229] p0193 A81-17526
- The GaAs solar cell research and development  
programs of the Air Force p0260 A81-17542
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge  
solar cell technology using OM/CVD p0261 A81-17543
- Study of process technology for GaInAs/GaAs  
heteroface solar cells p0261 A81-17544
- High efficiency compound semiconductor  
concentrator photovoltaics p0261 A81-17545
- Status of Rockwell-ERC high efficiency solar cell  
programs p0261 A81-17546
- GaAs workshop report p0261 A81-17547
- Results of the Air Force high efficiency cascaded  
multiple bandgap solar cell programs p0261 A81-17548
- Incorporation of superlattice crystal layers in  
multijunction solar cells p0261 A81-17549
- AlGaAs-GaAs cascade solar cell p0261 A81-17550
- Fabrication of AlGaAs/GaAs cascade solar cell by LPE  
p0262 A81-17551
- QM-VPE grown materials for high efficiency solar  
cells p0262 A81-17552

# SUBJECT INDEX

# ENERGY POLICY CONTD

- Characterization of solid waste conversion and cogeneration systems  
[DOE/EV-0105] p0307 N81-17585
- Fuels and chemicals made from solar energy:  
Options for the 1990's and beyond  
[DOE/CS-21051/01] p0263 N81-17586
- Community energy auditing: Experience with the comprehensive community energy management program  
[ANL/CNSV/TM-43] p0193 N81-17588
- Capital cost estimates of selected advanced thermal energy storage technologies  
[ANL/SPG-11] p0376 N81-17590
- Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30384/1] p0263 N81-17592
- Ocean Thermal Energy Conversion Power System Development: PSD-I, phase 2  
[DOE/ET-21039/1] p0353 N81-17594
- Photoelectronic properties of zinc phosphide crystals, films and heterojunctions  
[SERI/PR-8031-1-T2] p0264 N81-17595
- Program plan for reliability and maintainability in active solar heating and cooling systems  
[DOE/CS-36010/01] p0264 N81-17596
- US solar energy policy for less developed countries  
[DOE/CS-10048/T1] p0194 N81-17598
- Carbon monoxide: Resource of the future  
[BNL-28576] p0307 N81-17603
- Residential use of photovoltaics  
[DOE/ET-20279/109] p0264 N81-17604
- Study of seed-reprocessing systems for open-cycle coal-fired MHD power plants.  
[DOE/ET-15613/T1-APP] p0353 N81-17606
- Development of sodium/sulfur batteries --- as storage batteries  
[BNFT-PB-T-79-60] p0376 N81-17607
- Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany  
[BNFT-PB-T-79-94] p0264 N81-17609
- Energy/economic model analysis. Volume 1: Gas technology assessments using three energy supply/demand integrating models  
[PB81-114225] p0194 N81-17611
- Energy/economic model analysis. Volume 2: Evaluation of energy supply/demand integrating models  
[PB81-114233] p0194 N81-17612
- Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies  
[PB81-114258] p0194 N81-17613
- Energy/economic model analysis. Energy economic modeling system  
[PB81-114274] p0194 N81-17614
- Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 N81-17615
- Energy/economic model analysis. Livermore energy policy model  
[PB81-114266] p0194 N81-17616
- Survey of EPA facilities for solar thermal energy applications  
[NASA-CR-162469] p0265 N81-17617
- Energy policy and research planning. Citations from the NTIS data base  
[PB81-800112] p0195 N81-17620
- A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 N81-17644
- Introduction to meteorological measurements and data handling for solar energy applications  
[DOE/ER-0084] p0265 N81-17681
- Automotive fuel economy program  
[DOT-HS-805-279] p0195 N81-17959
- Verification test of jet industries Electra-Van 1000P  
[AD-A093738] p0376 N81-17961
- Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles  
[UCRL-15259] p0376 N81-17963
- An evaluation of polycyclic aromatic hydrocarbons from processed oil shales  
p0308 N81-18104
- Flash photolysis studies of the semiconductor/electrolyte interface  
p0265 N81-18114
- Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments  
p0309 N81-18211
- Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 N81-18232
- EDS coal liquefaction process development, phase 4-5 --- donor solvent technique  
[FE-2893-53] p0312 N81-18240
- Hybrid fuels for highway transportation  
[DOE/CS-54240/T1] p0313 N81-18242
- Closed-cycle helium gas turbine for solar tower power plant  
p0353 N81-18247
- Internal combustion engines for alcohol motor fuels: A compilation of background technical information  
[DOE/AF-0001] p0313 N81-18398
- High temperature thermal energy storage in aquifers with a solar power plant application  
p0377 N81-18486
- Design study of a kinematic Stirling engine for dispersed solar electric power systems  
[NASA-CR-159588] p0265 N81-18492
- Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495
- Heat exchange and solar energy, volume 1 --- conference proceedings, Rhode-Saint-Genese, Belgium, 18 Jan. - 1 Feb. 1980  
[VKI-LS-1980-2-VOL-1] p0266 N81-18499
- General introduction to thermal conversion of solar energy  
p0266 N81-18500
- Meteorological data: Measurement techniques and solar components --- solar radiation, meteorological data  
p0266 N81-18501
- Meteorological data: Treatment of radiation data, test reference year --- solar radiation  
p0266 N81-18502
- Thermal processes in flat plate solar collectors --- conduction, convective radiative heat transfer  
p0266 N81-18503
- Description and thermal performance of corrugated solar collectors --- made of extruded aluminum  
p0266 N81-18504
- Advanced solar collectors (concentrating troughs) --- paraboloid mirrors, mathematical models  
p0267 N81-18505
- A natural convection solar house system --- air heating  
p0267 N81-18506
- US Department of Energy thermal energy storage program  
[CONP-801154-1] p0196 N81-18510
- Regional conversion to coal  
[FE-2468-63] p0314 N81-18517
- Fuel-cells for electric utility and transportation applications  
[BNL-28696] p0354 N81-18518
- Electrochemical photovoltaic cells  
[SERI/PR-9175-1-T2] p0267 N81-18521
- Barstow heliostat mirror glass characterization  
[BNL-3576] p0267 N81-18522
- Solar central receiver systems comparative economics  
[SERI/SP-633-637] p0267 N81-18523
- Reducing US oil vulnerability: Energy policy for the 1980's  
[DOE/PR-0021] p0196 N81-18524
- Wind-power site-screening methodology  
[UCRL-52938] p0314 N81-18526
- Economic application, design analysis, and material availability for ceramic heat exchangers  
[ORNL/TM-7580] p0196 N81-18528
- Task report no. 3. Systems analysis of organic Rankine bottoming cycles  
[PSI-TR-245] p0354 N81-18529
- Indium phosphide/cadmium sulfide thin-film solar cells  
[SERI/PR-8170-1-T2] p0268 N81-18533
- Boston solar retrofits: Studies of solar access and economics  
[DOE/CS-10047/T5] p0268 N81-18538
- Some basic considerations and possible improvements on the solar pond  
[ANL-CF-80-23] p0268 N81-18540
- Assessment of solar options for large power applications  
[BNL-SA-8968] p0268 N81-18542

- Thin-film flat-plate solar collectors for low cost manufacture and installation  
[BNL-51124] p0269 N81-18545
- Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant  
[DOE/CS-56604/T1] p0355 N81-18546
- Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2] p0315 N81-18547
- Thin film electrochromic materials for energy efficient windows  
[LBL-10862] p0197 N81-18549
- Proceedings of the Vertical Axis Wind Turbine (VANT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 N81-18550
- Midtemperature Solar Systems Test Facility Program for predicting thermal performance of line-focusing, concentrating solar collectors  
[SAND-80-1964] p0269 N81-18551
- Photochemical solar energy conversion in surfactant vehicles  
[DOE/ER-10601/1] p0269 N81-18560
- Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TM-6783] p0198 N81-18578
- Example of a favorable policy for space technology transfer to other fields  
p0198 N81-18591
- Development of sweet sorghum as an energy crop. Volume 3: Integration concepts  
[BNI-2054-VOL-3] p0316 N81-19334
- Biomass energy systems program summary. Information current as of September 30, 1979  
[DOE/CS-21059/01] p0317 N81-19337
- Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary --- and water splitting technology  
[BMFT-FB-T-79-121] p0291 N81-19339
- Copper doped polycrystalline silicon solar cell  
[NASA-CASE-MPO-14670-1] p0270 N81-19558
- Satellite Power Study (SPS) concept definition study (Exhibit D). Volume 1: Executive summary  
[NASA-CR-3392] p0271 N81-19562
- Wind energy - how reliable  
[AD-A094988] p0317 N81-19563
- Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator  
[NASA-CR-164038] p0271 N81-19567
- Development of megasonic cleaning for silicon wafers  
[NASA-CR-164011] p0271 N81-19569
- Advanced solar concentrator mass production, operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 N81-19571
- Array automated assembly task low cost silicon solar array project, phase 2  
[NASA-CR-164037] p0272 N81-19572
- Cell module and fuel conditioner development  
[NASA-CR-165190] p0357 N81-19573
- Technical evaluation of gaseous suspensions of graphite for the absorption of concentrated solar radiation  
[EPFL-ITA-6] p0272 N81-19574
- The US Air Force Academy solar energy research project summary report  
[AD-A094802] p0199 N81-19576
- Computer simulation of solar air heating systems using rock bed thermal storage units  
[AD-A094771] p0377 N81-19580
- Electrochemical photovoltaic cells  
[SERI/TR-8002-5-T1] p0272 N81-19582
- Ground Water and Energy: Proceedings of the US Department of Energy's National Workshop  
[CONF-800137] p0199 N81-19584
- Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597
- Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 N81-19598
- Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5] p0200 N81-19599
- Small wind systems technology assessment. State of the art and near term goals  
[RFP-3136/3533/80/18] p0358 N81-19600
- Dunlite model 81/002550 wind turbine generator  
[RFP-3149/3533/80/17] p0358 N81-19601
- Social acceptability of Satellite Power Systems (SPS). The near term outlook  
[DOE/ER-10072/1] p0200 N81-19603
- Solar gasification of carbonaceous materials  
[UCRL-53063] p0272 N81-19605
- Appliance energy efficiency in new home construction  
[DOE/CS-23999/T1] p0200 N81-19608
- Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SERI/TR-351-461-VOL-1] p0273 N81-19618
- Surface-heating greenhouses with waste heated water  
[DOE/ES-10107/T1] p0200 N81-19620
- Optimization of transparent electrode for solar cells  
[SERI/ER-9318-1-T1] p0274 N81-19621
- Transparent glass honeycomb structures for energy loss control  
[UCLA-ENG-8039] p0274 N81-19622
- GaAs (GaAl) as solar cells to be used under concentrated solar light condition  
[EUR-6934-EN] p0274 N81-19625
- Plasma-assisted CVD of fluorinated, hydrogenated amorphous silicon  
[SERI/TR-8041-2-T1] p0274 N81-19629
- Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California  
[EPRI-EM-1654] p0275 N81-19630
- Low cost sprayed CdTe solar cell research  
[DSE-4042-T34] p0275 N81-19631
- Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy  
[DOE/ET-20417/4] p0378 N81-19633
- Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells  
[SAN-3045-3] p0275 N81-19634
- Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IEA, research and development WECS, annex one, subtask A1 --- conference, Stockholm 1980  
[FFA-TN-HU-2218] p0359 N81-19636
- Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-M-2242] p0359 N81-19637
- A 10 kW small solar power station and operations optimization  
[BMFT-FB-T-79-139] p0275 N81-19638
- A solar heating plant in Studsvik: Design and first year operational performance  
[PB81-114480] p0275 N81-19640
- Life-cycle cost manual for the Federal Energy Management Program  
[PB81-136269] p0200 N81-19641
- Continuous heat source model for ground heat storage  
[PB81-122889] p0378 N81-19643
- Swedish energy storage projects 1979: Research-development-full-scale experiments supported by governmental organizations  
[PB81-122947] p0378 N81-19644
- Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain  
[PB81-123861] p0200 N81-19645
- Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 N81-19646
- Local air quality constraints on energy growth, 1985-1990  
[ABL/RES-TM-114] p0201 N81-19653
- Kilauea Iki lava lake experiment plans  
[SAND-80-1653] p0318 N81-19699
- Transport of low energy positive and negative ion beam by permanent magnets  
[LBL-11636] p0359 N81-19888
- An optimal control approach to energy minimization in electric vehicles --- boundary value methods  
[REPT-109] p0201 N81-19972
- The development of synthetic fuels: Department of Defense logistics implications  
[AD-A095713] p0319 N81-20290



- Coal preparation using magnetic separation.  
Volume 5: Evaluation of magnetic coal  
desulfurization concepts  
[EPRI-CS-1517-VOL-5] p0319 N81-20302
- Development of high-temperature turbine subsystem  
technology to a technology readiness status,  
phase 2  
[FE-1806-96] p0360 N81-20440
- Highly efficient welding power supply  
[DOE/CS-40023/T1] p0202 N81-20441
- Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 6, part 1: Cost and  
Programmatic  
[NASA-CR-3397] p0276 N81-20537
- Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG), volume 1  
[NASA-CR-164051] p0202 N81-20538
- Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG). Volume 2, appendix A: Selected DSG  
technologies and their general control  
requirements  
[NASA-CR-164052] p0202 N81-20539
- Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG). Volume 3, appendix B: State of the art,  
trends, and potential growth of selected DSG  
technologies  
[NASA-CR-164054] p0202 N81-20540
- Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG). Volume 4, appendix C: Identification  
from utility visits of present and future  
approaches to integration of DSG into  
distribution networks  
[NASA-CR-164055] p0202 N81-20541
- Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG). Volume 5, appendix D: Cost-benefit  
considerations for providing dispersed storage  
and generation for electric utilities  
[NASA-CR-164053] p0202 N81-20542
- Proceedings of the 16th Project Integration Meeting  
[NASA-CR-164073] p0276 N81-20545
- Heat exchange and solar energy, volume 2 ---  
conference proceedings, Rhode Saint Genese,  
Belgium  
[VKI-LS-1980-2-VOL-2] p0277 N81-20549
- Latent and chemical storage --- solar energy,  
thermochemical storage  
p0277 N81-20550
- The benefits of advanced heat storage systems ---  
solar energy, phase changes, encapsulation, heat  
of fusion  
p0277 N81-20551
- A method to tune the various components of a solar  
heating system --- economic factors and cost  
analysis  
p0277 N81-20552
- Performance of air collector house heating systems  
with rock bed storage --- solar heating  
p0277 N81-20553
- Water systems modeling --- solar collectors and  
heating systems  
p0277 N81-20554
- System modeling using TRSYS computer simulation  
--- solar heating  
p0277 N81-20555
- Thermomechanical solar power/electricity  
generation. Technico-economic problems and  
prospectives of development and application  
p0277 N81-20556
- The a priori decision in solar energy and  
conservation economics  
p0278 N81-20558
- A life-cycle model for solar heating system design  
and economic evaluation Michigan Economic Model  
for Solar Heating (MESB)  
p0278 N81-20559
- The 1980 flywheel technology symposium  
[CONF-801022] p0378 N81-20561
- Study of the potential for cogeneration in Canada:  
Industrial steam turbines. Volume 1: Main report  
[EP-25187-VOL-1] p0203 N81-20563
- Energy out of groundwater  
[HE/BEPV-80/9] p0320 N81-20565
- Optimization of storage in passive solar heating  
systems  
[DOE/CS-35405/T1] p0278 N81-20574
- Marine biomass: Algae as source of energy  
[NE/RIO-80/12] p0320 N81-20581
- Solar collector foundation designs  
[SAND-80-7070] p0279 N81-20582
- Handbook for calculating solar-influenced building  
heat losses  
[SAND-79-2173] p0279 N81-20583
- Development of zinc-bromine batteries for utility  
energy storage  
[DOE/ET-29345/21] p0379 N81-20591
- Wind energy resource atlas. Volume 4: The  
Northeast region  
[FNL-3195-WERA-4] p0321 N81-20592
- Environmental assessment for the satellite power  
system concept development and evaluation  
program. Atmosphere effects  
[DOE/ER-0090] p0203 N81-20598
- Experimental study to define developments for  
terrestrial solar cell generators  
[BMFT-PB-T-79-143] p0279 N81-20600
- Fabrication of amorphous silicon solar cells,  
using an industrial process --- based on a  
nitride plasma reactor  
[LEP-80.638.SHE-689-A] p0280 N81-20602
- Alternative fuels production program  
[DOE/RA-0058/2] p0321 N81-21220
- Comparative analysis of coal use options for  
reducing the dependence of utilities on imported  
oil  
[DOE/RA-12301-T1] p0322 N81-21230
- Energy from biological processes. Volume 3:  
Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 N81-21234
- Energy from biological processes. Volume 3:  
Appendixes. Part B: Agriculture,  
unconventional crops, and selected biomass wastes  
[PB81-134785] p0323 N81-21235
- Energy from biological processes. Volume 3:  
Appendixes. Part C: Selected conversion  
technologies and end use  
[PB81-134793] p0323 N81-21236
- Change-of-pace electric automobile user  
demonstration (COMCAR 2)  
[DOE/TIC-11373] p0379 N81-21359
- Solar options in central Europe. A synthesis of  
solar technology assessment and contemporary  
criteria in 1978-1979  
[IIASA-RR-79-14] p0280 N81-21489
- Effects of accounting rules on utility choices of  
energy technologies in the United States  
[IIASA-RR-80-27] p0204 N81-21490
- Applications study of advanced power generation  
systems utilizing coal-derived fuels. Volume 1:  
Executive summary  
[NASA-CR-161691] p0362 N81-21538
- Applications study of advanced power generation  
systems utilizing coal-derived fuels, volume 2  
[NASA-CR-161692] p0362 N81-21539
- Technology development for phosphoric acid fuel  
cell powerplant (phase 2)  
[NASA-CR-165316] p0362 N81-21547
- Alternative energy facility siting policies for  
urban coastal areas: Executive summary of  
findings and policy recommendations  
[DOE/EV-01528/T1] p0204 N81-21559
- Water supply and demand in an energy  
supply model  
[DOE/EV-10180/2] p0204 N81-21560
- US energy consumption and supply  
[UCID-18856] p0204 N81-21565
- Prospects of fuel cells with alkaline,  
solid-polymer, and superacid electrolytes as  
power sources for electric vehicles  
[LA-UR-81-293] p0363 N81-21572
- Solar energy in Italy: A profile of renewable  
energy activity in its national context  
[SRII/SP-763-718] p0204 N81-21576
- Design and development of Stirling engines for  
stationary power generation applications in the  
500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1] p0363 N81-21581
- Municipal geothermal heat utilization plan for  
Glenwood Springs, Colorado  
[DOE/ID-12049-3] p0324 N81-21585
- Wind energy integration study  
[DOE/BP-10552/17] p0205 N81-21593

## ENERGY REQUIREMENTS

- Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 1: Beluga coal district  
analysis [DOE/EV-73002/1-VOL-1] p0205 N81-21595
- Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 2: Hydroelectric  
development [DOE/EV-73002/1-VOL-2] p0205 N81-21596
- Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 3: Alaska's alternative  
energies and regional assessment inventory update  
[DOE/EV-73002/1-VOL-3] p0205 N81-21597
- High temperature water vapor electrolysis (HOT ELLT)  
--- for hydrogen production [BNFT-PB-T-80-051] p0292 N81-21627
- Improved data and procedures needed for  
development and implementation of building  
energy performance standards [PB81-138422] p0206 N81-21630
- Environmental overview for the development of  
geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 N81-21639
- ### ENERGY REQUIREMENTS
- Classification of bituminous coals - Application  
of the technique of optimal sections in coal  
classification p0293 N81-19847
- Prospective energy sources and their comparison  
with current supplies p0185 N81-21063
- Solar satellites - The trillion dollar question  
p0219 N81-23724
- Physical and chemical processes for latent heat  
storage at low temperatures p0372 N81-24995
- Ammoniated salt heat pump --- using solar energy  
or industrial waste energy for space heating and  
cooling p0372 N81-25019
- In situ and modified in situ recovery of fossil  
fuels p0297 N81-25110
- Photovoltaic intermediate applications p0247 N81-27246
- Overview of unconventional energy projects in the  
public power sector [ASME PAPER 81-DGP-1] p0189 N81-30118
- On-farm production of fuel-alcohol in Mid-America  
technical and economic potential [NASEC-TP-80-009] p0189 N81-16316
- Study of seed-reprocessing systems for open-cycle  
coal-fired MHD power plants. [DOE/ET-15613/T1-APP] p0353 N81-17606
- Energy/economic model analysis. Livermore energy  
policy model [PB81-114266] p0194 N81-17616
- Drivers for light ion fusion --- inertial  
confinement fusion [SAND-80-2432C] p0353 N81-17883
- Compilation of energy efficient concepts in  
advanced aircraft design and operations. Volume  
1: Technical report [AD-A094225] p0196 N81-18051
- Reducing US oil vulnerability: Energy policy for  
the 1980's [DOE/PE-0021] p0196 N81-18524
- Development of an improved degree-day concept by  
analysis of historical weather data for  
predicting energy requirements of buildings p0198 N81-18620
- A reference building approach to building energy  
performance standards for single-family residences  
[PB81-135642] p0201 N81-20318
- Liquefying coal for future energy needs [PB81-135956] p0322 N81-21232
- High energy density batteries for satellite  
applications p0379 N81-21505
- ### ENERGY SOURCES
- Prospective energy sources and their comparison  
with current supplies p0185 N81-21063
- Meteorological aspects of wind energy - Assessing  
the resource and selecting the sites p0295 N81-23690

## SUBJECT INDEX

- Wind energy resource survey methodology p0295 N81-23691
- An investigation of wind-energy prospects in the  
Otago region of New Zealand p0295 N81-23692
- Alternative energy sources II: Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 2 -  
Solar Energy 2 p0381 N81-25004
- Domestic utilization of solar energy in the  
Michigan area p0226 N81-25034
- Wood energy in West Virginia p0297 N81-25066
- Estimating the wind's potential for small scale  
energy generation using available local  
climatological data p0338 N81-25074
- The utilization of the free and at present  
dissipated gravitational force inherent in tidal  
motion by conversion to electrical energy, using  
compressed air as the active intermediary p0339 N81-25083
- Indian energy sources in 1980's p0187 N81-25098
- Alternative energy sources II: Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 7 -  
Hydrocarbon conversion p0297 N81-25109
- The conversion of peat - Recent developments in  
simultaneous dewatering and hydrogenolysis p0298 N81-25116
- Alternative energy sources II: Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 8 -  
Hydrogen energy p0287 N81-25137
- Feasibility study on the Porsche - Optimum design  
of solar collection on a fluctuating base p0288 N81-25149
- Photosynthetic bacteria as alternative energy  
sources Overview on hydrogen production research p0288 N81-25152
- Alternative energy sources II: Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 9 -  
Conservation, economics, and policy; Index p0187 N81-25161
- Energy accounting for solar and alternative energy  
sources p0382 N81-25165
- The Chicago Southwest Supplemental Fuel Processing  
Facility p0300 N81-25552
- Wisconsin Electric's characterization of  
America's refuse-derived fuel p0301 N81-25555
- Eco-Fuel and the Bridgeport facility p0301 N81-25556
- Conversion of organic wastes to oil by reductive  
foraylation p0302 N81-25563
- Wind energy - A utility perspective p0187 N81-26371
- Photovoltaic applications - Past and future p0246 N81-27231
- Use of coal injection and oxygen in a blast  
furnace to produce fuel gas [IDO-10089] p0312 N81-18236
- Groundwater as an alternative energy source for  
space heating and cooling, geothermal heat  
extraction [DOE/TIC-11357] p0320 N81-20571
- ### ENERGY STORAGE
- Efficiency of energy storage in photochemical  
electron transfer reactions p0371 N81-19897
- Perspectives for metal hydride technology p0285 N81-21504
- An evaluation of superconducting magnetic energy  
storage p0371 N81-23439
- Design of the BPA superconducting 30 MJ energy  
storage coil p0371 N81-23450

# SUBJECT INDEX

# ENERGY TECHNOLOGY

- Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling  
p0286 A81-24021
- Hydrogen storage in aluminium-substituted TiFe compounds  
p0287 A81-24560
- Energy storage technology - Environmental implications of large scale utilization  
p0186 A81-24991
- Numerical resolution of the heat transfer equations in a latent heat solar energy storage system  
p0224 A81-25005
- Heat transfer through a paraffin wax solar energy storage characterized by a temperature dependent specific heat  
p0224 A81-25006
- Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages  
p0225 A81-25021
- Automotive dual-mode hydrogen generation system  
p0288 A81-25147
- Feasibility study on the Porsche - Optimum design of solar collection on a fluctuating base  
p0288 A81-25149
- Bulk hydrogen storage using metal hydrides  
p0289 A81-25154
- Hydrogen in thin film hydriding alloys  
p0289 A81-25155
- Efficiency of hydrogen compression by means of hydrides  
p0289 A81-25157
- Development of solar-hydrogen systems using metal hydrides  
p0289 A81-25158
- Fixed site hydrogen storage. I - Applications impact  
p0289 A81-25159
- Fixed site hydrogen storage. II - Comparison of technologies and economics  
p0289 A81-25160
- HVEM in situ hydriding of hydrogen storage materials --- High Voltage Electron Microscope  
p0342 A81-25492
- Surface segregation effects in Mg<sub>2</sub>Cu, Mg<sub>2</sub>Ni and Mg-Mg<sub>2</sub>Ni hydrogen storage compounds  
p0290 A81-25498
- Zinc-bromine batteries for energy storage  
p0373 A81-25607
- Energy analysis of high temperature batteries  
p0374 A81-25614
- Shape optimization study for a three-tunnel superconductive energy storage magnet  
p0374 A81-26861
- Liquid hydrogen as an automotive fuel  
p0290 A81-26880
- Liquid nitrogen as an energy source for an automotive vehicle  
p0345 A81-26881
- System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications  
p0375 A81-27232
- Energy storage in grid-connected applications  
p0375 A81-27233
- Storage of cold water in aquifers  
p0375 A81-29257
- Electrical energy storage via high efficiency-cost effective hydrogen/halogen regenerative fuel cell systems  
p0375 A81-29266
- The chemically pumped iodine laser as a fusion driver  
[KNSP-U-944]  
p0350 A81-16456
- Heat transport in groundwater systems. Volume 2: Laboratory model  
[PB81-104135]  
p0375 A81-16523
- Criteria for evaluation of reflective surface for parabolic dish concentrators  
[NASA-CR-163898]  
p0258 A81-16581
- Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications  
[ANL-80-49]  
p0375 A81-16591
- Laboratory studies of hard rock for CAES  
[PRL-SA-8971]  
p0375 A81-16599
- Compressed Air Energy Storage Technology Program overview  
[PRL-SA-8988]  
p0376 A81-16600
- Photovoltaic advanced systems test facility: Description and operations plan  
[SAND-80-1612]  
p0259 A81-16607
- Adiabatic compressed air energy storage in hard rock  
[PRL-SA-9010]  
p0376 A81-17591
- High temperature thermal energy storage in aquifers with a solar power plant application  
p0377 A81-18486
- Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245]  
p0354 A81-18496
- Development of a system for off-peak electrical energy use by air conditioners and heat pumps  
[IWA-EDT-122]  
p0377 A81-18509
- Compressed air energy storage: Preliminary design and site development program in an aquifer, task 2. Volume 2: Characterize and explore potential sites and prepare research and development plan  
[DOE/ET-29232/TI-VOL-2]  
p0377 A81-18531
- Compressed air energy storage: Preliminary design and site development program in an aquifer. Task 1: Establish facility design criteria and utility benefits  
[DOE/ET-29232/T2]  
p0377 A81-19586
- Swedish energy storage projects 1979: Research-development-full-scale experiments supported by governmental organizations  
[PB81-122947]  
p0378 A81-19644
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 2, appendix A: Selected DSG technologies and their general control requirements  
[NASA-CR-164052]  
p0202 A81-20539
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 5, appendix D: Cost-benefit considerations for providing dispersed storage and generation for electric utilities  
[NASA-CR-164053]  
p0202 A81-20542
- Proceedings of the 16th Project Integration Meeting  
[NASA-CR-164073]  
p0276 A81-20545
- The 1980 flywheel technology symposium  
[CONFP-801022]  
p0378 A81-20561
- Evaluation of solar collectors for heat pump applications  
[DOE/CS-35351/T1]  
p0278 A81-20568
- Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter  
[DOE/BA-26961/01]  
p0378 A81-20575
- Development of zinc-bromine batteries for utility energy storage  
[DOE/ET-29345/21]  
p0379 A81-20591
- Basic research on ceramic materials for energy storage and conversion systems  
[COO-2564-6]  
p0361 A81-21207
- Line-Focus Solar Central Power System, phase 1. Volume 1: Executive summary  
[DOE/ET-20550/2-VOL-1]  
p0283 A81-21598
- Line-Focus Solar Central Power System, phase 1. Volume 2: Text  
[DOE/ET-20550/2-VOL-2]  
p0283 A81-21599
- ENERGY TECHNOLOGY**
- U-25B MHD generator performance  
[AIAA PAP88 81-0032]  
p0328 A81-20552
- Pressurized fluidized bed - A technology for combined cycle power generation  
[AIAA PAP88 81-0392]  
p0330 A81-20802
- Solar electric propulsion systems - A survey  
p0211 A81-20910
- Heat transfer and the future of solar energy utilization  
[ASME PAP88 80-WA/SOL-41]  
p0215 A81-21161
- Frameworks for modeling learning on the supply side of solar technology market penetration studies  
p0215 A81-21958
- A dish-Stirling solar-thermal power system  
p0217 A81-22697
- Energy from space - A survey of activities for power generation using space technology  
p0219 A81-23861
- Hydrogen technology - An overview  
p0285 A81-24014
- Synthetic gas production for methanol - Current and future trends  
p0295 A81-24016

- Technical and economic advances in steam reforming of hydrocarbons p0285 A81-24017
- Coal gasification for hydrogen manufacturing p0286 A81-24018
- A solar-pond power plant p0219 A81-24056
- Tapping the main stream of geothermal energy p0296 A81-24749
- China starts tapping rich geothermal resources p0296 A81-24750
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1 - Solar energy p0222 A81-24976
- Energy storage technology - Environmental implications of large scale utilization p0186 A81-24991
- Convertible, tri-mode solar conversion system p0226 A81-25031
- A solar-powered organic vapour power cycle with electricity generation p0228 A81-25047
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 4 - Indirect solar energy p0382 A81-25065
- New developments in wind systems technology p0338 A81-25067
- An unconventional wind machine p0338 A81-25072
- Sources and potential uses of wave energy p0339 A81-25079
- Some new conceptions in the approach to harnessing tidal energy p0339 A81-25082
- Korea tidal power and beyond p0340 A81-25084
- Alternative energy source II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 6 - Nuclear energy p0340 A81-25099
- The future of fusion power comes into focus p0341 A81-25101
- Concept evaluation of nuclear fusion driven symbiotic energy systems p0341 A81-25102
- The fusion fission hybrid - Roles in the energy economy p0341 A81-25103
- The role of high-Btu coal gasification technology p0298 A81-25112
- Coal-oil mixtures - Their technical and commercial status p0300 A81-25133
- Fixed site hydrogen storage. II - Comparison of technologies and economics p0289 A81-25160
- Energy accounting for solar and alternative energy sources p0382 A81-25165
- Compatibility of BSE and BSP solar cell technology --- Back Surface Reflector and Back Surface Field p0232 A81-27093
- Photovoltaic concentrators p0246 A81-27230
- Photovoltaic intermediate applications p0247 A81-27246
- Overview of wind energy systems - Issues in development and application p0345 A81-27551
- Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings p0303 A81-28992
- Development of liquefaction and gasification in the Federal Republic of Germany p0304 A81-28996
- Energy analysis of four geothermal technologies p0346 A81-29031
- The state of solar technology p0255 A81-29196
- Fundamentals and applications of solar energy; Proceedings of the Seventy-Second Annual Meeting, San Francisco, Calif., November 25-29, 1979 p0382 A81-29251
- Private sector initiatives - A case history p0188 A81-29681
- Coal liquefaction: The chemistry and technology of thermal processes --- Book p0304 A81-29692
- Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64] p0348 A81-29974
- Overview of unconventional energy projects in the public power sector [ASME PAPER 81-DGP-1] p0189 A81-30118
- Advanced Cogeneration Technology Economic Optimization Study (ACTEOS) [NASA-CR-163887] p0306 A81-16573
- A directory of computer software applications: Energy [PB80-105497] p0383 A81-16773
- The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology [NASA-TM-58229] p0193 A81-17526
- Seasonal Thermal Energy Storage Program [PNL-SA-9030] p0376 A81-17602
- Optimized design of total energy systems: The RETE project [CISE-1606] p0196 A81-18512
- Long-Range Environmental Outlook [PB81-114977] p0198 A81-18580
- Fuel cells feasibility p0356 A81-18998
- Array automated assembly task low cost silicon solar array project, phase 2 [NASA-CR-164037] p0272 A81-19572
- Technical evaluation of gaseous suspensions of graphite for the absorption of concentrated solar radiation [EPFL-ITA-6] p0272 A81-19574
- Fossil energy program [ORNL-5702] p0317 A81-19588
- Some long-term energy options [LA-8628-H5] p0200 A81-19596
- Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-1] p0318 A81-19616
- Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-2] p0318 A81-19617
- Optimization of transparent electrode for solar cells [SERI/PR-9318-1-T1] p0274 A81-19621
- Transparent glass honeycomb structures for energy loss control [UCLA-ENG-8039] p0274 A81-19622
- GaAs (GaAl) as solar cells to be used under concentrated solar light condition [EUB-6934-EN] p0274 A81-19625
- Plasma-assisted CVD of fluorinated, hydrogenated amorphous silicon [SERI/TR-8041-2-T1] p0274 A81-19629
- Low cost sprayed CdTe solar cell research [DSE-4042-T34] p0275 A81-19631
- Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy [DOE/ET-20417/4] p0378 A81-19633
- Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells [SAN-3045-3] p0275 A81-19634
- Life-cycle cost manual for the Federal Energy Management Program [PB81-136269] p0200 A81-19641
- Continuous heat source model for ground heat storage [PB81-122889] p0378 A81-19643
- LSA field test [NASA-CR-164083] p0276 A81-20544
- Engineering study of pelleting waste paper for energy recovery [WZBDC-53] p0320 A81-20562
- Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study [DOE/CS-30108/T3] p0278 A81-20567
- Photovoltaics information user study [SERI/TR-751-652] p0278 A81-20570
- High concentration silicon photovoltaic cell development [SAND-80-7068] p0279 A81-20595
- Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects [DOE/ER-0090] p0203 A81-20598

- The 10-kilowatt photovoltaic concentrator array fabrication  
[SAND-80-7062] p0279 N81-20599
- Flat plate thermal solar collectors: A physical background  
[PB81-135741] p0280 N81-20605
- Liquefying coal for future energy needs  
[PB81-135956] p0322 N81-21232
- Energy from biological processes. Volume 2: Technical and environmental analyses  
[PB81-134769] p0323 N81-21233
- Updated plan for support of research related to geothermal reservoir engineering  
[LBL-10807] p0323 N81-21463
- Solar options in central Europe. A synthesis of solar technology assessment and contemporary criteria in 1978-1979  
[IIASA-88-79-14] p0280 N81-21489
- Effects of accounting rules on utility choices of energy technologies in the United States  
[IIASA-88-80-27] p0204 N81-21490
- Alternate sources of energy  
[CONF-8009109] p0384 N81-21580
- Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PRL-3533-VOL-1] p0283 N81-21605
- Chalcogenide-glass solar cells  
[DOE/ET-23043/T1] p0284 N81-21608
- Methodology for estimating future market values of solar thermal technologies  
[SAND-80-8248] p0284 N81-21617
- The Energy Link catalog. Volume 2: Energy resource catalog --- bibliographies  
[PB81-140824] p0384 N81-21633
- Environmental overview for the development of geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 N81-21639
- Max Planck Institute for Plasma Physics --- energy technology utilization of nuclear fusion  
[LA-TR-80-25] p0364 N81-21919
- Defense Energy Information System (DEIS): DEIS-80 system design specification  
[AD-A096263] p0384 N81-21960
- ENERGY TRANSFER**
- An assessment of the use of chemical reaction systems for thermal energy transport  
p0365 N81-25011
- Energy transfer in a system of superconductive magnets  
p0374 N81-26858
- Energy transport system optimization for distributed networks of solar collectors  
[ASME PAPER 81-SOL-1] p0365 N81-30109
- Inductive energy transfer in transportation  
[UCRL-85141] p0368 N81-18962
- ENGINE DESIGN**
- The rebirth of the Rankine cycle  
p0327 N81-20225
- Theory of a conducting MHD motor with a free field  
p0331 N81-21062
- Commercial, or usable, size Campbell Chinese type windmill  
p0338 N81-25073
- The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources  
p0342 N81-25131
- An experimental investigation of manned vehicle utilizing CDE/concentration difference energy/engine --- thermal energy storage with water lithium salts solution  
p0342 N81-25132
- An automobile manufacturer and his electric vehicle  
p0373 N81-25604
- Calculation of the internal heat exchange cycle of a Stirling engine --- Russian book  
p0343 N81-25625
- Gas turbine combustor design problems --- Book  
p0343 N81-26006
- Problems and promises in gas turbine combustor design development  
p0343 N81-26007
- The possibilities of improving the efficiency of gas turbines  
p0346 N81-28614
- A new breed of an air breathing engine  
p0347 N81-29070
- Transpiration air cooled turbine blade - A technology for future generation aircraft and industrial gas turbine engines using coal or coal derived fuels  
p0347 N81-29115
- Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels  
[ASME PAPER 81-GT-109] p0348 N81-30014
- Evaluation of advanced combustors for dry NO<sub>x</sub>/suppression with nitrogen bearing fuels in utility and industrial gas turbines  
[ASME PAPER 81-GT-125] p0349 N81-30029
- Design analysis of high-efficiency low-stress ceramic gas turbines  
[ASME PAPER 81-GT-130] p0349 N81-30034
- ITI GT601 - A new approach to vehicular gas turbine power unit design  
[ASME PAPER 81-GT-152] p0349 N81-30051
- Progress in the development of the Marine Spey, SM1A  
[ASME PAPER 81-GT-186] p0349 N81-30080
- Engine cycle selection for advanced technology engine studies  
[ASME PAPER 81-GT-191] p0349 N81-30084
- Design study of a kinematic Stirling engine for dispersed solar electric power systems  
[NASA-CR-159588] p0265 N81-18492
- Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range  
[DOE/ET-15208/1] p0355 N81-18562
- Development of a prototype heat engine for energy conservation  
[DOE/OR-06028/T6] p0199 N81-19589
- Analytical design of an advanced radial turbine --- automobile engines  
[NASA-CR-165170] p0361 N81-20958
- Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 N81-21080
- ENGINE PARTS**
- Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles  
[UCRL-15259] p0376 N81-17963
- ENGINE TESTS**
- Methanol combustion in a 26-MW gas turbine  
[ASME PAPER 81-GT-64] p0348 N81-29974
- Evaluation of advanced combustors for dry NO<sub>x</sub>/suppression with nitrogen bearing fuels in utility and industrial gas turbines  
[ASME PAPER 81-GT-125] p0349 N81-30029
- Support for the analytical tools for automotive fuel economy activities  
[PB81-109555] p0192 N81-17445
- Automotive technology development program  
[DOE/CS-0069/1] p0356 N81-19464
- Emissions and fuel economy of a Compress Pressure Wave Supercharged Diesel  
[PB81-133399] p0204 N81-21371
- ENGINEERING MANAGEMENT**
- Energy supply and demand properties from engineering process models  
[EPRI-8A-1568] p0191 N81-15603
- Coal gasification systems engineering and analysis. Appendix B: Work breakdown structure  
[NASA-CR-161662] p0310 N81-16221
- ENGINEERING TEST REACTORS**
- Engineering aspects of cryogenic laser-fusion targets  
p0345 N81-26857
- ENGINES**
- Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range  
[DOE/ET-15208/1] p0355 N81-18562
- Considerations in the design of solar engines  
p0276 N81-20536
- ENRICHMENT**
- Oxygen-enriched air production for MHD power plants  
[DOE/ET-11058/T4] p0364 N81-21920
- ENTRAINMENT**
- Coal Hydrogasification process development. volume 1: Coal studies  
[FE-3125-24-VOL-1] p0312 N81-18238
- Coal Hydrogasification process development. volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 N81-18239
- ENVIRONMENT EFFECTS**
- Environmental assessment for the satellite power system concept development and evaluation program  
[AIAA PAPER 81-0244] p0185 N81-26695

# ENVIRONMENT POLLUTION

# SUBJECT INDEX

Preliminary environmental assessment for the satellite power system /SPS/ p0186 A81-22548

Energy storage technology - Environmental implications of large scale utilization p0186 A81-24991

An environmental appraisal of tidal power stations: With particular reference to the Severn barrage --- Book p0187 A81-26196

Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra p0188 A81-28478

Constraints to bio-energy development [LA-UR-80-3387] p0191 N81-16604

Ecology problems associated with geothermal development in California [UCRL-83941-REV-1] p0192 N81-16635

Life Sciences Synthetic Fuels program at Oak Ridge National Lab. [CONF-801039-3] p0192 N81-17285

Characterization of solid waste conversion and cogeneration systems [DOE/EV-0105] p0307 N81-17585

Report to the Congress on ocean pollution and offshore development [PB81-118333] p0195 N81-17630

Environmental impact assessment guidelines for new source coal gasification facilities [PB81-114555] p0195 N81-17635

Compressed air energy storage: Preliminary design and site development program in an aquifer, task 2. Volume 2: Characterize and explore potential sites and prepare research and development plan [DOE/ET-29232/T1-VOL-2] p0377 N81-18531

The environmental assessment of a contemporary coal mining system [NASA-CR-163974] p0197 N81-18571

Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site [LBL-11978] p0270 N81-18572

Environment, health, socioeconomic and environmental control technology executive summary [DOE/TIC-11308] p0197 N81-18575

Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study [UCIA-12/1268] p0197 N81-18576

A comparison of environmental issues related to development of small hydropower resources at new versus existing sites [CONF-801210-13] p0197 N81-18577

Strategies for ecological effects assessment at DOE energy activity sites [ORNL/TM-6783] p0198 N81-18578

Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TM-7525] p0316 N81-19332

Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the USD gasifier facility [ORNL/TM-7428] p0320 N81-20305

Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects [DOE/ER-0090] p0203 N81-20598

Environmental consideration for TVA's ammonia from coal project [CONF-8004137-1] p0203 N81-21216

Satellite Power System (SPS) societal assessment [NASA-CR-164153] p0205 N81-21590

Fuel cycle analysis for fossil energy systems: Coal combustion [ORNL-5661] p0205 N81-21606

Environmental assessment for the Satellite Power System concept development and evaluation program: Nonmicrowave health and ecological effects [DOE/ER-0089] p0205 N81-21613

Environmental overview for the development of geothermal resources in the state of New Mexico [UCRL-15317] p0206 N81-21639

Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic [DOE/ER-0096] p0207 N81-21642

Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas [DOE/ET-27127/1] p0207 N81-21646

ENVIRONMENT POLLUTION

Solid-fuel combustion in fluidized beds --- Russian book p0303 A81-27539

Scientific and Technical Publications of the Environmental Research Laboratories' fiscal year 1978 [PB81-141301] p0384 N81-21975

ENVIRONMENT PROTECTION

The Indian Lands Study: An example of the application of geographic research to the analysis of complex energy and environmental policy issues --- strip mining and oil exploration effects on tribal culture and economics p0189 N81-16510

Military wastes-to-energy applications [AD-A093042] p0193 N81-17578

Military wastes-to-energy applications p0314 N81-18483

Ground Water and Energy: Proceedings of the US Department of Energy's National Workshop [CONF-800137] p0199 N81-19584

Local air quality constraints on energy growth, 1985-1990 [ANL/EES-TM-114] p0201 N81-19653

ENVIRONMENTAL CHEMISTRY

Scientific and Technical Publications of the Environmental Research Laboratories' fiscal year 1978 [PB81-141301] p0384 N81-21975

ENVIRONMENTAL CONTROL

Environmental and safety issues of the fusion fuel cycle [CONF-801011-66] p0353 N81-17911

Management plan for fiscal year 1981: Environmental Control Technology Project geothermal development [UCID-18903] p0206 N81-21640

ENVIRONMENTAL MONITORING

Remote sensing techniques for identification and evaluation of geothermal areas p0294 A81-23587

Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the USD gasifier facility [CONF-8010106-7] p0189 N81-16314

Proceedings: EPA/Industry Forum on Coal-Liquefaction [PB81-113052] p0195 N81-17645

Long-Range Environmental Outlook [PB81-114977] p0198 N81-18580

Environmental development plan: Coal liquefaction [DOE/EDF-0044] p0206 N81-21641

Environmental data for sites in the National Solar Data Network, January 1981 [SOLAR/0010-81/01] p0284 N81-21710

ENVIRONMENTAL TESTS

The development of advanced structural materials for fusion power p0333 A81-22659

The performance of MCrAl alloys in complex coal conversion atmospheres p0302 A81-26492

Qualification test results for DOE solar photovoltaic flat panel procurement - PRDA 38 p0251 A81-27278

Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280

EPITAXIAL

Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations --- Epitaxial Film Growth p0230 A81-27078

Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals --- Epitaxial Film Growth p0230 A81-27079

Epitaxial solar cells on metallurgical grade silicon substrates p0231 A81-27085

Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287

# SUBJECT INDEX

# EXPLOSIVE DEVICES

- Research on high efficiency cascade solar cells  
[SEBI/PR-8136-1-11] p0258 N81-16595
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge  
solar cell technology using OM/CVD p0261 N81-17543
- Study of process technology for GaInAs/GaAs  
heteroface solar cells p0261 N81-17544
- High efficiency compound semiconductor  
concentrator photovoltaics p0261 N81-17545
- Incorporation of superlattice crystal layers in  
multijunction solar cells p0261 N81-17549
- OM-VPE grown materials for high efficiency solar  
cells p0262 N81-17552
- GaAs(GaAl) as solar cells to be used under  
concentrated solar light condition p0274 N81-19625
- EQUIPMENT SPECIFICATIONS**
- Solar standards and testing activities in  
developed and developing countries p0229 A81-25096
- Barstov heliostat mirror glass characterization  
[FNL-3576] p0267 N81-18522
- Solar collector foundation designs  
[SAND-80-7070] p0279 N81-20582
- EQUIVALENT CIRCUITS**
- Two modified single diode models for simulating  
solar cells with distributed series resistance p0239 A81-27161
- Inhomogeneities in silicon solar cells and their  
influence on cell performance - An experimental  
study p0239 A81-27165
- EROSIVE BURNING**
- Materials technology for coal-conversion processes  
[ANL-80-93] p0322 N81-21228
- ERROR CORRECTING DEVICES**
- Diffuse sky measurements and determination of  
corrected shadow band multiplication factors ---  
solar photovoltaic demonstration project  
[ASHE PAPER 80-WA/SOL-26] p0213 A81-21150
- ERROR DETECTION CODES**
- Environmetrics of synfuels. II: A computer-based  
coding scheme for coal-conversion research data  
[CONP-8010106-3] p0305 N81-16315
- ESTUARIES**
- An environmental appraisal of tidal power  
stations: With particular reference to the  
Sewern barrage --- Book p0187 A81-26196
- ETHYL ALCOHOL**
- Utilization of biomass in the U.S. for the  
production of ethanol fuel as a gasoline  
replacement. I - Terrestrial resource potential.  
II - Energy requirements, with emphasis on  
lignocellulosic conversion p0296 A81-24427
- Ethanol from municipal cellulosic wastes p0299 A81-25124
- Alcohols as fuels - The global picture p0303 A81-27572
- Ethanol: A brief economic evaluation  
[DOE/ET-27256/T7] p0316 N81-19331
- EUROPE**
- Europe in face of the future p0383 N81-18955
- Solar options in central Europe. A synthesis of  
solar technology assessment and contemporary  
criteria in 1978-1979  
[IIASA-BB-79-14] p0280 N81-21489
- EVALUATION**
- Energy/economic model analysis. Volume 2:  
Evaluation of energy supply/demand integrating  
models p0194 N81-17612
- [PB81-114233] p0194 N81-17612
- Evaluation and targeting of geothermal energy  
resources in the southeastern United States  
[DOE/ET-27001/8] p0314 N81-18480
- Classification and evaluation of electric motors  
and pumps p0199 N81-19463
- [DOE/TIC-11339] p0199 N81-19463
- A life-cycle model for solar heating system design  
and economic evaluation Michigan Economic Model  
for Solar Heating (MESB) p0278 N81-20559
- Solar energy system performance evaluation:  
Boulder Corporation, West Greenwood, Indiana  
[SOLAR/1001-80/14] p0363 N81-21552
- Yearly average performance of the principal solar  
collector tapes p0282 N81-21579
- [SEBI/TE-631-716]
- EVAPORATIVE COOLING**
- Analytical and experimental evaluation of solar  
absorption and vapor compression residential  
cooling systems p0226 A81-25028
- EVAPORATORS**
- Analysis of two-phase flow solar collectors with  
application to heat pumps  
[ASHE PAPER 80-WA/SOL-32] p0214 A81-21153
- EVOLUTION (DEVELOPMENT)**
- General reflections on the theme of innovations  
--- evolution and inventions p0383 N81-18940
- EXCIMER LASERS**
- Efficient Si solar cells by laser photochemical  
doping p0229 A81-25873
- EXHAUST EMISSION**
- Utilization of staged combustion for controlling  
NO<sub>x</sub> emissions from a test facility simulating  
a coal-fired MHD power plant p0328 A81-20603
- [AIAA PAPER 81-0101]
- Solid-fuel combustion in fluidized beds ---  
Russian book p0303 A81-27539
- Evaluation of advanced combustors for dry NO<sub>x</sub>/  
suppression with nitrogen bearing fuels in  
utility and industrial gas turbines p0349 A81-30029
- [ASHE PAPER 81-GT-125]
- Evaluation of concepts for controlling exhaust  
emissions from minimally processed petroleum and  
synthetic fuels p0188 A81-30056
- [ASHE PAPER 81-GT-157]
- Two-stage combustion for reducing pollutant  
emissions from gas turbine combustors p0350 N81-16056
- [NASA-CR-163877]
- Informational report: 1979 progress of the  
Chemical Characterization Panel of the  
composition of diesel exhaust project and  
results of particulate extraction round-robin  
[PB81-114670] p0195 N81-17636
- Proceedings: EPA/Industry Forum on  
Coal-Liquefaction p0195 N81-17645
- [PB81-113052]
- Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study p0201 N81-19674
- [PB81-121147]
- EXHAUST GASES**
- Utilization of cascade impactors in hot waste gas  
from an oil firing installation p0186 A81-23416
- Effect of water injection for NO<sub>x</sub> reduction with  
synthetic liquid fuels containing high  
fuel-bound nitrogen in a gas turbine combustor  
[ASHE PAPER 81-GT-51] p0348 A81-29964
- Informational report: 1979 progress of the  
Chemical Characterization Panel of the  
composition of diesel exhaust project and  
results of particulate extraction round-robin  
[PB81-114670] p0195 N81-17636
- Comparison of gas phase hydrocarbon emissions from  
light-duty gasoline vehicles and light-duty  
vehicles equipped with diesel engines p0203 N81-20620
- [PB81-122996]
- EXPERIMENTAL DESIGN**
- Construction and properties of a quadrupole mass  
spectrometer device, developed for the  
investigation of a thermionic  
barium-cesium-diode vapor atmosphere  
[DFVLR-FB-79-39] p0361 N81-21308
- EXPLOITATION**
- Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 2: Hydroelectric  
development p0205 N81-21596
- [DOE/EV-73002/1-VOL-2]
- EXPLOSIVE DECOMPRESSION**
- Municipal solid waste combustion by steam explosion  
p0301 A81-25561
- EXPLOSIVE DEVICES**
- MX-generators using the transition of a  
semiconductor material into a conducting state  
p0331 A81-21064

## EXPOSURE

Photovoltaic module soiling studies, May 1978 -  
October 1980  
[DOE/JPL-1012-49] p0258 N81-16580

## EXTRATERRESTRIAL RESOURCES

Analysis of the utilization of lunar resources for  
space power systems. Part 1: System definition  
and model structure  
[ILR-MITT-73/1980-PT-1] p0284 N81-21628

## EXTRUDING

Description and thermal performance of corrugated  
solar collectors --- made of extruded aluminum  
p0266 N81-18504

## F

## FABRICATION

Development trends for the mass production of low  
cost conductor-insulator-semiconductor /CIS/  
solar cells  
p0228 A81-25051

Laser processing for high-efficiency silicon solar  
cells  
p0241 A81-27177

Growth and evaluation of CdS and /CdZn/S films for  
the fabrication of high performance photovoltaic  
devices  
p0241 A81-27180

Empirical study of the interaction of silicon  
substrate thickness, device design, and solar  
cell processing  
p0244 A81-27200

Low cost processes for fabricating silicon solar  
cells  
p0245 A81-27218

Advanced module technique with thin solar cells  
p0248 A81-27251

Stacked multiple-bandgap solar cells prepared by  
CVD techniques  
p0253 A81-27297

Development of simplified process for  
environmentally resistant cells  
[NASA-CR-163884] p0257 N81-16575

Design, fabrication, test, qualification and price  
analysis for third generation design solar cell  
modules  
[NASA-CR-163917] p0257 N81-16576

Development of a high efficiency thin silicon  
solar cell  
[NASA-CR-163931] p0259 N81-17522

High efficiency epitaxial GaAs/GaAs and GaAs/Ge  
solar cell technology using OM/CVD  
p0261 N81-17543

Study of process technology for GaInAs/GaAs  
heteroface solar cells  
p0261 N81-17544

High efficiency compound semiconductor  
concentrator photovoltaics  
p0261 N81-17545

Status of Rockwell-ERC high efficiency solar cell  
programs  
p0261 N81-17546

GaAs workshop report  
p0261 N81-17547

Results of the Air Force high efficiency cascaded  
multiple bandgap solar cell programs  
p0261 N81-17548

Incorporation of superlattice crystal layers in  
multijunction solar cells  
p0261 N81-17549

AlGaAs-GaAs cascade solar cell  
p0261 N81-17550

Fabrication of AlGaAs/GaAs cascade solar cell by LPE  
p0262 N81-17551

OM-VPE grown materials for high efficiency solar  
cells  
p0262 N81-17552

Silicon solar cell optimization  
[AD-A092908] p0263 N81-17579

Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495

Indium phosphide/cadmium sulfide thin-film solar  
cells  
[SERI/TR-8170-1-T2] p0268 N81-18533

Fabrication and testing of MIS solar cells on  
a-Si:F:H  
[SERI/TR-8041-9-T1] p0269 N81-18552

## Emerging materials for solar cell applications:

Electrodeposited CdTe  
[SERI/PR-9152-1-T1] p0269 N81-18555

Thin film polycrystalline silicon solar cells  
[SERI/PR-9192-1-T2] p0269 N81-18557

Copper doped polycrystalline silicon solar cell  
[NASA-CASE-NPO-14670-1] p0270 N81-19558

Cell module and fuel conditioner development  
[NASA-CR-165190] p0357 N81-19573

Optimization of transparent electrode for solar  
cells  
[SERI/PR-9318-1-T1] p0274 N81-19621

GaAs (GaAl) as solar cells to be used under  
concentrated solar light condition  
[EUR-6934-EN] p0274 N81-19625

Plasma-assisted CVD of fluorinated, hydrogenated  
amorphous silicon  
[SERI/TR-8041-2-T1] p0274 N81-19629

Low cost, sprayed CdTe solar cell research  
[SERI/PR-8104-3-T2] p0279 N81-20585

The 10-kilowatt photovoltaic concentrator array  
fabrication  
[SAND-80-7062] p0279 N81-20599

PBI treated polypropylene battery separator  
p0379 N81-21512

The 10 kilowatt photovoltaic concentrator system  
as installed at Sandia Laboratories, 1979  
[SAND-80-7063] p0283 N81-21601

## FAILURE ANALYSIS

Design and management for resource recovery.  
Volume 2 - High technology A failure analysis  
--- Book on materials and energy reclamation  
projects from solid wastes  
p0300 A81-25225

State-of-the-art review of materials-related  
problems in flue gas desulfurization systems  
[ANL-80-59] p0384 N81-21645

## FARADAY EFFECT

Preliminary Faraday performance of a large MHD  
generator at high magnetic field  
[ATAA PAPER 81-0028] p0327 A81-20548

Electrical characteristics of MHD generators with  
solid electrodes and linear distribution of  
potential at the end strips  
p0337 A81-23747

## FARM CROPS

On-farm production of fuel-alcohol in Mid-America  
technical and economic potential  
[NASEC-TP-80-009] p0189 N81-16316

Production of a raw material for energy production  
in agriculture  
[DFE-31] p0324 N81-21550

## FARMLANDS

On-farm production of fuel-alcohol in Mid-America  
technical and economic potential  
[NASEC-TP-80-009] p0189 N81-16316

## FAST NEUTRONS

Selective fast neutron detector  
p0332 A81-21640

## FATIGUE LIFE

Wind machine fatigue analysis and life prediction  
[RFP-3135/3533/80/19] p0357 N81-19495

Fatigue-creep lifetime analysis of four advanced  
central receiver concepts  
[SAND-80-8047] p0273 N81-19612

## FATIGUE TESTS

Testing the mechanical characteristics of sintered  
nickel battery plaque and their relationship to  
nickel electrode performance  
p0372 A81-25323

## FAULT TREES

Availability modeling methodology applied to solar  
power systems  
p0220 A81-24431

## FEASIBILITY

Domestic solar water preheating versus solar water  
heating An economic evaluation  
p0229 A81-25064

A primer on economic feasibility for direct-users  
p0346 A81-28550

Adiabatic compressed air energy storage in hard rock  
[PHI-SA-9010] p0376 N81-17591

Regional conversion to cpal  
[FE-2468-63] p0314 N81-18517

## FEASIBILITY ANALYSIS

Feasibility of the inflow disk generator for  
open-cycle MHD power generation  
[ATAA PAPER 81-0250] p0330 A81-26700



## SUBJECT INDEX

## FLAT PLATES

- BGP-A wellhead generator feasibility project ---  
geothermal power plant in Hawaii p0333 A81-22775
- Workshop on the microwave power transmission  
system for the solar power satellite - Review  
panel report p0365 A81-24832
- A solar-powered organic vapour power cycle with  
electricity generation p0228 A81-25047
- A perspective on OTEC plants p0340 A81-25085
- Making geothermal power competitive p0340 A81-25092
- Pricetown I - In-situ coal conversion field test  
for bituminous coals p0298 A81-25111
- Feasibility study on the Porsche - Optimum design  
of solar collection on a fluctuating base p0288 A81-25149
- Economic feasibility of photovoltaic energy systems  
p0246 A81-27229
- On-farm production of fuel-alcohol in Mid-America  
technical and economic potential [MASEC-TP-80-009] p0189 A81-16316
- Farm and cooperative alcohol plant study:  
Technical and economic assessment as a  
commercial venture [PB81-112641] p0306 A81-17290
- Fuels and chemicals made from solar energy:  
Options for the 1990's and beyond [DOE/CS-21051/01] p0263 A81-17586
- Survey of EPA facilities for solar thermal energy  
applications [NASA-CR-162469] p0265 A81-17617
- Coal gasification systems engineering and  
analysis. Volume 1: Executive summary [NASA-CR-161653] p0309 A81-18212
- Coal gasification systems engineering and  
analysis. Appendix E: Cost estimation and  
economic evaluation methodology [NASA-CR-161659] p0310 A81-18218
- Design study of a kinematic Stirling engine for  
dispersed solar electric power systems [NASA-CR-159588] p0265 A81-18492
- Technical and economic feasibility of a Thermal  
Gradient Utilization Cycle (TGUC) power plant [DOE/CS-56604/T1] p0355 A81-18546
- Utilization of geothermal energy for methane  
production for J. A. Albertson Land and Cattle  
Company [DOE/ET-27230/T2] p0316 A81-19333
- Analysis of geopressured aquifers [PB81-123416] p0317 A81-19553
- Alternative fuels production program [DOE/RA-0058/2] p0321 A81-21220
- Municipal geothermal heat utilization plan for  
Glenwood Springs, Colorado [DOE/ID-12049-3] p0324 A81-21585
- Investigations on catalyzed steam gasification of  
biomass. Appendix B: Feasibility study of  
methanol production via catalytic gasification  
of 2000 tons of wood per day [PML-3695-APP-B] p0324 A81-21604
- Analysis of the utilization of lunar resources for  
space power systems. Part 1: System definition  
and model structure [ILR-MITT-73/1980-PT-1] p0284 A81-21628
- FECS**  
Utilization of geothermal energy for methane  
production for J. A. Albertson Land and Cattle  
Company [DOE/ET-27230/T2] p0316 A81-19333
- FEEDBACK CONTROL**  
An interferometer-based phase control system p0366 A81-16545
- A sonic satellite power system microwave power  
transmission simulation p0366 A81-16546
- FEEDING (SUPPLYING)**  
Development of a system for off-peak electrical  
energy use by air conditioners and heat pumps  
[TVA-EDT-122] p0377 A81-18509
- Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project [DOE/METC-SP-80/17] p0323 A81-21361
- FERMENTATION**  
Ethanol from municipal cellulosic wastes p0299 A81-25124
- FERROUS METALS**  
The Ames Resource Recovery facility p0301 A81-25558
- FIBER OPTICS**  
SPS fiber optic link assessment p0366 A81-16548
- FIGURE OF MERIT**  
An economics method for symbiotic fusion-fission  
electricity generation systems p0336 A81-23716
- A figure of merit for solar collectors with  
several separate absorber segments p0222 A81-24980
- FILM BOILING**  
An acoustic measurement of boiling instabilities  
in a solar receiver [SAND-80-2409] p0284 A81-21621
- FILM THICKNESS**  
Effect of anodic-oxide layer thickness on the  
performance of GaAs MOS solar cells p0209 A81-20008
- FINITE DIFFERENCE THEORY**  
PREHEAT - A passive solar system simulation program  
p0216 A81-22212
- Solar energy in the field of distillation - Design  
parameters and thermodynamic analysis of solar  
stills p0227 A81-25041
- FINLAND**  
Applied research activities for 1979 --- Finnish  
technology development and transfer p0384 A81-20004
- FISSION**  
Fusion energy research, development, and  
demonstration act of 1980 [H-REPT-96-1096] p0352 A81-16898
- FLAT PLATES**  
Optimization of fin and tube parameters in a  
flat-plate collector p0209 A81-19849
- Temperature variation in the absorber plate of an  
air heating flat plate solar collector [ASME PAPER 80-WA/SOL-2] p0211 A81-21130
- Analytical predictions of liquid and air  
photovoltaic/thermal flat-plate collector  
performance [ASME PAPER 80-WA/SOL-3] p0212 A81-21131
- Modeling and analysis of an all-fiberglass flat  
plate solar collector [ASME PAPER 80-WA/SOL-4] p0212 A81-21132
- Design of solar cells for use in  
photovoltaic/thermal collectors [ASME PAPER 80-WA/SOL-37] p0214 A81-21157
- Energy collected by flat-plate collectors, not  
oriented toward the south p0218 A81-23010
- Calculation of hourly and daily available solar  
energy to a flat plate collector inclined by the  
angle of optimum tilt in Iraq p0222 A81-24977
- Static endo-absorbent flat solar collector p0222 A81-24979
- Performance comparison of flat plate collector  
absorber coatings utilizing NBS Standard 74-635  
and the ASHRAE Collector Performance Method p0222 A81-24981
- Performance of a flat type solar collector  
composed of the selective transparent and  
absorbing plates p0223 A81-24982
- Theoretical and experimental investigation of a  
flat-plate solar collector performance with the  
use of a solar simulator p0223 A81-24983
- Effects of dust on the performance of thermal and  
photovoltaic flat plate collectors in Saudi  
Arabia - Preliminary results p0223 A81-24985
- Preliminary evaluation of overall thermal  
performance of solar water heating systems using  
air and liquid flat-plate collectors p0225 A81-25015
- Bi-coolant flat plate solar collector p0226 A81-25023

# FLAT SURFACES

# SUBJECT INDEX

Design of a 100 kW photovoltaic flat panel system at a Washington, D.C. area waste treatment plant  
p0228 A81-25056

Flat-plate tubular TP lead-acid traction battery for electric vehicles  
p0373 A81-25603

Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis  
p0238 A81-27146

Flat-plate photovoltaic array design optimization  
p0248 A81-27247

Influence of module requirements on flat plate module design evolution  
p0251 A81-27279

A non-linear flat-plate collector model  
p0254 A81-27571

Digital holographic interferometry of convective heat transport  
p0254 A81-28737

Optimization of fin and tube parameters in a flat-plate collector  
p0255 A81-29032

A numerical approach for the prediction of the front losses of a flat-plate solar collector  
p0255 A81-29255

Flat plate thermal solar collectors: A physical background  
[PB81-135741] p0280 A81-20605

Solar energy system performance evaluation: Hei Mai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980  
[SOLAR/1014-80/14] p0281 A81-21557

**FLAT SURFACES**  
Thermal processes in flat plate solar collectors --- conduction, convective radiative heat transfer  
p0266 A81-18503

**FLIGHT TESTS**  
Summary results of the ATS-6 solar cell flight experiment  
p0244 A81-27209

Review of in-orbit performance of ESA's spacecraft solar arrays  
p0249 A81-27267

NTS-2 solar cell experiment after two years in orbit  
p0249 A81-27268

**FLIGHT VEHICLES**  
Complex computation of flywheel power systems for flight vehicles  
p0375 A81-30158

**FLORIDA**  
Acid rain: The impact of local sources  
[DOE/NETC-14787/103] p0197 A81-18573

**FLOW CHARACTERISTICS**  
Wellbore flow characteristics for optimal energy recovery from Gulf Coast geopressed geothermal sources  
[ASME PAPER 81-PET-18] p0350 A81-30112

Solids circulation around a jet in a fluidized bed gasifier  
[DOE/ET-12229/T1] p0313 A81-18343

**FLOW DISTRIBUTION**  
The flow field about a vertical axis wind turbine  
p0338 A81-25069

Flow field analysis and performance of wind turbines employing slotted diffusers  
p0345 A81-27553

The aerodynamic analysis of a 10 kW horizontal-axis windmill  
p0354 A81-18484

**FLOW MEASUREMENT**  
Sampling and instrumentation for fluidized-bed combustion  
[ANL/CEN/FE-80-2] p0305 A81-16317

Materials technology for coal-conversion processes  
[ANL-80-93] p0322 A81-21228

**FLOW REGULATORS**  
Frequency response analysis of fluid control systems for parabolic-trough solar collectors  
[ASME PAPER 80-WA/SOL-15] p0213 A81-21140

**FLOW VELOCITY**  
Ultra headless hydro power  
[SLAC-PUB-2613] p0352 A81-16609

Coal hydrogasification process development. Volume 1: Coal studies  
[FE-3125-24-VOL-1] p0312 A81-18238

Coal hydrogasification process development. Volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 A81-18239

**FLUERS**  
State-of-the-art review of materials-related problems in flue gas desulfurization systems  
[ANL-80-59] p0384 A81-21645

**FLUID DYNAMICS**  
Power from water waves  
p0337 A81-23955

Wave-energy extraction by a submerged cylindrical resonant duct  
p0303 A81-28680

**FLUID FILTERS**  
High-temperature high-pressure particulate removal in coal gasification  
[FB81-113664] p0308 A81-17642

**FLUID FLOW**  
Optimal and suboptimal control policies for a solar collector system  
p0211 A81-21029

A non-linear flat-plate collector model  
p0254 A81-27571

Methodology to evaluate the potential for ground water contamination from geothermal fluid releases  
[PB81-111114] p0195 A81-17641

**FLUID INJECTION**  
Heavy oil reservoirs recoverable by thermal technology --- steam injection  
[DOE/ET-12380/1-VOL-3] p0317 A81-19540

**FLUID MECHANICS**  
Dynamic response analysis of a solar powered heliostatic fluid-mechanical drive system  
p0223 A81-24990

**FLUIDIZED BED PROCESSORS**  
Pressurized fluidized bed - A technology for combined cycle power generation  
[AIAA PAPER 81-0392] p0330 A81-20802

Solar energy assisted fluidized bed fruit drying  
p0227 A81-25037

Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project  
p0298 A81-25113

Fluid bed hydrogenation of agglomerating bituminous coals  
p0298 A81-25115

Bed expansion and attrition studies in a coal-fired fluidized bed  
p0299 A81-25128

Fluidized bed combustion of coal  
p0299 A81-25130

Economics and concepts of industrial coal fluidized bed combustion in Brazil  
p0300 A81-25135

Corrosion of alloys at high temperature in coal gasification environments  
p0302 A81-26491

Solid-fuel combustion in fluidized beds --- Russian book  
p0303 A81-27539

Development of the Shell-Koppers coal gasification process  
p0303 A81-28995

Sampling and instrumentation for fluidized-bed combustion  
[ANL/CEN/FE-80-2] p0305 A81-16317

Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 A81-18232

Computer modeling of coal gasification reactors, year 4  
[FE-1770-66] p0312 A81-16235

EDS coal liquefaction process development, phase 4-5 --- donor solvent technique  
[FE-2893-53] p0312 A81-18240

Solids circulation around a jet in a fluidized bed gasifier  
[DOE/ET-12229/T1] p0313 A81-18343

**FLUORESCENCE**  
Efficiency and stability of experimental fluorescent planar concentrators /FPC/  
p0242 A81-27190

**FLUX PUMPS**  
Flux pump excited brushless alternator  
p0334 A81-23436

**FLYWHEELS**  
System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications  
p0375 A81-27232

Complex computation of flywheel power systems for flight vehicles  
p0375 A81-30158

# SUBJECT INDEX

# FUEL CELLS

- Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCRL-15259] p0376 N81-17963
- The USAF Academy flywheel-electric car [AD-A095130] p0378 N81-19969
- The 1980 flywheel technology symposium [CONF-801022] p0378 N81-20561
- FOCUSING**
- Optical analysis of point focus parabolic radiation concentrators p0219 A81-24332
- FOILS (MATERIALS)**
- The CMG nickel electrode p0379 N81-21509
- FORECASTING**
- Life-cycle cost manual for the Federal Energy Management Program [PB81-136269] p0200 N81-19641
- FOREIGN POLICY**
- US solar energy policy for less developed countries [DOE/CS-10048/T1] p0194 N81-17598
- FOREIGN TRADE**
- US energy consumption and supply [UCID-18856] p0204 N81-21565
- FORESTS**
- The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant [BNL-51279] p0192 N81-16631
- FOSSIL FUELS**
- Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning [ASME PAPER 80-WA/HT-3] p0185 A81-21101
- Combined solar and fossil fuel systems for electric power generation p0381 A81-25048
- In situ and modified in situ recovery of fossil fuels p0297 A81-25110
- Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit [EPRI-CS-1444-VOL-4] p0351 N81-16602
- Comments on long-term aspects of renewable versus nonrenewable resource substitution [CONF-801158-1] p0313 N81-18477
- Rate coefficients of combustion/fuel conversion reactions by high-temperature photochemistry [COO-4169-5] p0314 N81-18525
- Distillate fuel-oil processing for phosphoric acid fuel cell power plants [DOE/ET-13323/2] p0358 N81-19583
- Fossil energy program [ORNL-5702] p0317 N81-19588
- Coal conversion 1979 technical report [DOE/FE-0010] p0319 N81-20297
- Coal hydrogasification process development [DOE/ET-10328/27] p0319 N81-20304
- Considerations in the design of solar engines p0276 N81-20536
- Fuel cycle analysis for fossil energy systems: Coal combustion [ORNL-5661] p0205 N81-21606
- Environmental development plan: Coal liquefaction [DOE/EDP-0044] p0206 N81-21641
- FOULING**
- Ocean Thermal Energy Conversion Power System Development: PSD-I, phase 2 [DOE/ET-21039/1] p0353 N81-17594
- FOUNDATIONS**
- Solar collector foundation designs [SAND-80-7070] p0279 N81-20582
- FRACTURE MECHANICS**
- Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979 p0381 A81-21730
- Geothermal energy enhancement by thermal fracture [LA-8428] p0325 N81-21623
- FRANCE**
- Energy: Economic activity and energy demand; link to energy flow. Example: France [EUR-6773-EN] p0194 N81-17597
- FREE CONVECTION**
- Radiation and free convection shield for passive thermal control --- in solar buildings [ASME PAPER 80-WA/SOL-7] p0212 A81-21134
- Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium --- application to solar energy collection p0215 A81-21584
- Natural convection heat leak in supercritical hydrogen tanks p0290 A81-26872
- Dynamic behavior of a natural circulation loop for a solar collector p0256 A81-29261
- FREE RADICALS**
- Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions p0294 A81-23495
- FREEZING**
- Solar desalination by freezing and distillation p0227 A81-25043
- FREQUENCY CONTROL**
- Variable speed constant frequency constant voltage alternator --- converting wind power to usable 60 hertz power [DOE/ET-29246-T1] p0361 N81-21298
- FREQUENCY RESPONSE**
- Frequency response analysis of fluid control systems for parabolic-trough solar collectors [ASME PAPER 80-WA/SOL-15] p0213 A81-21140
- Short wavelength spectral response of the tandem junction solar cell p0221 A81-24808
- FRESNEL LENSES**
- The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport p0232 A81-27091
- Low-cost, high-performance, point-focus concentrator array design p0242 A81-27189
- Active and passive cooling for concentrating photovoltaic arrays p0243 A81-27192
- Solar coal gasification [DOE/TIC-11384] p0279 N81-20587
- Photovoltaic concentrator technology development project [SAND-80-2373] p0282 N81-21571
- FRESNEL REFLECTORS**
- A Fresnel-Winston tandem concentrator system p0218 A81-23497
- FRUITS**
- Solar energy assisted fluidized bed fruit drying p0227 A81-25037
- FUEL CAPSULES**
- Engineering study of pelleting waste paper for energy recovery [NERDC-53] p0320 N81-20562
- FUEL CELLS**
- Status of commercial phosphoric acid fuel cell system development [AIAA PAPER 81-0396] p0330 A81-20805
- Fuel cells - A survey. I p0333 A81-22400
- Direct conversion of chemical energy to electrical energy p0337 A81-23901
- Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes --- in fuel cells p0342 A81-25325
- Development of advanced electrocatalysts for phosphoric acid fuel cells p0342 A81-25602
- The oxygen electrode - A major problem in energy conversion p0342 A81-25608
- Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte p0343 A81-25611
- Electrical energy storage via high efficiency-cost effective hydrogen/halogen regenerative fuel cell systems p0375 A81-29266
- Improvement of phosphoric acid fuel cell stacks [AD-A092814] p0351 N81-16589
- Improved FCG-1 cell technology [EPRI-EM-1566] p0351 N81-16598
- Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base [PB81-800021] p0352 N81-16615

# FUEL COMBUSTION

# SUBJECT INDEX

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165179] p0352 N81-17527

Fuel cell support studies: On-site molten carbonate systems [PB81-113672] p0353 N81-17619

Cell module and fuel conditioner [NASA-CR-165189] p0354 N81-18494

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165245] p0354 N81-18496

Non-noble catalysts and catalyst supports for phosphoric acid fuel cells [NASA-CR-165221] p0354 N81-18497

Fuel-cells for electric utility and transportation applications [BNL-28696] p0354 N81-18518

Task report no. 3. Systems analysis of organic Rankine bottoming cycles [PSI-TR-245] p0354 N81-18529

Fuel cells feasibility p0356 N81-18998

Recent advances in the sciences of electrocatalysis [AD-A095095] p0356 N81-19257

Cell module and fuel conditioner development [NASA-CR-165190] p0357 N81-19573

Optimization of carbon-supported platinum catalysts for fuel cell electrodes [AD-A094714] p0357 N81-19579

Distillate fuel-oil processing for phosphoric acid fuel cell power plants [DOE/ET-13323/2] p0358 N81-19583

Characteristics of acidic electrolyte hydrogen-air fuel batteries (3) [UCRL-TRANS-11655] p0358 N81-19604

Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter [DOE/RA-26961/01] p0378 N81-20575

Economic comparison of molten carbonate fuel cells and gas turbines in coal gasification based power plants [EPRI-AP-1543] p0322 N81-21229

Study of fuel cell on-site, integrated energy systems in residential/commercial applications [NASA-CR-165144] p0361 N81-21533

Technology development for phosphoric acid fuel cell powerplant, phase 2 [NASA-CR-165317] p0362 N81-21536

Technology development for phosphoric acid fuel cell powerplant (phase 2) [NASA-CR-165316] p0362 N81-21547

Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles [LA-UR-81-293] p0363 N81-21572

Metal chelate catalysts for fuel cells [PB81-132953] p0364 N81-21629

**FUEL COMBUSTION**

Utilization of staged combustion for controlling NO<sub>x</sub> emissions from a test facility simulating a coal-fired MHD power plant [AIAA PAPER 81-0101] p0328 N81-20603

Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning [ASME PAPER 80-WA/HT-3] p0185 N81-21101

Utilization of cascade impactors in hot waste gas from an oil firing installation p0186 N81-23416

Bed expansion and attrition studies in a coal-fired fluidized bed p0299 N81-25128

Combustion of coal suspension fuels using air atomizers p0299 N81-25129

Fluidized bed combustion of coal p0299 N81-25130

Economics and concepts of industrial coal fluidized bed combustion in Brazil p0300 N81-25135

Problems due to multifuel operation of gas turbine combustors p0343 N81-26009

Residual fuel combustion in industrial gas turbines p0343 N81-26010

Combustion of coal-derived liquids and shale oil in gas turbine combustors p0343 N81-26016

Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/ p0302 N81-26195

Coal conversion /combustion and gasification/ p0302 N81-26477

Solid-fuel combustion in fluidized beds --- Russian book p0303 N81-27539

Ultra-lean combustion at high inlet temperatures [ASME PAPER 81-GT-44] p0347 N81-29958

Combustion of methanol and liquefied butane in a gas turbine combustor [ASME PAPER 81-GT-50] p0348 N81-29963

Effect of water injection for NO<sub>x</sub> reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor [ASME PAPER 81-GT-51] p0348 N81-29964

Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64] p0348 N81-29974

Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels [ASME PAPER 81-GT-109] p0348 N81-30014

Internal combustion engines for alcohol motor fuels: A compilation of background technical information [DOE/AF-0001] p0313 N81-18398

Acid rain: The impact of local sources [DOE/NETC-14787/103] p0197 N81-18573

Catalytic combustion of synthetic fuels [DOE/PC-30220/X1] p0321 N81-21154

Fuel cycle analysis for fossil energy systems: Coal combustion [ORNL-5661] p0205 N81-21606

**FUEL CONSUMPTION**

Operational energy conservation strategies in commercial aviation p0185 N81-20465

Integration of fuel conservative procedures in the high density terminal area p0185 N81-20468

The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources p0342 N81-25131

A UK view on future fuels --- for aircraft [ASME PAPER 81-GT-87] p0304 N81-29994

Progress in the development of the Marine Spey, S81A [ASME PAPER 81-GT-186] p0349 N81-30080

Analytical consideration of fuel economy and dynamic response of a regenerative high temperature automobile gas turbine. II [ASME PAPER 81-GT-218] p0350 N81-30106

AGT-1500 combustor and fuel effects modeling [AD-A092255] p0350 N81-16061

Support for the analytical tools for automotive fuel economy activities [PB81-109555] p0192 N81-17445

Automotive fuel economy program [DOT-HS-805-279] p0195 N81-17959

Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report [AD-A094225] p0196 N81-18051

The effect of economic regulation on fuel use efficiency in private trucking-operations [PB81-114753] p0198 N81-18931

An evaluation of NASA's program for improving aircraft fuel efficiency [NASA-CR-164015] p0198 N81-19110

Use of non-petroleum fuels to reduce military energy vulnerabilities: Self-sufficient bases and new weapon propulsion systems [LA-UR-80-3445] p0199 N81-19329

A look at NASA's Aircraft Energy Efficiency program [PSAD-80-50] p0201 N81-20077

The development of synthetic fuels: Department of Defense logistics implications [AD-A095713] p0319 N81-20290

Current and future industrial energy service characterizations, volume 1 [SERI/TR-733-790-VOL-1] p0206 N81-21618

**FUEL CONTROL**

Energy conservation through process modification and control [ASME PAPER 81-PID-2] p0188 N81-30111

# SUBJECT INDEX

# FUEL PRODUCTION

## FUEL CORROSION

Development of advanced electrocatalysts for phosphoric acid fuel cells p0342 A81-25602

Economics of heavy fuels in gas turbines and combined cycles [ASME PAPER 81-GT-45] p0347 A81-29959

## FUEL INJECTION

Alcohols as auxiliary fuels for diesel engines p0299 A81-25122

## FUEL OILS

Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City p0186 A81-23073

Utilization of cascade impactors in hot waste gas from an oil firing installation p0186 A81-23416

Hydrogen production from partial oxidation of residual fuel oil p0285 A81-24015

Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas p0298 A81-25114

An update in the 'development of alternate liquid fuels' p0299 A81-25125

Coal-oil mixtures - Their technical and commercial status p0300 A81-25133

Albany biomass-to-oil project p0301 A81-25562

Conversion of organic wastes to oil by reductive formylation p0302 A81-25563

The SRC-II process --- Solvent Refined Coal p0304 A81-28997

Oil substitution and energy saving - A research and development strategy of the International Energy Agency /IEA/ p0188 A81-29195

Economics of heavy fuels in gas turbines and combined cycles [ASME PAPER 81-GT-45] p0347 A81-29959

Distillate fuel-oil processing for phosphoric acid fuel cell power plants [DOE/ET-13323/2] p0358 A81-19583

Performance profiles of major energy producers [DOE/EIA-0206/78] p0324 A81-21610

## FUEL PRODUCTION

Effects of pore diameter and catalyst loading in hydroliquefaction of coal with CoO/MoO3/Al2O3 catalysts p0293 A81-22274

Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion p0296 A81-24427

Geothermal energy and biofuel production in agriculture p0297 A81-25093

Synthetic fuel production in a particle-beam driven fusion reactor p0297 A81-25107

Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources p0297 A81-25108

Gasification of biomass as a source of synfuels for developing countries p0298 A81-25118

Production of liquid fuels with a high-temperature gas-cooled reactor p0298 A81-25120

Future of alcohol fuels programs in Brasil p0299 A81-25121

An update in the 'development of alternate liquid fuels' p0299 A81-25125

Advanced synfuels production/power systems utilizing laser particulate control p0299 A81-25127

Coal-oil mixtures - Their technical and commercial status p0300 A81-25133

Overall efficiencies for conversion of solar energy to a chemical fuel p0288 A81-25148

Design and management for resource recovery. Volume 1 - Energy from waste --- Book p0300 A81-25551

The Chicago Southwest Supplemental Fuel Processing Facility p0300 A81-25552

Methane production from the Mountain View landfill p0300 A81-25553

The Pompano Beach RefCOM facility p0300 A81-25554

Wisconsin Electric's characterization of Americology's refuse-derived fuel p0301 A81-25555

Eco-Fuel and the Bridgeport facility p0301 A81-25556

The Niagara Falls resource recovery system p0301 A81-25557

Technology for powdered fuel preparation from solid waste p0301 A81-25559

Commercialization potential of the China Lake trash-to-gasoline process p0301 A81-25560

Albany biomass-to-oil project p0301 A81-25562

Conversion of organic wastes to oil by reductive formylation p0302 A81-25563

Conversion of cellulosic wastes to liquid fuels p0302 A81-25564

Alcohols as fuels - The global picture p0303 A81-27572

Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings p0303 A81-28992

Motor fuels and chemicals from coal via the Sasol Synthol route p0303 A81-28994

Development of the Shell-Koppers coal gasification process p0303 A81-28995

A new route to liquid fuels from coal p0304 A81-28999

Oil substitution and energy saving - A research and development strategy of the International Energy Agency /IEA/ p0188 A81-29195

Production of fuels from high temperature solar thermal systems - Economic analysis p0256 A81-29268

Private sector initiatives - A case history p0188 A81-29681

Engine fuels from biomass [ASME PAPER 81-DGP-4] p0305 A81-30116

On-farm production of fuel-alcohol in Mid-America technical and economic potential [NASEC-TP-80-009] p0189 A81-16316

HYPIRE: A Tokamak high temperature electrolysis system --- synfuel production [BNL-28679] p0352 A81-16908

Life Sciences Synthetic Fuels program at Oak Ridge National Lab. [CONF-801039-3] p0192 A81-17285

Farm and cooperative alcohol plant study: Technical and economic assessment as a commercial venture [FB81-112641] p0306 A81-17290

Fuels and chemicals made from solar energy: Options for the 1990's and beyond [DOE/CS-21051/01] p0263 A81-17586

Energy/economic model analysis. Time-stepped energy system optimization model [FB81-114241] p0194 A81-17615

Preparation of a coal conversion systems technical data book [FE-2286-48] p0315 A81-19327

Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies [FE-1743-80-VOL-1] p0316 A81-19335

Analysis of geopressured aquifers [FB81-123416] p0317 A81-19553

Solar gasification of carbonaceous materials [UCRL-53063] p0272 A81-19605

## FUEL SPRAYS

Production of a raw material for energy production in agriculture [DFE-31] p0324 N81-21550

Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day [PHL-3695-APP-B] p0324 N81-21604

### FUEL SPRAYS

Combustion of coal suspension fuels using air atomizers p0299 A81-25129

### FUEL TANKS

Natural convection heat leak in supercritical hydrogen tanks p0290 A81-26872

### FUEL TESTS

Gasoline from alcohols p0297 A81-24900

Combustion of methanol and liquefied butane in a gas turbine combustor [ASME PAPER 81-GT-50] p0348 A81-29963

Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64] p0348 A81-29974

### FUEL-AIR RATIO

Ultra-lean combustion at high inlet temperatures [ASME PAPER 81-GT-44] p0347 A81-29958

### FUELS

AGT-1500 combustor and fuel effects modeling [AD-A092255] p0350 N81-16061

Hybrid fuels for highway transportation [DOB/CS-54240/T1] p0313 N81-18242

### FURNACES

Use of coal injection and oxygen in a blast furnace to produce fuel gas [IDO-10089] p0312 N81-18236

### FUSION REACTORS

Contribution of activation products to fusion accident risk. I - A preliminary investigation p0336 A81-23712

Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor p0336 A81-23714

Fusion reactors as high-temperature process heat sources p0341 A81-25105

Synthetic fuel production in a particle-beam driven fusion reactor p0297 A81-25107

Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources p0297 A81-25108

Fusion reactors for hydrogen production via electrolysis p0287 A81-25139

Metal hydrides in energy conversion systems p0342 A81-25480

Environmental and safety issues of the fusion fuel cycle [CONF-801011-66] p0353 N81-17911

### FUSION-FISSION HYBRID REACTORS

An economics method for symbiotic fusion-fission electricity generation systems p0336 A81-23716

Performance and economics analysis of several laser fusion breeder fueled electricity generation systems p0336 A81-23717

The fusion-supported decentralized nuclear energy system p0337 A81-23848

Concept evaluation of nuclear fusion driven symbiotic energy systems p0341 A81-25102

The fusion fission hybrid - Roles in the energy economy p0341 A81-25103

Overview of nonelectrical applications of fusion p0341 A81-25104

## G

### GALLIUM ARSENIDES

Low bandgap /0.7 to 1.1 eV/ solar cells in the GaAlAsSb/GaSb system p0235 A81-27119

## SUBJECT INDEX

### GALLIUM ARSENIDES

Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells p0209 A81-20008

Molecular beam epitaxial GaAs heteroface solar cell grown on Ge p0217 A81-22874

ZnSe solar spectrum converter for GaAs solar cells p0237 A81-27143

Concepts for GaAs//AlGa/As solar cells with valley-transferred electrons for voltage and efficiency enhancement p0238 A81-27154

A monolithic series-connected Al<sub>0.93</sub>Ga<sub>0.07</sub>As/GaAs solar cell array p0239 A81-27158

Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells p0247 A81-27239

Simultaneous radiation damage and annealing of GaAs solar cells p0247 A81-27240

High temperature properties of GaAlAs/GaAs heteroface solar cells p0247 A81-27242

GaAs shallow-homojunction solar cells p0247 A81-27243

Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions p0248 A81-27254

NTS-2 solar cell experiment after two years in orbit p0249 A81-27268

Improved polycrystalline thin film gallium arsenide MOS solar cells p0251 A81-27281

Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells p0251 A81-27282

Grain boundary edge passivated solar cells on thin film GaAs p0251 A81-27284

Efficient large-grained GaAs homojunction solar cells p0251 A81-27285

Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287

High efficiency 1.43 and 1.69 eV band gap Ga<sub>1-x</sub>Al<sub>x</sub>As-GaAs solar cells for multicolour applications p0255 A81-28958

The GaAs solar cell research and development programs of the Air Force p0260 N81-17542

High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD p0261 N81-17543

Study of process technology for GaAlAs/GaAs heteroface solar cells p0261 N81-17544

High efficiency compound semiconductor concentrator photovoltaics p0261 N81-17545

Status of Rockwell-ERC high efficiency solar cell programs p0261 N81-17546

GaAs workshop report p0261 N81-17547

Results of the Air Force high efficiency cascaded multiple bandgap solar cell programs p0261 N81-17548

AlGaAs-GaAs cascade solar cell p0261 N81-17550

Fabrication of AlGaAs/GaAs cascade solar cell by LPE p0262 N81-17551

Gallium arsenide photovoltaic dense array for concentrator applications [SAND-78-7056] p0267 N81-18530

Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator [NASA-CR-164038] p0271 N81-19567

GaAs (GaAl) as solar cells to be used under concentrated solar light condition [EUR-6934-EE] p0274 N81-19625

# SUBJECT INDEX

# GAS TURBINES

- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications  
[NASA-TP-1811] p0276 N81-20173
- GALLIUM COMPOUNDS**  
Chemistry and preparation of III-V heterojunction solar cells p0252 A81-27288
- GAS CHROMATOGRAPHY**  
Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors p0318 N81-20202
- GAS COOLING**  
Safety analysis of the UTSI-CFFF superconducting magnet p0345 A81-26856  
Combined gas and steam cycle for a gas-cooled solar tower power plant [ASME PAPER 81-GT-102] p0348 A81-30008
- GAS DYNAMICS**  
Study of the behavior of gas distribution equipments in hydrogen service, phase 2 [CONF-801055-5] p0291 N81-16323  
Initiation of detonation in unconfined natural gas-air clouds [PB81-113292] p0308 N81-18149
- GAS GENERATORS**  
Progress in the development of the Marine Spey, SM1A [ASME PAPER 81-GT-186] p0349 A81-30080  
Generator gas operation of motor vehicles [DOE-TR-219] p0310 N81-18224
- GAS HEATING**  
Comparison of the HTTT reheat-gas-turbine combined cycle with the HTTT nonreheat gas-turbine combined cycle --- High-Temperature Turbine Technology [ASME PAPER 81-GT-69] p0348 A81-29978
- GAS LASERS**  
Solar-pumped gas laser development [AIAA PAPER 81-0098] p0210 A81-20600  
Solar-pumped gas laser development [NASA-TM-81894] p0257 N81-16437
- GAS MIXTURES**  
Study of the behavior of gas distribution equipments in hydrogen service, phase 2 [CONF-801055-5] p0291 N81-16323
- GAS STREAMS**  
Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams p0286 A81-24559  
High-temperature high-pressure particulate removal in coal gasification [PB81-113664] p0308 N81-17642
- GAS TRANSPORT**  
Applied research and evaluation of process concepts for liquefaction and gasification of western coals [DOE/ET-10527/T1] p0319 N81-20292
- GAS TURBINE ENGINES**  
The rotating traction drive [ASME PAPER 80-GT-99] p0332 A81-21163  
Gas turbine combustor design problems --- Book p0343 A81-26006  
Problems and promises in gas turbine combustor design development p0343 A81-26007  
Problems due to multifuel operation of gas turbine combustors p0343 A81-26009  
Residual fuel combustion in industrial gas turbines p0343 A81-26010  
Combustion of coal-derived liquids and shale oil in gas turbine combustors p0343 A81-26016  
Coalescence/dispersion modeling of gas turbine combustors p0344 A81-26018  
The possibilities of improving the efficiency of gas turbines p0346 A81-28614  
A new breed of an air breathing engine p0347 A81-29070  
Transpiration air cooled turbine blade - A technology for future generation aircraft and industrial gas turbine engines using coal or coal derived fuels p0347 A81-29115
- Ultra-lean combustion at high inlet temperatures [ASME PAPER 81-GT-44] p0347 A81-29958  
Economics of heavy fuels in gas turbines and combined cycles [ASME PAPER 81-GT-45] p0347 A81-29959  
Modified Brayton cycles utilizing alcohol fuels [ASME PAPER 81-GT-103] p0348 A81-30009  
Evaluation of advanced combustors for dry NO<sub>x</sub> suppression with nitrogen bearing fuels in utility and industrial gas turbines [ASME PAPER 81-GT-125] p0349 A81-30029  
Design analysis of high-efficiency low-stress ceramic gas turbines [ASME PAPER 81-GT-130] p0349 A81-30034  
ITI GT601 - A new approach to vehicular gas turbine power unit design [ASME PAPER 81-GT-152] p0349 A81-30051  
Progress in the development of the Marine Spey, SM1A [ASME PAPER 81-GT-186] p0349 A81-30080  
Cooled radial in-flow turbines for advanced gas turbine engines [ASME PAPER 81-GT-213] p0350 A81-30102  
Analytical consideration of fuel economy and dynamic response of a regenerative high temperature automobile gas turbine. II [ASME PAPER 81-GT-218] p0350 A81-30106  
AGT-1500 combustor and fuel effects modeling [AD-A092255] p0350 N81-16061  
Automotive technology development program [DOE/CS-0069/1] p0356 N81-19464  
High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1599-VOL-1] p0357 N81-19466  
High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendices [EPRI-AP-1599-VOL-2] p0360 N81-20434
- GAS TURBINES**  
Operational, control and protective system transient analyses of the closed-cycle GT-HTGR power plant --- Gas turbine High Temperature Gas-cooled Reactor [ASME PAPER 80-NA/GT-1] p0331 A81-21096  
The nuclear closed-cycle gas turbine /HTGR-GT/ - Dry cooled commercial power plant studies [ASME PAPER 80-GT-82] p0332 A81-21162  
Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal p0341 A81-25119  
Advanced synfuels production/power systems utilizing laser particulate control p0299 A81-25127  
Combustion of methanol and liquefied butane in a gas turbine combustor [ASME PAPER 81-GT-50] p0348 A81-29963  
Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64] p0348 A81-29974  
Gas turbine materials evaluation program utilizing coal derived gaseous fuel [ASME PAPER 81-GT-65] p0348 A81-29975  
Comparison of the HTTT reheat-gas-turbine combined cycle with the HTTT nonreheat gas-turbine combined cycle --- High-Temperature Turbine Technology [ASME PAPER 81-GT-69] p0348 A81-29978  
Combined gas and steam cycle for a gas-cooled solar tower power plant [ASME PAPER 81-GT-102] p0348 A81-30008  
A baseload gas turbine to meet utility requirements for reliability and availability [ASME PAPER 81-GT-127] p0349 A81-30031  
A market research effort leading to the development of a high efficiency 10,000 shp gas turbine system [ASME PAPER 81-GT-190] p0349 A81-30083  
Small gas turbine with large parabolic dish collectors [ASME PAPER 81-GT-201] p0349 A81-30091  
Coal-fired heaters for CCGT cogeneration service --- Closed-Cycle Gas Turbine [ASME PAPER 81-GT-212] p0350 A81-30101  
Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources [ASME PAPER 81-PET-5] p0350 A81-30114  
Two-stage combustion for reducing pollutant emissions from gas turbine combustors [NASA-CR-163877] p0350 N81-16056

- Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels [NASA-TN-81611] p0351 N81-16571
- Closed-cycle helium gas turbine for solar tower power plant p0353 N81-18247
- Gas turbine combustor performance on synthetic fuels, volume 1 [EPRI-AP-1623-VOL-1] p0356 N81-19259
- High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1598] p0358 N81-19632
- Development of high-temperature turbine subsystem technology to a technology readiness status, phase 2 [FE-1806-96] p0360 N81-20440
- Economic comparison of molten carbonate fuel cells and gas turbines in coal gasification based power plants [EPRI-AP-1543] p0322 N81-21229
- GAS-METAL INTERACTIONS**
- Hydrogen/metal interactions with special reference to electrochemical approaches p0286 A81-24556
- Metal hydrides in energy conversion systems p0342 A81-25480
- Investigations of intermetallic alloy film hydriding mechanisms p0290 A81-25497
- Surface segregation effects in Mg<sub>2</sub>Cu, Mg<sub>2</sub>Ni and Mg-Mg<sub>2</sub>Ni hydrogen storage compounds p0290 A81-25498
- Kinetics of the reaction between Mg<sub>2</sub>Ni and H<sub>2</sub> p0290 A81-25499
- Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979 p0382 A81-26476
- Coal conversion /combustion and gasification/ p0302 A81-26477
- GASEOUS FUELS**
- The development of biogas technology in India p0298 A81-25117
- Development of the Shell-Koppers coal gasification process p0303 A81-28995
- Gas turbine materials evaluation program utilizing coal derived gaseous fuel [ASME PAPER 81-GT-65] p0348 A81-29975
- Analytical consideration of fuel economy and dynamic response of a regenerative high temperature automobile gas turbine. II [ASME PAPER 81-GT-218] p0350 A81-30106
- GASIFICATION**
- Gasification of biomass as a source of synfuels for developing countries p0298 A81-25118
- Hydrogasification of oil shale [PB81-114092] p0306 N81-17292
- Combustion, pyrolysis, gasification, and liquefaction of biomass [SEB/TP-622-893] p0307 N81-17601
- Distillate fuel-oil processing for phosphoric acid fuel cell power plants [DOE/ET-13323/2] p0358 N81-19583
- Solar gasification of carbonaceous materials [UCRL-53063] p0272 N81-19605
- Energy from biological processes. Volume 3: Appendixes. Part C: Selected conversion technologies and end use [PB81-134793] p0323 N81-21236
- Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day [PNL-3695-APP-B] p0324 N81-21604
- GASOLINE**
- Gasoline from alcohols p0297 A81-24900
- Commercialization potential of the China Lake trash-to-gasoline process p0301 A81-25560
- A new route to liquid fuels from coal p0304 A81-26999
- Comparisons of gasohol and gasoline in laboratory and field trials [CONP-801030-3] p0312 N81-18237
- Comparison of gas phase hydrocarbon emissions from light-duty gasoline vehicles and light-duty vehicles equipped with diesel engines [PB81-122996] p0203 N81-20620
- Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology [ORNL-5664] p0322 N81-21223
- GEARS**
- Advanced continuously variable transmissions for electric and hybrid vehicles [NASA-TN-81718] p0368 N81-19459
- GEOCHEMISTRY**
- Synopses of B and D in geothermal-geochemical engineering at the Lawrence Livermore National Laboratory, 1976 - 1980 [UCID-18863] p0324 N81-21615
- GEOLOGICAL FAULTS**
- Petroleum exploration with Landsat in Bay County, Michigan - An interim case study p0294 A81-23562
- GEOLOGICAL SURVEYS**
- Remote sensing techniques for identification and evaluation of geothermal areas p0294 A81-23587
- The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey p0297 A81-25090
- Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content p0302 A81-26895
- Assessment of methane hydrates --- permafrost zone of Alaska and deep sediments in oceans [PB81-113300] p0307 N81-17510
- Compressed air energy storage: Preliminary design and site development program in an aquifer, task 2. Volume 2: Characterize and explore potential sites and prepare research and development plan [DOE/ET-29232/TI-VOL-2] p0377 N81-18531
- Comparative assessment of five potential sites for hydrothermal-magma systems: Summary [DOE/TIC-11303] p0320 N81-20525
- Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome [SAND-80-1323] p0324 N81-21468
- GEOLOGY**
- Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas [DOE/ET-27127/1] p0207 N81-21646
- GEOMETRICAL OPTICS**
- Performance test of a non-parabolic asymmetrical solar concentrator p0230 A81-26473
- GEOPHYSICAL FLUIDS**
- The mass discharge of a geofluid from a geothermal reservoir - Well system with flashing flow in the bore p0296 A81-24302
- GEOPHYSICS**
- Research in the geosciences related to resource assessment [DOE/IR-10119/TI] p0313 N81-18476
- GEOTHERMAL ENERGY CONVERSION**
- Solar power generation by ground thermal energy conversion p0227 A81-25046
- Pacific Northwest geothermal - Review and outlook p0188 A81-28549
- A primer on economic feasibility for direct-users p0346 A81-28550
- Energy analysis of four geothermal technologies p0346 A81-29031



# SUBJECT INDEX

# GEOTHERMAL RESOURCES

Wellbore flow characteristics for optimal energy recovery from Gulf Coast geopressured geothermal sources  
[ASME PAPER 81-PET-18] p0350 A81-30112

Ecology problems associated with geothermal development in California  
[UCRL-83941-REV-1] p0192 A81-16635

Environment, health, socioeconomic and environmental control technology executive summary  
[DOE/TIC-11308] p0197 A81-18575

Ethanol: A brief economic evaluation  
[DOE/ET-27256/T7] p0316 A81-19331

Improved liquid/solids handling module --- Geothermal energy conversion  
[DOE/ET-27193/T1] p0363 A81-21582

**GEOTHERMAL ENERGY EXTRACTION**

Tapping the main stream of geothermal energy  
p0296 A81-24749

China starts tapping rich geothermal resources  
p0296 A81-24750

Hot Dry Rock Geothermal Energy Development Program  
p0297 A81-25091

Use of weighted brines in recovery of geothermal energy from hot, dry rock  
p0303 A81-26928

Pacific Northwest geothermal - Review and outlook  
p0188 A81-28549

Engineering and economic studies for direct applications of geothermal energy in an industrial park in Pahoa, Hawaii  
[DOE/ET-27233/T2] p0314 A81-18513

Groundwater as an alternative energy source for space heating and cooling, geothermal heat extraction  
[DOE/TIC-11357] p0320 A81-20571

Basic research needed for the development of geothermal energy  
[LA-8562-MS] p0320 A81-20580

Updated plan for support of research related to geothermal reservoir engineering  
[LBI-10807] p0323 A81-21463

Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 A81-21562

Geothermal energy enhancement by thermal fracture  
[LA-8428] p0325 A81-21623

**GEOTHERMAL ENERGY UTILIZATION**

Energy analysis of four geothermal technologies  
p0185 A81-19848

Thermal techniques for characterizing magma body geometries --- geothermal energy resources  
p0296 A81-24303

The Philippines geothermal success story  
p0296 A81-24751

Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5 - Geothermal power/energy program  
p0187 A81-25088

Hot Dry Rock Geothermal Energy Development Program  
p0297 A81-25091

Making geothermal power competitive  
p0340 A81-25092

Geothermal energy and biofuel production in agriculture  
p0297 A81-25093

The utilization of geothermal energy in the Philippines  
p0340 A81-25095

A primer on economic feasibility for direct-users  
p0346 A81-28550

Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources  
[ASME PAPER 81-PET-5] p0350 A81-30114

Engineering and economic studies for direct applications of geothermal energy in an industrial park in Pahoa, Hawaii  
[DOE/ET-27233/T2] p0314 A81-18513

Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant  
[DOE/CS-56604/T1] p0355 A81-18546

Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain  
[PB81-123861] p0200 A81-19645

Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 A81-19646

Municipal geothermal heat utilization plan for Glenwood Springs, Colorado  
[DOE/ID-12049-3] p0324 A81-21585

Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update  
[DOE/EV-73002/1-VOL-3] p0205 A81-21597

Environmental overview for the development of geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 A81-21639

**GEOTHERMAL RESOURCES**

Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution  
p0293 A81-22207

HGP-A wellhead generator feasibility project --- geothermal power plant in Hawaii  
p0333 A81-22775

Remote sensing techniques for identification and evaluation of geothermal areas  
p0294 A81-23587

Application of aerial remote sensing to the study of geothermal resources in the desertic north of Chile and environmental pollution in Santiago, Chile  
p0294 A81-23590

Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goias - Brazil  
p0295 A81-23630

The mass discharge of a geofluid from a geothermal reservoir - Well system with flashing flow in the bore  
p0296 A81-24302

Thermal techniques for characterizing magma body geometries --- geothermal energy resources  
p0296 A81-24303

Construction of a probe for measuring temperature and pressure in deep wells --- geothermal energy application  
p0296 A81-24304

Hydrothermal metamorphism in the Larderello geothermal field  
p0296 A81-24306

Tapping the main stream of geothermal energy  
p0296 A81-24749

China starts tapping rich geothermal resources  
p0296 A81-24750

Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5 - Geothermal power/energy program  
p0187 A81-25088

The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey  
p0297 A81-25090

The utilization of geothermal energy in the Philippines  
p0340 A81-25095

Pacific Northwest geothermal - Review and outlook  
p0188 A81-28549

Energy analysis of four geothermal technologies  
p0346 A81-29031

Wellbore flow characteristics for optimal energy recovery from Gulf Coast geopressured geothermal sources  
[ASME PAPER 81-PET-18] p0350 A81-30112

Geothermal reservoir engineering computer code comparison and validation using the GEONZ simulator program  
[DOE/SP-11450/1] p0314 A81-18478

Thermal studies in a geothermal area. Report 1: Thermal studies at Roosevelt Hot Springs, Utah. Report 2: Heat flow above an arbitrarily dipping plane of heat sources. Report 3: A datum correction for heat flow measurements made on an arbitrary surface  
[DOE/ID-12079/19] p0314 A81-18479

Evaluation and targeting of geothermal energy resources in the southeastern United States  
[DOE/ET-27001/8] p0314 A81-18480

# GEO THERMAL TECHNOLOGY

# SUBJECT INDEX

Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2] p0315 N81-18547

Utilization of geothermal energy for methane production for J. A. Albertson Land and Cattle Company  
[DOE/ET-27230/T2] p0316 N81-19333

Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597

Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 N81-19598

Kilauea Iki lava lake experiment plans  
[SAND-80-1653] p0318 N81-19699

Comparative assessment of five potential sites for hydrothermal-magma systems: Summary  
[DOE/TIC-11303] p0320 N81-20525

Basic research needed for the development of geothermal energy  
[LA-8562-MS] p0320 N81-20580

Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain  
[EB1-10119] p0323 N81-21423

Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 N81-21562

Heat-flow measurements in the state of Arkansas  
[LA-8569-MS] p0324 N81-21573

Synopses of B and D in geothermal-geochemical engineering at the Lawrence Livermore National Laboratory, 1976 - 1980  
[UCID-18863] p0324 N81-21615

Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas  
[DOE/ET-27127/1] p0207 N81-21646

**GEO THERMAL TECHNOLOGY**

Energy analysis of four geothermal technologies  
p0185 N81-19848

Suppression of steam condensate corrosion at Waiakeke Geothermal Project  
p0294 A81-22774

Construction of a probe for measuring temperature and pressure in deep wells --- geothermal energy application  
p0296 A81-24304

The Philippines geothermal success story  
p0296 A81-24751

Use of weighted brines in recovery of geothermal energy from hot, dry rock  
p0303 A81-26928

Energy analysis of four geothermal technologies  
p0346 A81-29031

Methodology to evaluate the potential for ground water contamination from geothermal fluid releases  
[PB81-111114] p0195 N81-17641

Thermal studies in a geothermal area. Report 1: Thermal studies at Roosevelt Hot Springs, Utah. Report 2: Heat flow above an arbitrarily dipping plane of heat sources. Report 3: A datum correction for heat flow measurements made on an arbitrary surface  
[DOE/ID-12079/19] p0314 N81-18479

Basic research needed for the development of geothermal energy  
[LA-8562-MS] p0320 N81-20580

Updated plan for support of research related to geothermal reservoir engineering  
[LBI-10807] p0323 N81-21463

Management plan for fiscal year 1981: Environmental Control Technology Project geothermal development  
[UCID-18903] p0206 N81-21640

**GERMANIUM**

Molecular beam epitaxial GaAs heteroface solar cell grown on Ge  
p0217 A81-22874

**GERMANIUM COMPOUNDS**

Development and study of a lead telluride/germanium telluride solar thermoelectric generator  
p0254 A81-28588

**GERMANY**

Development of liquefaction and gasification in the Federal Republic of Germany  
p0304 A81-28996

Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany  
[BMFT-FB-T-79-94] p0264 N81-17609

**GETTERS**

POCL3 gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216

**GLASS**

Integral glass covering of spacecraft solar cells by electrostatic bonding  
p0250 A81-27269

Barstow heliostat mirror glass characterization  
[PNL-3576] p0267 N81-18522

Development of sheet molding compound solar collectors with molded-in silvered glass reflective surfaces  
[SAND-80-0702] p0273 N81-15613

Transparent glass honeycomb structures for energy loss control  
[UCLA-ENG-8039] p0274 N81-19622

**GLASS FIBERS**

Modeling and analysis of an all-fiberglass flat plate solar collector  
[ASME PAPER 80-WA/SOL-4] p0212 A81-21132

**GOVERNMENT/INDUSTRY RELATIONS**

Proceedings: EPA/Industry Forum on Coal-Liquefaction  
[PB81-113052] p0195 N81-17645

The effect of economic regulation on fueluse efficiency in private trucking-operations  
[PB81-114753] p0198 N81-18931

**GOVERNMENTS**

Energy policy and research planning. Citations from the NTIS data base  
[PB81-800112] p0195 N81-17620

**GRAIN BOUNDARIES**

The properties of polycrystalline silicon solar cells with controlled titanium additions  
p0209 A81-26010

The effects of intragrain defects on the local photoreponse of polycrystalline silicon solar cells  
p0221 A81-24805

Performance study of p+/n and n+/p solar cell structures on polycrystalline material  
p0231 A81-27087

The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells  
p0233 A81-27101

Physical and chemical characterization of R.A.D. silicon films  
p0249 A81-27260

Grain size dependence of silicon solar cell parameters  
p0249 A81-27261

Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells  
p0251 A81-27282

The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells  
p0251 A81-27283

Grain boundary edge passivated solar cells on thin film GaAs  
p0251 A81-27284

Efficient large-grained GaAs homojunction solar cells  
p0251 A81-27285

Applications of laser annealing and laser-induced diffusion to photovoltaic conversion  
[CENF-801153-1] p0258 N81-16594

Automated array assembly task development of low-cost polysilicon solar cells  
[NASA-CR-163939] p0259 N81-17521

**GRAPHIC ARTS**

A new formal graphic language for the representation of complex energy distribution systems  
p0225 A81-25010

**GRAPHITE**

Technical evaluation of gaseous suspensions of graphite for the absorption of concentrated solar radiation  
[EPFL-ITA-6] p0272 N81-19574

**GRAVITATIONAL EFFECTS**

The utilization of the free and at present dissipated gravitational force inherent in tidal motion by conversion to electrical energy, using compressed air as the active intermediary  
p0339 A81-25083

**GREENHOUSE EFFECT**

Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 A81-21101  
Effects of carbon dioxide buildup in the atmosphere  
[GPO-62-841] p0191 A81-16626

**GREENHOUSES**

Surface-heating greenhouses with waste heated water  
[DOE/ES-10107/T1] p0200 A81-19620  
Hullo Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980  
[SOLAR/1043-80/14] p0281 A81-21553

**GROUND BASED CONTROL**

Coherent multiple tone technique for ground based SPS control  
p0366 A81-16544

**GROUND EFFECT**

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect  
[PB81-142184] p0364 A81-21635

**GROUND EFFECT (AERODYNAMICS)**

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect  
[PPA-133] p0359 A81-20037

**GROUND WATER**

Heat transport in groundwater systems. Volume 2: Laboratory model  
[PB81-104135] p0375 A81-16523  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C  
[DOE/CS-20060/5120-VOL-1] p0192 A81-17394  
Methodology to evaluate the potential for ground water contamination from geothermal fluid releases  
[PB81-111114] p0195 A81-17641  
Ground Water and Energy: Proceedings of the US Department of Energy's National Workshop  
[CONF-800137] p0199 A81-19584  
Energy out of groundwater  
[NE/HETV-80/9] p0320 A81-20565  
Groundwater as an alternative energy source for space heating and cooling, geothermal heat extraction  
[DOE/TIC-11357] p0320 A81-20571

**GROUND WIND**

Wind-power site-screening methodology  
[UCRL-52938] p0314 A81-18526

**GUYANA**

An evaluation of alternate energy sources for the Guyana energy crisis  
p0340 A81-25097

**H****HALL EFFECT**

Plasma diagnostics of MHD generators  
[AIAA PAPER 81-0099] p0328 A81-20601  
Electrical conductivity and Hall parameter measurements in Faraday MHD generators  
[ASME PAPER 80-WA/HT-9] p0331 A81-21103

**HANDBOOKS**

Introduction to meteorological measurements and data handling for solar energy applications  
[DOE/ER-0084] p0265 A81-17681

**HAULING**

Critical parameters for coarse coal underground slurry haulage systems  
[JPL-PUB-81-11] p0369 A81-20495

**HAZARDS**

On the safety to solar electric power generation  
p0256 A81-29269

**HEAD (FLUID MECHANICS)**

Head-sea diffraction by a slender raft with application to wave-power absorption  
p0303 A81-28690

**HEALTH PHYSICS**

Contribution of activation products to fusion accident risk. I - A preliminary investigation  
p0336 A81-23712

Life Sciences Synthetic Fuels program at Oak Ridge National Lab.  
[CONF-801039-3] p0192 A81-17285  
Environmental assessment for the Satellite Power System concept development and evaluation program: Nonmicrowave health and ecological effects  
[DOE/ER-0089] p0205 A81-21613

**HEAT**

Heat exchange and solar energy, volume 1 --- conference proceedings, Rhode-Saint-Genese, Belgium, 18 Jan. - 1 Feb. 1980  
[VKI-LS-1980-2-VOL-1] p0266 A81-18499  
Heat exchange and solar energy, volume 2 --- conference proceedings, Rhode Saint Genese, Belgium  
[VKI-LS-1980-2-VOL-2] p0277 A81-20549

**HEAT BALANCE**

On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution  
[ASME PAPER 80-WA/HT-11] p0331 A81-21105  
Flat plate thermal solar collectors: A physical background  
[PB81-135741] p0280 A81-20605

**HEAT CAPACITY MAPPING MISSION**

Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain  
[81-10119] p0323 A81-21423

**HEAT EXCHANGERS**

Calculation of the internal heat exchange cycle of a Stirling engine --- Russian book  
p0343 A81-25625  
Low-cost conversion of polycrystalline silicon into sheet by HEM and FAST --- Heat Exchanger Method and Fixed Abrasive Slicing Technique  
p0238 A81-27145  
Heat exchanger for in-ground heat storage  
p0375 A81-29260  
Economic application, design analysis, and material availability for ceramic heat exchangers  
[ORNL/TM-7580] p0196 A81-18528  
Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5] p0200 A81-19599  
Energy out of groundwater  
[NE/HETV-80/9] p0320 A81-20565  
Development of method and equipment for energy recovery from the exhaust gases of the oil-fueled smelting and holding furnaces  
[STU-78-6895] p0203 A81-20573  
Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 A81-21080  
Improved liquid/solids handling module --- Geothermal energy conversion  
[DOE/ET-27193/T1] p0363 A81-21582

**HEAT FLUX**

On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution  
[ASME PAPER 80-WA/HT-11] p0331 A81-21105  
Temperature variation in the absorber plate of an air heating flat plate solar collector  
[ASME PAPER 80-WA/SOL-2] p0211 A81-21130  
Thermal techniques for characterizing magma body geometries --- geothermal energy resources  
p0296 A81-24303  
Basic research needed for the development of geothermal energy  
[LA-8562-MS] p0320 A81-20580

**HEAT GENERATION**

Laser fusion systems for process heat  
p0341 A81-25106

**HEAT OF COMBUSTION**

Methane production from the Mountain View landfill  
p0300 A81-25553

**HEAT OF FUSION**

Latent and chemical storage --- solar energy, thermochemical storage  
p0277 A81-20550  
The benefits of advanced heat storage systems --- solar energy, phase changes, encapsulation, heat of fusion  
p0277 A81-20551

**HEAT PIPES**

Ceramic heat pipe development  
[DOE/TIC-11389] p0205 A81-21611

## HEAT PUMPS

- Design procedure and application of solar-assisted series heat pump systems  
[ASHE PAPER 80-WA/SOL-9] p0212 A81-21135
- Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems  
[ASHE PAPER 80-WA/SOL-10] p0212 A81-21136
- Analysis of two-phase flow solar collectors with application to heat pumps  
[ASHE PAPER 80-WA/SOL-32] p0214 A81-21153
- The parallel heat pump and photovoltaic heating and cooling - Phase II  
[ASHE PAPER 80-WA/SOL-40] p0214 A81-21160
- The absorption process for heating, cooling and energy storage - An historical survey  
p0381 A81-23496
- Thermochemical storage for solar heating and cooling  
p0219 A81-23702
- Solar-powered saline sorbent-solution heat pump/storage system  
p0224 A81-25001
- Experimental results from the first year of operation of the solar ground coupling research facility of Brookhaven National Laboratory  
p0225 A81-25009
- Enhancement of low grade heat via the HYCSOS chemical heat pump --- Hydride Conversion and Storage System  
p0225 A81-25018
- Ammoniated salt heat pump --- using solar energy or industrial waste energy for space heating and cooling  
p0372 A81-25019
- The series solar heat pump and energy conservation  
p0186 A81-25020
- Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages  
p0225 A81-25021
- Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C  
[DOE/CS-20060/5120-VOL-1] p0192 A81-17394
- Capital cost estimates of selected advanced thermal energy storage technologies  
[ANI/SPG-11] p0376 A81-17590
- Development of a system for off-peak electrical energy use by air conditioners and heat pumps  
[TVA-EDT-122] p0377 A81-18509
- Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5] p0200 A81-19599
- Solar/performance goals for solar and ground-coupled heat pump systems  
[BNL-51259] p0273 A81-19609
- Energy out of groundwater  
[NE/HETV-80/9] p0320 A81-20565
- Evaluation of solar collectors for heat pump applications  
[DOE/CS-35351/T1] p0278 A81-20568
- Analysis of field test data on residential heating and cooling  
[EPRI-BA-1649] p0204 A81-21561
- HEAT RESISTANT ALLOYS**
- Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979  
p0382 A81-26476
- Coal conversion /combustion and gasification/  
p0302 A81-26477
- Corrosion of alloys at high temperature in coal gasification environments  
p0302 A81-26491
- The performance of MCral alloys in complex coal conversion atmospheres  
p0302 A81-26492

## HEAT SINKS

- Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C  
[DOE/CS-20060/5120-VOL-1] p0192 A81-17394

## HEAT SOURCES

- Kilauea Iki lava lake experiment plans  
[SAND-80-1653] p0318 A81-19699

## HEAT STORAGE

- Use of the ATOP system in the control of an off-peak storage device --- Ambient Temperature Observer/Predictor in heating system  
p0371 A81-20491
- Temperature stratification in hot water solar thermal storage tanks  
[AIAA PAPER 81-0368] p0210 A81-20787
- Enhanced heat conduction in phase-change thermal energy storage devices  
[ASHE PAPER 80-WA/HT-45] p0371 A81-21114
- Thermal storage requirements for parabolic dish solar power plants  
[ASHE PAPER 80-WA/SOL-21] p0213 A81-21145
- Comparison of liquid solar thermal storage subsystems in the national solar data network  
[ASHE PAPER 80-WA/SOL-36] p0214 A81-21156
- Thermal energy storage and regeneration --- Book  
p0371 A81-21391
- The absorption process for heating, cooling and energy storage - An historical survey  
p0381 A81-23496
- Simple transient thermal model for solar collector/storage water heaters  
p0218 A81-23498
- Thermochemical storage for solar heating and cooling  
p0219 A81-23702
- Thermal energy storage in aquifers for a solar power plant  
p0224 A81-24992
- Thermal storage cell for high temperature solar systems  
p0224 A81-24993
- Advanced solar thermal storage medium test data and analysis  
p0224 A81-24994
- Physical and chemical processes for latent heat storage at low temperatures  
p0372 A81-24995
- PCM thermal energy storage in cylindrical containers of various configurations --- Phase Change Materials  
p0372 A81-24996
- A cycle life tester for the long-term stability of phase change materials for thermal energy storage  
p0372 A81-24997
- Sensitivity analysis of a community solar system using annual cycle thermal energy storage  
p0224 A81-24998
- The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building  
p0224 A81-24999
- Membrane-lined thermal storage systems  
p0224 A81-25000
- Solar-powered saline sorbent-solution heat pump/storage system  
p0224 A81-25001
- High temperature storage for a wind energy system  
p0372 A81-25002
- Experimental results from the first year of operation of the solar ground coupling research facility of Brookhaven National Laboratory  
p0225 A81-25009
- Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors  
p0225 A81-25015
- Engineering development of a HYCSOS chemical heat pump --- Hydride Conversion and Storage System  
p0287 A81-25017
- Ammoniated salt heat pump --- using solar energy or industrial waste energy for space heating and cooling  
p0372 A81-25019
- A 'two-tank' seasonal storage concept for solar space heating of buildings  
p0372 A81-25035
- The construction cost of thermal storage for solar systems  
p0229 A81-25062
- An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine --- thermal energy storage with water lithium salts solution  
p0342 A81-25132
- Heat exchanger for in-ground heat storage  
p0375 A81-29260

# SUBJECT INDEX

# HEAT TREATMENT

- Central solar heating plants - Optimal ratio between solar collector area and heat storage volume p0256 A81-29262
- Storage requirement definition study [NASA-CR-163882] p0257 N81-16572
- Capital cost estimates of selected advanced thermal energy storage technologies [ANL/SPG-11] p0376 N81-17590
- Energy: Solar energy programme of the Commission of the European Communities [EUR-6959-EM] p0263 N81-17593
- Seasonal Thermal Energy Storage Program [PNL-SA-9030] p0376 N81-17602
- Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage [PB81-114324] p0376 N81-17618
- High temperature thermal energy storage in aquifers with a solar power plant application p0377 N81-18486
- US Department of Energy thermal energy storage program [CONP-801154-1] p0196 N81-18510
- Passive and hybrid solar manufactured housing and buildings [DOE/CS-30371/1] p0267 N81-18515
- Some basic considerations and possible improvements on the solar pond [ANL-CT-80-23] p0268 N81-18540
- Computer simulation of solar air heating systems using rock bed thermal storage units [AD-A094771] p0377 N81-19580
- Aquifer thermal energy storage: A survey [LBL-10441] p0378 N81-19606
- Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy [DOE/ET-20417/4] p0378 N81-19633
- Continuous heat source model for ground heat storage [PB81-122889] p0378 N81-19643
- Latent and chemical storage --- solar energy, thermochemical storage p0277 N81-20550
- The benefits of advanced heat storage systems --- solar energy, phase changes, encapsulation, heat of fusion p0277 N81-20551
- Performance of air collector house heating systems with rock bed storage --- solar heating p0277 N81-20553
- Optimization of storage in passive solar heating systems [DOE/CS-35405/T1] p0278 N81-20574
- Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana [SOLAR/1001-80/14] p0363 N81-21552
- Solar energy system performance evaluation: Kalwall Corporation, Manchester, New Hampshire [SOLAR/2015-80/14] p0281 N81-21554
- Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation [SOLAR/2029-80/14] p0281 N81-21555
- Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980 [SOLAR/1014-80/14] p0281 N81-21557
- Analysis of field test data on residential heating and cooling [EPRI-BA-1649] p0204 N81-21561
- World activity in solar ponds [UCID-18900] p0282 N81-21564
- Handbook of experiences in the design and installation of solar heating and cooling systems [DOE/CS-32224/T1] p0282 N81-21566
- Guidelines for conceptual design and evaluation of aquifer thermal energy storage [PNL-3581] p0380 N81-21587
- HEAT TRANSFER**
- MHD electrode performance - Heat transfer and voltage drops [ASME PAPER 80-WA/HT-10] p0331 A81-21104
- On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution [ASME PAPER 80-WA/HT-11] p0331 A81-21105
- Temperature variation in the absorber plate of an air heating flat plate solar collector [ASME PAPER 80-WA/SOL-2] p0211 A81-21130
- Parametric analysis of louvered air-heating solar collectors [ASME PAPER 80-WA/SOL-38] p0214 A81-21158
- Heat transfer and the future of solar energy utilization [ASME PAPER 80-WA/SOL-41] p0215 A81-21161
- Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium --- application to solar energy collection p0215 A81-21584
- FREHEAT - A passive solar system simulation program p0216 A81-22212
- Advanced solar thermal storage medium test data and analysis p0224 A81-24994
- Heat transfer through a paraffin wax solar energy storage characterized by a temperature dependent specific heat p0224 A81-25006
- Experimental results from the first year of operation of the solar ground coupling research facility of Brookhaven National Laboratory p0225 A81-25009
- Heat transfer enhancement in metal hydride systems p0289 A81-25156
- PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements p0250 A81-27275
- Heat transport in groundwater systems. Volume 2: Laboratory model [PB81-104135] p0375 N81-16523
- Environmental influences in the simulation of a solar space heating system [AD-A092436] p0190 N81-16587
- Heat exchange and solar energy, volume 1 --- conference proceedings, Rhode-Saint-Genese, Belgium, 18 Jan. - 1 Feb. 1980 [VKI-LS-1980-2-VOL-1] p0266 N81-18499
- Thermal performance predictions of flat-plate solar collector air heaters p0270 N81-18566
- Kilauea Iki lava lake experiment plans [SAND-80-1653] p0318 N81-19699
- Heat exchange and solar energy, volume 2 --- conference proceedings, Rhode Saint Genese, Belgium [VKI-LS-1980-2-VOL-2] p0277 N81-20549
- Handbook of experiences in the design and installation of solar heating and cooling systems [DOE/CS-32224/T1] p0282 N81-21566
- HEAT TRANSFER COEFFICIENTS**
- Analysis by real-time holographic interferometry of heat transfer at the surface of cold solar collectors p0216 A81-22695
- A comparison of theory and experiment for photovoltaic/thermal collector performance p0250 A81-27276
- A non-linear flat-plate collector model p0254 A81-27571
- Line-Focus Solar Central Power System, phase 1. Volume 3: Appendices [DOE/ET-20550/2-VOL-3] p0283 N81-21600
- HEAT TRANSMISSION**
- Fluids for energy transport and conversion in solar power stations p0220 A81-24616
- Development and testing of heat transport fluids for use in active solar heating and cooling systems [NASA-TM-82395] p0368 N81-16584
- Thermal studies in a geothermal area. Report 1: Thermal studies at Roosevelt Hot Springs, Utah. Report 2: Heat flow above an arbitrarily dipping plane of heat sources. Report 3: A datum correction for heat flow measurements made on an arbitrary surface [DOE/ID-12079/19] p0314 N81-18479
- Some basic considerations and possible improvements on the solar pond [ANL-CT-80-23] p0268 N81-18540
- Heat-flow measurements in the state of Arkansas [LA-8569-MS] p0324 N81-21573
- HEAT TREATMENT**
- High performance BSF silicon solar cell with fire through contacts printed on AR coating --- Back Surface Field p0243 A81-27198

## HEATING EQUIPMENT

## SUBJECT INDEX

### HEATING EQUIPMENT

A new formal graphic language for the representation of complex energy distribution systems p0225 A81-25010

Direct solar air heating in Denmark /56 deg N/ - Heating strategies in theory and practice p0225 A81-25022

A non-conventional reversible total energy system --- solar heating and electric power p0186 A81-25036

Trash to energy p0300 A81-25162

Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays [NASA-CR-163943] p0260 N81-17525

Appliance energy efficiency in new home construction [DOE/CS-23999/T1] p0200 N81-19608

Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California [EPRI-EM-1654] p0275 N81-19630

MHD air heater development technology [DOE/ET-15602/T2] p0360 N81-20590

Regional analysis of residential/commercial gas demand [PB81-134496] p0206 N81-21631

**HEAVY LIFT LAUNCH VEHICLES**

An assessment of the atmospheric effects of a Satellite Power System p0187 A81-25053

Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 3: Transportation analysis [NASA-CR-3394] p0271 N81-19565

**HEAVY WATER**

Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams p0286 A81-24559

**HELICAL FLOW**

Aerodynamic analysis of propeller-type windmills with helical trailing vortices p0355 N81-18565

**HELIOSTATS**

Method of calculating shading of heliostats in tower-type solar power plants p0211 A81-20907

Heliostats and concentrators with variable reflecting-surface geometry p0211 A81-20908

Design of self-calibrating controllers for heliostats in a solar power plant p0211 A81-21030

A consideration of possible receiver designs for solar tower plants p0220 A81-24426

The aerodynamics of heliostats for solar power plant applications p0253 A81-27310

Barstow heliostat mirror glass characterization [PNL-3576] p0267 N81-18522

Development of an automatic heliostat cleaning system [SAND-79-8184] p0268 N81-18532

**HELIUM**

Energy, helium, and the future, 2 [LA-UR-80-3342] p0191 N81-16605

Closed-cycle helium gas turbine for solar tower power plant p0353 N81-18247

**HERMETIC SEALS**

Development of simplified process for environmentally resistant cells [NASA-CR-163884] p0257 N81-16575

**ETEROJUNCTION DEVICES**

Heterojunction solar cells on cuprous oxide p0221 A81-24809

Thin film photovoltaic solar energy conversion p0228 A81-25054

Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110

Concepts for GaAs/AlGaAs solar cells with valley-transferred electrons for voltage and efficiency enhancement p0238 A81-27154

Heterojunction solar cell design and evaluation p0239 A81-27163

A microstructural study of the heterojunction materials of the CdS-Cu<sub>2</sub>S solar cell p0241 A81-27179

The role of deep levels in controlling the photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction p0241 A81-27182

High temperature properties of GaAlAs/GaAs heteroface solar cells p0247 A81-27242

Low-cost high-efficiency SnO<sub>2</sub>/n/+/-p Si heteroface solar cell fabricated by paint-on-diffusant method p0249 A81-27259

Chemistry and preparation of III-V heterojunction solar cells p0252 A81-27288

Theoretical advantages of pn/+/-type Cu<sub>2</sub>S-ZnO solar cell p0346 A81-28395

AlGaAs-GaAs cascade solar cell p0261 N81-17550

**ETEROJUNCTIONS**

Theoretical limit efficiency of direct gap solar cells p0239 A81-27162

ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis p0240 A81-27169

Incorporation of superlattice crystal layers in multijunction solar cells p0261 A81-17549

Fabrication of AlGaAs/GaAs cascade solar cell by LPE p0262 N81-17551

OM-VPE grown materials for high efficiency solar cells p0262 N81-17552

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions [SEMI/PR-8031-1-T2] p0264 A81-17595

**HIGH CURRENT**

Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications p0344 A81-26853

Pulsed high voltage and high current homopolar energy storage system [AD-A094910] p0377 N81-19575

**HIGH FIELD MAGNETS**

Preliminary Faraday performance of a large MHD generator at high magnetic field [AIAA PAPER 81-0028] p0327 A81-20548

**HIGH POWER LASERS**

Solar-pumped gas laser development [AIAA PAPER 81-0098] p0210 A81-20600

Solar-pumped gas laser development [NASA-TN-81894] p0257 N81-16437

**HIGH PRESSURE**

High-temperature high-pressure particulate removal in coal gasification [PB81-113664] p0308 N81-17642

**HIGH TEMPERATURE**

High temperature solar reactors for hydrogen production p0286 A81-24557

High temperature storage for a wind energy system p0372 A81-25002

Fusion reactors as high-temperature process heat sources p0341 A81-25105

High temperature batteries p0373 A81-25567

High-temperature high-pressure particulate removal in coal gasification [PB81-113664] p0308 N81-17642

Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase 0: Proof of concept experiment [NASA-CR-164137] p0291 A81-21210

**HIGH TEMPERATURE AIR**

A natural convection solar house system --- air heating p0267 N81-18506

**HIGH TEMPERATURE GAS COOLED REACTORS**

Operational, control and protective system transient analyses of the closed-cycle GT-HTGR power plant --- Gas Turbine High Temperature Gas-cooled Reactor [ASME PAPER 80-WA/GT-1] p0331 A81-21096

# SUBJECT INDEX

# HYDROCARBON FUELS

- The nuclear closed-cycle gas turbine /HTGR-GT/-  
Dry cooled commercial power plant studies  
[ASME PAPER 80-GT-82] p0332 A81-21162  
Production of liquid fuels with a high-temperature  
gas-cooled reactor p0298 A81-25120
- HIGH TEMPERATURE GASES**  
Utilization of cascade injectors in hot waste gas  
from an oil firing installation p0186 A81-23416  
Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106
- HIGH TEMPERATURE NUCLEAR REACTORS**  
Rate coefficients of combustion/fuel conversion  
reactions by high-temperature photochemistry  
[COO-4169-5] p0314 A81-18525
- HIGH TEMPERATURE RESEARCH**  
Diagnostic instrumentation development program for  
the heat recovery/seed recovery system of the  
open-cycle, coal-fired magnetohydrodynamic power  
plant [AIAA PAPER 81-0110] p0328 A81-20602  
HYFIRE: A Tokamak high temperature electrolysis  
system --- synfuel production [BNL-28679] p0352 A81-16908  
High temperature water vapor electrolysis (HOT ELLV)  
--- for hydrogen production [BNFT-PB-T-80-051] p0292 A81-21627
- HIGH TEMPERATURE TESTS**  
Behaviour of high temperature alloys in aggressive  
environments; Proceedings of the Petten  
International Conference, Petten, Netherlands,  
October 15-18, 1979 p0382 A81-26476  
High temperature properties of GaAs/GaAs  
heteroface solar cells p0247 A81-27242  
Gas turbine materials evaluation program utilizing  
coal derived gaseous fuel [ASME PAPER 81-GT-65] p0348 A81-29975  
Thermal stability tests of heat transfer fluids  
for transfer and storage of thermal energy  
[DOE/ET-20417/4] p0378 A81-19633
- HIGH VOLTAGES**  
Concentration dependences of the parameters of  
high-voltage silicon photocells under high  
levels of illumination p0219 A81-23803  
Optimum design and device physics of the  
horizontally multilayered high voltage solar  
cells produced by plasma deposited amorphous  
silicon p0247 A81-27238  
Recent progress in high-output-voltage silicon  
solar cells p0260 A81-17534  
Pulsed high voltage and high current outputs from  
homopolar energy storage system [AD-A094910] p0377 A81-19575
- HOLOGRAPHIC INTERFEROMETRY**  
Analysis by real-time holographic interferometry  
of heat transfer at the surface of cold solar  
collectors p0216 A81-22695  
Digital holographic interferometry of convective  
heat transport p0254 A81-28737
- HOMOJUNCTIONS**  
Theoretical limit efficiency of direct gap solar  
cells p0239 A81-27162  
GaAs shallow-homojunction solar cells p0247 A81-27243  
Efficient large-grained GaAs homojunction solar  
cells p0251 A81-27285
- HOMOPOLAR GENERATORS**  
Pulsed high voltage and high current outputs from  
homopolar energy storage system [AD-A094910] p0377 A81-19575
- HONEYCOMB STRUCTURES**  
Transparent glass honeycomb structures for energy  
loss control [UCLA-ENG-8039] p0274 A81-19622
- HORIZONTAL ORIENTATION**  
Stability of large horizontal-axis axisymmetric  
wind turbines p0333 A81-22526
- HOT CORROSION**  
Behaviour of high temperature alloys in aggressive  
environments; Proceedings of the Petten  
International Conference, Petten, Netherlands,  
October 15-18, 1979 p0382 A81-26476  
Corrosion of alloys at high temperature in coal  
gasification environments p0302 A81-26491
- HOT WEATHER**  
Solar air conditioning in a hot arid climate  
p0226 A81-25027
- HUMAN FACTORS ENGINEERING**  
Biological exposure sensors in coal conversion  
technologies [CONF-801143-1] p0192 A81-17410
- HUMAN RESOURCES**  
Employment impacts of selected solar and  
conventional energy systems: A framework for  
comparisons and preliminary findings  
[ANL/EES-TN-116] p0383 A81-19611
- HYBRID STRUCTURES**  
Performance evaluation of conceptual hybrid solar  
photovoltaic/solar thermal electric power systems  
p0247 A81-27244
- HYDRATES**  
Assessment of methane hydrates --- permafrost zone  
of Alaska and deep sediments in oceans  
[PB81-113300] p0307 A81-17510
- HYDRIDES**  
Efficiency of hydrogen compression by means of  
hydrides p0289 A81-25157
- HYDROCARBON COMBUSTION**  
Comparison of gas phase hydrocarbon emissions from  
light-duty gasoline vehicles and light-duty  
vehicles equipped with diesel engines  
[PB81-122996] p0203 A81-20620
- HYDROCARBON FUEL PRODUCTION**  
Motor fuels from coal - Technology and economics  
p0293 A81-22275  
Liquefaction of biomass as a source of fuels or  
chemicals p0294 A81-22350  
Synthetic gas production for methanol - Current  
and future trends p0295 A81-24016  
Gasoline from alcohols p0297 A81-24900  
Alternative energy sources II; Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 7 -  
Hydrocarbon conversion p0297 A81-25109  
Combustion of coal-derived liquids and shale oil  
in gas turbine combustors p0343 A81-26016  
Development of liquefaction and gasification in  
the Federal Republic of Germany p0304 A81-28996  
The SRC-LI process --- Solvent Refined Coal  
p0304 A81-28997  
Methanol - The efficient conversion of valueless  
fuels into a versatile fuel and chemical feedstock  
[ASME PAPER 81-PID-1] p0305 A81-30110  
Molten salt pyrolysis of latex --- synthetic  
hydrocarbon fuel production using the Guayule  
sarub [NASA-CASE-MPO-14315-1] p0306 A81-17261  
Hydrogasification of oil shale [PB81-114092] p0306 A81-17292  
Energy from biological processes. Volume 3:  
Appendixes. Part C: Selected conversion  
technologies and end use [PB81-134793] p0323 A81-21236
- HYDROCARBON FUELS**  
Technical and economic advances in steam reforming  
of hydrocarbons p0285 A81-24017  
Major electrochemical developments related to the  
energy problem p0382 A81-25610  
Residual fuel combustion in industrial gas turbines  
p0343 A81-26010

- Motor fuels and chemicals from coal via the Sasol Synthol route  
p0303 A81-28994
- Methanol combustion in a 26-MW gas turbine  
[ASME PAPER 81-GT-64] p0348 A81-29974
- On-farm production of fuel-alcohol in Mid-America technical and economic potential  
[NASC-TP-80-009] p0189 A81-16316
- Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base  
[PB81-800021] p0352 A81-16615
- Fleet trails using methanol/gasoline blends  
[CONP-801030-4] p0311 A81-18230
- Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 A81-18232
- Comparisons of gasohol and gasoline in laboratory and field trials  
[CONP-801030-3] p0312 A81-18237
- Hybrid fuels for highway transportation  
[DOE/CS-54240/T1] p0313 A81-18242
- An assessment of the use of antimisting fuel in turbofan engines  
[NASA-CR-165258] p0315 A81-19316
- Office of alcohol fuels program plan, FY 1981  
[DOE/AF-10001/T2] p0319 A81-20293
- Conversion of cellulosic wastes to liquid fuels  
[COO-2982-57] p0320 A81-20306
- Materials technology for coal-conversion processes  
[ANL-80-93] p0322 A81-21228
- HYDROCARBONS**
- Biological exposure sensors in coal conversion technologies  
[CONP-801143-1] p0192 A81-17410
- Fuel alcohol extraction technology commercialization conference  
[CONP-801212] p0311 A81-18233
- Flash pyrolysis and hydropyrolysis of coal  
[BNL-28577] p0319 A81-20301
- HYDROCHLORIC ACID**
- 11.5% solar conversion efficiency in the photocathodically protected p-InP/V<sub>3+</sub>/V<sub>2+</sub>/HCl/C semiconductor liquid junction cell  
p0230 A81-27014
- HYDROCRACKING**
- Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas  
p0298 A81-25114
- Exxon donor solvent liquefaction process  
p0304 A81-28998
- Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies  
[FE-1743-80-VOL-1] p0316 A81-19335
- HYDROELECTRIC POWER STATIONS**
- Lifting hydro's potential  
p0335 A81-23515
- Submarine hydro-electro-osmotic power plants for an efficient exploitation of salinity gradients  
p0337 A81-24447
- Assessment of high-head turbomachinery for underground pumped hydroelectric storage plants  
p0372 A81-25003
- The design and analysis of a vertical axis ocean current power plant  
p0339 A81-25081
- An evaluation of alternate energy sources for the Guyana energy crisis  
p0340 A81-25097
- Ultra headless hydro power  
[SLAC-PUB-2613] p0352 A81-16609
- Mathematical programming applied to power systems expansion planning with pumped storage  
p0377 A81-18485
- Solar/hydro integration study  
[DOE/SP-10505/4] p0355 A81-18558
- A comparison of environmental issues related to development of small hydropower resources at new versus existing sites  
[CONP-801210-13] p0197 A81-18577
- Wind energy integration study  
[DOE/BP-10552/17] p0205 A81-21593
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 2: Hydroelectric development  
[DOE/EV-73002/1-VOL-2] p0205 A81-21596
- HYDROELECTRICITY**
- Lifting hydro's potential  
p0335 A81-23515
- HYDROGEN**
- Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling  
p0286 A81-24021
- Hydrogen in LaNi<sub>5</sub> intermetallic compound  
p0290 A81-25496
- Kinetics of the reaction between Mg<sub>2</sub>Ni and H<sub>2</sub>  
p0290 A81-25499
- Co-sputtered doped amorphous silicon as a photovoltaic material  
p0249 A81-27264
- Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T2] p0305 A81-16318
- Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165179] p0352 A81-17527
- Recent advances in the sciences of electrocatalysis  
[AD-A095095] p0356 A81-19257
- Characteristics of acidic electrolyte hydrogen-air fuel batteries (3)  
[UCRL-TRANS-11655] p0358 A81-19604
- Hydrogen-methane separation processes and related phenomena  
[DOE/NETC-14386/106] p0321 A81-21153
- HYDROGEN BONDS**
- Hydrogen bonding in asphaltenes and coal liquids  
[DOE/PC-30252/T1] p0318 A81-20227
- HYDROGEN ENBRITTELEMENT**
- Hydrogen/metal interactions with special reference to electrochemical approaches  
p0286 A81-24556
- HYDROGEN ENGINES**
- Perspectives for metal hydride technology  
p0285 A81-21504
- HYDROGEN FUELS**
- Automotive dual-mode hydrogen generation system  
p0288 A81-25147
- Bulk hydrogen storage using metal hydrides  
p0289 A81-25154
- Hydrogen in thin film hydriding alloys  
p0289 A81-25155
- Efficiency of hydrogen compression by means of hydrides  
p0289 A81-25157
- Development of advanced electrocatalysts for phosphoric acid fuel cells  
p0342 A81-25602
- Natural convection heat leak in supercritical hydrogen tanks  
p0290 A81-26872
- Liquid hydrogen as an automotive fuel  
p0290 A81-26880
- Some long-term energy options  
[LA-8628-HS] p0200 A81-19596
- Liquid-hydrogen automotive onboard storage and servicing system project  
[LA-UR-80-3491] p0291 A81-19971
- HYDROGEN OXIGEN FUEL CELLS**
- Electrodes and diaphragms for fuel cells  
[BNFT-FB-T-79-140] p0359 A81-19639
- HYDROGEN PRODUCTION**
- Hydrogen and oxygen from water. V - The ROC system  
p0285 A81-21955
- H<sub>2</sub> as an energy vector - Hydrogen production by the ELOFLUX electrolytic cell  
p0285 A81-23014
- Design and efficiency estimation of a thermochemical system of hydrogen production  
p0285 A81-23531
- Hydrogen: Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979  
p0285 A81-24012
- The economics of hydrogen production  
p0285 A81-24013
- Hydrogen production from partial oxidation of residual fuel oil  
p0285 A81-24015
- Technical and economic advances in steam reforming of hydrocarbons  
p0285 A81-24017
- Coal gasification for hydrogen manufacturing  
p0286 A81-24018
- Production and application of electrolytic hydrogen - Present and future  
p0286 A81-24019



# SUBJECT INDEX

# HYDROGENOLYSIS

- Closing the loop for the sulfur-iodine cycle ---  
for thermochemical hydrogen production p0286 A81-24022
- Hydrogen from fuel desulfurization p0286 A81-24023
- The sulfur-cycle hydrogen production process p0286 A81-24024
- High temperature solar reactors for hydrogen production p0286 A81-24557
- Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams p0286 A81-24559
- More on dual purpose solar-electric power plants p0227 A81-25045
- Overview of nonelectrical applications of fusion p0341 A81-25104
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 8 - Hydrogen energy p0287 A81-25137
- Fusion reactors for hydrogen production via electrolysis p0287 A81-25139
- An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical p0287 A81-25140
- Status of the development of the general atomic thermochemical water-splitting cycle p0287 A81-25141
- Development status of the Steam-Iron Process for hydrogen production p0287 A81-25142
- Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates p0287 A81-25143
- Non-corrosive, two-reaction, low temperature T/C cycles p0287 A81-25144
- Thermoelectrochemical hydrogen production using sodium chloride p0288 A81-25145
- Production of hydrogen from carbonaceous materials p0288 A81-25146
- Automotive dual-mode hydrogen generation system p0288 A81-25147
- Feasibility study on the Porsche - Optimum design of solar collection on a fluctuating base p0288 A81-25149
- Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage p0288 A81-25151
- Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research p0288 A81-25152
- Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite p0289 A81-25153
- Development of solar-hydrogen systems using metal hydrides p0289 A81-25158
- Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base [PB81-800021] p0352 A81-16615
- Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary --- and water splitting technology [BAFT-PB-T-79-121] p0291 A81-19339
- Improvements in the electrolytic generation of hydrogen p0291 A81-20287
- Review of fusion synfuels [BBL-28627] p0291 A81-20300
- Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase 0: Proof of concept experiment [NASA-CR-164137] p0291 A81-21210
- High temperature water vapor electrolysis (HOT ELIX) --- for hydrogen production [BAFT-PB-T-80-051] p0292 A81-21627
- HYDROGEN-BASED ENERGY**
- Perspectives for metal hydride technology p0285 A81-21504
- Hydrogen technology - An overview p0285 A81-24014
- Hydrogen requirements in shale oil and synthetic crude from coal p0295 A81-24020
- Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling p0286 A81-24021
- Hydrogen storage in aluminum-substituted TiFe compounds p0287 A81-24560
- Engineering development of a HYCSOS chemical heat pump --- Hydride Conversion and Storage System p0287 A81-25017
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 8 - Hydrogen energy p0287 A81-25137
- Bulk hydrogen storage using metal hydrides p0289 A81-25154
- Heat transfer enhancement in metal hydride systems p0289 A81-25156
- Development of solar-hydrogen systems using metal hydrides p0289 A81-25158
- Fixed site hydrogen storage. I - Applications impact p0289 A81-25159
- Fixed site hydrogen storage. II - Comparison of technologies and economics p0289 A81-25160
- Metal hydrides in energy conversion systems p0342 A81-25480
- HVEM in situ hydriding of hydrogen storage materials --- High Voltage Electron Microscope p0342 A81-25492
- Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493
- Hydrogen storage properties of FeTi<sub>1+x</sub>/p0290 A81-25494
- Surface segregation effects in Mg<sub>2</sub>Cu, Mg<sub>2</sub>Ni and Mg-Mg<sub>2</sub>Ni hydrogen storage compounds p0290 A81-25498
- Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys p0290 A81-25500
- A liquid-hydrogen-fueled buick [LA-8605-MS] p0291 A81-16483
- HYDROGENATION**
- Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size p0293 A81-22273
- Effects of pore diameter and catalyst loading in hydroliquefaction of coal with CoO/BoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> catalysts p0293 A81-22274
- Fluid bed hydrogenation of agglomerating bituminous coals p0298 A81-25115
- HVEM in situ hydriding of hydrogen storage materials --- High Voltage Electron Microscope p0342 A81-25492
- Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493
- Investigations of intermetallic alloy film hydriding mechanisms p0290 A81-25497
- Hydrides of ternary TiFe<sub>x</sub>/H<sub>1-x</sub>/H = Cr, Mn, Co, Ni/ intermetallics --- for hydrogen storage applications p0290 A81-26584
- Investigation of mechanism of hydrogen transfer in coal hydrogenation [DOE/PC-30080/T2] p0305 A81-16318
- Studies of the mechanism of coal hydrogenation by electron spin resonance [DOE/PC-30072/T2] p0313 A81-18241
- Investigation of mechanism of hydrogen transfer in coal hydrogenation [DOE/PC-30080/T1] p0315 A81-19258
- HYDROGENOLYSIS**
- The conversion of peat - Recent developments in simultaneous dewatering and hydrogenolysis p0298 A81-25116

## HYDROLYSIS

- High temperature solar reactors for hydrogen production  
p0286 A81-24557
- Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams  
p0286 A81-24559
- Ethanol from municipal, cellulosic wastes  
p0299 A81-25124
- Status of the development of the general atomic thermochemical water-splitting cycle  
p0287 A81-25141
- Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates  
p0287 A81-25143
- Thermoelectrochemical hydrogen production using sodium chloride  
p0288 A81-25145
- Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage  
p0288 A81-25151

## HYDROLYSIS

- Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions  
p0294 A81-23495
- Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas  
p0298 A81-25114
- Bixon donor solvent liquefaction process  
p0304 A81-28998
- Flash pyrolysis and hydrolysis of coal [BNL-28577]  
p0319 A81-20301
- HYDROTHERMAL SYSTEMS**
- Hydrothermal metamorphism in the Larderello geothermal field  
p0296 A81-24306
- Tapping the main stream of geothermal energy  
p0296 A81-24749
- Dynamic response analysis of a solar powered heliotropic fluid-mechanical drive system  
p0223 A81-24990
- A 'two-tank' seasonal storage concept for solar space heating of buildings  
p0372 A81-25035
- Combined solar and fossil fuel systems for electric power generation  
p0381 A81-25048
- Comparative assessment of five potential sites for hydrothermal-magma systems: Summary [DOE/TIC-11303]  
p0320 A81-20525
- Wind energy integration study [DOE/BP-10552/17]  
p0205 A81-21593

## ICE FORMATION

- A review of the icing problem for aerogenerators  
p0333 A81-23066

## ICE PREVENTION

- A review of the icing problem for aerogenerators  
p0333 A81-23066

## IGNITION

- Alcohols as auxiliary fuels for diesel engines  
p0299 A81-25122

## ILLUMINATION

- The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight  
p0237 A81-27135
- Effects of nonuniform illumination on the performance of silicon concentrator solar cells  
p0237 A81-27136

## ILLUMINATORS

- Radioisotope powered light sources [CONF-801157-1]  
p0351 A81-16597

## IMPEDANCE MATCHING

- On the dynamic optimal coupling of a solar cell array to a load and storage batteries  
p0229 A81-26372
- Dynamic matching of a solar-electrical /photovoltaic/ system - An estimation of the minimum requirements on the matching system  
p0229 A81-26373
- Optimum operation of a combined system of a solar cell array and a dc motor  
p0229 A81-26374

## IMPURITIES

- The effects of junction depth and impurity concentration on diffused junction solar cells  
p0228 A81-25050
- Chemical and structural defects in thin film polycrystalline silicon solar cells  
p0233 A81-27105

## INCIDENT RADIATION

- An algorithm for calculating monthly-average radiation on inclined surfaces  
p0253 A81-27555

## INCUBATORS

- Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs [DOE/EV-0115]  
p0201 A81-19655

## INDEPENDENT VARIABLES

- Critical parameters for coarse coal underground slurry haulage systems [JPL-PUB-81-11]  
p0369 A81-20495

## INDEXES (DOCUMENTATION)

- A directory of computer software applications: Energy [PB80-105497]  
p0383 A81-16773

## INDIA

- Indian energy sources in 1980's  
p0187 A81-25098
- Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany [BHT-PB-T-79-94]  
p0264 A81-17609

## INDIUM COMPOUNDS

- Chemistry and preparation of III-V heterojunction solar cells  
p0252 A81-27288
- Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon  
p0252 A81-27295

## INDIUM PHOSPHIDES

- 11.5% solar conversion efficiency in the photocathodically protected p-InP/V<sub>3</sub>A<sub>2</sub>/HCl/C semiconductor liquid junction cell  
p0230 A81-27014
- Indium phosphide films for photovoltaic devices  
p0240 A81-27173
- Indium phosphide/cadmium sulfide thin-film solar cells [SEMI/TR-8170-1-T2]  
p0268 A81-16533

## INDUCTORS

- Inductive energy transfer in transportation [UCRL-85141]  
p0368 A81-18962

## INDUSTRIAL ENERGY

- Some new conceptions in the approach to harnessing tidal energy  
p0339 A81-25082
- Fusion reactors as high-temperature process heat sources  
p0341 A81-25105
- Economics and concepts of industrial coal fluidized bed combustion in Brazil  
p0300 A81-25135
- Fusion reactors for hydrogen production via electrolysis  
p0287 A81-25139
- Application analysis of photovoltaic systems for service/commercial/institutional and industrial sectors  
p0233 A81-27106
- The economics of photovoltaics in the commercial, institutional, and industrial sectors  
p0233 A81-27107
- Cost-energy dynamics: An engineering-economic basis for industrial energy conservation policies [ORAU/IEA-80-12(M)]  
p0193 A81-17583
- Engineering and economic studies for direct applications of geothermal energy in an industrial park in Pahoa, Hawaii [DOE/ET-27233/T2]  
p0314 A81-18513
- Economic application, design analysis, and material availability for ceramic heat exchangers [ORNL/TM-7580]  
p0196 A81-18528
- Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 2: Economic potential [NE-25187-VOL-2]  
p0360 A81-20564

# SUBJECT INDEX

# INSOLATION

- Current and future industrial energy service characterizations, volume 1 [SERI/TR-733-790-VOL-1] p0206 N81-21618
- Survey of US industrial process heat usage distributions [SAND-80-8234] p0206 N81-21622
- INDUSTRIAL PLANTS**
- Energy conservation through process modification and control [ASME PAPER 81-FID-2] p0188 A81-30111
- Coal gasification systems engineering and analysis. Appendix A: Coal gasification catalog [NASA-CR-161655] p0309 N81-18214
- Coal gasification systems engineering and analysis. Appendix B: Medium B+U gas design [NASA-CR-161656] p0309 N81-18215
- Coal gasification systems engineering and analysis. Appendix C: Alternate product facility designs [NASA-CR-161657] p0309 N81-18216
- Coal gasification systems engineering and analysis. Appendix D: Cost and economic studies [NASA-CR-161658] p0310 N81-18217
- Coal gasification systems engineering and analysis. Appendix E: Cost estimation and economic evaluation methodology [NASA-CR-161659] p0310 N81-18218
- Coal gasification systems engineering and analysis. Appendix F: Critical technology items/issues [NASA-CR-161660] p0310 N81-18219
- Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation [NASA-CR-161661] p0310 N81-18220
- Coal hydrogasification process development [DOE/ET-10328/27] p0319 N81-20304
- INDUSTRIAL SAFETY**
- Biological exposure sensors in coal conversion technologies [CONF-801143-1] p0192 N81-17410
- INDUSTRIAL WASTES**
- The rebirth of the Rankine cycle p0327 A81-20225
- Utilization of cascade impactors in hot waste gas from an oil firing installation p0186 A81-23416
- The Pompano Beach RefCOM facility p0300 A81-25554
- Wisconsin Electric's characterization of Americology's refuse-derived fuel p0301 A81-25555
- Environmental impact assessment guidelines for new source coal gasification facilities [PB81-114555] p0195 N81-17635
- INDUSTRIES**
- Private sector initiatives - A case history p0188 A81-29681
- How the petroleum refining industry approaches energy conservation. A case study [EMD-80-55] p0190 N81-16532
- Performance profiles of major energy producers [DOE/EIA-0206/78] p0324 N81-21610
- Photovoltaics industry profile [DOE/EL-01830/13] p0284 N81-21619
- INERTIAL CONFINEMENT FUSION**
- Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory p0294 A81-22511
- Performance and economics analysis of several laser fusion breeder fueled electricity generation systems p0336 A81-23717
- Drivers for light ion fusion --- inertial confinement fusion [SAND-80-2432C] p0353 N81-17883
- Possible application of electromagnetic guns to impact fusion --- to the generation of electric power [LA-UR-80-3137] p0353 N81-17910
- INERTIAL FUSION (REACTOR)**
- Synthetic fuel production in a particle-beam driven fusion reactor p0297 A81-25107
- Self-magnetically insulated ion diode --- as ion source for inertial confinement fusion p0344 A81-26552
- Charge exchange and energy loss of carbon ions in air-plasma channels --- in inertial fusion reactor p0344 A81-26570
- Inertial fusion program [LA-7755-PB] p0360 N81-20901
- INFORMATION DISSEMINATION**
- Passive solar energy information user study [SERI/TR-751-746] p0273 N81-19607
- Satellite Power System (SPS) public outreach experiment [NASA-CR-164022] p0275 N81-19635
- INFORMATION MANAGEMENT**
- Wind energy systems information user study [SERI/TR-751-749] p0363 N81-21578
- INFORMATION SYSTEMS**
- Applied research activities for 1979 --- Finnish technology development and transfer p0384 A81-26004
- The Energy Link catalog. Volume 2: Energy resource catalog --- bibliographies [PB81-140824] p0384 A81-21633
- INGOTS**
- Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible p0234 A81-27116
- INJECTION**
- Gasification and desulfurization of coal by injection into molten metals [STD-78-4560] p0310 N81-18223
- INLET FLOW**
- Feasibility of the inflow disk generator for open-cycle MHD power generation [AIAA PAPER 81-0250] p0330 A81-20700
- Cooled radial in-flow turbines for advanced gas turbine engines [ASME PAPER 81-GT-213] p0350 A81-30102
- INLET TEMPERATURE**
- Ultra-lean combustion at high inlet temperatures [ASME PAPER 81-GT-44] p0347 A81-29958
- Cooled radial in-flow turbines for advanced gas turbine engines [ASME PAPER 81-GT-213] p0350 A81-30102
- INOCULATION**
- Synopses of E and D in geothermal-geochemical engineering at the Lawrence Livermore National Laboratory, 1976 - 1980 [UCID-18863] p0324 A81-21615
- INORGANIC COMPOUNDS**
- Survey of electrochemical production of inorganic compounds --- production of synthetic fuels [AWL/OEPH-80-3] p0318 N81-20226
- INORGANIC SULFIDES**
- Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte p0374 A81-25613
- A preliminary investigation of an Al/FeS2 secondary cell p0374 A81-25615
- Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics p0374 A81-25637
- INSOLATION**
- The Solar-Meteorological Research Program for the South-Central U.S. [ASME PAPER 80-WA/SOL-24] p0213 A81-21148
- Comparison of several models for long term monthly average daily insolation on horizontal surfaces and the estimation of horizontal surface insolation for 16 U. S. locations [ASME PAPER 80-WA/SOL-28] p0213 A81-21152
- Mapping of solar radiation for use in the Sudanese-Saharan region of Africa p0217 A81-23007
- Solar input and solar energy resources p0217 A81-23008
- Solar radiation estimates in Malaysia p0220 A81-24428
- Irradiance estimates for Zambia p0220 A81-24434
- Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq p0222 A81-24977
- Storage requirement definition study [NASA-CR-163862] p0257 N81-16572

# INSTALLING

# SUBJECT INDEX

- Introduction to meteorological measurements and data handling for solar energy applications [DOE/EE-0084] p0265 N81-17681
- Handbook for calculating solar-influenced building heat losses [SAND-79-2173] p0279 N81-20583
- Environmental data for sites in the National Solar Data Network, January 1981 [SOLAR/0010-81/01] p0284 N81-21710
- ## INSTALLING
- Thin-film flat-plate solar collectors for low cost manufacture and installation [BNL-51124] p0269 N81-18545
- ## INTEGRATED CIRCUITS
- A monolithic series-connected Al/.93/Ga/.07/As/GaAs solar cell array p0239 N81-27158
- Progress toward large area amorphous silicon solar cells p0240 A81-27167
- Design of monolithic, multiple-gap, amorphous Si-Ge solar cells p0247 A81-27236
- Variable speed constant frequency constant voltage alternator --- converting wind power to usable 60 hertz power [DOE/ET-29246-T1] p0361 N81-21298
- ## INTEGRATED ENERGY SYSTEMS
- On the possible use of MHD generators in solar energy systems p0209 A81-19813
- Reliability, energy, and cost effects of wind integration with conventional electrical generating systems p0339 A81-25078
- Passive and hybrid solar manufactured housing and buildings [DOE/CS-30384/1] p0263 N81-17592
- Passive and hybrid solar manufactured housing and buildings [DOE/CS-30371/1] p0267 N81-18515
- Study of fuel cell on-site, integrated energy systems in residential/commercial applications [NASA-CR-165144] p0361 N81-21533
- Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148] p0282 N81-21575
- Yearly average performance of the principal solar collector tapes [SERI/TR-631-716] p0282 N81-21579
- ## INTEGRATED OPTICS
- Coatings with induced transmission p0211 A81-20973
- ## INTERFEROMETRY
- An interferometer-based phase control system p0366 N81-16545
- ## INTERMETALLICS
- Hydrogen storage in aluminum-substituted TiFe compounds p0287 A81-24560
- HVM in situ hydriding of hydrogen storage materials --- High Voltage Electron Microscope p0342 A81-25492
- Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493
- Hydrogen storage properties of  $\text{FeTi}_{1-x}$  p0290 A81-25494
- Hydrogen in  $\text{LaNi}_5$  intermetallic compound p0290 A81-25496
- Investigations of intermetallic alloy film hydriding mechanisms p0290 A81-25497
- Surface segregation effects in  $\text{Mg}_2\text{Cu}$ ,  $\text{Mg}_2\text{Ni}$  and  $\text{Mg-Mg}_2\text{Ni}$  hydrogen storage compounds p0290 A81-25498
- Kinetics of the reaction between  $\text{Mg}_2\text{Ni}$  and  $\text{H}_2$  p0290 A81-25499
- Hydrides of ternary  $\text{TiFe}_x\text{Ni}_{1-x}/\text{M} = \text{Cr, Mn, Co, Ni}$  intermetallics --- for hydrogen storage applications p0290 A81-26584
- ## INTERNAL COMBUSTION ENGINES
- Automotive fuel economy program [DOT-HS-805-279] p0195 N81-17959
- Internal combustion engines for alcohol motor fuels: A compilation of background technical information [DOE/AP-0001] p0313 N81-18398
- Comparison of gas phase hydrocarbon emissions from light-duty gasoline vehicles and light-duty vehicles equipped with diesel engines [PB81-122996] p0203 N81-20620
- ## INTERNAL ENERGY
- Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages p0225 A81-25021
- ## INTERNATIONAL COOPERATION
- Oil substitution and energy saving - A research and development strategy of the International Energy Agency /IEA/ p0188 A81-29195
- Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany [BNFT-FB-T-79-94] p0264 N81-17609
- ## INVENTIONS
- General reflections on the theme of innovations --- evolution and inventions p0383 N81-18940
- ## INVENTORIES
- Defense Energy Information System (DEIS): DEIS-80 system design specification [AD-A096263] p0384 N81-21960
- ## INVERSIONS
- High efficiency MIS/inversion layer silicon solar cells p0252 A81-27290
- ## INVERTED CONVERTERS (DC TO AC)
- Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter [DOE/EA-26961/01] p0378 N81-20575
- ## IODINE LASERS
- Solar-pumped gas laser development [ATAA PAPER 81-0098] p0210 A81-26600
- Modeling of a solar-pumped iodine laser p0221 A81-24618
- The chemically pumped iodine laser as a fusion driver [KNSF-U-944] p0350 N81-16456
- ## ION BEAMS
- Transport of low energy positive and negative ion beam by permanent magnets [LBL-11636] p0359 N81-19888
- ## ION CURRENTS
- Electrode materials for coal-fired MHD generators [EPRI-AP-1562] p0355 N81-18536
- ## ION IMPLANTATION
- Ion implanted grating type Si solar cells - Junction depth dependence p0235 A81-27126
- Low-cost ion implantation and annealing technology for solar cells p0244 A81-27201
- ## ION SOURCES
- Self-magnetically insulated ion diode --- as ion source for inertial confinement fusion p0344 A81-26552
- Drivers for light ion fusion --- inertial confinement fusion [SAND-80-2432C] p0353 N81-17883
- ## IONIC COLLISIONS
- Charge exchange and energy loss of carbon ions in air-plasma channels --- in inertial fusion reactor p0344 A81-26570
- ## IONIC DIFFUSION
- Surface charge and specific ion adsorption effects in photoelectrochemical devices p0215 A81-22148
- Applications of laser annealing and laser-induced diffusion to photovoltaic conversion [CONF-801153-1] p0258 N81-16594
- ## IONIC MOBILITY
- Transport of low energy positive and negative ion beam by permanent magnets [LBL-11636] p0359 N81-19888
- ## IONIZED GASES
- On the flow of an ionized gas in a MHD generator with segmented electrodes p0337 A81-24811
- ## IONOSPHERIC PROPAGATION
- Tropospheric/ionospheric transmission tests p0369 N81-20335
- ## IONOSPHERICS
- Ionospheric effects in active retrodirective array and mitigating system design p0366 N81-16549

# SUBJECT INDEX

# LARGE SPACE STRUCTURES

**IRAN**  
Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany  
[BNFT-PB-T-79-94] p0264 N81-17609

**IRAQ**  
Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq p0222 A81-24977

**IRON**  
POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells p0245 A81-27216

**IRON ALLOYS**  
Hydrogen storage in aluminum-substituted TiFe compounds p0287 A81-24560  
Hydrogen storage properties of FeTi<sub>1-x</sub>/Ti<sub>x</sub> p0290 A81-25494  
Hydrides of ternary TiFe<sub>x</sub>M<sub>1-x</sub>/Ti<sub>x</sub>M<sub>1-x</sub> = Cr, Mn, Co, Ni/ intermetallics --- for hydrogen storage applications p0290 A81-26584

**IRON COMPOUNDS**  
Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte p0374 A81-25613  
A preliminary investigation of an Al/FeS<sub>2</sub> secondary cell p0374 A81-25615  
Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics p0374 A81-25837

**IRRADIANCE**  
Meteorological data: Measurement techniques and solar components --- solar radiation, meteorological data p0266 N81-18501

**IRRADIATION**  
Meteorological data: Treatment of radiation data, test reference year --- solar radiation p0266 N81-18502

**IRRIGATION**  
Operational characterization of the solar-thermal power system near Willard, New Mexico [ASME PAPER 80-WA/SOL-39] p0214 A81-21159

**ISOTHERMIZATION**  
Investigation of mechanism of hydrogen transfer in coal hydrogenation [DOE/PC-30080/T2] p0305 N81-16318

**ISOTHERMS**  
Kinetics of the reaction between Ag<sub>2</sub>H<sub>2</sub> and H<sub>2</sub> p0290 A81-25499

**ITALY**  
Solar energy in Italy: A profile of renewable energy activity in its national context [SEBI/SP-763-718] p0204 N81-21576

## J

**JET ENGINE FUELS**  
A UK view on future fuels --- for aircraft [ASME PAPER 81-GT-87] p0304 A81-29994

**JOSEPHSON JUNCTIONS**  
Excitation of a superconducting strip resonator by a system of point Josephson contacts p0365 A81-21295

**JP-5 JET FUEL**  
Two-stage combustion for reducing pollutant emissions from gas turbine combustors [NASA-CR-163877] p0350 N81-16056

**JUNCTION DIODES**  
Determination of lifetimes and recombination currents in p-n junction solar cells, diodes, and transistors p0209 A81-20011  
Results of the Air Force high efficiency cascaded multiple bandgap solar cell programs p0261 A81-17548

**JUNCTION TRANSISTORS**  
Determination of lifetimes and recombination currents in p-n junction solar cells, diodes, and transistors p0209 A81-20011

Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model p0232 A81-27099

## K

**KENTUCKY**  
Wind energy resource atlas. Volume 5: The East Central region [PHL-3195-VOL-5] p0325 N81-21712

**KEROSENE**  
An assessment of the use of antimisting fuel in turbofan engines [NASA-CR-165258] p0315 N81-19316

**KLYSTRONS**  
High efficiency SPS klystron design p0366 N81-16550  
High efficiency klystron for the SPS application p0366 N81-16551  
Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies p0367 N81-16552

Satellite Power System (SPS) concept definition study (Exhibit D). Volume 2: Systems/subsystems analyses [NASA-CR-3393] p0280 N81-21491

**KOREA**  
Korea tidal power and beyond p0340 A81-25084

**KRYPTON**  
Radioisotope powered light sources [CONF-801157-1] p0351 N81-16597

## L

**LABOR**  
Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings [ANL/EES-TB-116] p0383 N81-19611

**LAMINAR FLOW**  
Rapid-rate bituminous coal gasification --- laminar flow and particle trajectories [PB81-114290] p0306 N81-17293  
Effect of wall suction on laminar entrance flow with application to solar air heaters p0265 N81-18488

**LAMINATES**  
An improved lamination technique for solar arrays p0245 A81-27226

**LAND MANAGEMENT**  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis [DOE/EV-73002/1-VOL-1] p0205 N81-21595

**LAND USE**  
The Indian Lands Study: An example of the application of geographic research to the analysis of complex energy and environmental policy issues --- strip mining and oil exploration effects on tribal culture and economics p0189 N81-16510

Energy in transition, 1985-2010 [GPO-63-171] p0190 N81-16585  
Comments on long-term aspects of renewable versus nonrenewable resource substitution [CONF-801158-1] p0313 N81-16477  
Alternative energy facility siting policies for urban coastal areas: Executive summary of findings and policy recommendations [DOE/EV-01528/T1] p0204 N81-21559

Macro-level land use impacts of bioconversion [LA-8599-1] p0325 N81-21616  
Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas [DOE/ET-27127/1] p0207 N81-21646

**LANTHANUM COMPOUNDS**  
Hydrogen in LaNi<sub>5</sub> intermetallic compound p0290 A81-25496

**LARGE SPACE STRUCTURES**  
Environmental assessment for the satellite power system concept development and evaluation program [AIAA PAPER 81-0244] p0185 A81-20695

# LASER ANNEALING

# SUBJECT INDEX

- Space construction technology needs  
[ATAA PAPER 81-0442] p0381 A81-22757
- Energy from space - A survey of activities for  
power generation using space technology p0219 A81-23861
- Solar power satellite microwave power transmission  
system description executive summary p0365 N81-16535
- Space platform reference mission studies overview  
p0383 N81-19174
- Summary of LSST systems analysis and integration  
task for SPS flight test articles p0270 N81-19177
- Satellite Power Systems (SPS). LSST systems and  
integration task for SPS flight test article  
[NASA-CR-3375] p0271 N81-19564
- LASER ANNEALING**
- Laser processing for high-efficiency silicon solar  
cells p0241 A81-27177
- Applications of laser annealing and laser-induced  
diffusion to photovoltaic conversion  
[CONF-801153-1] p0258 N81-16594
- Space Photovoltaic Research and Technology 1980.  
High Efficiency, Radiation Damage and Blanket  
Technology [NASA-CP-2169] p0260 N81-17531
- LASER APPLICATIONS**
- Advanced synfuels production/power systems  
utilizing laser particulate control p0299 A81-25127
- Satellite Power System (SPS) concept definition  
study (Exhibit D). Volume 2:  
Systems/subsystems analyses [NASA-CR-3393] p0280 N81-21491
- LASER DRILLING**
- In situ and modified in situ recovery of fossil  
fuels p0297 A81-25110
- LASER FUSION**
- Nonlinear evolution of ablation-driven  
Rayleigh-Taylor instability --- behavior of  
laser fusion targets p0332 A81-21466
- Recent progress in inertial confinement fusion at  
the Lawrence Livermore Laboratory p0294 A81-22511
- The efficiency of conical pellets for laser fusion  
p0294 A81-23227
- Neutronics shielding analysis of the last  
mirror-beam duct system for a laser fusion power  
reactor p0336 A81-23714
- Performance and economics analysis of several  
laser fusion breeder fueled electricity  
generation systems p0336 A81-23717
- Laser fusion systems for process heat p0341 A81-25106
- Engineering aspects of cryogenic laser-fusion  
targets p0345 A81-26857
- Inertial fusion program  
[LA-7755-PB] p0360 N81-20901
- LASER HEATING**
- Silicon solar cells realized by laser induced  
diffusion of deposited antimony p0244 A81-27202
- Solar coal gasification  
[DOE/TIC-11384] p0279 N81-20587
- LASER PLASMAS**
- Nonlinear evolution of ablation-driven  
Rayleigh-Taylor instability --- behavior of  
laser fusion targets p0332 A81-21466
- LASER PROPULSION**
- Utility of and technology for a space central  
power station [ATAA PAPER 81-0449] p0216 A81-22763
- LASER PUMPING**
- Solar-pumped gas laser development  
[NASA-TN-81894] p0257 N81-16437
- The chemically pumped iodine laser as a fusion  
driver [KNSF-U-944] p0350 N81-16456
- LASER TARGETS**
- Nonlinear evolution of ablation-driven  
Rayleigh-Taylor instability --- behavior of  
laser fusion targets p0332 A81-21466
- Engineering aspects of cryogenic laser-fusion  
targets p0345 A81-26857
- Inertial fusion program  
[LA-7755-PB] p0360 N81-20901
- LATEX**
- Molten salt pyrolysis of latex --- synthetic  
hydrocarbon fuel production using the Guayule  
shrub [NASA-CASE-NPO-14315-1] p0306 N81-17261
- LAUNCHING BASES**
- Evaluation of the noise impact of satellite power  
system vehicles on the community and ecology at  
the launch site [LBL-11978] p0270 N81-16572
- LEAD ACID BATTERIES**
- Flat-plate tubular TP lead-acid traction battery  
for electric vehicles p0373 A81-25603
- LEAD TELLURIDES**
- Development and study of a lead  
telluride/germanium telluride solar  
thermoelectric generator p0254 A81-28588
- LEARNING**
- Frameworks for modeling learning on the supply  
side of solar technology market penetration  
studies p0215 A81-21958
- LEGUMINOUS PLANTS**
- Production of a raw material for energy production  
in agriculture [DPE-31] p0324 N81-21550
- LIFE (DURABILITY)**
- Determination of lifetimes and recombination  
currents in p-n junction solar cells, diodes,  
and transistors p0209 A81-20011
- Theory of photo induced open circuit voltage decay  
in a solar cell p0216 A81-22200
- LIFE CYCLE COSTS**
- Energy storage in grid-connected applications  
p0375 A81-27233
- Flat-plate photovoltaic array design  
optimization p0248 A81-27247
- Advanced propulsion system concept for hybrid  
vehicles [NASA-CR-159772] p0198 N81-18935
- Life-cycle cost manual for the Federal Energy  
Management Program [PB81-136269] p0200 N81-19641
- A life-cycle model for solar heating system design  
and economic evaluation Michigan Economic Model  
for Solar Heating (MESH) p0278 N81-20559
- Photovoltaic concentrator array production process  
study. Volume 2: Study results [SAND-79-7055/2] p0282 N81-21574
- LIFT**
- Aerodynamic analysis of propeller-type windmills  
with helical trailing vortices p0355 N81-18565
- LIGHT (VISIBLE RADIATION)**
- Radioisotope powered light sources  
[CONF-801157-1] p0351 N81-16597
- LIGHT AIRCRAFT**
- A new breed of an air breathing engine  
p0347 A81-29070
- LIGHT WATER BREEDER REACTORS**
- Performance and economics analysis of several  
laser fusion breeder fueled electricity  
generation systems p0336 A81-23717
- LIGHTING EQUIPMENT**
- Radioisotope powered light sources  
[CONF-801157-1] p0351 N81-16597
- LIGNITE**
- Magnetohydrodynamic generator of electrical energy  
using gasification products of lignite coal  
p0331 A81-21065
- Catalytic hydrogenation of Turkish lignites to  
oxygen free oil and gas p0298 A81-25114

- Observations on test stockpiles of dried lignite and subbituminous coals  
[DOE/GFSC/RI-80/5] p0321 N81-21217
- LINEAR PROGRAMMING**  
Mathematical programming applied to power systems expansion planning with pumped storage  
p0377 N81-18485  
Water supply and demand in an energy supply model  
[DOE/EV-10180/2] p0204 N81-21560
- LINEAR SYSTEMS**  
Linear induction-type MHD machine with a winding connected to the voltage source  
p0346 A81-27966
- LININGS**  
Membrane-lined thermal storage systems  
p0224 A81-25000
- LIQUEFACTION**  
Liquefaction of biomass as a source of fuels or chemicals  
p0294 A81-22350  
Conversion of cellulosic wastes to liquid fuels  
p0302 A81-25564  
Combustion, pyrolysis, gasification, and liquefaction of biomass  
[SERI/TP-622-893] p0307 N81-17601
- LIQUEFIED GASES**  
Combustion of methanol and liquefied butane in a gas turbine combustor  
[ASME PAPER 81-GT-50] p0348 A81-29963
- LIQUEFIED NATURAL GAS**  
National petroleum reserve - Alaska: Marine transportation system analysis  
[PB81-105041] p0368 N81-17288  
National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary  
[PB81-105033] p0368 N81-17289  
Initiation of detonation in unconfined natural gas-air clouds  
[PB81-113292] p0308 N81-18149
- LIQUID COOLING**  
Cells and modules for linear P.V. concentrator systems with forced cooling  
p0242 A81-27186  
Development of a combined photovoltaic/thermal linear receiver for a parabolic trough concentrator  
[SAND-80-7138] p0272 N81-19595
- LIQUID FUELS**  
Alcohols as fuels - The global picture  
p0303 A81-27572  
A new route to liquid fuels from coal  
p0304 A81-28999  
Effect of water injection for NOx reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor  
[ASME PAPER 81-GT-51] p0348 A81-29964  
Modified Brayton cycles utilizing alcohol fuels  
[ASME PAPER 81-GT-103] p0348 A81-30009  
Engine fuels from biomass  
[ASME PAPER 81-DGP-4] p0305 A81-30116
- LIQUID HELIUM**  
Cryogenic aspects of the UTSI-CPPF superconducting dipole magnet for MHD research  
p0345 A81-26855
- LIQUID HYDROGEN**  
Bulk hydrogen storage using metal hydrides  
p0289 A81-25154  
Liquid hydrogen as an automotive fuel  
p0290 A81-26880  
A liquid-hydrogen-fueled buick  
[LA-8605-MS] p0291 N81-16483  
Liquid-hydrogen automotive onboard storage and servicing system project  
[LA-GR-80-3491] p0291 N81-19971
- LIQUID METALS**  
Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations  
p0327 A81-19810  
Liquid metal MHD generators with shunt layer  
p0327 A81-19812  
Gasification and desulfurization of coal by injection into molten metals  
[STU-78-4560] p0310 N81-18223
- LIQUID NITROGEN**  
Liquid nitrogen as an energy source for an automotive vehicle  
p0345 A81-26881
- LIQUID WASTES**  
Military wastes-to-energy applications  
p0314 N81-18483
- LIQUID-GAS MIXTURES**  
Thermodynamic calculations for Otto cycle engines using methanol as a fuel  
p0342 A81-25123
- LIQUID-SOLID INTERFACES**  
Enhanced heat conduction in phase-change thermal energy storage devices  
[ASME PAPER 80-WA/HT-45] p0371 A81-21114  
Numerical resolution of the heat transfer equations in a latent heat solar energy storage system  
p0224 A81-25005  
Trombe-Michel wall using phase change materials --- for solar heating of buildings  
p0224 A81-25007
- LIQUID-VAPOR EQUILIBRIUM**  
Phase equilibrium in coal liquefaction processes  
[EFBI-AP-1593] p0311 N81-18227
- LIQUIDS**  
Improved liquid/solids handling module --- Geothermal energy conversion  
[DOE/ET-27193/T1] p0363 N81-21582
- LITHIUM**  
Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics  
p0374 A81-25837  
Performance and safety characteristics of Li/BCI and Li/CSC systems  
p0379 N81-21495
- LITHIUM COMPOUNDS**  
An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine --- thermal energy storage with water lithium salts solution  
p0342 A81-25132  
Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte  
p0374 A81-25613  
Design improvements in LiBr absorption chillers for solar applications  
p0253 A81-27558
- LITHIUM SULFUR BATTERIES**  
Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications  
[AHL-80-49] p0375 N81-16591  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586
- LOAD TESTS**  
Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979  
p0381 A81-21730
- LONG TERM EFFECTS**  
A cycle life tester for the long-term stability of phase change materials for thermal energy storage  
p0372 A81-24997  
Three year performance of the NTS-2 solar cell experiment  
p0262 A81-17559
- LORENTZ FORCE**  
The design of a tapered bore superconducting MHD magnet system  
p0334 A81-23442
- LOUISIANA**  
Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome  
[SAND-80-1323] p0324 N81-21468
- LOUVERES**  
Parametric analysis of louvered air-heating solar collectors  
[ASME PAPER 80-WA/SOL-38] p0214 A81-21158
- LOW COST**  
Overview - Cost goals in the LSA project --- Low-cost Solar Array  
p0230 A81-27077  
Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations --- Epitaxial Film Growth  
p0230 A81-27078  
Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals --- Epitaxial Film Growth  
p0230 A81-27079

## LOW TEMPERATURE

## SUBJECT INDEX

- Development of processes for the production of low cost silicon dendritic web for solar cells p0231 A81-27080
- Continuous coating of silicon-on-ceramic p0231 A81-27083
- Vacuum deposited polycrystalline silicon solar cells for terrestrial use p0236 A81-27128
- The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system p0238 A81-27152
- Designing practical silicon solar cells approaching the 'limit conversion efficiency' p0239 A81-27159
- Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study p0239 A81-27165
- Low-cost, high-performance, point-focus concentrator array design p0242 A81-27189
- Low-cost ion implantation and annealing technology for solar cells p0244 A81-27201
- Low cost processes for fabricating silicon solar cells p0245 A81-27218
- Silicon solar cells with screen printed diffusion and metallization p0245 A81-27221
- An improved lamination technique for solar arrays p0245 A81-27226
- Low cost structures for photovoltaic arrays p0248 A81-27248
- Low-cost high-efficiency  $\text{SnO}_2/\text{n}/\text{p}$  Si heteroface solar cell fabricated by paint-on-diffusant method p0249 A81-27259
- Influence of module requirements on flat plate module design evolution p0251 A81-27279
- Automated array assembly task development of low-cost polysilicon solar cells [NASA-CR-163939] p0259 A81-17521
- Thin-film flat-plate solar collectors for low cost manufacture and installation [BNL-51124] p0269 A81-18545
- Proceedings of the 16th Project Integration Meeting [NASA-CR-164073] p0276 A81-20545
- ### LOW TEMPERATURE
- Low-temperature thermal emission rectifier with an oxidized titanium collector p0337 A81-24209
- Physical and chemical processes for latent heat storage at low temperatures p0372 A81-24995
- Non-corrosive, two-reaction, low temperature T/C cycles p0287 A81-25144
- Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells p0244 A81-27207
- Low temperature alkali metal-sulfur batteries [COO-2520-7] p0379 A81-21586
- ### LUBRICANTS
- Lubricants for combating effects of high-sulfur fuel [AD-A094900] p0315 A81-19312
- ### LUMINOUS INTENSITY
- Variation of diffusion length of ribbon-Si solar cells with light intensity p0236 A81-27131
- ### LUNAR BASES
- Analysis of the utilization of lunar resources for space power systems. Part 1: System definition and model structure [ILR-MITT-73/1980-PT-1] p0284 A81-21628
- ### LUNAR SOIL
- Extraction of oxygen and metals from lunar ores p0222 A81-24827
- ## M
- ### MACHINE TOOLS
- A silicon sheet casting experiment --- for solar cell water production p0231 A81-27082
- ### MAGMA
- Thermal techniques for characterizing magma body geometries --- geothermal energy resources p0296 A81-24303
- Kilauea Iki lava lake experiment plans [SAND-80-1653] p0318 A81-19699
- Comparative assessment of five potential sites for hydrothermal-magma systems: Summary [DOE/TIC-11303] p0320 A81-20525
- ### MAGNESIUM ALLOYS
- Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys p0290 A81-25500
- ### MAGNESIUM COMPOUNDS
- Surface segregation effects in  $\text{Mg}_2\text{Cu}$ ,  $\text{Mg}_2\text{Ni}$  and  $\text{Mg-Mg}_2\text{Ni}$  hydrogen storage compounds p0290 A81-25498
- Kinetics of the reaction between  $\text{Mg}_2\text{Ni}$  and  $\text{H}_2$  p0290 A81-25499
- ### MAGNET COILS
- Flux pump excited brushless alternator p0334 A81-23436
- A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet p0334 A81-23447
- Design of the BPA superconducting 30 MJ energy storage coil p0371 A81-23450
- Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility p0334 A81-23451
- Energy transfer in a system of superconductive magnets p0374 A81-26858
- ### MAGNETIC CONTROL
- Trends and developments in magnetic confinement fusion reactor concepts p0336 A81-23711
- Self-magnetically insulated ion diode --- as ion source for inertial confinement fusion p0344 A81-26552
- Anode plasma behavior in a magnetically insulated ion diode p0344 A81-26571
- ### MAGNETIC DIPOLES
- Cryogenic aspects of the UTSI-CPPF superconducting dipole magnet for MHD research p0345 A81-26855
- ### MAGNETIC DISKS
- Disk MHD generator study [NASA-CR-159872] p0354 A81-18491
- ### MAGNETIC FIELDS
- Transport of low energy positive and negative ion beam by permanent magnets [LBL-11636] p0359 A81-19888
- ### MAGNETIC INDUCTION
- Theory of an induction MHD propeller with a free field --- MHD motor p0344 A81-26062
- Linear induction-type MHD machine with a winding connected to the voltage source p0346 A81-27966
- Transient processes and self-excited oscillations in the electrical circuit of an MHD generator p0346 A81-27968
- ### MAGNETIC MIRRORS
- Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor p0336 A81-23714
- ### MAGNETIC PROPERTIES
- HK-generators using the transition of a semiconductor material into a conducting state p0331 A81-21064
- ### MAGNETIC STORAGE
- An evaluation of superconducting magnetic energy storage p0371 A81-23439
- ### MAGNETIC SUSPENSION
- Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts [EPRI-CS-1517-VOL-5] p0319 A81-20302
- ### MAGNETOHYDRODYNAMIC FLOW
- On the magnetoacoustic instability [AIAA PAPER 81-0248] p0330 A81-26698
- Magnetohydrodynamic generator of electrical energy using gasification products of lignite coal p0331 A81-21065



## SUBJECT INDEX

## MAGNETOHYDRODYNAMIC GENERATORS

- On the flow of an ionized gas in a MHD generator with segmented electrodes p0337 A81-24811
- A numerical study of the nonuniform loading of a segmented MHD channel p0346 A81-27967
- MHD effects on viscous and thermal wakes and their influence on the performance of MHD generators [LOG-2281] p0352 N81-16899
- Investigation of swirling flow mixing for application in an MHD pulverized coal combustor using isothermal modeling [DOE/ET-10815/39] p0356 N81-19266
- MAGNETOHYDRODYNAMIC GENERATORS**
- Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations p0327 A81-19810
- Liquid metal MHD generators with shunt layer p0327 A81-19812
- On the possible use of MHD generators in solar energy systems p0209 A81-19813
- Pulsed self-excited MHD power generation at large energy densities p0327 A81-19814
- Approximate three-dimensional electric solution for a frame-type MHD generator p0327 A81-20022
- Preliminary Faraday performance of a large MHD generator at high magnetic field [AIAA PAPER 81-0028] p0327 A81-20548
- Comparison of analytical and experimental studies of the HPDE MHD generator performance --- High Performance Demonstration Experiment [AIAA PAPER 81-0029] p0327 A81-20549
- Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes [AIAA PAPER 81-0030] p0328 A81-20550
- A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions [AIAA PAPER 81-0031] p0328 A81-20551
- U-25B MHD generator performance [AIAA PAPER 81-0032] p0328 A81-20552
- Plasma diagnostics of MHD generators [AIAA PAPER 81-0099] p0328 A81-20601
- Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant [AIAA PAPER 81-0110] p0328 A81-20602
- Utilization of staged combustion for controlling NO<sub>x</sub> emissions from a test facility simulating a coal-fired MHD power plant [AIAA PAPER 81-0101] p0328 A81-20603
- The effect of secondary combustion on nitric oxide concentrations in a MHD combustion gas [AIAA PAPER 81-0102] p0328 A81-20604
- The SID/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc --- for MHD generator flows [AIAA PAPER 81-0173] p0329 A81-20649
- Three-dimensional analysis of MHD generators - Development of electrical solution [AIAA PAPER 81-0175] p0329 A81-20650
- Electrical effects of coal slag in a diffuse mode MHD generator [AIAA PAPER 81-0176] p0329 A81-20651
- Preliminary results of analytical modeling of subsonic MHD diffusers [AIAA PAPER 81-0177] p0329 A81-20652
- Investigative data analysis technique for MHD generators [AIAA PAPER 81-0174] p0329 A81-20653
- Power conditioning and control requirements of coal fired MHD generators [AIAA PAPER 81-0246] p0330 A81-20696
- On the magnetosothermal instability [AIAA PAPER 81-0248] p0330 A81-20698
- Performance of MHD generators with electrode current control [AIAA PAPER 81-0249] p0330 A81-20699
- Feasibility of the inflow disk generator for open-cycle MHD power generation [AIAA PAPER 81-0250] p0330 A81-20700
- Heat transfer in slagging MHD radiant boilers [AIAA PAPER 81-0316] p0330 A81-20747
- Off-design study of an open cycle MHD power plant with oxygen enrichment [AIAA PAPER 81-0319] p0330 A81-20748
- Theory of a conducting MHD motor with a free field p0331 A81-21062
- Magnetohydrodynamic generator of electrical energy using gasification products of lignite coal p0331 A81-21065
- Electrical conductivity and Hall parameter measurements in Faraday MHD generators [ASME PAPER 80-WA/HT-9] p0331 A81-21103
- MHD electrode performance - Heat transfer and voltage drops [ASME PAPER 80-WA/HT-10] p0331 A81-21104
- On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution [ASME PAPER 80-WA/HT-11] p0331 A81-21105
- Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator p0332 A81-21494
- Optical spectrum of a closed cycle MHD generator plasma p0333 A81-23063
- A superconducting magnet for Stanford University p0334 A81-23441
- The design of a tapered bore superconducting MHD magnet system p0334 A81-23442
- ETF magnet design alternatives for the national MHD program p0334 A81-23443
- A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet p0334 A81-23447
- Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility p0334 A81-23451
- Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips p0337 A81-23747
- On the flow of an ionized gas in a MHD generator with segmented electrodes p0337 A81-24811
- A study of a commercial MHD power plant scheme p0342 A81-25381
- Theory of an induction MHD propeller with a free field --- MHD motor p0344 A81-26062
- Superconducting MHD magnet engineering program p0344 A81-26852
- Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications p0344 A81-26853
- Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute p0345 A81-26854
- Cryogenic aspects of the UTSI-CFFF superconducting dipole magnet for MHD research p0345 A81-26855
- Safety analysis of the UTSI-CFFF superconducting magnet p0345 A81-26856
- Linear induction-type MHD machine with a winding connected to the voltage source p0346 A81-27966
- A numerical study of the nonuniform loading of a segmented MHD channel p0346 A81-27967
- Transient processes and self-excited oscillations in the electrical circuit of an MHD generator p0346 A81-27968
- Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition p0346 A81-28217
- Performance calculations for 1000 MWe MHD/steam power plants [NASA-TN-81667] p0351 N81-16570
- MHD effects on viscous and thermal wakes and their influence on the performance of MHD generators [LOG-2281] p0352 N81-16899
- Operational analysis of open-cycle MHD [EPRI-AP-1463] p0352 N81-16909

# MAGNETOHYDRODYNAMIC STABILITY

# SUBJECT INDEX

- Study of seed-reprocessing systems for open-cycle coal-fired MHD power plants.  
[DOE/ET-15613/T1-APP] p0353 N81-17606
- Optical diagnostic measurements of coal slag parameters in combustion MHD systems  
p0353 N81-18153
- Disk MHD generator study  
[NASA-CR-159872] p0354 N81-18491
- Electrode materials for coal-fired MHD generators  
[EPRI-AP-1562] p0355 N81-18536
- Fluctuations in combustion-driven MHD generators  
p0356 N81-18877
- Two-dimensional MHD generator model  
[ANL/MHD-80-11] p0359 N81-19932
- MHD air heater development technology  
[DOE/ET-15602/T2] p0360 N81-20590
- Preliminary design procedure for high power density MHD generators  
[AD-A096144] p0364 N81-21916
- Oxygen-enriched air production for MHD power plants  
[DOE/ET-11058/T4] p0364 N81-21920
- MAGNETOHYDRODYNAMIC STABILITY**
- On the magnetoaerothermal instability  
[AIAA PAPER 81-0248] p0330 A81-20698
- Nonlinear evolution of ablation-driven Rayleigh-Taylor instability --- behavior of laser fusion targets  
p0332 A81-21466
- Effects of toroidal coupling on the stability of tearing modes  
p0332 A81-21480
- Limits to plasma science  
p0333 A81-22876
- MAGNETOHYDRODYNAMICS**
- Transport of low energy positive and negative ion beam by permanent magnets  
[LBL-11636] p0359 N81-19888
- MAGNETOPLASMA DYNAMICS**
- Pulsed self-excited MHD power generation at large energy densities  
p0327 A81-19814
- MAGNETRONS**
- Satellite Power System (SPS) magnetron tube assessment study  
[NASA-CR-3383] p0368 N81-18490
- MAGNETS**
- Transport of low energy positive and negative ion beam by permanent magnets  
[LBL-11636] p0359 N81-19888
- MAGNETIC EFFECT**
- Performance assessment of a Flettner wind turbine  
p0327 A81-20025
- MAINTAINABILITY**
- Program plan for reliability and maintainability in active solar heating and cooling systems  
[DOE/CS-36010/01] p0264 N81-17596
- MAJORITY CARRIERS**
- Majority carrier conduction effects in ITO/SIS solar cells --- Indium Titanium Oxide/Semiconductor-Insulator-Semiconductors  
p0239 A81-27166
- MALAYA**
- Solar radiation estimates in Malaysia  
p0220 A81-24428
- MAR ENVIRONMENT INTERACTIONS**
- Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 A81-21101
- Effects of carbon dioxide buildup in the atmosphere  
[GPO-62-841] p0191 N81-16626
- MANAGEMENT INFORMATION SYSTEMS**
- Defense Energy Information System (DEIS): DEIS-80 system design specification  
[AD-A096263] p0384 N81-21960
- MANAGEMENT METHODS**
- Community energy auditing: Experience with the comprehensive community energy management program  
[ANL/CMV/IN-43] p0193 N81-17588
- Life-cycle cost manual for the Federal Energy Management Program  
[PB81-136269] p0200 N81-19641
- MANAGEMENT PLANNING**
- Systems engineering - Fundamental limits and future prospects  
p0381 A81-22877
- The GaAs solar cell research and development programs of the Air Force  
p0260 N81-17542
- Coal gasification systems engineering and analysis, volume 2  
[NASA-CR-161654] p0309 N81-18213
- Mathematical programming applied to power systems expansion planning with pumped storage  
p0377 N81-18485
- The development of synthetic fuels: Department of Defense logistics implications  
[AD-A095713] p0319 N81-20290
- Comparative analysis of coal use options for reducing the dependence of utilities on imported oil  
[DOE/RA-12301-T1] p0322 N81-21230
- MANAGEMENT SYSTEMS**
- Solar Energy Management System  
p0210 A81-20492
- MANUFD SPACE FLIGHT**
- The Marshall Center: Its place in NASA  
[NASA-TN-82254] p0383 N81-17958
- MANUALS**
- Life-cycle cost manual for the Federal Energy Management Program  
[PB81-136269] p0200 N81-19641
- MANUFACTURING**
- Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays  
[NASA-CR-163943] p0260 N81-17525
- Thin-film flat-plate solar collectors for low cost manufacture and installation  
[BNL-51124] p0269 N81-18545
- Process feasibility study in support of silicon material task 1  
[NASA-CR-164009] p0271 N81-19570
- Advanced solar concentrator mass production, operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 N81-19571
- Array automated assembly task low cost silicon solar array project, phase 2  
[NASA-CR-164037] p0272 N81-19572
- MARINE ENVIRONMENTS**
- Report to the Congress on ocean pollution and offshore development  
[PB81-118333] p0195 N81-17630
- Marine biomass: Algae as source of energy  
[NE/BIO-80/12] p0320 N81-20581
- MARINE PROPULSION**
- Theory of a conducting MHD motor with a free field  
p0331 A81-21062
- Progress in the development of the Marine Spey, SM1A  
[ASME PAPER 81-GT-186] p0349 A81-30080
- MARINE TRANSPORTATION**
- National petroleum reserve - Alaska: Marine transportation system analysis  
[PB81-105041] p0368 N81-17288
- National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary  
[PB81-105033] p0368 N81-17289
- MARKET RESEARCH**
- Frameworks for modeling learning on the supply side of solar technology market penetration studies  
p0215 A81-21958
- Solar energy market penetration models - Science or number mysticism  
p0218 A81-23026
- An analysis of macroeconomic effects of increased market penetration by solar energy technologies  
p0229 A81-25060
- A market research effort leading to the development of a high efficiency 10,000 shp gas turbine system  
[ASME PAPER 81-GT-190] p0349 A81-30083
- Regional price targets appropriate for advanced coal extraction  
[NASA-CR-163896] p0189 N81-16513
- The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology  
[NASA-TN-58229] p0193 N81-17526
- Energy: Economic activity and energy demand; link to energy flow. Example: France  
[EUR-6773-EN] p0194 N81-17597
- Residential use of photovoltaics  
[DOE/ET-20279/109] p0264 N81-17604
- Coal gasification systems engineering and analysis. Appendix A: Coal gasification catalog  
[NASA-CR-161655] p0309 N81-18214

# SUBJECT INDEX

# MATHEMATICAL MODELS

- Research and evaluation of biomass resources/conversion/utilization systems  
[market/experimental analysis for development of a data base for a fuels from biomass model.  
Volume 1: Biomass allocation model  
[DOE/ET-20611/14] p0315 N81-18553  
Appliance energy efficiency in new home construction  
[DOE/CS-23999/T1] p0200 N81-19608  
Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain  
[PB81-123861] p0200 N81-19645  
Geothermal energy market study on the Atlantic Coastal Plain. GHITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 N81-19646  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix B: State of the art, trends, and potential growth of selected DSG technologies  
[NASA-CR-164054] p0202 N81-20540  
Wind energy systems information user study  
[SERI/TR-751-749] p0363 N81-21578  
Methodology for estimating future market values of solar thermal technologies  
[SAND-80-8248] p0284 N81-21617
- MARKETING**  
Hydrogen: Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979  
p0285 N81-24012  
World activity in solar ponds  
[UCID-18900] p0282 N81-21564  
Current and future industrial energy service characterizations, volume 1  
[SERI/TR-733-790-VOL-1] p0206 N81-21618  
Photovoltaics industry profile  
[DOE/RI-01830/T3] p0284 N81-21619
- MARYLAND**  
Wind energy resource atlas. Volume 5: The East Central region  
[PNL-3195-VOL-5] p0325 N81-21712
- MASS DISTRIBUTION**  
Study of seed-reprocessing systems for open-cycle coal-fired MHD power plants.  
[DOE/ET-15613/T1-APP] p0353 N81-17606
- MASS FLOW RATE**  
The mass discharge of a geofluid from a geothermal reservoir - Well system with flashing flow in the bore  
p0296 N81-24302
- MASS SPECTROMETERS**  
Construction and properties of a quadrupole mass spectrometer device, developed for the investigation of a thermionic barium-cesium-diode vapor atmosphere  
[DPVLR-FB-79-39] p0361 N81-21308
- MASS TRANSFER**  
Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T1] p0315 N81-19258
- MASSACHUSETTS**  
Boston solar retrofits: Studies of solar access and economics  
[DOE/CS-10047/T5] p0268 N81-18538
- MATERIAL ABSORPTION**  
Hydrogen absorption and hydriding of Ti-based intermetallic compounds  
p0289 N81-25493
- MATERIALS HANDLING**  
Fixed site hydrogen storage. I - Applications impact  
p0289 N81-25159  
National petroleum reserve, - Alaska: Marine transportation system analysis  
[PB81-105041] p0368 N81-17288  
Initiation of detonation in unconfined natural gas-air clouds  
[PB81-113292] p0308 N81-18149
- MATERIALS RECOVERY**  
Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams  
p0286 N81-24559  
The Bridgeport resource recovery system  
p0300 N81-25163
- Design and management for resource recovery.  
Volume 2 - High technology A failure analysis  
--- Book on materials and energy reclamation projects from solid wastes  
p0300 N81-25225  
Design and management for resource recovery.  
Volume 1 - Energy from waste --- Book  
p0300 N81-25551  
The Chicago Southwest Supplemental Fuel Processing Facility  
p0300 N81-25552  
The Ames Resource Recovery facility  
p0301 N81-25558  
Characterization of solid waste conversion and cogeneration systems  
[DOE/EV-0105] p0307 N81-17585  
The detection of trace element species in solvent refined coal  
p0308 N81-18117
- MATERIALS TESTS**  
Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979  
p0382 N81-26476  
A new method of measuring diffusion length and surface recombination velocity --- for materials effects on solar cell efficiency  
p0239 N81-27164  
Gas turbine materials evaluation program utilizing coal derived gaseous fuel  
[ASME PAPER 81-GT-65] p0348 N81-29975
- MATHEMATICAL MODELS**  
Modeling and analysis of an all-fiberglass flat plate solar collector  
[ASME PAPER 80-WA/SOL-4] p0212 N81-21132  
Frameworks for modeling learning on the supply side of solar technology market penetration studies  
p0215 N81-21958  
Availability modeling methodology applied to solar power systems  
p0220 N81-24431  
An analytical model for solar cells  
p0221 N81-24806  
On the flow of an ionized gas in a MHD generator with segmented electrodes  
p0337 N81-24811  
Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics  
p0374 N81-25837  
Environmental influences in the simulation of a solar space heating system  
[AD-A092436] p0190 N81-16587  
The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 N81-16612  
AlGaAs-GaAs cascade solar cell  
p0261 N81-17550  
Energy: Economic activity and energy demand; link to energy flow. Example: France  
[EUR-6773-BN] p0194 N81-17597  
Energy/economic model analysis. Volume 1: Gas technology assessments using three energy supply/demand integrating models  
[PB81-114225] p0194 N81-17611  
Energy/economic model analysis. Volume 2: Evaluation of energy supply/demand integrating models  
[PB81-114233] p0194 N81-17612  
Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies  
[PB81-114258] p0194 N81-17613  
Energy/economic model analysis. Energy economic modeling system  
[PB81-114274] p0194 N81-17614  
Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 N81-17615  
Energy/economic model analysis. Livermore energy policy model  
[PB81-114266] p0194 N81-17616  
Oil ganglion dynamics in flow through porous media  
p0313 N81-18314

## MATRIX MATERIALS

Effect of wall suction on laminar entrance flow with application to solar air heaters p0265 N81-18488

Advanced solar collectors (concentrating troughs) --- paraboloid mirrors, mathematical models p0267 N81-18505

Wind-power site-screening methodology [UCRL-52938] p0314 N81-18526

Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant [DOE/CS-56604/T1] p0355 N81-18546

Research and evaluation of biomass resources/conversion/utilization systems (market/experimental analysis for development of a data base for a fuels from biomass model. Volume 1: Biomass allocation model [DOE/ET-20611/14] p0315 N81-18553

Strategies for ecological effects assessment at DOE energy activity sites [ORNL/TN-6783] p0198 N81-18578

Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells [NASA-CR-164012] p0271 N81-19568

Design optimization of conventional heat pumps: Application to steady state heating efficiency [CONP-810101-5] p0200 N81-19599

Continuous heat source model for ground heat storage [PB81-122889] p0378 N81-19643

Two-dimensional MHD generator model [ANL/MHD-80-11] p0359 N81-19932

A life-cycle model for solar heating system design and economic evaluation Michigan Economic Model for Solar Heating (MESH) p0278 N81-20559

Water supply and demand in an energy supply model [DOE/EV-10180/2] p0204 N81-21560

Yearly average performance of the principal solar collector tapes [SERI/TR-631-716] p0282 N81-21579

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [PB81-142184] p0364 N81-21635

**MATRIX MATERIALS**

Improvement of phosphoric acid fuel cell stacks [AD-A092814] p0351 N81-16589

**MEASURING INSTRUMENTS**

Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant [AIAA PAPER 81-0110] p0328 N81-20602

Voltage and current sensors for a high-density z-pinch experiment p0332 N81-21641

**MECHANICAL DRIVES**

Advanced continuously variable transmissions for electric and hybrid vehicles [NASA-TN-81718] p0368 N81-19459

**MECHANICAL PROPERTIES**

Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance p0372 N81-25323

**MEDITERRANEAN SEA**

Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain [81-10119] p0323 N81-21423

**MELTING**

Study of process technology for GaAlAs/GaAs heteroface solar cells p0261 N81-17544

**MELTS (CRYSTAL GROWTH)**

Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology p0234 N81-27113

**MEMBRANE STRUCTURES**

Membrane-lined thermal storage systems p0224 N81-25000

**MEMBRANES**

Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase O: Proof of concept experiment [NASA-CR-164137] p0291 N81-21210

**METAL AIR BATTERIES**

The oxygen electrode - a major problem in energy conversion p0342 N81-25608

## SUBJECT INDEX

**METAL FATIGUE**

Prediction model for fatigue crack growth in windmill structures p0371 N81-21740

**METAL FILMS**

Low-temperature thermal emission rectifier with an oxidized titanium collector p0337 N81-24209

Investigations of intermetallic alloy film hydriding mechanisms p0290 N81-25497

Screenable silver and base metal solar cell contacts p0243 N81-27195

**METAL HYDRIDES**

Perspectives for metal hydride technology p0285 N81-21504

Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling p0286 N81-24021

Engineering development of a HYCSOS chemical heat pump --- Hydride Conversion and Storage System p0287 N81-25017

Enhancement of low grade heat via the HYCSOS chemical heat pump --- Hydride Conversion and Storage System p0225 N81-25018

Bulk hydrogen storage using metal hydrides p0289 N81-25154

Hydrogen in thin film hydriding alloys p0289 N81-25155

Heat transfer enhancement in metal hydride systems p0289 N81-25156

Development of solar-hydrogen systems using metal hydrides p0289 N81-25158

Metal hydrides in energy conversion systems p0342 N81-25480

HEM in situ hydriding of hydrogen storage materials --- High Voltage Electron Microscope p0342 N81-25492

Hydrogen storage properties of FeTi/1+x/ p0290 N81-25494

Investigations of intermetallic alloy film hydriding mechanisms p0290 N81-25497

Kinetics of the reaction between Mg<sub>2</sub>Ni and H<sub>2</sub> p0290 N81-25499

Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys p0290 N81-25500

Hydrides of ternary TiFe/xH/1-x/H = Cr, Mn, Co, Ni/ intermetallics --- for hydrogen storage applications p0290 N81-26584

**METAL OXIDE SEMICONDUCTORS**

Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells p0209 N81-20008

Improved polycrystalline thin film gallium arsenide MOS solar cells p0251 N81-27281

**METAL SURFACES**

Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator p0332 N81-21494

Hydrogen/metal interactions with special reference to electrochemical approaches p0286 N81-24556

Behavior of interdigitated back-contact solar cells p0231 N81-27086

A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings p0243 N81-27194

**METAL VAPORS**

Effect of zinc impurity on silicon solar-cell efficiency p0256 N81-29290

Construction and properties of a quadrupole mass spectrometer device, developed for the investigation of a thermionic barium-cesium-diode vapor atmosphere [DPVLE-FB-79-39] p0361 N81-21308

**METAL-GAS SYSTEMS**

Hydrogen in LaNi<sub>5</sub> intermetallic compound p0290 N81-25496

# SUBJECT INDEX

# MICROWAVE TRANSMISSION

## METALLIZING

- Behavior of interdigitated back-contact solar cells p0231 A81-27086
- Design of metallization for higher-efficiency solar cells p0237 A81-27137
- A base-metal conductor system for silicon solar cells p0243 A81-27196
- An all-plated, low cost contact system for silicon solar cells p0243 A81-27197
- High performance BSF silicon solar cell with fire through contacts printed on AR coating --- Back Surface Field p0243 A81-27198
- Silicon solar cells with screen printed diffusion and metallization p0245 A81-27221

## METEOROLOGICAL INSTRUMENTS

- Introduction to meteorological measurements and data handling for solar energy applications [DOE/EE-0084] p0265 N81-17681

## METEOROLOGICAL PARAMETERS

- The Solar-Meteorological Research Program for the South-Central U.S. [ASME PAPER 80-WA/SOL-24] p0213 A81-21148
- A simple method for computing the dynamic response of passive solar buildings to design weather conditions p0226 A81-25029
- Estimating the wind's potential for small scale energy generation using available local climatological data p0338 A81-25074
- Introduction to meteorological measurements and data handling for solar energy applications [DOE/EE-0084] p0265 N81-17681
- Meteorological data: Measurement techniques and solar components --- solar radiation, meteorological data p0266 N81-18501
- Meteorological data: Treatment of radiation data, test reference year --- solar radiation p0266 N81-18502
- Environmental data for sites in the National Solar Data Network [SOLAR/0010-80/12] p0276 N81-19665
- October 1980 environmental data for sites in the National Solar Data Network [SOLAR/0010-80/10] p0279 N81-20588
- Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas [DOE/ET-27127/1] p0207 N81-21646
- METEOROLOGICAL SERVICES
- Meteorological data: Measurement techniques and solar components --- solar radiation, meteorological data p0266 N81-18501

## METHANATION

- Cryogenic methane separation/catalytic hydrogasification process analysis [DOE/ET-10325/T3] p0321 N81-21218

## METHANE

- The development of biogas technology in India p0298 A81-25117
- Methane production from the Mountain View landfill p0300 A81-25553
- The Pompano Beach RefCOM facility p0300 A81-25554
- Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources [ASME PAPER 81-PET-5] p0350 A81-30114
- Evaluation of coal conversion catalysts [PB81-111387] p0306 N81-17291
- Marine Biomass Program [PB81-113185] p0307 N81-17297
- Assessment of methane hydrates --- permafrost zone of Alaska and deep sediments in oceans [PB81-113300] p0307 N81-17510
- Initiation of detonation in unconfined natural gas-air clouds [PB81-113292] p0308 N81-18149
- Utilization of geothermal energy for methane production for J. A. Alberts and Land and Cattle Company [DOE/ET-27230/T2] p0316 N81-19333

- Some long-term energy options [LA-8628-MS] p0200 N81-19596
- Marine biomass: Algae as source of energy [NE/BIO-80/12] p0320 N81-20581
- Hydrogen-methane separation processes and related phenomena [DOE/NETC-14386/106] p0321 N81-21153
- Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day [PNL-3695-APP-B] p0324 N81-21604

## METHODOLOGY

- Wind energy resource survey methodology p0295 A81-23691

## METHYL ALCOHOLS

- Synthetic gas production for methanol - Current and future trends p0295 A81-24016
- Gasoline from alcohols p0297 A81-24900
- Thermodynamic calculations for Otto cycle engines using methanol as a fuel p0342 A81-25123
- Alcohols as fuels - The global picture p0303 A81-27572
- A new route to liquid fuels from coal p0304 A81-28999
- Combustion of methanol and liquefied butane in a gas turbine combustor [ASME PAPER 81-GT-50] p0348 A81-29963
- Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64] p0348 A81-29974
- Methanol - The efficient conversion of valueless fuels into a versatile fuel and chemical feedstock [ASME PAPER 81-PID-1] p0305 A81-30110
- Fleet trails using methanol/gasoline blends [CONF-801030-4] p0311 N81-18230
- Energy balances in the production and end-use of methanol derived from coal p0312 N81-18234
- Methanol production with elemental phosphorus byproduct gas: Technical and economic feasibility [PNL-3694] p0322 N81-21224

## MEXICO

- Remote sensing techniques for identification and evaluation of geothermal areas p0294 A81-23587

## MICHIGAN

- Petroleum exploration with Landsat in Bay County, Michigan - An interim case study p0294 A81-23562

## MICROPROCESSORS

- Solar Energy Management System p0210 A81-20492

## MICROSTRUCTURE

- The CdSe thin-film solar cell p0240 A81-27168
- A microstructural study of the heterojunction materials of the CdS-Cu<sub>2</sub>S solar cell p0241 A81-27179
- Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors [DOE/AL-04266/T1] p0268 N81-18537

## MICROWAVE ANTENNAS

- SPS large array simulation --- spacetennas p0365 N81-16537

## MICROWAVE FREQUENCIES

- A theoretical study of microwave beam absorption by a rectenna [NASA-CR-160921] p0369 N81-20328

## MICROWAVE TRANSMISSION

- Preliminary environmental assessment for the satellite power system /SPS/ p0186 A81-22548
- SPS design with solid-state transmitter p0365 A81-24831
- Workshop on the microwave power transmission system for the solar power satellite - Review panel report p0365 A81-24832
- An assessment of the atmospheric effects of a Satellite Power System p0187 A81-25053
- Solar power satellite system [NASA-CASE-RQN-10949-1] p0190 N81-16530

- Solar Power Satellite Microwave Transmission and Reception [NASA-CP-2141] p0365 N81-16533
- Solar power satellite microwave power transmission system description executive summary p0365 N81-16535
- Initial MPTS study results: Design considerations and issues p0365 N81-16536
- A sonic satellite power system microwave power transmission simulation p0366 N81-16546
- SPS phase control studies p0366 N81-16547
- Ionospheric effects in active retrodirective array and mitigating system design p0366 N81-16549
- High efficiency SPS klystron design p0366 N81-16550
- High efficiency klystron for the SPS application p0366 N81-16551
- Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies p0367 N81-16552
- The adapting of the crossed-field directional amplifier to the requirements of the SPS p0367 N81-16553
- Rectenna array measurement results --- Satellite power transmission and reception p0367 N81-16562
- Microwave power transmission system workshop, session on solid state p0367 N81-16563
- Solid state systems concepts --- solar power satellite transmission p0367 N81-16566
- Solid state device technology for Solar Power Satellite p0368 N81-16567
- Solid state sandwich concept: Design, considerations and issues --- solar power satellite transmission p0368 N81-16568
- Satellite Power System (SPS) magnetron tube assessment study [NASA-CR-3383] p0368 N81-18490
- Satellite Power System (SPS). Rectenna siting: Availability and distribution of nominally eligible sites [DOE/EE-1004/T10] p0369 N81-19602
- Satellite Power System (SPS) societal assessment [NASA-CR-164153] p0205 N81-21590
- MICROWAVES**
- A theoretical study of microwave beam absorption by a rectenna, introduction --- solar power satellites p0369 N81-20329
- MILITARY OPERATIONS**
- Use of non-petroleum fuels to reduce military energy vulnerabilities: Self-sufficient bases and new weapon propulsion systems [LA-UR-90-3445] p0199 N81-19329
- MINERAL EXPLORATION**
- Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3 p0293 N81-22278
- MINERALS**
- Extraction of oxygen and metals from lunar ores p0222 N81-24827
- Catalytic effects in coal gasification [SAND-80-2151] p0322 N81-21231
- MINES (EXCAVATIONS)**
- Evaluating the environmental effects of past and present surface mining - A remote sensing applied research review p0186 N81-23555
- The environmental assessment of a contemporary coal mining system [NASA-CR-163974] p0197 N81-18571
- Critical parameters for coarse coal underground slurry haulage systems [JPL-PUB-81-11] p0369 N81-20495
- Western Coal Survey: A survey of coal mining capacity in the west [DOE/EA-0045/1] p0323 N81-21464
- MINING**
- Regional price targets appropriate for advanced coal extraction [NASA-CR-163896] p0189 N81-16513
- Western Coal Survey: A survey of coal mining capacity in the west [DOE/EA-0045/1] p0323 N81-21464
- Fuel cycle analysis for fossil energy systems: Coal combustion [ORNL-5661] p0205 N81-21606
- MINORITY CARRIERS**
- Diffusion length measurements in CdS and CdSe Schottky barrier junctions p0209 N81-19698
- Determination of lifetimes and recombination currents in p-n junction solar cells, diodes, and transistors p0209 N81-20011
- Theory of photo induced open circuit voltage decay in a solar cell p0216 N81-22200
- Performance study of p+/n and n+/p solar cell structures on polycrystalline material p0231 N81-27087
- Transport properties in 100 mm Cz silicon --- Czochralski p0234 N81-27115
- Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 N81-27125
- Variation of diffusion length of ribbon-Si solar cells with light intensity p0236 N81-27131
- MIRRORS**
- Transparent heat mirrors - Influence of the materials on the optical characteristics p0215 N81-21939
- Development and study of a flat mirror multivalent concentrator p0223 N81-24988
- Barstow heliostat mirror glass characterization [PNL-3576] p0267 N81-18522
- MIS (SEMICONDUCTORS)**
- Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells p0217 N81-22872
- Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency p0221 N81-24803
- Development trends for the mass production of low cost conductor-insulator-semiconductor /CIS/ solar cells p0228 N81-25051
- Collection efficiency of low-mobility solar cells p0230 N81-27010
- A two-dimensional model of an MIS inversion layer solar cell p0232 N81-27088
- Design considerations for high efficiency polycrystalline silicon MIS solar cells p0236 N81-27127
- Cuprous oxide MIS solar cells p0237 N81-27139
- Investigation of Cu<sub>2</sub>O solar cells p0237 N81-27140
- Characterization of ZnO for the fabrication of conductor-insulator-semiconductor /CIS/ solar cells p0237 N81-27141
- Nuclear radiation effects on the photovoltaic performance and interface states of Cr, p-type, single crystal, MISi solar cells p0244 N81-27208
- An outlook for automated CIS solar cell factory p0246 N81-27228
- High efficiency MIS/inversion layer silicon solar cells p0252 N81-27290
- MIS silicon grating solar cells on BSP substrates p0252 N81-27293
- Review of conductor-insulator-semiconductor /CIS/ solar cells p0254 N81-28954
- MISMATCH (ELECTRICAL)**
- The correction for spectral mismatch effects on the calibration of a solar cell when using a solar simulator [NASA-CR-164074] p0276 N81-20546

- MOBILITY**  
Oil ganglion dynamics in flow through porous media  
p0313 N81-18314
- MOLDING MATERIALS**  
Development of sheet molding compound solar collectors with molded-in silvered glass reflective surfaces  
[SAND-80-0702] p0273 N81-19613
- MOLDS**  
Development of sheet molding compound solar collectors with molded-in silvered glass reflective surfaces  
[SAND-80-0702] p0273 N81-19613
- MOLECULAR BEAM EPITAXY**  
Molecular beam epitaxial GaAs heteroface solar cell grown on Ge  
p0217 N81-22874
- MOLECULAR GASES**  
Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys  
p0290 N81-25500
- MOLTEN SALT ELECTROLYTES**  
High temperature batteries  
p0373 N81-25567  
Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte  
p0374 N81-25613
- MOLTEN SALTS**  
Molten salt pyrolysis of latex --- synthetic hydrocarbon fuel production using the Guayule shrub  
[NASA-CASE-NPO-14315-1] p0306 N81-17261  
Molten salt coal gasification process development unit, phase 1. Volume 1: PDU operations  
[DOE/ET-10296/66-VOL-1] p0319 N81-20296
- MOLYBDENUM**  
POCL3 gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 N81-27216
- MONITORS**  
Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California  
[EPRI-EM-1654] p0275 N81-19630
- MONTICELLO REACTOR**  
Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor  
p0336 N81-23714
- MOTOR VEHICLES**  
An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine --- thermal energy storage with water lithium salts solution  
p0342 N81-25132
- N**
- N-P-N JUNCTIONS**  
Characterization of p+/nn+/ -BSF silicon concentrator solar cells --- Back Surface Field  
p0236 N81-27133
- N-TYPE SEMICONDUCTORS**  
Surface charge and specific ion adsorption effects in photoelectrochemical devices  
p0215 N81-22148
- NAPHTHALENE**  
Catalytic cracking of hydrotreated coal liquids and related polycyclic naphthenes and naphthoaromatics  
p0308 N81-18118
- NASA PROGRAMS**  
The Marshall Center: Its place in NASA  
[NASA-TM-82254] p0383 N81-17958  
Research and Technology: Annual report  
[NASA-TM-82314] p0384 N81-21949
- NATURAL GAS**  
Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas  
p0298 N81-25114  
Methane production from the Mountain View landfill  
p0300 N81-25553  
The Pompano Beach RefCOM facility  
p0300 N81-25554  
The Ames Resource Recovery facility  
p0301 N81-25558  
Energy, helium, and the future, 2  
[LA-OR-80-3342] p0191 N81-16605
- The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 N81-16612  
Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies  
[PB81-114258] p0194 N81-17613  
Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 N81-17615  
Fuel cell support studies: On-site molten carbonate systems  
[PB81-113672] p0353 N81-17619  
Energy balances in the production and end-use of methanol derived from coal  
[DOE/PB-70151/T4] p0312 N81-16234  
Analysis of geopressured aquifers  
[PB81-123416] p0317 N81-19553
- NATURAL GAS EXPLORATION**  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content  
p0302 N81-26895  
Assessment of methane hydrates --- permafrost zone of Alaska and deep sediments in oceans  
[PB81-113300] p0307 N81-17510
- NAVIGATION TECHNOLOGY SATELLITES**  
NTS-2 solar cell experiment after two years in orbit  
p0249 N81-27268  
Three year performance of the NTS-2 solar cell experiment  
p0262 N81-17559
- NEODYMIUM LASERS**  
Photochemical solar energy conversion in surfactant vehicles  
[DOE/ER-10601/1] p0269 N81-18560
- NETWORK ANALYSIS**  
A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet  
p0334 N81-23447  
The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight  
p0237 N81-27135  
Review of physics underlying recent improvements in silicon solar-cell performance  
p0241 N81-27176  
PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements  
p0250 N81-27275  
Energy transport system optimization for distributed networks of solar collectors  
[ASME PAPER 81-SOL-1] p0365 N81-30109  
Wind generator network methodology and analysis  
p0359 N81-20356
- NETWORK CONTROL**  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1  
[NASA-CR-164051] p0202 N81-20538  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix B: State of the art, trends, and potential growth of selected DSG technologies  
[NASA-CR-164054] p0202 N81-20540  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 4, appendix C: Identification from utility visits of present and future approaches to integration of DSG into distribution networks  
[NASA-CR-164055] p0202 N81-20541
- NETWORK SYNTHESIS**  
Circuit design considerations for photovoltaic modules and systems  
p0238 N81-27153  
Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis  
p0347 N81-29243
- NEUTRON ACTIVATION ANALYSIS**  
Contribution of activation products to fusion accident risk. I - A preliminary investigation  
p0336 N81-23712

## NEUTRON COUNTERS

## SUBJECT INDEX

### NEUTRON COUNTERS

Selective fast neutron detector p0332 A81-21640

### NEUTRON EMISSION

Preliminary skyshine calculations for the Poloidal Divertor Tokamak Experiment --- for plasma impurities control p0336 A81-23713

Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor p0336 A81-23714

### NEUTRON IRRADIATION

The development of advanced structural materials for fusion power p0333 A81-22659

### NEW JERSEY

Energy emergency contingency plan [PB81-128704] p0203 N81-20604

### NEW MEXICO

Environmental overview for the development of geothermal resources in the state of New Mexico [UCRL-15317] p0206 N81-21639  
Preparation of monthly maps of solar availability for New Mexico based on satellite photography [EHD-78-2131] p0284 N81-21668

### NICKEL

Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance p0372 A81-25323

### NICKEL ALLOYS

Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys p0290 A81-25500

### NICKEL CADMIUM BATTERIES

Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode p0372 A81-25322

Sealed nickel-cadmium batteries for memory backup p0374 A81-25616

A new airborne nickel cadmium battery concept p0374 A81-25618

The CMG nickel electrode p0379 N81-21509

PBI treated polypropylene battery separator p0379 N81-21512

### NICKEL COATINGS

A base-metal conductor system for silicon solar cells p0243 A81-27196

Nickel contacts for low cost solar cells p0245 A81-27223

### NICKEL COMPOUNDS

Hydrogen in LaNi5 intermetallic compound p0290 A81-25496  
Surface segregation effects in Mg2Cu, Mg2Ni and Mg-Mg2Ni hydrogen storage compounds p0290 A81-25498

### NICKEL OXIDES

Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode p0372 A81-25322

### NIOBIUM COMPOUNDS

Superconductive energy storage for diurnal use by electric utilities p0371 A81-23440

### NITINOL ALLOYS

Development of a prototype heat engine for energy conservation [DOE/OR-06028/T6] p0199 N81-19589

### NITRIC ACID

Acid rain: The impact of local sources [DOE/ETC-14787/103] p0197 N81-18573

### NITRIC OXIDE

The effect of secondary combustion on nitric oxide concentrations in a MHD combustion gas [AIAA PAPER 81-0102] p0328 A81-20604  
Fluidized bed combustion of coal p0299 A81-25130

### NITROGEN

Combustion of coal-derived liquids and shale oil in gas turbine combustors p0343 A81-26016

### NITROGEN OXIDES

Utilization of staged combustion for controlling NOx/ emissions from a test facility simulating a coal-fired MHD power plant [AIAA PAPER 81-0101] p0328 A81-20603  
Effect of water injection for NOx reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor [ASME PAPER 81-GT-51] p0348 A81-29964  
Low NOx/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels [ASME PAPER 81-GT-109] p0348 A81-30014  
Evaluation of advanced combustors for dry NOx/ suppression with nitrogen bearing fuels in utility and industrial gas turbines [ASME PAPER 81-GT-125] p0349 A81-30029

### NOCTURNAL VARIATIONS

Nocturnal radiation from a solar collector [ASME PAPER 80-WA/SOL-35] p0214 A81-21155

### NOISE POLLUTION

Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site [LBL-11978] p0270 N81-18572

### NOISE PREDICTION

The NASA-LaRC wind turbine sound prediction code [NASA-TN-81737] p0362 N81-21537

### NOISE REDUCTION

The NASA-LaRC wind turbine sound prediction code [NASA-TN-81737] p0362 N81-21537

### NORTH CAROLINA

Peat resources of North Carolina [DOE/ET-14693/T1] p0317 N81-19541  
Wind energy resource atlas. Volume 5: The East Central region [FNL-3195-VOL-5] p0325 N81-21712

### NUCLEAR ELECTRIC POWER GENERATION

An economics method for symbiotic fusion-fission electricity generation systems p0336 A81-23716

The fusion-supported decentralized nuclear energy system p0337 A81-23848

Possible application of electromagnetic guns to impact fusion --- to the generation of electric power [LA-UR-80-3137] p0353 N81-17910

Environmental and safety issues of the fusion fuel cycle [CONF-801011-66] p0353 N81-17911

### NUCLEAR ELECTRIC PROPULSION

Radiatively coupled thermionic and thermoelectric power system concept [AIAA PAPER 81-0217] p0329 A81-20683

### NUCLEAR ENERGY

Alternative energy source II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 6 - Nuclear energy p0340 A81-25099

### NUCLEAR FUELS

The efficiency of conical pellets for laser fusion p0294 A81-23227

Fusion energy research, development, and demonstration act of 1980 [H-REPT-96-1096] p0352 N81-16898

Performance profiles of major energy producers [DOE/EIA-0206/78] p0324 N81-21610

### NUCLEAR FUSION

The chemically pumped iodine laser as a fusion driver [KNSP-0-944] p0350 N81-16456

Fusion energy research, development, and demonstration act of 1980 [H-REPT-96-1096] p0352 N81-16898

Possible application of electromagnetic guns to impact fusion --- to the generation of electric power [LA-UR-80-3137] p0353 N81-17910

Environmental and safety issues of the fusion fuel cycle [CONF-801011-66] p0353 N81-17911

Review of fusion synfuels [BNL-28627] p0291 N81-20300



## SUBJECT INDEX

## OPERATING COSTS

- Max Planck Institute for Plasma Physics --- energy technology utilization of nuclear fusion [LA-TR-80-25] p0364 N81-21919
- NUCLEAR HEAT**  
Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants p0340 A81-25087  
Fusion reactors as high-temperature process heat sources p0341 A81-25105  
Production of liquid fuels with a high-temperature gas-cooled reactor p0298 A81-25120  
Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary --- and water splitting technology [BMFT-FB-T-79-121] p0291 N81-19339
- NUCLEAR MAGNETIC RESONANCE**  
Hydrogen bonding in asphaltenes and coal liquids [DOE/PC-30252/T1] p0318 N81-20227
- NUCLEAR POWER PLANTS**  
Operational, control and protective system transient analyses of the closed-cycle GT-HTGR power plant --- Gas Turbine High Temperature Gas-cooled Reactor [ASME PAPER 80-WA/GT-1] p0331 A81-21096  
The nuclear closed-cycle gas turbine /HTGR-GT/ - Dry cooled commercial power plant studies [ASME PAPER 80-GT-82] p0332 A81-21162  
Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants p0340 A81-25087
- NUCLEAR RESEARCH**  
National Academy of Sciences report: Energy in transition, 1985-2010 [GPO-61-647] p0189 N81-16524  
Energy in transition, 1985-2010 [GPO-63-171] p0190 N81-16585
- NUCLEAR BOILING**  
An acoustic measurement of boiling instabilities in a solar receiver [SAND-80-2409] p0284 N81-21621
- NUMERICAL ANALYSIS**  
Comparison of solar cell performance to calculations using different energy band-gap narrowing models p0217 A81-22861  
An analytical expression for the average output power of a wind machine p0337 A81-24433
- NUMERICAL CONTROL**  
Design and evaluation of a computer controlled solar collector simulator [ASME PAPER 80-WA/SOL-6] p0212 A81-21133
- NOTATION**  
The nutating traction drive [ASME PAPER 80-GT-99] p0332 A81-21163
- O**
- OCEAN BOTTOM**  
Assessment of methane hydrates --- permafrost zone of Alaska and deep sediments in oceans [PB81-113300] p0307 N81-17510
- OCEAN CURRENTS**  
The design and analysis of a vertical axis ocean current power plant p0339 A81-25081
- OCEAN THERMAL ENERGY CONVERSION**  
Contribution of ocean thermal energy conversion to world energy needs p0333 A81-22900  
A perspective on OTEC plants p0340 A81-25085  
A bottom fixed OTEC plant on the edge of a continental /or island/ shelf p0340 A81-25086  
Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants p0340 A81-25087  
An evaluation of alternate energy sources for the Guyana energy crisis p0340 A81-25097  
OTEC cold water pipe design for problems caused by vortex-excited oscillations p0347 A81-29200
- Ocean Thermal Energy Conversion Power System Development: PSD-I, phase 2 [DOE/ET-21039/1] p0353 N81-17594  
Preliminary designs for modular OTEC platforms' station-keeping subsystems, volume 3 [DOE/NOAA/OTEC-30-VOL-3] p0363 N81-21592
- OCEANOGRAPHY**  
Scientific and Technical Publications of the Environmental Research Laboratories' fiscal year 1978 [PB81-141301] p0384 N81-21975
- OFFSHORE ENERGY SOURCES**  
Investigation of dynamics of a waterwave power plant p0333 A81-22176  
Contribution of ocean thermal energy conversion to world energy needs p0333 A81-22900  
Submarine hydro-electro-osmotic power plants for an efficient exploitation of salinity gradients p0337 A81-24447  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 4 - Indirect solar energy p0382 A81-25065  
Sources and potential uses of wave energy p0339 A81-25079
- OFFSHORE PLATFORMS**  
Report to the Congress on ocean pollution and offshore development [PB81-118333] p0195 N81-17630  
Environmental exposure and design criteria for offshore and gas structures [AD-A094651] p0201 N81-19652
- OIL EXPLORATION**  
Petroleum exploration with Landsat in Bay County, Michigan - An interim case study p0294 A81-23562  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content p0302 A81-26895  
The Indian Lands Study: An example of the application of geographic research to the analysis of complex energy and environmental policy issues --- strip mining and oil exploration effects on tribal culture and economics p0189 N81-16510
- OIL FIELDS**  
Heavy oil reservoirs recoverable by thermal technology --- steam injection [DOE/ET-12380/1-VOL-3] p0317 N81-19540  
Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-1] p0318 N81-19616  
Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-2] p0318 N81-19617
- OIL RECOVERY**  
Oil ganglion dynamics in flow through porous media p0313 N81-18314  
Heavy oil reservoirs recoverable by thermal technology --- steam injection [DOE/ET-12380/1-VOL-3] p0317 N81-19540  
Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-1] p0318 N81-19616  
Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-2] p0318 N81-19617
- OILS**  
Pyrolytic oils: Characterization and data development for continuous processing [PB81-110959] p0306 N81-17294  
Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes [FE-2315-55] p0311 N81-18231
- ONBOARD EQUIPMENT**  
Simultaneous radiation damage and annealing of GaAs solar cells p0247 A81-27240
- OPERATING COSTS**  
Change-of-pace electric automobile user demonstration (COMCAR 2) [DOE/ETC-11373] p0379 N81-21359

# OPERATIONS RESEARCH

# SUBJECT INDEX

## OPERATIONS RESEARCH

Energy/economic model analysis. Livermore energy policy model [PB81-114266] p0194 N81-17616

Coal gasification systems engineering and analysis. Appendix B: Work breakdown structure [NASA-CR-161662] p0310 N81-18221

Mathematical programming applied to power systems expansion planning with pumped storage p0377 N81-18485

A 10 kW small solar power station and operations optimization [BMFT-FB-T-79-139] p0275 N81-19638

Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs [DOE/EV-0115] p0201 N81-19655

**OPTICAL COUPLING**  
On the dynamic optimal coupling of a solar cell array to a load and storage batteries p0229 N81-26372

**OPTICAL EMISSION SPECTROSCOPY**  
Optical spectrum of a closed cycle MHD generator plasma p0333 N81-23063

**OPTICAL FILTERS**  
Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 N81-20572

**OPTICAL MEASUREMENT**  
Optical diagnostic measurements of coal slag parameters in combustion MHD systems p0353 N81-18153

Omnium-G parabolic dish optical efficiency: A comparison of two independent measurement techniques [SERI/TR-631-544] p0267 N81-18520

**OPTICAL PROPERTIES**  
Transparent heat mirrors - Influence of the materials on the optical characteristics p0215 N81-21939

Optical analysis of point focus parabolic radiation concentrators p0219 N81-24332

Barstow heliostat mirror glass characterization [PNL-3576] p0267 N81-18522

The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties p0280 N81-20912

**OPTICAL PUMPING**  
Solar-pumped gas laser development [AIAA PAPER 81-0098] p0210 N81-20600

Modeling of a solar-pumped iodine laser p0221 N81-24618

**OPTICAL REFLECTION**  
Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 N81-27125

**OPTIMAL CONTROL**  
A review of the application of modern control theory to solar energy systems p0210 N81-20490

Optimal and suboptimal control policies for a solar collector system p0211 N81-21029

The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system p0238 N81-27152

An optimal control approach to energy minimization in electric vehicles --- boundary value methods [REPT-109] p0201 N81-19972

**OPTIMIZATION**  
Optimization of fin and tube parameters in a flat-plate collector p0209 N81-19849

Optimum performance of thermal trap collectors p0220 N81-24432

The effects of junction depth and impurity concentration on diffused junction solar cells p0228 N81-25050

Evaluation and optimization of silicon sheet solar cells p0234 N81-27114

Flat-plate photovoltaic array design optimization p0248 N81-27247

Silicon solar cell optimization [AD-A092908] p0263 N81-17579

Appropriate sizing of solar heating systems [SERI/TR-333-320] p0264 N81-17600

Optimized design of total energy systems: The RETE project [CISE-1606] p0196 N81-18512

Thermal performance predictions of flat-plate solar collector air heaters p0270 N81-18566

Optimization of carbon-supported platinum catalysts for fuel cell electrodes [AD-A094714] p0357 N81-19579

Design optimization of conventional heat pumps: Application to steady state heating efficiency [CONF-810101-5] p0200 N81-19599

Optimization of transparent electrode for solar cells [SERI/PR-9318-1-T1] p0274 N81-19621

Transparent glass honeycomb structures for energy loss control [UCLA-ENG-8039] p0274 N81-19622

A method to tune the various components of a solar heating system --- economic factors and cost analysis p0277 N81-20552

Optimization of storage in passive solar heating systems [DOE/CS-35405/T1] p0278 N81-20574

**ORBIT TRANSFER VEHICLES**  
Analysis of GAs and S1 solar cell arrays for earth orbital and orbit transfer missions p0248 N81-27254

Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 3: Transportation analysis [NASA-CR-3394] p0271 N81-19565

**ORBITAL ASSEMBLY**  
Space construction technology needs [AIAA PAPER 81-0442] p0381 N81-22757

**OREGON**  
Oregon: A guide to geothermal energy development [DOE/ET-28476/T11] p0318 N81-19598

The economics of residential energy efficiency [PNL-SA-8696] p0206 N81-21624

**ORGANIC MATERIALS**  
A solar-powered organic vapour power cycle with electricity generation p0228 N81-25047

**ORGANIC WASTES (FUEL CONVERSION)**  
The development of biogas technology in India p0298 N81-25117

The Niagara Falls resource recovery system p0301 N81-25557

Technology for powdered fuel preparation from solid waste p0301 N81-25559

Commercialization potential of the China Lake trash-to-gasoline process p0301 N81-25560

Conversion of organic wastes to oil by reductive formylation p0302 N81-25563

Conversion of cellulosic wastes to liquid fuels p0302 N81-25564

Energy from biological processes. Volume 3: Appendixes. Part B: Agriculture, unconventional crops, and selected biomass wastes [PB81-134785] p0323 N81-21235

**ORGANOMETALLIC COMPOUNDS**  
Efficient Si solar cells by laser photochemical doping p0229 N81-25873

Metal chelate catalysts for fuel cells [PB81-132953] p0364 N81-21629

**ORIENTATION**  
Energy collected by flat-plate collectors, not oriented toward the south p0218 N81-23010

**OSCILLATING FLOW**  
Dynamic behavior of a natural circulation loop for a solar collector p0256 N81-25261

**OSMOSIS**  
Submarine hydro-electro-osmotic power plants for an efficient exploitation of salinity gradients p0337 N81-24447

Osmo-power - Theory and performance of an osmo-power pilot plant p0347 N81-29199

# SUBJECT INDEX

# PARAMETERIZATION

## OTTO CYCLE

Thermodynamic calculations for Otto cycle engines  
using methanol as a fuel p0342 A81-25123

## OXIDATION

Hydrogen production from partial oxidation of  
residual fuel oil p0285 A81-24015  
Coal conservation and stabilization during storage  
p0299 A81-25126  
Preparation and evaluation of advanced  
electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165179] p0352 A81-17527

## OXIDE FILMS

Effect of anodic-oxide layer thickness on the  
performance of GaAs MOS solar cells p0209 A81-20008  
Characterization of ZnO for the fabrication of  
conductor-insulator-semiconductor /CIS/ solar  
cells p0237 A81-27141  
ZnO films and ZnO/CdTe heterojunctions prepared  
using spray pyrolysis p0240 A81-27169

## OXYGEN

Hydrogen and oxygen from water. V - The ROC system  
p0285 A81-21955  
Tetraethiafulvalenes as catalysts for the reduction  
of oxygen in acid electrolytes --- in fuel cells  
p0342 A81-25325  
The oxygen electrode - A major problem in energy  
conversion p0342 A81-25608  
Electrochemistry of oxygen p0343 A81-25609  
Recent advances in the sciences of electrocatalysis  
[AD-A095095] p0356 A81-19257

## OXYGEN PRODUCTION

Extraction of oxygen and metals from lunar ores  
p0222 A81-24827  
Oxygen-enriched air production for MHD power plants  
[DOE/ET-11058/T4] p0364 A81-21920

## P

## P-I-N JUNCTIONS

Thin n-i-p silicon solar cell p0232 A81-27097

## P-N JUNCTIONS

Determination of lifetimes and recombination  
currents in p-n junction solar cells, diodes,  
and transistors p0209 A81-20011  
Concentration dependences of the parameters of  
high-voltage silicon photocells under high  
levels of illumination p0219 A81-23803  
Theoretical efficiency of S/p+ -n/IS solar cells  
p0221 A81-24801  
Short wavelength spectral response of the tandem  
junction solar cell p0221 A81-24808  
The effects of junction depth and impurity  
concentration on diffused junction solar cells  
p0228 A81-25050  
Performance study of p+//n and n+//p solar cell  
structures on polycrystalline material p0231 A81-27087  
Cu2S-CdS-thin film solar cells p0234 A81-27110  
Ultra high efficiency thin silicon p-n junction  
solar cells using reflecting surfaces p0235 A81-27125  
Heterojunction solar cell design and evaluation  
p0239 A81-27163  
An outlook for automated CIS solar cell factory  
p0246 A81-27228  
Dependence of efficiency of shallow junction  
silicon solar cells on substrate doping p0254 A81-28216  
Theoretical advantages of pn+/-type  
Cu2S-ZnO solar cell p0346 A81-28395

## P-N-P-N JUNCTIONS

Silicon solar cell design for medium concentration  
applications p0270 A81-18564

## P-TYPE SEMICONDUCTORS

Polycrystalline Zn3P2 Schottky barrier solar cells  
p0220 A81-24414  
11.5% solar conversion efficiency in the  
photocathodically protected  
p-InP/V/3+/-V/2+/-HCl/C semiconductor liquid  
junction cell p0230 A81-27014

## PACIFIC NORTHWEST (US)

Wind energy integration study  
[DOE/BP-10552/17] p0205 A81-21593

## PAINTS

Performance comparison of flat plate collector  
absorber coatings utilizing NBS Standard 74-635  
and the ASHRAE Collector Performance Method  
p0222 A81-24981

## PARABOLIC REFLECTORS

Frequency response analysis of fluid control  
systems for parabolic-trough solar collectors  
[ASME PAPER 80-WA/SOL-15] p0213 A81-21140  
A Fresnel-Winston tandem concentrator system  
p0218 A81-23497  
Optical analysis of point focus parabolic  
radiation concentrators p0219 A81-24332  
Investigations on the prediction of thermal  
performance of compound parabolic concentrators  
p0223 A81-24989  
Optimization of a photovoltaic receiver for a  
parabolic trough concentrator p0242 A81-27187  
Parabolic troughs concentrators photovoltaic module  
p0242 A81-27188  
Minimizing end shadowing effects on parabolic  
concentrator arrays p0242 A81-27191  
Active and passive cooling for concentrating  
photovoltaic arrays p0243 A81-27192  
Performance enhancement of compound parabolic  
concentrators using air and a liquid  
simultaneously as heat transfer mediums p0255 A81-29254  
Small gas turbine with large parabolic dish  
collectors [ASME PAPER 81-GT-201] p0349 A81-30091  
Omnium-G parabolic dish optical efficiency: A  
comparison of two independent measurement  
techniques [SERI/TR-631-544] p0267 A81-18520  
Development of a combined photovoltaic/thermal  
linear receiver for a parabolic trough  
concentrator [SAND-80-7138] p0272 A81-19595

## PARABOLOID MIRRORS

Simplified methods for analyzing the performance  
of parabolic dish systems p0255 A81-29252  
Criteria for evaluation of reflective surface for  
parabolic dish concentrators [NASA-CR-163898] p0258 A81-16581  
Advanced solar collectors (concentrating troughs)  
--- paraboloid mirrors, mathematical models p0267 A81-18505  
Development of sheet molding compound solar  
collectors with molded-in silvered glass  
reflective surfaces [SAND-80-0702] p0273 A81-19613

## PARAFFINS

Heat transfer through a paraffin wax solar energy  
storage characterized by a temperature dependent  
specific heat p0224 A81-25006

## PARAMETER IDENTIFICATION

Identification of a solar pumping installation  
p0218 A81-23012  
The estimation of the parameters of the  
distribution of wind speed and direction p0294 A81-23069  
Critical parameters for coarse coal underground  
slurry haulage systems [JPL-PUB-81-11] p0369 A81-20495

## PARAMETERIZATION

Parametric analysis of louvered air-heating solar  
collectors [ASME PAPER 80-WA/SOL-38] p0214 A81-21158  
Combined solar and fossil fuel systems for  
electric power generation p0381 A81-25048

# PARTICLE ACCELERATORS

# SUBJECT INDEX

## PARTICLE ACCELERATORS

Drivers for light ion fusion --- inertial confinement fusion  
[SAND-80-2432C] p0353 N81-17883

## PARTICLE BEAMS

Synthetic fuel production in a particle-beam driven fusion reactor p0297 A81-25107

## PARTICLE PRECIPITATION

A manual for the use of electrostatic precipitators to collect fly ash particles  
[PB81-112757] p0308 N81-17640

## PARTICLE SIZE DISTRIBUTION

Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size p0293 A81-22273  
High-temperature high-pressure particulate removal in coal gasification  
[PB81-113664] p0308 N81-17642

## PARTICLE TRAJECTORIES

Rapid-rate bituminous coal gasification --- laminar flow and particle trajectories  
[PB81-114290] p0306 N81-17293

## PARTICULATE SAMPLING

Informational report: 1979 progress of the Chemical Characterization Panel of the composition of diesel exhaust project and results of particulate extraction round-robin  
[PB81-114670] p0195 N81-17636

## PATTERN RECOGNITION

Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors p0318 N81-20202

## PAYLOADS

Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 3: Transportation analysis  
[NASA-CR-3394] p0271 N81-19565

## PEAT

The conversion of peat - Recent developments in simultaneous dewatering and hydrogenolysis p0298 A81-25116  
Coal Hydrogasification process development. volume 1: Coal studies  
[FE-3125-24-VOL-1] p0312 N81-18238  
Coal Hydrogasification process development. volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 N81-18239  
Peat resources of North Carolina  
[DOR/ET-14693/T1] p0317 N81-19541

## PELLETS

The efficiency of conical pellets for laser fusion p0294 A81-23227  
Engineering study of pelletizing waste paper for energy recovery  
[NBERDC-53] p0320 N81-20562

## PERFORMANCE PREDICTION

Approximate three-dimensional electric solution for a frame-type MHD generator p0327 A81-20022  
Comparison of analytical and experimental studies of the HPDE MHD generator performance --- High Performance Demonstration Experiment  
[AIAA PAPER 81-0029] p0327 A81-20549  
A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions  
[AIAA PAPER 81-0031] p0328 A81-20551  
U-25B MHD generator performance  
[AIAA PAPER 81-0032] p0328 A81-20552  
The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc --- for MHD generator flows  
[AIAA PAPER 81-0173] p0329 A81-20649  
MHD electrode performance - Heat transfer and voltage drops  
[ASME PAPER 80-WA/HT-10] p0331 A81-21104  
Performance of solar collectors - An evaluation of standard ratings  
[ASME PAPER 80-WA/SOL-1] p0211 A81-21129  
Analytical predictions of liquid and air photovoltaic/thermal flat-plate collector performance  
[ASME PAPER 80-WA/SOL-3] p0212 A81-21131  
Prediction model for fatigue crack growth in windmill structures p0371 A81-21740

A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques p0215 A81-21956

Performance study of air-heated packed-bed solar-energy collectors p0215 A81-21957

A simplified non-linear model leading to full range valid calibration test of thermal solar collectors through simple experimental procedure p0217 A81-23009

A performance analysis for horizontal axis wind turbines applicable to variable pitch or airbrake control p0333 A81-23067

The performance of arrays of wind turbines p0335 A81-23698

Performance of a flat type solar collector composed of the selective transparent and absorbing plates p0223 A81-24982

Theoretical and experimental investigation of a flat-plate solar collector performance with the use of a solar simulator p0223 A81-24983

Investigations on the prediction of thermal performance of compound parabolic concentrators p0223 A81-24989

A simple method for computing the dynamic response of passive solar buildings to design weather conditions p0226 A81-25029

The flow field about a vertical axis wind turbine p0338 A81-25069

Room temperature cells with solid electrolytes p0373 A81-25568

Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts p0232 A81-27090

Theoretical limit efficiency of direct gap solar cells p0239 A81-27162

SOLCEL II - An improved photovoltaic system analysis computer program p0250 A81-27272

Osmo-power - Theory and performance of an osmo-power pilot plant p0347 A81-25199

A numerical approach for the prediction of the front losses of a flat-plate solar collector p0255 A81-29255

A market research effort leading to the development of a high efficiency 10,000 shf gas turbine system p0349 A81-30083

Performance of a solar-heated assembly building at Sandia National Laboratories p0258 A81-16593

Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results p0273 N81-19618

Electric vehicle simulation for design optimization [AD-A094734] p0378 N81-19970

Performance of air collector house heating systems with rock bed storage --- solar heating p0277 N81-20553

Midtemperature solar systems test facility predictions for thermal performance of the Acurex solar collector with PER 244 reflector surface [SAND-80-1964/3] p0282 N81-21568

## PERFORMANCE TESTS

Performance assessment of a Flettner wind turbine p0327 A81-20025

Experimental apparatus for cooling of photovoltaic cells at high concentration p0218 A81-23011

Comparison of commercial and do-it-yourself solar collectors p0219 A81-23704

Performance comparison of flat plate collector absorber coatings utilizing NBS Standard 74-635 and the ASHRAE Collector Performance Method p0222 A81-24981

Method of on site testing for performance rating of solar water heating systems p0225 A81-25014

- Performance of a solar heating system on the LSU Field House determined from test data p0226 A81-25033
- Commercial, or usable, size Campbell Chinese type windmill p0338 A81-25073
- Performance test of a non-parabolic asymmetrical solar concentrator p0230 A81-26473
- Behavior of interdigitated back-contact solar cells p0231 A81-27086
- Performance study of p+/n and n+/p solar cell structures on polycrystalline material p0231 A81-27087
- System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications p0375 A81-27232
- Review of in-orbit performance of ESA's spacecraft solar arrays p0249 A81-27267
- Performance and reliability of photovoltaic modules at various MIT LL test sites p0251 A81-27277
- Qualification test results for DOE solar photovoltaic flat panel procurement - PRDA 38 p0251 A81-27278
- Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280
- The ecliptic-align v-grooved hyperjunction cell p0252 A81-27296
- Design and performance of a concentrating solar collector p0255 A81-29253
- Verification test of jet industries Electra-Van 1000P [AD-A093738] p0376 A81-17961
- Midtemperature Solar Systems Test Facility Program for predicting thermal performance of line-focusing, concentrating solar collectors [SAND-80-1964] p0269 A81-18551
- An assessment of the use of antimisting fuel in turbofan engines [NASA-CR-165258] p0315 A81-19316
- Dunlite model 81/002550 wind turbine generator [RFP-3149/3533/80/17] p0358 A81-19601
- Change-of-pace electric automobile user demonstration (COMCAR 2) [DOE/TIC-11373] p0379 A81-21359
- Everlasting sliding-disc valve HETC SOA test valve No. B-3, state-of-the-art lockhopper valve testing and development project [DOE/HETC-SP-80/17] p0323 A81-21361
- High energy density batteries for satellite applications p0379 A81-21505
- Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana [SOLAR/1001-80/14] p0363 A81-21552
- Solar energy system performance evaluation: Kalwall Corporation, Manchester, New Hampshire [SOLAR/2015-80/14] p0281 A81-21554
- Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation [SOLAR/2029-80/14] p0281 A81-21555
- Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980 [SOLAR/1014-80/14] p0281 A81-21557
- PERIODICALS**  
Dimensions/NBS. Volume 64, no. 8, October 1980 [PB81-133654] p0384 A81-21007
- PERMEABILITY**  
Oil ganglion dynamics in flow through porous media p0313 A81-18314
- PETROGRAPHY**  
Evaluation and targeting of geothermal energy resources in the southeastern United States [DOE/ET-2700/8] p0314 A81-18480
- PETROLEUM PRODUCTS**  
Commercialization potential of the China Lake trash-to-gasoline process p0301 A81-25560
- Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels [ASME PAPER 81-GT-157] p0188 A81-30056
- October report on the current fuel situation from the Energy Information Administration [GPO-60-871] p0189 A81-16311
- Energy and materials flows in the production of olefins and their derivatives [AHL/CNSV-9] p0203 A81-21161
- PHASE CONJUGATION**  
Design and breadboard evaluation of the SPS reference phase control system concept p0366 A81-16543
- Ionospheric effects in active retrodirective array and mitigating system design p0366 A81-16549
- PHASE TRANSFORMATIONS**  
Enhanced heat conduction in phase-change thermal energy storage devices [ASME PAPER 80-WA/HT-45] p0371 A81-21114
- Advanced solar thermal storage medium test data and analysis p0224 A81-24994
- PCM thermal energy storage in cylindrical containers of various configurations --- Phase Change Materials p0372 A81-24996
- A cycle life tester for the long-term stability of phase change materials for thermal energy storage p0372 A81-24997
- The benefits of advanced heat storage systems --- solar energy, phase changes, encapsulation, heat of fusion p0277 A81-20551
- PHASED ARRAYS**  
Design and breadboard evaluation of the SPS reference phase control system concept p0366 A81-16543
- Coherent multiple tone technique for ground based SPS control p0366 A81-16544
- An interferometer-based phase control system p0366 A81-16545
- SPS phase control studies p0366 A81-16547
- SPS fiber optic link assessment p0366 A81-16548
- PHOSPHIDES**  
Polycrystalline Zn<sub>3</sub>P<sub>2</sub> Schottky barrier solar cells p0220 A81-24414
- Thin polycrystalline Zn<sub>3</sub>P<sub>2</sub> films for photovoltaic cells p0240 A81-27170
- PHOSPHORIC ACID**  
Status of commercial phosphoric acid fuel cell system development [AIAA PAPER 81-0396] p0330 A81-20805
- Development of advanced electrocatalysts for phosphoric acid fuel cells p0342 A81-25602
- Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte p0343 A81-25611
- Improvement of phosphoric acid fuel cell stacks [AD-A092814] p0351 A81-16589
- Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165179] p0352 A81-17527
- Cell module and fuel conditioner [NASA-CR-165189] p0354 A81-18494
- Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165245] p0354 A81-18496
- Non-noble catalysts and catalyst supports for phosphoric acid fuel cells [NASA-CR-165221] p0354 A81-18497
- Distillate fuel-oil processing for phosphoric acid fuel cell power plants [DOE/ET-13323/2] p0358 A81-19583
- Technology development for phosphoric acid fuel cell powerplant, phase 2 [NASA-CR-165317] p0362 A81-21536
- Technology development for phosphoric acid fuel cell powerplant (phase 2) [NASA-CR-165316] p0362 A81-21547
- PHOSPHORUS**  
Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition p0346 A81-26217
- Methanol production with elemental phosphorus byproduct gas: Technical and economic feasibility [PNL-3694] p0322 A81-21224

## PHOSPHORUS COMPOUNDS

POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216

## PHOTOABSORPTION

The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells  
p0209 A81-20007

Coatings with induced transmission  
p0211 A81-20973

Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells  
p0241 A81-27183

Optical absorption by gap states in amorphous silicon  
p0249 A81-27265

## PHOTOCATHODES

11.5% solar conversion efficiency in the photocathodically protected p-InP/V/3+/-V/2+/-HCl/C semiconductor liquid junction cell  
p0230 A81-27014

## PHOTOCHEMICAL REACTIONS

Efficiency of energy storage in photochemical electron transfer reactions  
p0371 A81-19897

Modeling of a solar-pumped iodine laser  
p0221 A81-24618

Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage  
p0288 A81-25151

Rate coefficients of combustion/fuel conversion reactions by high-temperature photochemistry [COO-4169-5]  
p0314 A81-18525

Photochemical solar energy conversion in surfactant vehicles [DOE/EE-10601/1]  
p0269 A81-18560

## PHOTOCONDUCTORS

Development trends for the mass production of low cost conductor-insulator-semiconductor /CIS/ solar cells  
p0228 A81-25051

## PHOTOELECTRIC CELLS

Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4759]  
p0283 A81-21583

## PHOTOELECTRIC EMISSION

Prospects for developing an efficient photoemissive solar cell  
p0228 A81-25049

Variation of diffusion length of ribbon-Si solar cells with light intensity  
p0236 A81-27131

Polka Dot Solar Cell  
p0238 A81-27157

## PHOTOELECTRIC GENERATORS

Evaluation of a two-phase turbine for solar electric power generation [DOE/ET-20431/T1]  
p0263 A81-17587

## PHOTOELECTRIC MATERIALS

Interactions of efficiency and material requirements for terrestrial silicon solar cells  
p0210 A81-20295

Prospects for developing an efficient photoemissive solar cell  
p0228 A81-25049

Photovoltaic module soiling studies, May 1978 - October 1980 [DOE/JPL-1012-49]  
p0258 A81-16580

## PHOTOELECTRICITY

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions [SERI/PR-8031-1-12]  
p0264 A81-17595

## PHOTOELECTROCHEMICAL DEVICES

Surface charge and specific ion adsorption effects in photoelectrochemical devices  
p0215 A81-22148

Solar energy conversion by chloroplast photoelectrochemical cells  
p0216 A81-22349

Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4745]  
p0259 A81-16606

## PHOTOGEOLOGY

Petroleum exploration with Landsat in Bay County, Michigan - An interim case study  
p0294 A81-23562

Remote sensing techniques for identification and evaluation of geothermal areas  
p0294 A81-23587

Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content  
p0302 A81-26895

## PHOTOLYSIS

Efficient Si solar cells by laser photochemical doping  
p0229 A81-25873

Flash photolysis studies of the semiconductor/electrolyte interface  
p0265 A81-18114

Rate coefficients of combustion/fuel conversion reactions by high-temperature photochemistry [COO-4169-5]  
p0314 A81-18525

## PHOTOMAPS

Preparation of monthly maps of solar availability for New Mexico based on satellite photography [EMD-78-2131]  
p0284 A81-21668

## PHOTOSYNTHESIS

Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research  
p0288 A81-25152

## PHOTOTHERMAL CONVERSION

The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport  
p0232 A81-27091

A comparison of theory and experiment for photovoltaic/thermal collector performance  
p0250 A81-27276

## PHOTOVOLTAIC CELLS

Titanium dioxide antireflection coating for silicon solar cells by spray deposition  
p0209 A81-19766

Analytical predictions of liquid and air photovoltaic/thermal flat-plate collector performance [ASME PAPER 80-WA/SOL-3]  
p0212 A81-21131

Design of solar cells for use in photovoltaic/thermal collectors [ASME PAPER 80-WA/SOL-37]  
p0214 A81-21157

The parallel heat pump and photovoltaic heating and cooling - Phase II [ASME PAPER 80-WA/SOL-40]  
p0214 A81-21160

Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells  
p0216 A81-22198

Solar energy conversion by chloroplast photoelectrochemical cells  
p0216 A81-22349

Utility of and technology for a space central power station [AIAA PAPER 81-0449]  
p0216 A81-22763

Experimental apparatus for cooling of photovoltaic cells at high concentration  
p0218 A81-23011

Identification of a solar pumping installation  
p0218 A81-23012

Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination  
p0219 A81-23803

Merocyanine-dye photovoltaic cell on a plastic film  
p0220 A81-24444

Temperature dependence for the power outputs of n-CdSe liquid junction cells  
p0222 A81-24823

Development trends for the mass production of low cost conductor-insulator-semiconductor /CIS/ solar cells  
p0228 A81-25051

Thin film photovoltaic solar energy conversion  
p0228 A81-25054

The DOE photovoltaic program - An overview  
p0228 A81-25055

Design of a 100 kW photovoltaic flat panel system at a Washington, D.C. area waste treatment plant  
p0228 A81-25056

# SUBJECT INDEX

# PHOTOVOLTAIC CONVERSION

Cu/x/S/Cd/Y/Zn/1-y/S and Cu/x/S/Cd/Y/Zn/1-y/S, CdS thin film solar cells using chemically sprayed films p0229 A81-26355

The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport p0232 A81-27091

High efficiency ultrathin coplanar back contact cells p0232 A81-27092

Compatibility of BSR and BSF solar cell technology --- Back Surface Reflector and Back Surface Field p0232 A81-27093

The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells p0233 A81-27101

Application analysis of photovoltaic systems for service/commercial/institutional and industrial sectors p0233 A81-27106

The economics of photovoltaics in the commercial, institutional, and industrial sectors p0233 A81-27107

Simulation of the performance of a 100-kW-peak photovoltaic system p0233 A81-27108

Recent progress in the development of the cascade solar cell p0235 A81-27118

Performance losses in high-efficiency monolithic multijunction solar cells p0235 A81-27120

A low series resistance silicon photovoltaic cell for high intensity applications p0236 A81-27134

Thin film polycrystalline solar cells prepared by electrodeposition p0237 A81-27142

Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis p0238 A81-27146

Thick film conductive ink contacts for concentrator cells p0238 A81-27155

Thin polycrystalline Zn3P2 films for photovoltaic cells p0240 A81-27170

Indium phosphide films for photovoltaic devices p0240 A81-27173

The role of deep levels in controlling the photovoltaic properties of Cu2S/CdS heterojunction p0241 A81-27182

Growth structure of cast silicon and related photovoltaic properties of solar cells p0245 A81-27214

Encapsulation of PV cells using silicone materials p0245 A81-27225

Development of glass encapsulation techniques for terrestrial photovoltaic arrays p0246 A81-27227

An outlook for automated CIS solar cell factory p0246 A81-27228

Photovoltaic concentrators p0246 A81-27230

Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems p0247 A81-27244

Flat-plate photovoltaic array design optimization p0248 A81-27247

Low cost structures for photovoltaic arrays p0248 A81-27248

Photovoltaic system sizing analysis p0248 A81-27249

CO-sputtered doped amorphous silicon as a photovoltaic material p0249 A81-27264

Concentrator designs for space photovoltaic arrays p0250 A81-27271

Optimization of total annual energy output from constant/adjustable tilt solar PV arrays p0250 A81-27273

PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements p0250 A81-27275

Qualification test results for DOE solar photovoltaic flat panel procurement - PEDS 38 p0251 A81-27278

High efficiency MIS/inversion layer silicon solar cells p0252 A81-27290

A 14 percent efficiency SnO/x-SiO2-n/Si solar cell p0252 A81-27294

The ecliptic-align v-grooved hyperjunction cell p0252 A81-27296

Chlorophyll sensitized solar photovoltaic cell with cuprous iodide electrode p0254 A81-28936

Review of conductor-insulator-semiconductor /CIS/ solar cells p0254 A81-28954

Concentrating solar collectors for thermal and photovoltaic application p0256 A81-29256

Active cooling system alternatives for concentrating photovoltaic systems p0256 A81-29265

Design, fabrication, test, qualification and price analysis for third generation design solar cell modules [NASA-CR-163917] p0257 A81-16576

Photovoltaic module soiling studies, May 1978 - October 1980 [DOE/JPL-1012-49] p0258 A81-16580

Photovoltaic advanced systems test facility: Description and operations plan [SAND-80-1612] p0259 A81-16607

Comparative analysis of combined flat-plate PV/T collectors with separate PV/T collectors [SAND-80-1494] p0259 A81-16608

Central station market development strategies for photovoltaics [NASA-CR-163947] p0193 A81-17520

The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology [NASA-TM-58229] p0193 A81-17526

High efficiency compound semiconductor concentrator photovoltaics p0261 A81-17545

Status of Rockwell-ERC high efficiency solar cell programs p0261 A81-17546

Incorporation of superlattice crystal layers in multijunction solar cells p0261 A81-17549

Cascade Solar Cell Workshop report p0262 A81-17553

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions [SEMI/PR-8031-1-T2] p0264 A81-17595

Electrochemical photovoltaic cells [SEMI/PR-9175-1-T2] p0267 A81-18521

Gallium arsenide photovoltaic dense array for concentrator applications [SAND-78-7056] p0267 A81-18530

Copper doped polycrystalline silicon solar cell [NASA-CASE-NPO-14670-1] p0270 A81-19558

Terrestrial photovoltaic system analysis [AD-A094827] p0272 A81-19578

Electrochemical photovoltaic cells [SEMI/TR-8002-5-T1] p0272 A81-19582

Near-term implementation of projection cost reductions for photovoltaic concentrator array [SAND-80-7073] p0274 A81-19628

High concentration silicon photovoltaic cell development [SAND-80-7068] p0279 A81-20595

The 10-kilowatt photovoltaic concentrator array fabrication [SAND-80-7062] p0279 A81-20599

Photovoltaic concentrator technology development project [SAND-80-2373] p0282 A81-21571

Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148] p0282 A81-21575

Measuring dirt on photovoltaic modules, part 2 [COO-4094-86-PT-2] p0284 A81-21609

**PHOTOVOLTAIC CONVERSION**

Diffusion length measurements in CdS and CdSe Schottky barrier junctions p0209 A81-19698

Theory of photo induced open circuit voltage decay in a solar cell p0216 A81-22200

- The photovoltaic-aeolian plant at Passo Mandrioli /Italy/ p0218 A81-23013
- Optimum cell size for concentrated-sunlight silicon solar cells p0221 A81-24802
- Effects of dust on the performance of thermal and photovoltaic flat plate collectors in Saudi Arabia - Preliminary results p0223 A81-24985
- Study of combined /photovoltaic-thermal/ solar energy systems p0228 A81-25059
- Dynamic matching of a solar-electrical /photovoltaic/ system - An estimation of the minimum requirements on the matching system p0229 A81-26373
- Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record p0230 A81-27076
- Overview - Cost goals in the LSA project --- Low-cost Solar Array p0230 A81-27077
- Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts p0232 A81-27090
- Pigmented tin oxide solar cell p0235 A81-27124
- High efficiency silicon concentrator cells p0236 A81-27132
- Low-cost conversion of polycrystalline silicon into sheet by HEM and FAST --- Heat Exchanger Method and Fixed Abrasive Slicing Technique p0238 A81-27145
- The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system p0238 A81-27152
- Circuit design considerations for photovoltaic modules and systems p0238 A81-27153
- Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing p0238 A81-27156
- Polka Dot Solar Cell p0238 A81-27157
- An investigation of the Cu/x/S-CdS structure for photovoltaic conversion using an AlI film vacuum deposited process p0241 A81-27178
- Cu<sub>2</sub>S-CdS sprayed solar cells p0241 A81-27181
- Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar cell with an interdigitated grid p0242 A81-27185
- Cells and modules for linear P.V. concentrator systems with forced cooling p0242 A81-27186
- Optimization of a photovoltaic receiver for a parabolic trough concentrator p0242 A81-27187
- Parabolic troughs concentrators photovoltaic module p0242 A81-27188
- Low-cost, high-performance, point-focus concentrator array design p0242 A81-27189
- Minimizing end shadowing effects on parabolic concentrator arrays p0242 A81-27191
- Active and passive cooling for concentrating photovoltaic arrays p0243 A81-27192
- Design and operation of the Solarex two-axis tracking linear concentrating collector system p0243 A81-27193
- Screenable silver and base metal solar cell contacts p0243 A81-27195
- Nuclear radiation effects on the photovoltaic performance and interface states of Cr, p-type, single crystal, MIS solar cells p0244 A81-27208
- The U.S. National Photovoltaic Program p0188 A81-27212
- Photovoltaic research and development projects in Germany p0245 A81-27213
- Economic feasibility of photovoltaic energy systems p0246 A81-27229
- Photovoltaic applications - Past and future p0246 A81-27231
- System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications p0375 A81-27232
- Energy storage in grid-connected applications p0375 A81-27233
- Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234
- Photovoltaic intermediate applications p0247 A81-27246
- Photovoltaic behavior of amorphous silicon-based alloys p0249 A81-27263
- Review of in-orbit performance of ESA's spacecraft solar arrays p0249 A81-27267
- High efficiency solar panel - Phase II p0250 A81-27270
- SOLCEL II - An improved photovoltaic system analysis computer program p0250 A81-27272
- A comparison of theory and experiment for photovoltaic/thermal collector performance p0250 A81-27276
- Performance and reliability of photovoltaic modules at various MIT LL test sites p0251 A81-27277
- Influence of module requirements on flat plate module design evolution p0251 A81-27279
- Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280
- The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells p0251 A81-27283
- Applications of laser annealing and laser-induced diffusion to photovoltaic conversion [COAF-801153-1] p0258 A81-16594
- Photovoltaic advanced systems test facility: Description and operations plan [SAND-80-1612] p0259 A81-16607
- Residential use of photovoltaics [DOE/ET-20279/109] p0264 A81-17604
- Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 A81-20572
- Experimental study to define developments for terrestrial solar cell generators [BNFT-FB-T-79-143] p0279 A81-20600
- Photovoltaic concentrator array production process study. Volume 2: Study results [SAND-79-7055/2] p0282 A81-21574
- Interim performance criteria for photovoltaic energy systems [SBRI/TR-742-654] p0282 A81-21577
- The 10 kilowatt photovoltaic concentrator system as installed at Sandia Laboratories, 1979 [SAND-80-7063] p0283 A81-21601
- Construction of a photovoltaic power system at Natural Bridges National Monument [DOE/ET-20279/94] p0283 A81-21607
- Photovoltaics industry profile [DOE/RI-01830/13] p0284 A81-21619
- PHOTOVOLTAIC EFFECT**
- Heterojunction solar cells on cuprous oxide p0221 A81-24809
- The GaAs solar cell research and development programs of the Air Force p0260 A81-17542
- Photovoltaics information user study [SBRI/TR-751-652] p0278 A81-20570
- PILOT PLANTS**
- Pressurized fluidized bed - A technology for combined cycle power generation [AIAA PAPER 81-0392] p0330 A81-20802
- Development status of the Steam-Iron Process for hydrogen production p0287 A81-25142
- Osmo-power - Theory and performance of an osmo-power pilot plant p0347 A81-29199



# SUBJECT INDEX

# POLARIZATION (CHARGE SEPARATION)

- Adiabatic compressed air energy storage in hard rock  
[PRL-5A-9010] p0376 N81-17591
- Solar coal gasification: Plant design and economics  
[UCRL-84610] p0265 N81-18225
- EDS coal liquefaction process development, phase 4-5  
--- donor solvent technique p0312 N81-18240
- Development of high-temperature turbine subsystem  
technology to a technology readiness status,  
phase 2 p0360 N81-20440
- PIPE FLOW  
Study of the behavior of gas distribution  
equipments in hydrogen service, phase 2  
[CONF-801055-5] p0291 N81-16323
- PIPELINES  
Suppression of steam condensate corrosion at  
Wairakei Geothermal Project p0294 N81-22774
- Critical parameters for coarse coal underground  
slurry haulage systems [JPL-PUB-81-11] p0369 N81-20495
- PIPES (TUBES)  
A preliminary investigation into the  
characteristics of a Rijke Tube pulsating  
combustor [AIAA PAPER 81-0411] p0293 N81-20815
- OPEC cold water pipe design for problems caused by  
vortex-excited oscillations p0347 N81-29200
- PLANE WAVES  
A theoretical study of microwave beam absorption  
by a rectenna [NASA-CR-160921] p0369 N81-20328
- PLANT STRESS  
Thermal mapping, geothermal source location,  
natural effluents and plant stress in the  
Mediterranean coast of Spain [E81-10119] p0323 N81-21423
- PLANTS (BOTANY)  
Molten salt pyrolysis of latex --- synthetic  
hydrocarbon fuel production using the Guayule  
shrub [NASA-CASE-NPO-14315-1] p0306 N81-17261
- Biosources digest, a journal on biomass  
utilization, volume 2, number 3, July 1980  
[PB81-123952] p0317 N81-19340
- Production of a raw material for energy production  
in agriculture [DFE-31] p0324 N81-21550
- PLASMA CONDUCTIVITY  
Plasma diagnostics of MHD generators  
[AIAA PAPER 81-0099] p0328 N81-20601
- Electrical conductivity and Hall parameter  
measurements in Faraday MHD generators  
[ASME PAPER 80-WA/HT-9] p0331 N81-21103
- PLASMA CONTROL  
Trends and developments in magnetic confinement  
fusion reactor concepts p0336 N81-23711
- Engineering aspects of cryogenic laser-fusion  
targets p0345 N81-26857
- PLASMA DIAGNOSTICS  
Plasma diagnostics of MHD generators  
[AIAA PAPER 81-0099] p0328 N81-20601
- Electrical conductivity and Hall parameter  
measurements in Faraday MHD generators  
[ASME PAPER 80-WA/HT-9] p0331 N81-21103
- Voltage and current sensors for a high-density  
z-pinch experiment p0332 N81-21641
- Optical spectrum of a closed cycle MHD generator  
plasma p0333 N81-23063
- Anode plasma behavior in a magnetically insulated  
ion diode p0344 N81-26571
- PLASMA DYNAMICS  
A comparison of experimental results from the OTSI  
coal-fired MHD generator to theoretical  
predictions [AIAA PAPER 81-0031] p0328 N81-20551
- Limits to plasma science p0333 N81-22876
- PLASMA ELECTRODES  
Performance of MHD generators with electrode  
current control [AIAA PAPER 81-0249] p0330 N81-20699
- MHD electrode performance - Heat transfer and  
voltage drops [ASME PAPER 80-WA/HT-10] p0331 N81-21104
- Anode plasma behavior in a magnetically insulated  
ion diode p0344 N81-26571
- PLASMA ENGINES  
Theory of a conducting MHD motor with a free field  
p0331 N81-21062
- PLASMA GENERATORS  
Pulsed high voltage and high current outputs from  
homopolar energy storage system [AD-A094910] p0377 N81-19575
- PLASMA GUNS  
Possible application of electromagnetic guns to  
impact fusion --- to the generation of electric  
power [LA-UR-80-3137] p0353 N81-17910
- PLASMA HEATING  
Solar coal gasification [DOE/TIC-11384] p0279 N81-20587
- PLASMA LOSS  
Improved thermionic energy converters  
[NASA-CASE-LEW-12443-1] p0357 N81-19561
- PLASMA PHYSICS  
Limits to plasma science p0333 N81-22876
- PLASMA PINCH  
Self-magnetically insulated ion diode --- as ion  
source for inertial confinement fusion p0344 N81-26552
- PLASMA POTENTIALS  
Approximate three-dimensional electric solution  
for a frame-type MHD generator p0327 N81-20022
- PLASMA PROBES  
Diagnostic instrumentation development program for  
the heat recovery/seed recovery system of the  
open-cycle, coal-fired magnetohydrodynamic power  
plant [AIAA PAPER 81-0110] p0328 N81-20602
- PLASMA PROPULSION  
Theory of an induction MHD propeller with a free  
field --- MHD motor p0344 N81-26062
- PLASMA SPECTRA  
Optical spectrum of a closed cycle MHD generator  
plasma p0333 N81-23063
- PLASMA SPRAYING  
Fabrication of amorphous silicon solar cells,  
using an industrial process --- based on a  
nitride plasma reactor [LEP-80.638.SHE-689-A] p0280 N81-20602
- PLASMA TEMPERATURE  
Electron and positive ion measurements in MHD  
combustion plasmas with phosphorous addition  
p0346 N81-28217
- PLASMA-PARTICLE INTERACTIONS  
Charge exchange and energy loss of carbon ions in  
air-plasma channels --- in inertial fusion reactor  
p0344 N81-26570
- PLASMAS (PHYSICS)  
Max Planck Institute for Plasma Physics --- energy  
technology utilization of nuclear fusion  
[LA-TR-80-25] p0364 N81-21919
- PLASTIC COATINGS  
Optimum performance of thermal trap collectors  
p0220 N81-24432
- PLASTIC MEMORY  
Energy production from waste heat by means of  
elastomers or memory metals [STU-79-6394] p0362 N81-21551
- PLASTICS  
Energy and materials flows in the production of  
olefins and their derivatives [ANL/CHSV-9] p0203 N81-21161
- PLATINUM  
Tungsten carbide/platinum fuel cell with  
phosphoric acid electrolyte p0343 N81-25611
- Recent advances in the sciences of electrocatalysis  
[AD-A095095] p0356 N81-19257
- Optimization of carbon-supported platinum  
catalysts for fuel cell electrodes [AD-A094714] p0357 N81-19579
- POLARIZATION (CHARGE SEPARATION)  
Electrode materials for coal-fired MHD generators  
[EPRI-AP-1562] p0355 N81-18536

# POLICIES

# SUBJECT INDEX

## POLICIES

Example of a favorable policy for space technology transfer to other fields  
p0198 A81-18951

## POLLUTION CONTROL

Utilization of staged combustion for controlling NO<sub>x</sub>/ emissions from a test facility simulating a coal-fired MHD power plant  
[AIAA PAPER 81-0101] p0328 A81-20603  
Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City  
p0186 A81-23073

Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants  
p0188 A81-28993

Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels  
[ASME PAPER 81-GT-157] p0188 A81-30056  
Two-stage combustion for reducing pollutant emissions from gas turbine combustors  
[NASA-CR-163877] p0350 A81-16056

The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant  
[BNL-51279] p0192 A81-16631  
Local air quality constraints on energy growth, 1985-1990  
[ANL/EES-TM-114] p0201 A81-19653

## POLLUTION MONITORING

Application of aerial remote sensing to the study of geothermal resources in the desertic north of Chile and environmental pollution in Santiago, Chile  
p0294 A81-23590  
Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TM-6783] p0198 A81-18578  
Environmental consideration for TVA's ammonia from coal project  
[CONF-8004137-1] p0203 A81-21216  
Environmental development plan: Coal liquefaction  
[DOE/EDP-0044] p0206 A81-21641

## POLYCRYSTALLS

The properties of polycrystalline silicon solar cells with controlled titanium additions  
p0209 A81-20010  
Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency  
p0221 A81-24803  
The effects of intragrain defects on the local photoresponse of polycrystalline silicon solar cells  
p0221 A81-24805  
Continuous coating of silicon-on-ceramic  
p0231 A81-27083  
Performance study of p<sup>+</sup>/n and n<sup>+</sup>/p solar cell structures on polycrystalline material  
p0231 A81-27087  
Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts  
p0232 A81-27090

The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells  
p0233 A81-27101

Chemical and structural defects in thin film polycrystalline silicon solar cells  
p0233 A81-27105

An overview of thin-film polycrystalline silicon research and development  
p0233 A81-27109

Design considerations for high efficiency polycrystalline silicon MIS solar cells  
p0236 A81-27127

Vacuum deposited polycrystalline silicon solar cells for terrestrial use  
p0236 A81-27128

Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells  
p0236 A81-27130

Thin film polycrystalline solar cells prepared by electrodeposition  
p0237 A81-27142

Low-cost conversion of polycrystalline silicon into sheet by HEM and FAST --- Heat Exchanger Method and Fixed Abrasive Slicing Technique  
p0238 A81-27145

Thin polycrystalline Zn<sub>3</sub>P<sub>2</sub> films for photovoltaic cells  
p0240 A81-27170

SnO<sub>2</sub>/polycrystalline silicon solar cells  
p0248 A81-27255

Grain size dependence of silicon solar cell parameters  
p0249 A81-27261

Improved polycrystalline thin film gallium arsenide MOS solar cells  
p0251 A81-27281

Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells  
p0251 A81-27282

The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells  
p0251 A81-27283

Grain boundary edge passivated solar cells on thin film GaAs  
p0251 A81-27284

Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques  
p0252 A81-27287

## POLYETHYLENES

The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction  
p0225 A81-25016

## POLYMER CHEMISTRY

Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 A81-25153

## POLYMERIC FILMS

Merocyanine-dye photovoltaic cell on a plastic film  
p0220 A81-24444

Cost effective, high throughput, junction formation techniques using spray-on dopants  
p0245 A81-27220

Criteria for evaluation of reflective surface for parabolic dish concentrators  
[NASA-CR-163898] p0258 A81-16581

## POLYPROPYLENE

PBI treated polypropylene battery separator  
p0379 A81-21512

## POROSITY

Effects of pore diameter and catalyst loading in hydroliquefaction of coal with CoO/MoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> catalysts  
p0293 A81-22274

## POROUS MATERIALS

Contiguous capillary coating of silicon on porous carbon substrates  
p0236 A81-27129

## POSITIONING

Design and breadboard evaluation of the SPS reference phase control system concept  
p0366 A81-16543

Coherent multiple tone technique for ground based SPS control  
p0366 A81-16544

## POSITIVE IONS

Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition  
p0346 A81-28217

## POWER CONDITIONING

New method for maximum power consideration in solar cells with and without resistive losses  
p0209 A81-15951

Power conditioning and control requirements of coal fired MHD generators  
[AIAA PAPER 81-0246] p0330 A81-26696

Wind energy conversion in the MW range  
p0339 A81-25076

SPS solid state antenna power combiner  
p0367 A81-16565

Photovoltaic advanced systems test facility: Description and operations plan  
[SAND-80-1612] p0259 A81-16607

Satellite Power System (SPS) magnetron tube assessment study  
[NASA-CR-3383] p0368 A81-18490

## SUBJECT INDEX

## PRESSURIZING

- Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter [DOE/EA-26961/01] p0378 N81-20575
- RCA Satcom in-orbit experience p0379 N81-21526
- POWER EFFICIENCY**
- Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes [AIAA PAPER 81-0030] p0328 N81-20550
- High temperature solar thermal technology [ASME PAPER 80-WA/SOL-20] p0213 N81-21144
- A simplified non-linear model leading to full range valid calibration test of thermal solar collectors through simple experimental procedure p0217 N81-23009
- Energy collected by flat-plate collectors, not oriented toward the south p0218 N81-23010
- Experimental apparatus for cooling of photovoltaic cells at high concentration p0218 N81-23011
- Identification of a solar pumping installation p0218 N81-23012
- A performance analysis for horizontal axis wind turbines applicable to variable pitch or airbrake control p0333 N81-23067
- Integration of wind power into Australian electricity grids without storage - A computer simulation p0334 N81-23068
- Superconducting generators - Economics, technical considerations and ancillary technology p0335 N81-23466
- Current developments in small wind energy conversion systems p0335 N81-23695
- The performance of arrays of wind turbines p0335 N81-23698
- Power from water waves p0337 N81-23955
- An analytical expression for the average output power of a wind machine p0337 N81-24433
- Assessment of high-head turbomachinery for underground pumped hydroelectric storage plants p0372 N81-25003
- Solar thermionic power plant. II p0228 N81-25057
- A study of a commercial MHD power plant scheme p0342 N81-25381
- High efficiency ultrathin coplanar back contact cells p0232 N81-27092
- Advanced module technique with thin solar cells p0248 N81-27251
- SnO<sub>2</sub>/polycrystalline silicon solar cells p0248 N81-27255
- Concentrator designs for space photovoltaic arrays p0250 N81-27271
- The possibilities of improving the efficiency of gas turbines p0346 N81-28614
- Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies p0367 N81-16552
- Prospects for enhancing SEP array performance p0262 N81-17572
- Efficient structures for geosynchronous spacecraft solar arrays p0262 N81-17573
- Steam turbines for large power outputs p0360 N81-20427
- Highly efficient welding power supply [DOE/CS-40023/T1] p0202 N81-20441
- POWER GAIN**
- A simulated comparison of the useful energy gain in fixed and tracking flat plate and evacuated tube collectors p0222 N81-24978
- POWER PLANTS**
- Method of calculating shading of heliostats in tower-type solar power plants p0211 N81-20907
- Solar power generation by ground thermal energy conversion p0227 N81-25046
- Central solar heating plants - Optimal ratio between solar collector area and heat storage volume p0256 N81-29262
- Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources [ASME PAPER 81-PET-5] p0350 N81-30114
- Technology development for phosphoric acid fuel cell powerplant, phase 2 [NASA-CN-165317] p0362 N81-21536
- POWER SUPPLY CIRCUITS**
- Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis p0347 N81-29243
- POWER TRANSMISSION (LASERS)**
- Solar-pumped gas laser development [AIAA PAPER 81-0098] p0210 N81-20600
- Modeling of a solar-pumped iodine laser p0221 N81-24618
- Solar-pumped gas laser development [NASA-TN-81894] p0257 N81-16437
- PREDICTION ANALYSIS TECHNIQUES**
- Prediction model for fatigue crack growth in windmill structures p0371 N81-21740
- Gasification combined cycle R&A assessment p0295 N81-24265
- Community energy auditing: Experience with the comprehensive community energy management program [ABT/CNSV/TN-43] p0193 N81-17588
- Energy/economic model analysis. Volume 1: Gas technology assessments using three energy supply/demand integrating models [PB81-114225] p0194 N81-17611
- Energy/economic model analysis. Volume 2: Evaluation of energy supply/demand integrating models [PB81-114233] p0194 N81-17612
- Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies [PB81-114258] p0194 N81-17613
- Energy/economic model analysis. Energy economic modeling system [PB81-114274] p0194 N81-17614
- Energy/economic model analysis. Time-stepped energy system optimization model [PB81-114241] p0194 N81-17615
- Methodology to evaluate the potential for ground water contamination from geothermal fluid releases [PB81-111114] p0195 N81-17641
- Midtemperature Solar Systems Test Facility Program for predicting thermal performance of line-focusing, concentrating solar collectors [SAND-80-1964] p0269 N81-18551
- PREPARATION**
- Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts [EPRI-CS-1517-VOL-5] p0319 N81-20302
- PRESSURE EFFECTS**
- Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size p0293 N81-22273
- Improved PCG-1 cell technology [EPRI-EM-1566] p0351 N81-16598
- PRESSURE GRADIENTS**
- Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations p0327 N81-19810
- PRESSURE SENSORS**
- Construction of a probe for measuring temperature and pressure in deep wells --- geothermal energy application p0296 N81-24304
- PRESSURIZED WATER REACTORS**
- The fusion-supported decentralized nuclear energy system p0337 N81-23848
- PRESSURIZING**
- Pressurized fluidized bed - A technology for combined cycle power generation [AIAA PAPER 81-0392] p0330 N81-20802

# PRETREATMENT

# SUBJECT INDEX

## PRETREATMENT

Investigation of the liquefaction of partially dried and oxidized coals  
[EPRI-AP-1625] p0321 A81-21222

**PRIMARY BATTERIES**  
Electrochemical power sources: Primary and secondary batteries --- Book p0373 A81-25565

Room temperature cells with solid electrolytes p0373 A81-25568

Major electrochemical developments related to the energy problem p0382 A81-25610

## PROCEEDINGS

Proceedings of the Vertical Axis Wind Turbine (VAWT) Design Technology Seminar for Industry [SAND-80-0984] p0355 A81-18550

Proceedings of the 16th Project Integration Meeting [NASA-CR-164073] p0276 A81-20545

The 1980 flywheel technology symposium [CONF-801022] p0378 A81-20561

## PROCESS CONTROL (INDUSTRY)

Development status of the Steam-Iron Process for hydrogen production p0287 A81-25142

Eco-Fuel and the Bridgeport facility p0301 A81-25556

Evaluation of coal conversion catalysts [PB81-111387] p0306 A81-17291

Phase equilibrium in coal liquefaction processes [EPRI-AP-1593] p0311 A81-18227

Solar production of industrial process hot water: Operation and evaluation of the Campbell Soup hot water solar facility [SAN-1218-4] p0274 A81-19626

Molten salt coal gasification process development unit, phase 1. Volume 1: PDU operations [DOE/ET-10296/66-VOL-1] p0319 A81-20296

Fabrication of amorphous silicon solar cells, using an industrial process --- based on a nitride plasma reactor [LEP-80.638.SMB-689-A] p0280 A81-20602

## PROCESS HEAT

Laser fusion systems for process heat p0341 A81-25106

Solar coal gasification: Plant design and economics [UCRL-84610] p0265 A81-18225

Solar coal gasification [DOE/TIC-11384] p0279 A81-20587

Energy production from waste heat by means of elastomers or memory metals [STU-79-6394] p0362 A81-21551

Survey of US industrial process heat usage distributions [SAND-80-8234] p0206 A81-21622

## PROCUREMENT MANAGEMENT

Qualification test results for DOE solar photovoltaic flat panel procurement - PRDA 38 p0251 A81-27278

## PRODUCT DEVELOPMENT

Pyrolytic oils: Characterization and data development for continuous processing [PB81-110959] p0306 A81-17294

Automated array assembly task development of low-cost polysilicon solar cells [NASA-CR-163939] p0259 A81-17521

Development of a high efficiency thin silicon solar cell [NASA-CR-163931] p0259 A81-17522

US solar energy policy for less developed countries [DOE/CS-10048/11] p0194 A81-17598

Development of an automatic heliostat cleaning system [SAND-79-8184] p0268 A81-18532

Development of zinc-bromine batteries for utility energy storage [DOE/ET-29345/21] p0379 A81-20591

The CHG nickel electrode p0379 A81-21509

Lightweight composite cadmium electrodes p0379 A81-21510

## PRODUCTION COSTS

Overview - Cost goals in the LSA project --- Low-cost Solar Array p0230 A81-27077

Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations --- Epitaxial Film Growth p0230 A81-27078

Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals --- Epitaxial Film Growth p0230 A81-27079

Thick film conductive ink contacts for concentrator cells p0238 A81-27155

The outlook for thin solar cells p0245 A81-27217

Low cost processes for fabricating silicon solar cells p0245 A81-27218

An improved lamination technique for solar arrays p0245 A81-27226

Engineering study of pelleting waste energy recovery [NERDC-53] p0320 A81-20562

Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology [ORNL-5664] p0322 A81-21223

**PRODUCTION ENGINEERING**  
Wisconsin Electric's characterization of Americology's refuse-derived fuel p0301 A81-25555

Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals --- Epitaxial Film Growth p0230 A81-27079

A silicon sheet casting experiment --- for solar cell water production p0231 A81-27082

Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing p0238 A81-27156

Laser processing for high-efficiency silicon solar cells p0241 A81-27177

A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings p0243 A81-27194

The outlook for thin solar cells p0245 A81-27217

Cost effective, high throughput, junction formation techniques using spray-on dopants p0245 A81-27220

Silicon solar cells with screen printed diffusion and metallization p0245 A81-27221

An improved lamination technique for solar arrays p0245 A81-27226

High efficiency solar panel - Phase II p0250 A81-27270

Design, fabrication, test, qualification and price analysis for third generation design solar cell modules [NASA-CR-163917] p0257 A81-16576

Automated array assembly, phase 2 [NASA-CR-163878] p0258 A81-16578

Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays [NASA-CR-163943] p0260 A81-17525

Study of process technology for GaAs/GaAs heteroface solar cells p0261 A81-17544

High efficiency compound semiconductor concentrator photovoltaics p0261 A81-17545

Status of Rockwell-ERC high efficiency solar cell programs p0261 A81-17546

The HEWAC pilot line experience p0262 A81-17574

Silicon solar cell optimization [AD-A092908] p0263 A81-17579

Carbon monoxide: Resource of the future [BNL-28576] p0307 A81-17603

Solar coal gasification: Plant design and economics [UCRL-84610] p0265 A81-18225

EDS coal liquefaction process development, phase 4-5 --- donor solvent technique [FE-2893-53] p0312 A81-18240

Thin-film flat-plate solar collectors for low cost manufacture and installation [BNL-51124] p0269 A81-18545

- Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary --- and water splitting technology  
[BMFT-PB-T-79-121] p0291 N81-19339
- Process feasibility study in support of silicon material task 1  
[NASA-CR-164009] p0271 N81-19570
- Near-term implementation of projection cost reductions for photovoltaic concentrator array  
[SAND-80-7073] p0274 N81-19628
- Energy and materials flows in the production of olefins and their derivatives  
[ANL/CNSV-9] p0203 N81-21161
- Photovoltaic concentrator array production process study. Volume 2: Study results  
[SAND-79-7055/2] p0282 N81-21574
- PRODUCTION PLANNING**  
Automated array assembly, phase 2  
[NASA-CR-163878] p0258 N81-16578
- PRODUCTIVITY**  
Western Coal Survey: A survey of coal mining capacity in the west  
[DOE/BA-0045/1] p0323 N81-21464
- PROGRAM VERIFICATION (COMPUTERS)**  
Geothermal reservoir engineering computer code comparison and validation using the GEONZ simulator program  
[DOE/SF-11450/1] p0314 N81-18478
- PROGRAMS**  
Fossil energy program  
[ORNL-5702] p0317 N81-19588
- PROGRESSES**  
Fossil energy program  
[ORNL-5702] p0317 N81-19588
- PROJECT MANAGEMENT**  
Design and management for resource recovery. Volume 2 - High technology A failure analysis --- Book on materials and energy reclamation projects from solid wastes  
p0300 A81-25225
- The Niagara Falls resource recovery system  
p0301 A81-25557
- The U.S. National Photovoltaic Program  
p0188 A81-27212
- Office of alcohol fuels program plan, FY 1981  
[DOE/AP-10001/12] p0319 N81-20293
- PROJECT PLANNING**  
Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 6, part 1: Cost and Programmatic  
[NASA-CR-3397] p0276 N81-20537
- Comparative analysis of coal use options for reducing the dependence of utilities on imported oil  
[DOE/BA-12301-T1] p0322 N81-21230
- PROPELLERS**  
Aerodynamic analysis of propeller-type windmills with helical trailing vortices  
p0355 N81-18565
- PROPULSION SYSTEM CONFIGURATIONS**  
Advanced propulsion system concept for hybrid vehicles  
[NASA-CR-159772] p0198 N81-18935
- PROPULSION SYSTEM PERFORMANCE**  
A new breed of an air breathing engine  
p0347 A81-29070
- Prospects for enhancing SEP array performance  
p0262 N81-17572
- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base  
[AD-A094226] p0196 N81-18050
- PROPULSIVE EFFICIENCY**  
Theory of an induction MHD propeller with a free field --- MHD motor  
p0344 A81-26062
- PROTECTIVE COATINGS**  
Encapsulation of PV cells using silicone materials  
p0245 A81-27225
- Solar Energy Program: Protective solar collector systems from corrosion  
[EP-25154] p0264 N81-17605
- PROTON IRRADIATION**  
Influence of processing on the electrical performance of proton irradiated silicon solar cells  
p0244 A81-27205
- Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239
- PROTOTYPES**  
Development of sodium/sulfur batteries --- as storage batteries  
[BMFT-PB-T-79-60] p0376 N81-17607
- Development of a prototype heat engine for energy conservation  
[DOE/OS-06028/T6] p0199 N81-19589
- PUBLIC HEALTH**  
Life Sciences Synthetic Fuels program at Oak Ridge National Lab.  
[CONF-801039-3] p0192 N81-17285
- Characterization of solid waste conversion and cogeneration systems  
[DOE/EV-0105] p0307 N81-17585
- Environment, health, socioeconomic and environmental control technology executive summary  
[DOE/TIC-11308] p0197 N81-18575
- PULSE GENERATORS**  
The chemically pumped iodine laser as a fusion driver  
[KNSF-U-944] p0350 N81-16456
- Pulsed high voltage and high current outputs from homopolar energy storage system  
[AD-A094910] p0377 N81-19575
- PUMPS**  
Identification of a solar pumping installation  
p0218 A81-23012
- PYRITES**  
Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants  
p0188 A81-28993
- PYROLYSIS**  
Hydrogen from fuel desulfurization  
p0286 A81-24023
- Technology for powdered fuel preparation from solid waste  
p0301 A81-25559
- ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis  
p0240 A81-27169
- Molten salt pyrolysis of latex --- synthetic hydrocarbon fuel production using the Guayule shrub  
[NASA-CASR-NPO-14315-1] p0306 N81-17261
- Pyrolytic oils: Characterization and data development for continuous processing  
[PB81-110959] p0306 N81-17294
- Obtaining improved products from the organic fraction of municipal solid waste  
[PB81-110918] p0307 N81-17295
- Combustion, pyrolysis, gasification, and liquefaction of biomass  
[SERI/TP-622-893] p0307 N81-17601
- Coal Hydrogasification process development. volume 1: Coal studies  
[FE-3125-24-VOL-1] p0312 N81-18238
- Coal Hydrogasification process development. volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 N81-18239
- Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs  
[DOE/EV-0115] p0201 N81-19655
- Flash pyrolysis and hydrogpyrolysis of coal  
[BBL-28577] p0319 N81-20301
- Conversion of cellulosic wastes to liquid fuels  
[COO-2982-57] p0320 N81-20306

## Q

- QUALITY CONTROL**  
Interim performance criteria for photovoltaic energy systems  
[SERI/TE-742-654] p0282 N81-21577
- QUANTUM EFFICIENCY**  
Method for evaluation of antireflection coatings  
p0221 A81-24804
- Collection efficiency of low-mobility solar cells  
p0230 A81-27010
- Pigmented tin oxide solar cell  
p0235 A81-27124
- Development of amorphous silicon cells  
p0249 A81-27262

## QUANTUM MECHANICS

Limits to plasma science

p0333 A81-22876

## R

## RADAR ASTRONOMY

Effects of a satellite power system on  
ground-based radio and radar astronomy

p0216 A81-22838

## RADIAL FLOW

Cooled radial in-flow turbines for advanced gas  
turbine engines

[ASME PAPER 81-GT-213]

p0350 A81-30102

Analytical design of an advanced radial turbine

--- automobile engines

[NASA-CR-165170]

p0361 A81-20958

## RADIANT COOLING

Nocturnal radiation from a solar collector  
[ASME PAPER 80-WA/SOL-35]

p0214 A81-21155

## RADIANT FLUX DENSITY

A low series resistance silicon photovoltaic cell  
for high intensity applications

p0236 A81-27134

Solar input and solar data computation for the  
engineering of solar systems - Transients'  
simulation

p0250 A81-27274

## RADIATION ABSORPTION

A theoretical study of microwave beam absorption  
by a rectenna, introduction --- solar power  
satellites

p0369 A81-20329

## RADIATION DAMAGE

Thin n-i-p silicon solar cell

p0232 A81-27097

Space solar cells - High efficiency and radiation  
damage

p0240 A81-27174

DLTS spectra and defect effects on irradiated  
silicon solar cells --- Deep Level Transient  
Spectroscopy

p0244 A81-27203

Radiation damage annealing mechanisms and possible  
low temperature annealing in silicon solar cells

p0244 A81-27207

Summary results of the ATS-6 solar cell flight  
experiment

p0244 A81-27209

Deep-level defects and recombination parameters in  
proton irradiated AlGaAs-GaAs solar cells

p0247 A81-27239

Simultaneous radiation damage and annealing of  
GaAs solar cells

p0247 A81-27240

Space Photovoltaic Research and Technology 1980.  
High Efficiency, Radiation Damage and Blanket  
Technology

[NASA-CR-2169]

p0260 A81-17531

NASA's high efficiency and radiation damage solar  
cell program

p0260 A81-17532

## RADIATION DETECTORS

Selective fast neutron detector

p0332 A81-21640

## RADIATION DISTRIBUTION

Optical analysis of point focus parabolic  
radiation concentrators

p0219 A81-24332

## RADIATION DOSAGE

Dimensions/NBS. Volume 64, no. 8, October 1980  
[PB81-133654]

p0384 A81-21007

## RADIATION EFFECTS

Influence of processing on the electrical  
performance of proton irradiated silicon solar  
cells

p0244 A81-27205

Nuclear radiation effects on the photovoltaic  
performance and interface states of Cr, p-type,  
single crystal, MISi solar cells

p0244 A81-27208

## RADIATION HAZARDS

Biological exposure sensors in coal conversion  
technologies

[CONF-801143-1]

p0192 A81-17410

Environmental and safety issues of the fusion fuel  
cycle

[CONF-801011-66]

p0353 A81-17911

## RADIATION MEASUREMENT

Solar radiation estimates in Malaysia

p0220 A81-24428

Irradiance estimates for Zambia

p0220 A81-24434

Solar collector performance without flow measurement  
p0223 A81-24984

## RADIATION SHIELDING

Radiation and free convection shield for passive  
thermal control --- in solar buildings

[ASME PAPER 80-WA/SOL-7]

p0212 A81-21134

Preliminary skyshine calculations for the Poloidal  
Diverter Tokamak Experiment --- for plasma  
impurities control

p0336 A81-23713

Neutronics shielding analysis of the last  
mirror-beam duct system for a laser fusion power  
reactor

p0336 A81-23714

Integral glass covering of spacecraft solar cells  
by electrostatic bonding

p0250 A81-27269

## RADIATION TOLERANCE

New developments in vertical junction silicon  
solar cells

p0232 A81-27095

GaAs shallow-homojunction solar cells

p0247 A81-27243

High efficiency solar panel - Phase II

p0250 A81-27270

Three year performance of the NTS-2 solar cell  
experiment

p0262 A81-17559

## RADIATIVE HEAT TRANSFER

Heat transfer in slagging MHD radiant boilers  
[AIChE PAPER 81-0316]

p0330 A81-20747

Numerical resolution of the heat transfer  
equations in a latent heat solar energy storage  
system

p0224 A81-25005

Radiatively coupled thermionic power  
system concept

p0346 A81-28219

Thermal processes in flat plate solar collectors  
--- conduction, convective radiative heat transfer

p0266 A81-16503

## RADIO ASTRONOMY

Effects of a satellite power system on  
ground-based radio and radar astronomy

p0216 A81-22838

## RADIO FREQUENCY INTERFERENCE

Effects of a satellite power system on  
ground-based radio and radar astronomy

p0216 A81-22838

## RADIO RECEPTION

Rectenna array measurement results --- Satellite  
power transmission and reception

p0367 A81-16562

## RADIOACTIVE ISOTOPES

Radioisotope powered light sources  
[CONF-801157-1]

p0351 A81-16597

## RADIOLYSIS

Realistic assessment of direct radiolysis for  
synthetic fuels production using fusion  
radiation sources

p0297 A81-25108

## RAIL TRANSPORTATION

Energy efficiency of electrified passenger railway  
in the Canadian context

p0187 A81-25800

Inductive energy transfer in transportation  
[UCL-85141]

p0368 A81-18962

## RANKINE CYCLE

The rebirth of the Rankine cycle

p0327 A81-20225

Binary Rankine-cycle engines for solar-thermal  
power systems

[ASME PAPER 80-WA/SOL-19]

p0332 A81-21143

Operational characterization of the solar-thermal  
power system near Willard, New Mexico

[ASME PAPER 80-WA/SOL-39]

p0214 A81-21159

Solar air conditioning in a hot arid climate

p0226 A81-25027

Solar power generation by ground thermal energy  
conversion

p0227 A81-25046

Liquid nitrogen as an energy source for an  
automotive vehicle

p0345 A81-26881

# SUBJECT INDEX

# REDUCTION (CHEMISTRY)

Task report no. 3. Systems analysis of organic Rankine bottoming cycles  
[PSI-TR-245] p0354 N81-18529

Energy production from waste heat by means of elastomers or memory metals  
[STU-79-6394] p0362 N81-21551

Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PHL-3533-VOL-1] p0283 N81-21605

**RARE GAS-HALIDE LASERS**  
Efficient Si solar cells by laser photochemical doping  
p0229 A81-25873

**RATINGS**  
Performance of solar collectors - An evaluation of standard ratings  
[ASME PAPER 80-WA/SOL-1] p0211 A81-21129

**RCA SATCOM SATELLITES**  
RCA Satcom in-orbit experience  
p0379 N81-21526

**REACTION KINETICS**  
Status of the development of the general atomic thermochemical water-splitting cycle  
p0287 A81-25141

Development status of the Steam-Iron Process for hydrogen production  
p0287 A81-25142

Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates  
p0287 A81-25143

Non-corrosive, two-reaction, low temperature T/C cycles  
p0287 A81-25144

Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage  
p0288 A81-25151

Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 A81-25153

Hydrogen in thin film hydriding alloys  
p0289 A81-25155

Kinetics of the reaction between Mg<sub>2</sub>Ni and H<sub>2</sub>  
p0290 A81-25499

Cu/x/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements  
p0241 A81-27184

Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments  
p0309 N81-18211

Rate coefficients of combustion/fuel conversion reactions by high-temperature photochemistry  
[COO-4169-5] p0314 N81-18525

Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 N81-21629

**REACTION PRODUCTS**  
Efficiency of energy storage in photochemical electron transfer reactions  
p0371 A81-19897

Upgrading of coal liquids: Upgrading distillates from coal liquefaction  
[FE-2566-42] p0310 N81-18226

**REACTOR DESIGN**  
The nuclear closed-cycle gas turbine /HTGR-GT/- Dry cooled commercial power plant studies  
[ASME PAPER 80-GT-82] p0332 A81-21162

The development of advanced structural materials for fusion power  
p0333 A81-22659

Trends and developments in magnetic confinement fusion reactor concepts  
p0336 A81-23711

Overview of nonelectrical applications of fusion  
p0341 A81-25104

Fusion reactors as high-temperature process heat sources  
p0341 A81-25105

Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 A81-25153

# REACTOR MATERIALS

The development of advanced structural materials for fusion power  
p0333 A81-22659

Contribution of activation products to fusion accident risk. I - A preliminary investigation  
p0336 A81-23712

Stress corrosion studies in solvent refined coal liquefaction pilot plants  
[ORNL/TR-7513] p0321 N81-21179

**REAL TIME OPERATION**  
Digital holographic interferometry of convective heat transport  
p0254 A81-28737

**RECEIVERS**  
Storage requirement definition study  
[NASA-CR-163882] p0257 N81-16572

Solar central receiver systems comparative economics  
[SERI/SP-633-637] p0267 N81-18523

Line-Focus Solar Central Power System, phase 1. Volume 1: Executive summary  
[DOE/ET-20550/2-VOL-1] p0283 N81-21598

Line-Focus Solar Central Power System, phase 1. Volume 2: Text  
[DOE/ET-20550/2-VOL-2] p0283 N81-21599

Line-Focus Solar Central Power System, phase 1. Volume 3: Appendices  
[DOE/ET-20550/2-VOL-3] p0283 N81-21600

**RECHARGING**  
Solar Maximum Mission (SMM) in-flight performance  
p0281 N81-21523

RCA Satcom in-orbit experience  
p0379 N81-21526

Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586

**RECOMBINATION REACTIONS**  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239

Effect of zinc impurity on silicon solar-cell efficiency  
p0256 A81-29290

Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides  
[IS-4759] p0283 N81-21583

**RECTENNAS**  
Solar Power Satellite Microwave Transmission and Reception  
[NASA-CP-2141] p0365 N81-16533

The history of the development of the rectenna --- solar power satellites  
p0257 N81-16558

Rectenna system design --- energy conversion solar power satellites  
p0257 N81-16559

Rectenna array measurement results --- Satellite power transmission and reception  
p0367 N81-16562

Satellite Power System (SPS). Rectenna siting: Availability and distribution of nominally eligible sites  
[DOE/ER-10041/T10] p0369 N81-19602

A theoretical study of microwave beam absorption by a rectenna  
[NASA-CR-160921] p0369 N81-20328

A theoretical study of microwave beam absorption by a rectenna, introduction --- solar power satellites  
p0369 N81-20329

Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic  
[DOE/ER-0096] p0207 N81-21642

**RECYCLING**  
Energy and materials flows in the production of olefins and their derivatives  
[ANL/CHSV-9] p0203 N81-21161

**REDUCTION (CHEMISTRY)**  
Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator  
p0332 A81-21494

Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes --- in fuel cells  
p0342 A81-25325

Conversion of organic wastes to oil by reductive foraylation  
p0302 A81-25563

## REFERENCE ATMOSPHERES

## SUBJECT INDEX

### REFERENCE ATMOSPHERES

Meteorological data: Treatment of radiation data,  
test reference year --- solar radiation  
p0266 N81-18502

### REFINING

Sampling and instrumentation for fluidized-bed  
combustion  
[ANL/CEN/FE-80-2] p0305 N81-16317  
How the petroleum refining industry approaches  
energy conservation. A case study  
[END-80-55] p0190 N81-16532

### REFLECTANCE

Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit  
voltage and low reflection losses  
p0253 A81-27299

### REFLECTION

Thin film electrochromic materials for energy  
efficient windows  
[LBL-10862] p0197 N81-18549

### REFRACTORIES

Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project  
p0298 A81-25113  
Materials technology for coal-conversion processes  
[ANL-80-93] p0322 N81-21228

### REFRACTORY MATERIALS

Gas turbine materials evaluation program utilizing  
coal derived gaseous fuel  
[ASME PAPER 81-GT-65] p0348 A81-29975  
A conceptual design study of a high temperature  
solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523

### REGENERATION (ENGINEERING)

Thermal energy storage and regeneration --- Book  
p0371 A81-21391  
Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106  
Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 N81-21080

### REGENERATORS

Thermal energy storage and regeneration --- Book  
p0371 A81-21391

### REGIONAL PLANNING

Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 1: Beluga coal district  
analysis  
[DOE/EV-73002/1-VOL-1] p0205 N81-21595

### REGRESSION ANALYSIS

Classification of petroleum samples from gas  
chromatographic data by pattern recognition  
techniques and simulation of mass spectra by  
regression analysis of structural descriptors  
p0318 N81-20202

### REGULATIONS

Environmental impact assessment guidelines for new  
source coal gasification facilities  
[PB81-114555] p0195 N81-17635  
The effect of economic regulation on fuel-use  
efficiency in private trucking-operations  
[PB81-114753] p0198 N81-18931

### RELATIVITY

Limits to plasma science  
p0333 A81-22876

### RELIABILITY

Wind energy - how reliable  
[AD-A094988] p0317 N81-19563

### RELIABILITY ANALYSIS

Gasification combined cycle R&A assessment  
p0295 A81-24265  
Reliability, energy, and cost effects of wind  
integration with conventional electrical  
generating systems  
p0339 A81-25078  
Performance and reliability of photovoltaic  
modules at various MIT LL test sites  
p0251 A81-27277

### RELIABILITY ENGINEERING

Reliability of large superconducting magnets  
through design  
p0335 A81-23452  
Method of on site testing for performance rating  
of solar water heating systems  
p0225 A81-25014  
Influence of module requirements on flat plate  
module design evolution  
p0251 A81-27279

Handbook of experiences in the design and  
installation of solar heating and cooling systems  
[DOE/CS-32224/T1] p0282 N81-21566  
Interim performance criteria for photovoltaic  
energy systems  
[SRI/TR-742-654] p0282 N81-21577

### REMOTE SENSING

Mapping of solar radiation for use in the  
Sudanese-Sahelian region of Africa  
p0217 A81-23007

### REMOTE SENSORS

Statistical model fitting of remote induction  
sounding data from underground coal gasification  
site - Hanna II, phases 2 and 3  
p0293 A81-22278

### RESEARCH

Hydrocarbonization research: Completion report  
[ORNL/TR-6693] p0311 N81-18232

### RESEARCH AND DEVELOPMENT

Meteorological aspects of wind energy - Assessing  
the resource and selecting the sites  
p0295 A81-23690  
Wind energy resource survey methodology  
p0295 A81-23691  
Large wind-turbine projects in the United States  
wind energy program  
p0335 A81-23694

Solar energy research and applications in China  
p0219 A81-23703

The DOE photovoltaic program - An overview  
p0228 A81-25055

Alternative energy sources II; Proceedings of the  
Second Miami International Conference, Miami  
Beach, Fla., December 10-13, 1979. Volume 5 -  
Geothermal power/energy program  
p0187 A81-25088

Status of the development of the general atomic  
thermochemical water-splitting cycle  
p0287 A81-25141

Photosynthetic bacteria as alternative energy  
sources Overview on hydrogen production research  
p0288 A81-25152

Progress in batteries and solar cells. Volume 3  
--- Book  
p0382 A81-25601

Recent developments in secondary batteries for use  
in electric vehicles  
p0373 A81-25606

Superconducting MHD magnet engineering program  
p0344 A81-26852

An overview of thin-film polycrystalline silicon  
research and development  
p0233 A81-27109

The U.S. National Photovoltaic Program  
p0188 A81-27212

Photovoltaic research and development projects in  
Germany  
p0245 A81-27213

Photovoltaic applications - Past and future  
p0246 A81-27231

Development of amorphous silicon cells  
p0249 A81-27262

Oil substitution and energy saving - A research  
and development strategy of the International  
Energy Agency /IEA/  
p0188 A81-29195

Private sector initiatives - A case history  
p0188 A81-29681

Wind energy systems act of 1980  
[H-REPT-96-1217] p0190 N81-16525

The GaAs solar cell research and development  
programs of the Air Force  
p0260 A81-17542

Development of sodium/sulfur batteries --- as  
storage batteries  
[BNFT-PB-T-79-60] p0376 N81-17607

Energy/economic model analysis. Energy economic  
modeling system  
[PB81-114274] p0194 N81-17614

Applied research activities for 1979 --- Finnish  
technology development and transfer  
p0384 A81-20004

World activity in solar ponds  
[UCID-18900] p0282 N81-21564

Solar energy in Italy: A profile of renewable  
energy activity in its national context  
[SRI/SP-763-718] p0204 N81-21576

Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586



## SUBJECT INDEX

## RESONATORS

- Research and Technology: Annual report  
[NASA-TM-82314] p0384 N81-21949
- RESEARCH FACILITIES**  
Experimental results from the first year of operation of the solar ground coupling research facility of Brookhaven National Laboratory  
p0225 A81-25009
- The Marshall Center: Its place in NASA  
[NASA-TM-82254] p0383 N81-17958
- RESEARCH MANAGEMENT**  
Program plan for reliability and maintainability in active solar heating and cooling systems  
[DOE/CS-36010/01] p0264 N81-17596
- Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies  
[PB81-114258] p0194 N81-17613
- Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 N81-17615
- Energy policy and research planning. Citations from the NTIS data base  
[PB81-800112] p0195 N81-17620
- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report  
[AD-A094225] p0196 N81-18051
- Coal gasification systems engineering and analysis. Appendix F: Critical technology items/issues  
[NASA-CR-161660] p0310 N81-18219
- Swedish energy storage projects 1979: Research-development-full-scale experiments supported by governmental organizations  
[PB81-122947] p0378 N81-19644
- Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study  
[DOE/CS-30108/T3] p0278 N81-20567
- Updated plan for support of research related to geothermal reservoir engineering  
[LBL-10807] p0323 N81-21463
- RESEARCH PROJECTS**  
Overview - Cost goals in the LSA project --- Low-cost Solar Array  
p0230 A81-27077
- Photovoltaic research and development projects in Germany  
p0245 A81-27213
- RESERVES**  
October report on the current fuel situation from the Energy Information Administration  
[GPO-60-871] p0189 N81-16311
- Comments on long-term aspects of renewable versus nonrenewable resource substitution  
[CONF-801158-1] p0313 N81-18477
- Strategic Petroleum Reserve data acquisition system  
[SAND-80-2143] p0317 N81-19539
- Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome  
[SAND-80-1323] p0324 N81-21468
- RESERVOIRS**  
Updated plan for support of research related to geothermal reservoir engineering  
[LBL-10807] p0323 N81-21463
- RESIDENTIAL AREAS**  
Housing authority of Baltimore City-Public Housing Energy Workshop  
[NASA-TM-82050] p0190 N81-16569
- Residential energy efficiency standards study: Technical analysis  
[PB81-106981] p0191 N81-16611
- Hot water from the Sun: A consumer guide to solar water heating  
[PB81-128597] p0275 N81-19647
- RESIDENTIAL ENERGY**  
Use of the ATOP system in the control of an off-peak storage device --- Ambient Temperature Observer/Predictor in heating system  
p0371 A81-20491
- Solar Energy Management System  
p0210 A81-20492
- Temperature stratification in hot water solar thermal storage tanks  
[AIAA PAPER 81-0368] p0210 A81-20787
- An energy used model of the residential sector  
p0185 A81-21022
- Performance of solar collectors - An evaluation of standard ratings  
[ASME PAPER 80-WA/SOL-1] p0211 A81-21129
- Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems  
[ASME PAPER 80-WA/SOL-10] p0212 A81-21136
- Economic analysis and optimization of solar residential space heating  
[ASME PAPER 80-WA/SOL-11] p0212 A81-21137
- The parallel heat pump and photovoltaic heating and cooling - Phase II  
[ASME PAPER 80-WA/SOL-40] p0214 A81-21160
- The photovoltaic-aeolian plant at Passo Mandrioli /Italy/  
p0218 A81-23013
- Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems  
p0226 A81-25028
- Convertible, tri-mode solar conversion system  
p0226 A81-25031
- Domestic utilization of solar energy in the Michigan area  
p0226 A81-25034
- Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices  
p0187 A81-25061
- Solar energy for multi-residential water heating - An economic approach  
p0229 A81-25063
- Economic feasibility of photovoltaic energy systems  
p0246 A81-27229
- Storage of cold water in aquifers  
p0375 A81-29257
- Housing authority of Baltimore City-Public Housing Energy Workshop  
[NASA-TM-82050] p0190 N81-16569
- Analysis of residential duct losses  
[PB80-228000] p0191 N81-16614
- Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C  
[DOE/CS-20060/5120-VOL-1] p0192 N81-17394
- Residential use of photovoltaics  
[DOE/ET-20279/109] p0264 N81-17604
- Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report  
[EPF-3007-VOL-2] p0357 N81-19581
- Appliance energy efficiency in new home construction  
[DOE/CS-23999/T1] p0200 N81-19608
- Residential solar design review: A manual on community architectural controls and solar energy use  
[PB81-128605] p0275 N81-19648
- A reference building approach to building energy performance standards for single-family residences  
[PB81-135642] p0201 N81-20318
- Study of fuel cell on-site, integrated energy systems in residential/commercial applications  
[NASA-CR-165144] p0361 N81-21533
- Hulco Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980  
[SOLAB/1043-80/14] p0281 N81-21553
- The economics of residential energy efficiency  
[FNL-SA-8696] p0206 N81-21624
- Regional analysis of residential/commercial gas demand  
[PB81-134496] p0206 N81-21631
- Environmental data for sites in the National Solar Data Network, January 1981  
[SOLAB/0010-81/01] p0284 N81-21710
- RESIDUES**  
Resource recovery from coal residues  
[CONF-801104-8] p0305 N81-16322
- RESISTANCE HEATING**  
A new formal graphic language for the representation of complex energy distribution systems  
p0225 A81-25010
- RESONATORS**  
Excitation of a superconducting strip resonator by a system of point Josephson contacts  
p0365 A81-21295

## RESOURCE ALLOCATION

## SUBJECT INDEX

### RESOURCE ALLOCATION

Energy supply and demand properties from engineering process models  
[EPRI-BA-1568] p0191 N81-16603  
The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 N81-16612  
Reducing US oil vulnerability: Energy policy for the 1980's  
[DOE/PE-0021] p0196 N81-18524

### RESOURCES

Wind energy resource atlas. Volume 4: The Northeast region  
[PNL-3195-WERA-4] p0321 N81-20592

### RESOURCES MANAGEMENT

Fixed site hydrogen storage. I - Applications impact  
p0289 A81-25159  
Design and management for resource recovery. Volume 1 - Energy from waste --- Book  
p0300 A81-25551  
National Academy of Sciences report: Energy in transition, 1985-2010  
[GPO-61-647] p0189 N81-16524  
Energy in transition, 1985-2010  
[GPO-63-171] p0190 N81-16585  
Wind resource of the area surrounding Medicine Bow, Wyoming  
[PB81-109621] p0308 N81-17684  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597  
Defense Energy Information System (DEIS): DEIS-80 system design specification  
[AD-A096263] p0384 N81-21960

### RESPIRATORY DISEASES

Biological exposure sensors in coal conversion technologies  
[CONF-801143-1] p0192 N81-17410

### RETROFITTING

Review of activities and plans for solar energy in Federal buildings  
[DOE/CB-10001/T2] p0200 N81-19590

### RIBBONS

Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells  
p0216 A81-22198

### ROCKET ENGINE NOISE

Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site  
[LBL-11978] p0270 N81-18572

### ROCKET EXHAUST

An assessment of the atmospheric effects of a Satellite Power System  
p0187 A81-25053

### ROCKS

Use of weighted brines in recovery of geothermal energy from hot, dry rock  
p0303 A81-26928  
Laboratory studies of hard rock for CAES  
[PNL-SA-8971] p0375 N81-16599  
Performance of air collector house heating systems with rock bed storage --- solar heating  
p0277 N81-20553

### ROCKY MOUNTAINS (NORTH AMERICA)

Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 N81-21562

### ROOM TEMPERATURE

Room temperature cells with solid electrolytes  
p0373 A81-25568

### ROTARY WINGS

Static deflection and eigenfrequency analysis of the Hube wind turbine rotors. Theoretical background --- structural vibration  
[RISOE-M-2199] p0357 N81-19497

### ROTOR AERODYNAMICS

Torque ripple in a Darrieus, vertical axis wind turbine  
[ASME PAPER 80-WA/SOL-13] p0331 A81-21138  
VARTDYB - A numerical package for the dynamic analysis of vertical axis wind turbines  
[ASME PAPER 80-WA/SOL-18] p0331 A81-21142  
Wind-turbine aerodynamics  
p0335 A81-23696  
Performance calculation of a vertical-axis wind power converter  
p0337 A81-24617

A new concept in horizontal axis wind turbine rotors  
p0338 A81-25071  
Dynamic response of power generating wind turbines  
p0339 A81-25077

The aerodynamic analysis of a 10 kW horizontal-axis windmill  
p0354 N81-18484

Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-M-2242] p0359 N81-19637

### ROTOR BLADES (TURBOMACHINERY)

Stability of large horizontal-axis axisymmetric wind turbines  
p0333 A81-22526  
Aeroelastic stability of wind turbine rotors  
p0345 A81-26975  
Large wind energy converter: Growian 3 MW  
[NASA-TN-75404] p0360 N81-20543

### ROTOR SPEED

The characteristics of two, simple, automatic speed-control devices for horizontal axis wind-turbines  
p0338 A81-25070  
Variable speed constant frequency constant voltage alternator --- converting wind power to usable 60 hertz power  
[DOE/ET-29246-T1] p0361 N81-21298

### ROTORS

Aerodynamic analysis of propeller-type windmills with helical trailing vortices  
p0355 N81-18565  
Investigations of structural dynamics on the Gedser WTG and on new Danish wind turbines  
[RISOE-M-2146] p0363 N81-21626

## S

### SAFETY FACTORS

Operational, control and protective system transient analyses of the closed-cycle GT-BTGR power plant --- Gas Turbine High Temperature Gas-cooled Reactor  
[ASME PAPER 80-WA/GT-1] p0331 A81-21096  
Safety analysis of the UISI-CFFP superconducting magnet  
p0345 A81-26856  
On the safety to solar electric power generation  
p0256 A81-29269  
Environmental and safety issues of the fusion fuel cycle  
[CONF-801011-66] p0353 N81-17911  
Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IEA, research and development WECS, annex one, subtask A1 --- conference, Stockholm 1980  
[FFA-TN-HU-2218] p0359 N81-19636  
Performance and safety characteristics of Li/BCX and Li/CSC systems  
p0379 N81-21495

### SAFETY MANAGEMENT

The Chicago Southwest Supplemental Fuel Processing Facility  
p0300 A81-25552  
Sampling and instrumentation for fluidized-bed combustion  
[ANL/CEN/PE-80-2] p0305 N81-16317  
Dimensions/NBS. Volume 64, no. 8, October 1980  
[PB81-133654] p0384 N81-21007

### SALINITY

The solar pond - A collector and store of solar energy  
p0219 A81-23701  
Submarine hydro-electro-osmotic power plants for an efficient exploitation of salinity gradients  
p0337 A81-24447

### SALT BEDS

Salt gradient solar pond with reflective bottom - Application to the 'saturated' pond  
p0254 A81-27570  
Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome  
[SAND-80-1323] p0324 N81-21468

### SAMPLING

Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors  
p0318 N81-20202

## SUBJECT INDEX

## SCHOTTKY DIODES

## SATELLITE ANTENNAS

- Reference System Description p0367 N81-16554
- Modified reference SPS with solid state transmitting antenna p0367 N81-16564
- SPS solid state antenna power combiner p0367 N81-16565

## SATELLITE DESIGN

- Summary of LSST systems analysis and integration task for SPS flight test articles p0270 N81-19177

## SATELLITE POWER TRANSMISSION (TO EARTH)

- Environmental assessment for the satellite power system concept development and evaluation program [AIAA PAPER 84-0244] p0185 A81-20695
- Preliminary environmental assessment for the satellite power system /SPS/ p0186 A81-22548
- Effects of a satellite power system on ground-based radio and radar astronomy p0216 A81-22838
- SPS design with solid-state transmitter p0365 A81-24831
- Workshop on the microwave power transmission system for the solar power satellite - Review panel report p0365 A81-24832
- Solar Power Satellite Microwave Transmission and Reception [NASA-CP-2141] p0365 N81-16533
- Solar power satellite microwave power transmission system description executive summary p0365 N81-16535
- Initial NPTS study results: Design considerations and issues p0365 N81-16536
- An interferometer-based phase control system p0366 N81-16545
- A sonic satellite power system microwave power transmission simulation p0366 N81-16546
- SPS phase control studies p0366 N81-16547
- High efficiency klystron for the SPS application p0366 N81-16551
- The adapting of the crossed-field directional amplifier to the requirements of the SPS p0367 N81-16553
- Rectenna array measurement results --- Satellite power transmission and reception p0367 N81-16562
- Microwave power transmission system workshop, session on solid state p0367 N81-16563
- Modified reference SPS with solid state transmitting antenna p0367 N81-16564
- SPS solid state antenna power combiner p0367 N81-16565
- Solid state systems concepts --- solar power satellite transmission p0367 N81-16566
- Solid state device technology for Solar Power Satellite p0368 N81-16567
- Solid state sandwich concept: Designs, considerations and issues --- solar power satellite transmission p0368 N81-16568
- Satellite Power Study (SPS) concept definition study (Exhibit D). Volume 1: Executive summary [NASA-CR-3392] p0271 N81-19562
- Satellite Power System (SPS) utility integration: Institutional, planning and operational issues [EAC-8-4015] p0279 N81-20596
- Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects [DOE/ER-0090] p0203 N81-20598
- Satellite Power System (SPS) concept definition study (Exhibit D). Volume 2: Systems/subsystems analyses [NASA-CR-3393] p0280 N81-21491
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 4, Part 2: Cost and programmatic appendix [NASA-CR-3398] p0280 N81-21492

- Satellite Power System (SPS) societal assessment [NASA-CR-164153] p0205 N81-21590
- Environmental assessment for the Satellite Power System concept development and evaluation program: Nonmicrowave health and ecological effects [DOE/ER-0089] p0205 N81-21613
- Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic [DOE/ER-0096] p0207 N81-21642

## SATELLITE SOLAR ENERGY CONVERSION

- Satellite Power Study (SPS) concept definition study (Exhibit D). Volume 1: Executive summary [NASA-CR-3392] p0271 N81-19562
- Satellite Power System (SPS). Rectenna siting: Availability and distribution of nominally eligible sites [DOE/ER-10041/T10] p0369 N81-19602
- Social acceptability of Satellite Power Systems (SPS). The near term outlook [DOE/ER-10072/1] p0200 N81-19603
- Satellite Power Systems (SPS) space transportation cost analysis and evaluation [NASA-CR-164020] p0273 N81-19610
- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications [NASA-TF-1811] p0276 N81-20173
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 6, part 1: Cost and Programmatic [NASA-CR-3397] p0276 N81-20537
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 4, Part 2: Cost and programmatic appendix [NASA-CR-3398] p0280 N81-21492

## SATELLITE SOLAR POWER STATIONS

- Solar power satellite system [NASA-CASE-HQN-10949-1] p0190 N81-16530
- Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site [LBL-11978] p0270 N81-18572
- Summary of LSST systems analysis and integration task for SPS flight test articles p0270 N81-19177
- Satellite Power Systems (SPS). LSST systems and integration task for SPS flight test article [NASA-CR-3375] p0271 N81-19564
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 3: Transportation analysis [NASA-CR-3394] p0271 N81-19565
- Satellite Power System (SPS) public outreach experiment [NASA-CR-164022] p0275 N81-19635

## SAUDI ARABIA

- Effects of dust on the performance of thermal and photovoltaic flat plate collectors in Saudi Arabia - Preliminary results p0223 A81-24985

## SCALE (CORROSION)

- Synopses of B and D in geothermal-geochemical engineering at the Lawrence Livermore National Laboratory, 1976 - 1980 [UCID-18863] p0324 N81-21615

## SCALING LAWS

- Solids circulation around a jet in a fluidized bed gasifier [DOE/ET-12229/T1] p0313 N81-18343

## SCHOOLS

- Solar water heating demonstration program for public schools in New Mexico p0225 A81-25013

## SCHOTTKY DIODES

- Diffusion length measurements in CdS and CdSe Schottky barrier junctions p0209 A81-19698
- Polycrystalline Zn<sub>3</sub>P<sub>2</sub> Schottky barrier solar cells p0220 A81-24414
- Collection efficiency of low-mobility solar cells p0230 A81-27010
- Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells p0236 A81-27130
- Indium phosphide films for photovoltaic devices p0240 A81-27173

## SCINTILLATION COUNTERS

- Short circuit currents and collection efficiencies in a-SiHx solar cells p0246 A81-27235
- Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells p0251 A81-27282
- ### SCINTILLATION COUNTERS
- Selective fast neutron detector p0332 A81-21640
- ### SCRUBBERS
- State-of-the-art review of materials-related problems in flue gas desulfurization systems [ANI-80-59] p0384 A81-21645
- ### SEA WATER
- Solar desalination by freezing and distillation p0227 A81-25043
- ### SEAWERDS
- Marine Biomass Program [PB81-113185] p0307 A81-17297
- ### SECONDARY FLOW
- On the magnetoaerothermal instability [AIAA PAPER 81-0248] p0330 A81-20698
- ### SEISMOGRAMS
- Research in the geosciences related to resource assessment [IOE/IR-10119/T1] p0313 A81-18476
- ### SEISMOLOGY
- Evaluation and targeting of geothermal energy resources in the southeastern United States [DOE/ET-27001/8] p0314 A81-18480
- ### SELENIDES
- Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4745] p0259 A81-16606
- Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4759] p0283 A81-21583
- ### SELF ALIGNMENT
- Design of self-calibrating controllers for heliostats in a solar power plant p0211 A81-21030
- ### SELF EXCITATION
- Pulsed self-excited MHD power generation at large energy densities p0327 A81-19814
- Transient processes and self-excited oscillations in the electrical circuit of an MHD generator p0346 A81-27968
- ### SELF OSCILLATION
- Transient processes and self-excited oscillations in the electrical circuit of an MHD generator p0346 A81-27968
- ### SEMICONDUCTING FILMS
- An overview of thin-film polycrystalline silicon research and development p0233 A81-27109
- Grain boundary edge passivated solar cells on thin film GaAs p0251 A81-27284
- Optimization of transparent electrode for solar cells [SERI/PR-9318-1-T1] p0274 A81-19621
- ### SEMICONDUCTOR DEVICES
- Electrochemical semiconductor solar energy converters p0215 A81-21674
- Inclusion of degeneracy in the analysis of heavily doped regions in silicon solar cells and other semiconductor devices p0221 A81-24810
- ### SEMICONDUCTOR DIODES
- Two modified single diode models for simulating solar cells with distributed series resistance p0239 A81-27161
- ### SEMICONDUCTOR JUNCTIONS
- Diffusion length measurements in CdS and CdSe Schottky barrier junctions p0209 A81-19698
- Temperature dependence for the power outputs of n-CdSe liquid junction cells p0222 A81-24823
- The effects of junction depth and impurity concentration on diffused junction solar cells p0228 A81-25050
- Collection efficiency of low-mobility solar cells p0230 A81-27010

## SUBJECT INDEX

- 11.5% solar conversion efficiency in the photocathodically protected p-InP/V/3+/-V/2+/-BCl/C semiconductor liquid junction cell p0230 A81-27014
- Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model p0232 A81-27099
- Recent progress in the development of the cascade solar cell p0235 A81-27118
- Performance losses in high-efficiency monolithic multi-junction solar cells p0235 A81-27120
- Ion implanted grating type Si solar cells - Junction depth dependence p0235 A81-27126
- Cascade Solar Cell Workshop report p0262 A81-17553
- The HENAC pilot line experience p0262 A81-17574
- The CdSAs2 thin films for solar cell applications [DOE/ET-23007/4] p0270 A81-18561
- ### SEMICONDUCTORS (MATERIALS)
- HK-generators using the transition of a semiconductor material into a conducting state p0331 A81-21064
- Heterojunction solar cells on cuprous oxide p0221 A81-24809
- An overview of amorphous silicon solar-cell development p0234 A81-27111
- A microstructural study of the heterojunction materials of the CdS-Cu2S solar cell p0241 A81-27179
- Research on high efficiency cascade solar cells [SERI/PR-8136-1-T1] p0258 A81-16595
- Space Photovoltaic Research and Technology 1980. High Efficiency, Radiation Damage and Blanket Technology [NASA-CP-2169] p0260 A81-17531
- Silicon Research and Technology Workshop report p0260 A81-17541
- Flash photolysis studies of the semiconductor/electrolyte interface p0265 A81-18114
- ### SEPARATORS
- The Cycloentrifuge - An advanced gas/solids separator for coal conversion processes [AIAA PAPER 81-0395] p0293 A81-20804
- Hydrogen and oxygen from water. V - The ROC system p0285 A81-21955
- Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts [SERI-CS-1517-VOL-5] p0319 A81-20302
- PBI treated polypropylene battery separator p0379 A81-21512
- Improved liquid/solids handling module --- Geothermal energy conversion [DOE/ET-27193/T1] p0363 A81-21582
- ### SERVICE LIFE
- Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280
- Wind machine fatigue analysis and life prediction [RFP-3135/3533/80/19] p0357 A81-19495
- Fatigue-creep lifetime analysis of four advanced central receiver concepts [SAND-80-8047] p0273 A81-19612
- Everlasting sliding-disc valve METC SOA test valve No. B-3, state-of-the-art lockhopper valve testing and development project [DOE/METC-SP-80/17] p0323 A81-21361
- ### SERVICES
- Energy accounting for solar and alternative energy sources p0382 A81-25165
- ### SEWAGE TREATMENT
- Design of a 100 kW photovoltaic flat panel system at a Washington, D.C. area waste treatment plant p0228 A81-25056
- ### SHADOWS
- Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study [UCLA-12/1268] p0197 A81-18576

# SUBJECT INDEX

# SILICON FILMS

## SHALE OIL

- Hydrogen requirements in shale oil and synthetic crude from coal p0295 A81-24020
- Combustion of coal-derived liquids and shale oil in gas turbine combustors p0343 A81-26016
- Hydrogasification of oil shale [PB81-114092] p0306 A81-17292
- An evaluation of polycyclic aromatic hydrocarbons from processed oil shales p0308 A81-18104
- The development of synthetic fuels: Defense logistics implications [AD-A095713] p0319 A81-20290

## SHALES

- Hydrogasification of oil shale [PB81-114092] p0306 A81-17292
- Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes [PB-2315-55] p0311 A81-18231

## SHAPES

- Shape optimization study for a three-tunnel superconductive energy storage magnet p0374 A81-26861

## SHEAR LAYERS

- The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [PFA-133] p0359 A81-20037
- The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [PB81-142184] p0364 A81-21635

## SHIVA LASER SYSTEM

- Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory p0294 A81-22511

## SHORT CIRCUITS

- The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells p0209 A81-20007
- Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells p0241 A81-27183
- Short circuit currents and collection efficiencies in a-SiH<sub>x</sub> solar cells p0246 A81-27235

## SIBERIA

- Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content p0302 A81-26895

## SILICA GLASS

- Design and qualification of BSR-solar cells for future solar arrays --- Back-Side-Reflection p0248 A81-27250

## SILICON

- Epitaxial solar cells on metallurgical grade silicon substrates p0231 A81-27085
- The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells p0233 A81-27101
- An overview of thin-film polycrystalline silicon research and development p0233 A81-27109
- Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology p0234 A81-27113
- Transport properties in 100 μm CZ silicon --- Czochralski p0234 A81-27115
- Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible p0234 A81-27116
- Solar cells and modules from dendritic web silicon p0234 A81-27117
- Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing p0244 A81-27200

- Influence of processing on the electrical performance of proton irradiated silicon solar cells p0244 A81-27205
- Growth structure of cast silicon and related photovoltaic properties of solar cells p0245 A81-27214
- Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays [NASA-CR-163943] p0260 A81-17525
- Space Photovoltaic Research and Technology 1980. High Efficiency, Radiation Damage and Blanket Technology [NASA-CR-2169] p0260 A81-17531
- Recent progress in high-output-voltage silicon solar cells p0260 A81-17534
- Silicon Research and Technology Workshop report p0260 A81-17541
- The HENAC pilot line experience p0262 A81-17574
- Fabrication and testing of MIS solar cells on a-Si:F:H [SEEL/TR-8041-9-T1] p0269 A81-18552
- Thin film polycrystalline silicon solar cells [SEEL/PB-9192-1-T2] p0269 A81-18557
- Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator [NASA-CR-164038] p0271 A81-19567
- Process feasibility study in support of silicon material task 1 [NASA-CR-164009] p0271 A81-19570
- Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells [SAN-3045-3] p0275 A81-19634
- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications [NASA-TF-1811] p0276 A81-20173
- Amorphous thin films for solar-cell applications [SEEL/PB-0-8254-F] p0283 A81-21591
- SILICON ALLOYS**
  - Photovoltaic behavior of amorphous silicon-based alloys p0249 A81-27263
  - The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties p0280 A81-20912
- SILICON CARBIDES**
  - Ceramic heat pipe development [DOE/TIC-11389] p0205 A81-21611
- SILICON COMPOUNDS**
  - Silicon solar cell optimization [AD-A092908] p0263 A81-17579
  - The CdSiAs<sub>2</sub> thin films for solar cell applications [DOE/ET-23007/4] p0270 A81-18561
  - Silicon solar cell process development, fabrication and analysis [NASA-CR-164164] p0281 A81-21541
- SILICON FILMS**
  - Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations --- Epitaxial Film Growth p0230 A81-27078
  - Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals --- Epitaxial Film Growth p0230 A81-27079
  - Development of processes for the production of low cost silicon dendritic web for solar cells p0231 A81-27080
  - Ultra high speed growth of silicon ribbons for solar cells p0231 A81-27081
  - A silicon sheet casting experiment --- for solar cell water production p0231 A81-27082
  - Continuous coating of silicon-on-ceramic p0231 A81-27083
  - Substrate related problems in RAD solar cells --- Ribbon Against Drop p0231 A81-27084

## SILICON JUNCTIONS

## SUBJECT INDEX

- Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts p0232 A81-27090
- Chemical and structural defects in thin film polycrystalline silicon solar cells p0233 A81-27105
- An overview of amorphous silicon solar-cell development p0234 A81-27111
- Evaluation and optimization of silicon sheet solar cells p0234 A81-27114
- Vacuum deposited polycrystalline silicon solar cells for terrestrial use p0236 A81-27128
- Contiguous capillary coating of silicon on porous carbon substrates p0236 A81-27129
- Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells p0236 A81-27130
- Low-cost conversion of polycrystalline silicon into sheet by HEM and FAST --- Heat Exchanger Method and Fixed Abrasive Slicing Technique p0238 A81-27145
- Physical and chemical characterization of R.A.D. silicon films p0249 A81-27260
- CO-sputtered doped amorphous silicon as a photovoltaic material p0249 A81-27264
- ### SILICON JUNCTIONS
- The properties of polycrystalline silicon solar cells with controlled titanium additions p0209 A81-20010
- Interactions of efficiency and material requirements for terrestrial silicon solar cells p0210 A81-20295
- MX-generators using the transition of a semiconductor material into a conducting state p0331 A81-21064
- Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems p0215 A81-21954
- The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states p0215 A81-22155
- Two-dimensional analysis of the interdigitated back-contact solar cell p0216 A81-22197
- Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells p0216 A81-22198
- Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency p0221 A81-24803
- The effects of intragrain defects on the local photoresponse of polycrystalline silicon solar cells p0221 A81-24805
- Wide band wide angle reflection-reducing coatings for silicon cells p0221 A81-24807
- Inclusion of degeneracy in the analysis of heavily doped regions in silicon solar cells and other semiconductor devices p0221 A81-24810
- The effects of junction depth and impurity concentration on diffused junction solar cells p0228 A81-25050
- Silicon solar cells with high open-circuit voltage p0232 A81-27089
- New developments in vertical junction silicon solar cells p0232 A81-27095
- Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 A81-27125
- Ion implanted grating type Si solar cells - Junction depth dependence p0235 A81-27126
- Design considerations for high efficiency polycrystalline silicon MIS solar cells p0236 A81-27127
- Variation of diffusion length of ribbon-Si solar cells with light intensity p0236 A81-27131
- High efficiency silicon concentrator cells p0236 A81-27132
- A low series resistance silicon photovoltaic cell for high intensity applications p0236 A81-27134
- Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing p0238 A81-27156
- Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study p0239 A81-27165
- Progress toward large area amorphous silicon solar cells p0240 A81-27167
- High efficiency silicon solar cells p0240 A81-27175
- Review of physics underlying recent improvements in silicon solar-cell performance p0241 A81-27176
- Laser processing for high-efficiency silicon solar cells p0241 A81-27177
- A base-metal conductor system for silicon solar cells p0243 A81-27196
- An all-plated, low cost contact system for silicon solar cells p0243 A81-27197
- High performance BSF silicon solar cell with fire through contacts printed on AR coating --- Back Surface Field p0243 A81-27198
- Solid source diffusion process for silicon solar cells p0243 A81-27199
- Low-cost ion implantation and annealing technology for solar cells p0244 A81-27201
- DLTS spectra and defect effects on irradiated silicon solar cells --- Deep Level Transient Spectroscopy p0244 A81-27203
- Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells p0244 A81-27207
- Nickel contacts for low cost solar cells p0245 A81-27223
- Proposed design of a-Si:H solar cells using ultrathin active layer to increase conversion efficiency p0247 A81-27237
- Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions p0248 A81-27254
- Degradation of ITO/p-Si solar cells --- Indium Tin Oxide p0248 A81-27257
- Low-cost high-efficiency SnO<sub>2</sub>/n<sup>+</sup>/p Si heterojunction solar cell fabricated by paint-on-diffusant method p0249 A81-27259
- Grain size dependence of silicon solar cell parameters p0249 A81-27261
- Development of amorphous silicon cells p0249 A81-27262
- Optical absorption by gap states in amorphous silicon p0249 A81-27265
- Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics p0249 A81-27266
- NTS-2 solar cell experiment after two years in orbit p0249 A81-27268
- MIS silicon grating solar cells on BSF substrates p0252 A81-27293
- ### SILICON NITRIDES
- Interaction in Si<sub>3</sub>N<sub>4</sub>-C and BN-C systems under conditions of radiation heating p0210 A81-20906
- ### SILICON TETRACHLORIDE
- Effect of zinc impurity on silicon solar-cell efficiency p0256 A81-29290

# SUBJECT INDEX

# SOCIAL FACTORS

## SILICONES

Encapsulation of PV cells using silicone materials  
p0245 A81-27225

## SILVER ZINC BATTERIES

High power silver zinc and thermal batteries for  
missiles and aviation applications  
p0373 A81-25612

## SIMULATORS

A sonic satellite power system microwave power  
transmission simulation  
p0366 A81-16546

## SIMULTANEOUS EQUATIONS

Simultaneous radiation damage and annealing of  
GaAs solar cells  
p0247 A81-27240

## SINGLE CRYSTALS

Loss mechanism analysis in single-crystal and  
polycrystalline silicon MIS solar cells to  
produce 13% efficiency  
p0221 A81-24803

Low cost monocrystalline silicon sheet fabrication  
for solar cells by advanced ingot technology  
p0234 A81-27113

Transport properties in 100 nm Cz silicon ---  
Czochralski  
p0234 A81-27115

Solar cells and modules from dendritic web silicon  
p0234 A81-27117

Nuclear radiation effects on the photovoltaic  
performance and interface states of Cr, p-type,  
single crystal, MISi solar cells  
p0244 A81-27208

MIS silicon grating solar cells on BSE substrates  
p0252 A81-27293

Study of process technology for GaAlAs/GaAs  
heteroface solar cells  
p0261 A81-17544

Photoelectronic properties of zinc phosphide  
crystals, films and heterojunctions  
[SERI/TR-8031-1-T2]  
p0264 A81-17595

Photoelectrochemical solar cells based on d-band  
electrochemistry at transition metal diselenides  
[IS-4759]  
p0283 A81-21583

## SINTERING

Testing the mechanical characteristics of sintered  
nickel battery plaque and their relationship to  
nickel electrode performance  
p0372 A81-25323

Nickel contacts for low cost solar cells  
p0245 A81-27223

## SIS (SEMICONDUCTORS)

The operation of the  
semiconductor-insulator-semiconductor solar cell  
- Barrier height lowering through interface states  
p0215 A81-22155

Theoretical efficiency of S/p+ -n/IS solar cells  
p0221 A81-24801

Characterization of ZnO for the fabrication of  
conductor-insulator-semiconductor /CIS/ solar  
cells  
p0237 A81-27141

Majority carrier conduction effects in ITO/SIS  
solar cells --- Indium Titanium  
Oxide/Semiconductor-Insulator-Semiconductors  
p0239 A81-27166

A 14 percent efficiency SnO<sub>2</sub>/x-SiO<sub>2</sub>-n/Si solar cell  
p0252 A81-27294

Semiconductor-insulator-semiconductor /SIS/ solar  
cells - Indium-tin-oxide on silicon  
p0252 A81-27295

## SITE SELECTION

Meteorological aspects of wind energy - Assessing  
the resource and selecting the sites  
p0295 A81-23690

Wind energy - A utility perspective  
p0187 A81-26371

Performance and reliability of photovoltaic  
modules at various MIT LL test sites  
p0251 A81-27277

Ultra headless hydro power  
[SLAC-PUB-2613]  
p0352 A81-16609

Wind-power site-screening methodology  
[UCRL-52938]  
p0314 A81-18526

Compressed air energy storage: Preliminary design  
and site development program in an aquifer, task  
2. Volume 2: Characterize and explore  
potential sites and prepare research and  
development plan  
[DOE/ET-29232/T1-VOL-2]  
p0377 A81-18531

A comparison of environmental issues related to  
development of small hydropower resources at new  
versus existing sites  
[COMF-801210-13]  
p0197 A81-18577

Long-Range Environmental Outlook  
[PB81-114977]  
p0198 A81-18580

Compressed air energy storage: Preliminary design  
and site development program in an aquifer.  
Task 1: Establish facility design criteria and  
utility benefits  
[DOE/ET-29232/T2]  
p0377 A81-19586

Satellite Power System (SPS). Rectenna siting:  
Availability and distribution of nominally  
eligible sites  
[DOE/EB-10041/T10]  
p0369 A81-19602

Environmental data for sites in the National Solar  
Data Network  
[SOLAR/0010-80/12]  
p0276 A81-15665

Comparative assessment of five potential sites for  
hydrothermal-magma systems: Summary  
[DOE/TIC-11303]  
p0320 A81-26525

October 1980 environmental data for sites in the  
National Solar Data Network  
[SOLAR/0010-80/10]  
p0279 A81-20588

Alternative energy facility siting policies for  
urban coastal areas: Executive summary of  
findings and policy recommendations  
[DOE/EV-01528/T1]  
p0204 A81-21559

Water supply and demand in an energy supply model  
[DOE/EV-10180/2]  
p0204 A81-21560

Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 2: Hydroelectric  
development  
[DOE/EV-73002/1-VOL-2]  
p0205 A81-21596

Preparation of monthly maps of solar availability  
for New Mexico based on satellite photography  
[END-78-2131]  
p0284 A81-21668

## SIZE (DIMENSIONS)

Optimum cell size for concentrated-sunlight  
silicon solar cells  
p0221 A81-24802

Photovoltaic system sizing analysis  
p0248 A81-27249

Appropriate sizing of solar heating systems  
[SERI/TR-333-320]  
p0264 A81-17600

## SKY RADIATION

Diffuse sky measurements and determination of  
corrected shadow band multiplication factors ---  
solar photovoltaic demonstration project  
[ASER PAPER 80-WA/SOL-26]  
p0213 A81-21150

Nocturnal radiation from a solar collector  
[ASER PAPER 80-WA/SOL-35]  
p0214 A81-21155

## SLAGS

Heat transfer in slagging MHD radiant boilers  
[AIAA PAPER 81-0316]  
p0330 A81-20747

Coal gasifier wall protection system  
[PB81-141921]  
p0323 A81-21237

## SLENDER BODIES

Head-sea diffraction by a slender raft with  
application to wave-power absorption  
p0303 A81-28690

## SLURRIES

Critical parameters for coarse coal underground  
slurry haulage systems  
[JPL-PUB-81-11]  
p0369 A81-20495

## SOCIAL FACTORS

National Academy of Sciences report: Energy in  
transition, 1985-2010  
[GEO-61-647]  
p0189 A81-16524

Forecast. Volume 2: Energy conservation in cities  
[GPO-47-454]  
p0190 A81-16527

US solar energy policy for less developed countries  
[DOE/CS-10048/T1]  
p0194 A81-17598

Energy choices in a democratic society  
[PB81-114852]  
p0197 A81-18563

Environment, health, socioeconomic and  
environmental control technology executive summary  
[DOE/TIC-11308]  
p0197 A81-18575

Social acceptability of Satellite Power  
Systems (SPS). The near term outlook  
[DOE/EB-10072/1]  
p0200 A81-19603

Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 1: Beluga coal district  
analysis  
[DOE/EV-73002/1-VOL-1]  
p0205 A81-21595

## SOCIOLOGY

- Satellite Power System (SPS) societal assessment  
[NASA-CR-164153] p0205 N81-21590
- SODIUM CARBONATES**  
Molten salt coal gasification process development  
unit, phase 1. Volume 1: PDU operations  
[DOE/ET-10296/66-VOL-1] p0319 N81-20296
- SODIUM CHLORIDES**  
Thermoelectrochemical hydrogen production using  
sodium chloride p0288 A81-25145
- SODIUM COOLING**  
A consideration of possible receiver designs for  
solar tower plants p0220 A81-24426
- SODIUM SULFUR BATTERIES**  
Development of sodium/sulfur batteries --- as  
storage batteries  
[BNMT-PB-T-79-60] p0376 N81-17607
- SOIL MAPPING**  
Remote sensing applied to the prospecting of  
geothermal anomaly in Caldas Novas County -  
State of Goias - Brazil p0295 A81-23630
- SOILS**  
Environmental analysis of geopressured-geothermal  
prospect areas, DeWitt and Colorado counties,  
Texas  
[DOE/ET-27127/1] p0207 N81-21646
- SOLAR ARRAYS**  
Capacity modulation of solar-fired absorption  
chillers with single and multi-temperature  
energizing sources p0210 A81-20493
- On the dynamic optimal coupling of a solar cell  
array to a load and storage batteries p0229 A81-26372
- Dynamic matching of a solar-electrical  
/photovoltaic/ system - An estimation of the  
minimum requirements on the matching system p0229 A81-26373
- Optimum operation of a combined system of a solar  
cell array and a dc motor p0229 A81-26374
- Overview - Cost goals in the LSA project ---  
Low-cost Solar Array p0230 A81-27077
- Low cost production of terrestrial solar arrays  
utilizing EFG silicon ribbon crystals ---  
Epitaxial Film Growth p0230 A81-27079
- Development of processes for the production of low  
cost silicon dendritic web for solar cells p0231 A81-27080
- Simulation of the performance of a 100-kW-peak  
photovoltaic system p0233 A81-27108
- Low-cost conversion of polycrystalline silicon  
into sheet by HEM and FAST --- Heat Exchanger  
Method and Fixed Abrasive Slicing Technique p0238 A81-27145
- The energy balance associated with the use of a  
maximum power tracer in a 100-kW-peak power system p0238 A81-27152
- Circuit design considerations for photovoltaic  
modules and systems p0238 A81-27153
- A monolithic series-connected  
Al<sub>0.93</sub>Ga<sub>0.07</sub>As/GaAs solar cell array p0239 A81-27158
- Parabolic troughs concentrators photovoltaic module p0242 A81-27188
- Low-cost, high-performance, point-focus  
concentrator array design p0242 A81-27189
- Minimizing end shadowing effects on parabolic  
concentrator arrays p0242 A81-27191
- Active and passive cooling for concentrating  
photovoltaic arrays p0243 A81-27192
- An improved lamination technique for solar arrays p0245 A81-27226
- Development of glass encapsulation techniques for  
terrestrial photovoltaic arrays p0246 A81-27227
- Photovoltaic concentrators p0246 A81-27230
- Flat-plate photovoltaic array design optimization p0248 A81-27247
- Low cost structures for photovoltaic arrays p0248 A81-27248
- Design and qualification of BSR-solar cells for  
future solar arrays --- Back-Side-Reflection p0248 A81-27250
- Analysis of GaAs and Si solar cell arrays for  
earth orbital and orbit transfer missions p0248 A81-27254
- Review of in-orbit performance of ESA's spacecraft  
solar arrays p0249 A81-27267
- High efficiency solar panel - Phase II p0250 A81-27270
- Concentrator designs for space photovoltaic arrays p0250 A81-27271
- SOLCEL II - An improved photovoltaic system  
analysis computer program p0250 A81-27272
- Optimisation of total annual energy output from  
constant/adjustable tilt solar PV arrays p0250 A81-27273
- PV-TAP - A program for performing electrical and  
thermal analyses on photovoltaic elements p0250 A81-27275
- Qualification test results for DOE solar  
photovoltaic flat panel procurement - PRDA 38 p0251 A81-27278
- Influence of module requirements on flat plate  
module design evolution p0251 A81-27279
- Solar power satellite system  
[NASA-CASE-HQN-10949-1] p0190 N81-16530
- Automated array assembly, phase 2  
[NASA-CR-163878] p0258 N81-16578
- Photovoltaic advanced systems test facility:  
Description and operations plan p0259 N81-16607
- Commercial (terrestrial) and modified solar array  
design studies for low cost, low power space  
applications [NASA-TN-81622] p0259 N81-17266
- Low cost solar array project silicon materials  
task. Development of a process for high  
capacity arc heater production of silicon for  
solar arrays [NASA-CR-163943] p0260 N81-17525
- Prospects for enhancing SEP array performance p0262 N81-17572
- Efficient structures for geosynchronous spacecraft  
solar arrays p0262 N81-17573
- Gallium arsenide photovoltaic dense array for  
concentrator applications [SAND-78-7056] p0267 N81-18530
- Conceptual design study of concentrator enhanced  
solar arrays for space applications.  
Performance evaluation of 5 KW and 20 KW systems  
in Si and GaAs at 1 AU employing a flat plate  
trough concentrator [NASA-CR-164038] p0271 N81-19567
- Array automated assembly task low cost silicon  
solar array project, phase 2 [NASA-CR-164037] p0272 N81-19572
- Near-term implementation of projection cost  
reductions for photovoltaic concentrator array  
[SAND-80-7073] p0274 N81-19628
- Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 6, part 1: Cost and  
Programmatic [NASA-CR-3397] p0276 N81-20537
- LSA field test [NASA-CR-164083] p0276 N81-20544
- Proceedings of the 16th Project Integration Meeting  
[NASA-CR-164073] p0276 N81-20545
- Satellite Power System (SPS) utility integration:  
Institutional, planning and operational issues  
[EAC-R-4015] p0279 N81-20596
- The 10-kilowatt photovoltaic concentrator array  
fabrication [SAND-80-7062] p0279 N81-20599
- Satellite Power System (SPS) concept definition  
study (Exhibit D). Volume 2:  
Systems/subsystems analyses [NASA-CR-3393] p0280 N81-21491



# SUBJECT INDEX

# SOLAR CELLS

- Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project  
[NASA-CR-164134] p0281 881-21546
- SOLAR AUXILIARY POWER UNITS**  
Design improvements in LiBr absorption chillers for solar applications p0253 881-27558
- SOLAR BLANKETS**  
Blanket technology workshop report p0263 881-17576
- SOLAR CELLS**  
Titanium dioxide antireflection coating for silicon solar cells by spray deposition p0209 881-19766  
New method for maximum power consideration in solar cells with and without resistive losses p0209 881-19951  
The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells p0209 881-20007  
Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells p0209 881-20008  
The properties of polycrystalline silicon solar cells with controlled titanium additions p0209 881-20010  
Determination of lifetimes and recombination currents in p-n junction solar cells, diodes, and transistors p0209 881-20011  
Interactions of efficiency and material requirements for terrestrial silicon solar cells p0210 881-20295  
Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems p0215 881-21954  
The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states p0215 881-22155  
Two-dimensional analysis of the interdigitated back-contact solar cell p0216 881-22197  
Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells p0216 881-22198  
Theory of photo induced open circuit voltage decay in a solar cell p0216 881-22200  
Solar energy conversion by chloroplast photoelectrochemical cells p0216 881-22349  
Comparison of solar cell performance to calculations using different energy band-gap narrowing models p0217 881-22861  
Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells p0217 881-22872  
Molecular beam epitaxial GaAs heteroface solar cell grown on Ge p0217 881-22874  
Solar energy research and applications in China p0219 881-23703  
Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination p0219 881-23803  
Polycrystalline Zn<sub>3</sub>P<sub>2</sub> Schottky barrier solar cells p0220 881-24414  
An assessment of solar energy availability in different regions of the solar spectrum p0220 881-24429  
Solar energy breeders p0220 881-24430  
Merocyanine-dye photovoltaic cell on a plastic film p0220 881-24444  
Theoretical efficiency of S/p+ -n/IS solar cells p0221 881-24801  
Optimum cell size for concentrated-sunlight silicon solar cells p0221 881-24802
- Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency p0221 881-24803  
Method for evaluation of antireflection coatings p0221 881-24804  
The effects of intragrain defects on the local photoresponse of polycrystalline silicon solar cells p0221 881-24805  
An analytical model for solar cells p0221 881-24806  
Wide band wide angle reflection-reducing coatings for silicon cells p0221 881-24807  
Short wavelength spectral response of the tandem junction solar cell p0221 881-24808  
Heterojunction solar cells on cuprous oxide p0221 881-24809  
Inclusion of degeneracy in the analysis of heavily doped regions in silicon solar cells and other semiconductor devices p0221 881-24810  
Thermal storage cell for high temperature solar systems p0224 881-24993  
Prospects for developing an efficient photoemissive solar cell p0228 881-25049  
The effects of junction depth and impurity concentration on diffused junction solar cells p0228 881-25050  
Development trends for the mass production of low cost conductor-insulator-semiconductor /CIS/ solar cells p0228 881-25051  
Thin film photovoltaic solar energy conversion p0228 881-25054  
The DOE photovoltaic program - An overview p0228 881-25055  
Progress in batteries and solar cells. Volume 3 --- Book p0382 881-25601  
Efficient Si solar cells by laser photochemical doping p0229 881-25673  
Cu/x/S/Cd/y/Zn/1-y/S and Cu/x/S/Cd/y/Zn/1-y/S, CdS thin film solar cells using chemically sprayed films p0229 881-26355  
On the dynamic optimal coupling of a solar cell array to a load and storage batteries p0229 881-26372  
Dynamic matching of a solar-electrical /photovoltaic/ system - An estimation of the minimum requirements on the matching system p0229 881-26373  
Optimum operation of a combined system of a solar cell array and a dc motor p0229 881-26374  
Collection efficiency of low-mobility solar cells p0230 881-27010  
11.5% solar conversion efficiency in the photocathodically protected p-InP/V<sub>3</sub>/-V<sub>2</sub>/-HCl/C semiconductor liquid junction cell p0230 881-27014  
Photovoltaic Specialists Conference, 14th, San Diego, Calif., January 7-10, 1980, Conference Record p0230 881-27076  
Progress in the growth of wide silicon ribbons by the EPG technique at high speed using multiple growth stations --- Epitaxial Film Growth p0230 881-27078  
Development of processes for the production of low cost silicon dendritic web for solar cells. p0231 881-27080  
Ultra high speed growth of silicon ribbons for solar cells p0231 881-27081  
A silicon sheet casting experiment --- for solar cell water production p0231 881-27082  
Substrate related problems in RAD solar cells --- Ribbon Against Drop p0231 881-27084

## SOLAR CELLS CONTD

## SUBJECT INDEX

- Epitaxial solar cells on metallurgical grade silicon substrates p0231 A81-27085
- Behavior of interdigitated back-contact solar cells p0231 A81-27086
- Performance study of p+/n and n+/p solar cell structures on polycrystalline material p0231 A81-27087
- A two-dimensional model of an MIS inversion layer solar cell p0232 A81-27088
- Silicon solar cells with high open-circuit voltage p0232 A81-27089
- Design and performance characteristics of a solar photovoltaic power system at the Oklahoma Center for Science and Arts p0232 A81-27090
- Compatibility of BSR and BSF solar cell technology --- Back Surface Reflector and Back Surface Field p0232 A81-27093
- High efficiency wraparound contact solar cells /HEWACS/ p0232 A81-27094
- New developments in vertical junction silicon solar cells p0232 A81-27095
- Thin n-i-p silicon solar cell p0232 A81-27097
- Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model p0232 A81-27099
- Improved performance from thin film dielectric wraparound solar cells p0233 A81-27100
- The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells p0233 A81-27101
- Chemical and structural defects in thin film polycrystalline silicon solar cells p0233 A81-27105
- Simulation of the performance of a 100-kW-peak photovoltaic system p0233 A81-27108
- An overview of thin-film polycrystalline silicon research and development p0233 A81-27109
- Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110
- An overview of amorphous silicon solar-cell development p0234 A81-27111
- Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology p0234 A81-27113
- Evaluation and optimization of silicon sheet solar cells p0234 A81-27114
- Transport properties in 100 mm CZ silicon --- Czochralski p0234 A81-27115
- Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible p0234 A81-27116
- Solar cells and modules from dendritic web silicon p0234 A81-27117
- Recent progress in the development of the cascade solar cell p0235 A81-27118
- Low bandgap /0.7 to 1.1 eV/ solar cells in the Ga<sub>1-x</sub>AsSb/GaSb system p0235 A81-27119
- Performance losses in high-efficiency monolithic multijunction solar cells p0235 A81-27120
- A low-cost manufacturing process for thin-film solar cells p0235 A81-27121
- Pigmented tin oxide solar cell p0235 A81-27124
- Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 A81-27125
- Ion implanted grating type Si solar cells - Junction depth dependence p0235 A81-27126
- Design considerations for high efficiency polycrystalline silicon MIS solar cells p0236 A81-27127
- Vacuum deposited polycrystalline silicon solar cells for terrestrial use p0236 A81-27128
- Contiguous capillary coating of silicon on porous carbon substrates p0236 A81-27129
- Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells p0236 A81-27130
- Variation of diffusion length of ribbon-Si solar cells with light intensity p0236 A81-27131
- High efficiency silicon concentrator cells p0236 A81-27132
- Characterization of p+/nn+/ BSF silicon concentrator solar cells --- Back Surface Field p0236 A81-27133
- A low series resistance silicon photovoltaic cell for high intensity applications p0236 A81-27134
- The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight p0237 A81-27135
- Effects of nonuniform illumination on the performance of silicon concentrator solar cells p0237 A81-27136
- Design of metallization for higher-efficiency solar cells p0237 A81-27137
- Effects of temperature variation in concentrator cell series resistance measurements p0237 A81-27138
- Cuprous oxide MIS solar cells p0237 A81-27139
- Investigation of Cu<sub>2</sub>O solar cells p0237 A81-27140
- Characterization of ZnO for the fabrication of conductor-insulator-semiconductor /CIS/ solar cells p0237 A81-27141
- Thin film polycrystalline solar cells prepared by electrodeposition p0237 A81-27142
- ZnSe solar spectrum converter for GaAs solar cells p0237 A81-27143
- Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis p0238 A81-27146
- The spectral irradiance of some solar simulators and its effect on cell measurements p0238 A81-27147
- Concepts for GaAs//AlGa/As solar cells with valley-transferred electrons for voltage and efficiency enhancement p0238 A81-27154
- Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing p0238 A81-27156
- Polka Dot Solar Cell p0238 A81-27157
- A monolithic series-connected Al<sub>0.93</sub>Ga<sub>0.07</sub>As/GaAs solar cell array p0239 A81-27158
- Designing practical silicon solar cells approaching the 'limit conversion efficiency' p0239 A81-27159
- Theoretical design considerations for back surface field solar cells p0239 A81-27160
- Two modified single diode models for simulating solar cells with distributed series resistance p0239 A81-27161
- Theoretical limit efficiency of direct gap solar cells p0239 A81-27162
- Heterojunction solar cell design and evaluation p0239 A81-27163
- A new method of measuring diffusion length and surface recombination velocity --- for materials effects on solar cell efficiency p0239 A81-27164

- Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study  
p0239 A81-27165
- Majority carrier conduction effects in ITO/SiS solar cells --- Indium Titanium Oxide/Semiconductor-Insulator-Semiconductors  
p0239 A81-27166
- Progress toward large area amorphous silicon solar cells  
p0240 A81-27167
- The CdSe thin-film solar cell  
p0240 A81-27168
- Space solar cells - High efficiency and radiation damage  
p0240 A81-27174
- High efficiency silicon solar cells  
p0240 A81-27175
- Review of physics underlying recent improvements in silicon solar-cell performance  
p0241 A81-27176
- Laser processing for high-efficiency silicon solar cells  
p0241 A81-27177
- An investigation of the Cu/x/S-CdS structure for photovoltaic conversion using an Al film vacuum deposited process  
p0241 A81-27178
- A microstructural study of the heterojunction materials of the CdS-Cu<sub>2</sub>S solar cell  
p0241 A81-27179
- Growth and evaluation of CdS and /CdZn/S films for the fabrication of high performance photovoltaic devices  
p0241 A81-27180
- Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181
- The role of deep levels in controlling the photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction  
p0241 A81-27182
- Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells  
p0241 A81-27183
- Cu/x/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements  
p0241 A81-27184
- Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar cell with an interdigitated grid  
p0242 A81-27185
- Cells and modules for linear P.V. concentrator systems with forced cooling  
p0242 A81-27186
- Optimization of a photovoltaic receiver for a parabolic trough concentrator  
p0242 A81-27187
- Parabolic troughs concentrators photovoltaic module  
p0242 A81-27188
- A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings  
p0243 A81-27194
- Screenable silver and base metal solar cell contacts  
p0243 A81-27195
- A base-metal conductor system for silicon solar cells  
p0243 A81-27196
- An all-plated, low cost contact system for silicon solar cells  
p0243 A81-27197
- High performance BSF silicon solar cell with fire through contacts printed on AR coating --- Back Surface Field  
p0243 A81-27198
- Solid source diffusion process for silicon solar cells  
p0243 A81-27199
- Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing  
p0244 A81-27200
- Low-cost ion implantation and annealing technology for solar cells  
p0244 A81-27201
- Silicon solar cells realized by laser induced diffusion of deposited antimony  
p0244 A81-27202
- DLTS spectra and defect effects on irradiated silicon solar cells --- Deep Level Transient Spectroscopy  
p0244 A81-27203
- Influence of processing on the electrical performance of proton irradiated silicon solar cells  
p0244 A81-27205
- Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells  
p0244 A81-27207
- Nuclear radiation effects on the photovoltaic performance and interface states of Cr, p-type, single crystal, MISi solar cells  
p0244 A81-27208
- Summary results of the ATS-6 solar cell flight experiment  
p0244 A81-27209
- The U.S. National Photovoltaic Program  
p0188 A81-27212
- Photovoltaic research and development projects in Germany  
p0245 A81-27213
- Growth structure of cast silicon and related photovoltaic properties of solar cells  
p0245 A81-27214
- POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216
- The outlook for thin solar cells  
p0245 A81-27217
- Low cost processes for fabricating silicon solar cells  
p0245 A81-27218
- Cost effective, high throughput, junction formation techniques using spray-on dopants  
p0245 A81-27220
- Silicon solar cells with screen printed diffusion and metallization  
p0245 A81-27221
- Nickel contacts for low cost solar cells  
p0245 A81-27223
- An outlook for automated CIS solar cell factory  
p0246 A81-27228
- Economic feasibility of photovoltaic energy systems  
p0246 A81-27229
- Photovoltaic applications - Past and future  
p0246 A81-27231
- Short circuit currents and collection efficiencies in a-Si:H solar cells  
p0246 A81-27235
- Design of monolithic, multiple-gap, amorphous Si-Ge solar cells  
p0247 A81-27236
- Proposed design of a-Si:H solar cells using ultrathin active layer to increase conversion efficiency  
p0247 A81-27237
- Optimum design and device physics of the horizontally multilayered high voltage solar cells produced by plasma deposited amorphous silicon  
p0247 A81-27238
- Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239
- Simultaneous radiation damage and annealing of GaAs solar cells  
p0247 A81-27240
- High temperature properties of GaAlAs/GaAs heteroface solar cells  
p0247 A81-27242
- GaAs shallow-homojunction solar cells  
p0247 A81-27243
- Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems  
p0247 A81-27244
- Design and qualification of BSR-solar cells for future solar arrays --- Back-Side-Reflection  
p0248 A81-27250
- Advanced module technique with thin solar cells  
p0248 A81-27251
- Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions  
p0248 A81-27254
- SnO<sub>2</sub>/polycrystalline silicon solar cells  
p0248 A81-27255

- Degradation of ITO/p-Si solar cells --- Indium Tin Oxide p0248 A81-27257
- Low-cost high-efficiency  $\text{SnO}_2/\text{n}^+/\text{p}$  Si heteroface solar cell fabricated by paint-on-diffusant method p0249 A81-27259
- Grain size dependence of silicon solar cell parameters p0249 A81-27261
- Development of amorphous silicon cells p0249 A81-27262
- Photovoltaic behavior of amorphous silicon-based alloys p0249 A81-27263
- Optical absorption by gap states in amorphous silicon p0249 A81-27265
- Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics p0249 A81-27266
- Review of in-orbit performance of ESA's spacecraft solar arrays p0249 A81-27267
- MTS-2 solar cell experiment after two years in orbit p0249 A81-27268
- Integral glass covering of spacecraft solar cells by electrostatic bonding p0250 A81-27269
- High efficiency solar panel - Phase II p0250 A81-27270
- Performance and reliability of photovoltaic modules at various MIT LL test sites p0251 A81-27277
- Improved polycrystalline thin film gallium arsenide MOS solar cells p0251 A81-27281
- Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells p0251 A81-27282
- The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells p0251 A81-27283
- Grain boundary edge passivated solar cells on thin film GaAs p0251 A81-27284
- Efficient large-grained GaAs homojunction solar cells p0251 A81-27285
- Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287
- Chemistry and preparation of III-V heterojunction solar cells p0252 A81-27288
- High efficiency MIS/inversion layer silicon solar cells p0252 A81-27290
- MIS silicon grating solar cells on BSP substrates p0252 A81-27293
- A 14 percent efficiency  $\text{SnC}/\text{x}/\text{SiO}_2/\text{n}/\text{Si}$  solar cell p0252 A81-27294
- Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon p0252 A81-27295
- The ecliptic-align v-grooved hyperjunction cell p0252 A81-27296
- Stacked multiple-bandgap solar cells prepared by CVD techniques p0253 A81-27297
- Thin-film  $\text{CdS}/\text{Cu}_2\text{S}$  cells with high open-circuit voltage and low reflection losses p0253 A81-27299
- Dependence of efficiency of shallow junction silicon solar cells on substrate doping p0254 A81-28216
- Theoretical advantages of  $\text{pn}^+/\text{p}$ -type  $\text{Cu}_2\text{S}-\text{ZnO}$  solar cell p0346 A81-28395
- Theoretical analysis of simplified four wavelength division solar cell system p0254 A81-28926
- Chlorophyll sensitized solar photovoltaic cell with cuprous iodide electrode p0254 A81-28936
- Review of conductor-insulator-semiconductor /CIS/ solar cells p0254 A81-28954
- High efficiency 1.43 and 1.69 eV band gap  $\text{Ga}/\text{I-x}/\text{Al}/\text{x}/\text{As}-\text{GaAs}$  solar cells for multicolour applications p0255 A81-28958
- The state of solar technology p0255 A81-29196
- Effect of zinc impurity on silicon solar-cell efficiency p0256 A81-29290
- Development of simplified process for environmentally resistant cells [NASA-CR-163884] p0257 A81-16575
- Design, fabrication, test, qualification and price analysis for third generation design solar cell modules [NASA-CR-163917] p0257 A81-16576
- Automated array assembly, phase 2 [NASA-CR-163878] p0258 A81-16578
- Design, fabrication, and performance of a 20 percent efficient silicon solar cell [SAND-80-2225] p0258 A81-16592
- Research on high efficiency cascade solar cells [SERI/PR-8136-1-T1] p0258 A81-16595
- Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4745] p0259 A81-16606
- Automated array assembly task development of low-cost polysilicon solar cells [NASA-CR-163939] p0259 A81-17521
- Development of a high efficiency thin silicon solar cell [NASA-CR-163931] p0259 A81-17522
- The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology [NASA-TN-58229] p0193 A81-17526
- Space Photovoltaic Research and Technology 1980. High Efficiency, Radiation Damage and Blanket Technology [NASA-CR-2169] p0260 A81-17531
- NASA's high efficiency and radiation damage solar cell program p0260 A81-17532
- Recent progress in high-output-voltage silicon solar cells p0260 A81-17534
- Computer modeling of high-efficiency solar cells p0260 A81-17537
- The GaAs solar cell research and development programs of the Air Force p0260 A81-17542
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD p0261 A81-17543
- Study of process technology for GaAlAs/GaAs heteroface solar cells p0261 A81-17544
- High efficiency compound semiconductor concentrator photovoltaics p0261 A81-17545
- Status of Rockwell-BBC high efficiency solar cell programs p0261 A81-17546
- GaAs workshop report p0261 A81-17547
- Results of the Air Force high efficiency cascaded multiple bandgap solar cell programs p0261 A81-17548
- Incorporation of superlattice crystal layers in multijunction solar cells p0261 A81-17549
- AlGaAs-GaAs cascade solar cell p0261 A81-17550
- Fabrication of AlGaAs/GaAs cascade solar cell by LPE p0262 A81-17551
- OM-VPE grown materials for high efficiency solar cells p0262 A81-17552
- Cascade Solar Cell Workshop report p0262 A81-17553
- Three year performance of the MTS-2 solar cell experiment p0262 A81-17559
- The HEWAC pilot line experience p0262 A81-17574
- Design requirements for high-efficiency high concentration ratio space solar cells p0263 A81-17575

## SUBJECT INDEX

## SOLAR COLLECTORS

- Blanket technology workshop report p0263 N81-17576
- Silicon solar cell optimization [AD-A092908] p0263 N81-17579
- Energy: Solar energy programme of the Commission of the European Communities [EUR-6959-EN] p0263 N81-17593
- Flash photolysis studies of the semiconductor/electrolyte interface p0265 N81-18114
- Coplanar back contacts for thin silicon solar cells [NASA-CR-165272] p0266 N81-18495
- Development of an automatic heliostat cleaning system [SAND-79-8184] p0268 N81-18532
- Indium phosphide/cadmium sulfide thin-film solar cells [SERI/TR-8170-1-T2] p0268 N81-18533
- Fabrication and testing of MIS solar cells on a-Si:F:H [SERI/TR-8041-9-11] p0269 N81-18552
- Emerging materials for solar cell applications: Electrodeposited CdTe [SERI/PR-9152-1-T1] p0269 N81-18555
- Thin film polycrystalline silicon solar cells [SERI/PR-9192-1-T2] p0269 N81-18557
- Development of copper sulfide/cadmium sulfide thin film solar cells [SERI/PR-8143-1-T2] p0269 N81-18559
- The CdSiAs<sub>2</sub> thin films for solar cell applications [DOE/ET-23007/4] p0270 N81-18561
- Silicon solar cell design for medium concentration applications p0270 N81-18564
- Copper doped polycrystalline silicon solar cell [NASA-CASE-NPO-14670-1] p0270 N81-19558
- Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator [NASA-CR-764038] p0271 N81-19567
- Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells [NASA-CR-164012] p0271 N81-19568
- Development of megasonic cleaning for silicon wafers [NASA-CR-164011] p0271 N81-19569
- Process feasibility study in support of silicon material task 1 [NASA-CR-164009] p0271 N81-19570
- Optimization of transparent electrode for solar cells [SERI/PR-9318-1-T1] p0274 N81-19621
- GaAs(GaAl) as solar cells to be used under concentrated solar light condition [EUR-6934-EN] p0274 N81-19625
- Plasma-assisted CVD of fluorinated, hydrogenated amorphous silicon [SERI/TR-8041-2-T1] p0274 N81-19629
- Low cost sprayed CdTe solar cell research [DSE-4042-T34] p0275 N81-19631
- Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells [SAN-3045-3] p0275 N81-19634
- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications [NASA-TP-1811] p0276 N81-20173
- Proceedings of the 16th Project Integration Meeting [NASA-CR-164073] p0276 N81-20545
- The correction for spectral mismatch effects on the calibration of a solar cell when using a solar simulator [NASA-CR-164074] p0276 N81-20546
- Results of the 1980 NASA/JPL balloon flight solar cell calibration program [NASA-CR-164078] p0277 N81-20548
- Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 N81-20572
- Low cost, sprayed CdTe solar cell research [SERI/PR-8104-3-T2] p0279 N81-20585
- Experimental study to define developments for terrestrial solar cell generators [BNFT-FB-T-79-143] p0279 N81-20600
- Fabrication of amorphous silicon solar cells, using an industrial process --- based on a nitride plasma reactor [LEP-80.638.SRE-689-A] p0280 N81-20602
- Silicon solar cell process development, fabrication and analysis [NASA-CR-164164] p0281 N81-21541
- Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project [NASA-CR-164134] p0281 N81-21546
- Photovoltaic concentrator technology development project [SAND-80-2373] p0282 N81-21571
- Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides [IS-4759] p0283 N81-21583
- Amorphous thin films for solar-cell applications [SERI/PR-0-8254-F] p0283 N81-21591
- Chalcogenide-glass solar cells [DOE/ET-23043/T1] p0284 N81-21608
- Measuring dirt on photovoltaic modules, part 2 [COO-4094-86-PT-2] p0284 N81-21609
- SOLAR COLLECTORS**
- Optimization of fin and tube parameters in a flat-plate collector p0209 A81-19849
- A review of the application of modern control theory to solar energy systems p0210 A81-20490
- Interaction in Si<sub>3</sub>N<sub>4</sub>-C and BN-C systems under conditions of radiation heating p0210 A81-20906
- Method of calculating shading of heliostats in tower-type solar power plants p0211 A81-20907
- Heliostats and concentrators with variable reflecting-surface geometry p0211 A81-20908
- Optimal and suboptimal control policies for a solar collector system p0211 A81-21029
- Performance of solar collectors - An evaluation of standard ratings [ASME PAPER 80-WA/SOL-1] p0211 A81-21129
- Temperature variation in the absorber plate of an air heating flat plate solar collector [ASME PAPER 80-WA/SOL-2] p0211 A81-21130
- Analytical predictions of liquid and air photovoltaic/thermal flat-plate collector performance [ASME PAPER 80-WA/SOL-3] p0212 A81-21131
- Modeling and analysis of an all-fiberglass flat plate solar collector [ASME PAPER 80-WA/SOL-4] p0212 A81-21132
- Design and evaluation of a computer controlled solar collector simulator [ASME PAPER 80-WA/SOL-6] p0212 A81-21133
- Dynamic modeling and experimental simulation of active solar energy systems for the evaluation of control strategies [ASME PAPER 80-WA/SOL-14] p0213 A81-21139
- Frequency response analysis of fluid control systems for parabolic-trough solar collectors [ASME PAPER 80-WA/SOL-15] p0213 A81-21140
- Binary Rankine-cycle engines for solar-thermal power systems [ASME PAPER 80-WA/SOL-19] p0332 A81-21143
- Diffuse sky measurements and determination of corrected shadow band multiplication factors --- solar photovoltaic demonstration project [ASME PAPER 80-WA/SOL-26] p0213 A81-21150
- Analysis of two-phase flow solar collectors with application to heat pumps [ASME PAPER 80-WA/SOL-32] p0214 A81-21153
- Nocturnal radiation from a solar collector [ASME PAPER 80-WA/SOL-35] p0214 A81-21155
- Design of solar cells for use in photovoltaic/thermal collectors [ASME PAPER 80-WA/SOL-37] p0214 A81-21157
- Parametric analysis of louvered air-heating solar collectors [ASME PAPER 80-WA/SOL-38] p0214 A81-21158
- Operational characterization of the solar-thermal power system near Willard, New Mexico [ASME PAPER 80-WA/SOL-39] p0214 A81-21159
- Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium --- application to solar energy collection p0215 A81-21584

- Transparent heat mirrors - Influence of the materials on the optical characteristics p0215 A81-21939
- Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems p0215 A81-21954
- Performance study of air-heated packed-bed solar-energy collectors p0215 A81-21957
- Analysis by real-time holographic interferometry of heat transfer at the surface of cold solar collectors p0216 A81-22695
- A simplified non-linear model leading to full range valid calibration test of thermal solar collectors through simple experimental procedure p0217 A81-23009
- Energy collected by flat-plate collectors, not oriented toward the south p0218 A81-23010
- A Fresnel-Winston tandem concentrator system p0218 A81-23497
- Simple transient thermal model for solar collector/storage water heaters p0218 A81-23498
- The solar pond - A collector and store of solar energy p0219 A81-23701
- Solar energy research and applications in China p0219 A81-23703
- Comparison of commercial and do-it-yourself solar collectors p0219 A81-23704
- Optimum performance of thermal trap collectors p0220 A81-24432
- High temperature solar reactors for hydrogen production p0286 A81-24557
- Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq p0222 A81-24977
- A simulated comparison of the useful energy gain in fixed and tracking flat plate and evacuated tube collectors p0222 A81-24978
- Static endo-absorbent flat solar collector p0222 A81-24979
- A figure of merit for solar collectors with several separate absorber segments p0222 A81-24980
- Performance comparison of flat plate collector absorber coatings utilizing NBS Standard 74-635 and the ASHRAE Collector Performance Method p0222 A81-24981
- Performance of a flat type solar collector composed of the selective transparent and absorbing plates p0223 A81-24982
- Theoretical and experimental investigation of a flat-plate solar collector performance with the use of a solar simulator p0223 A81-24983
- Solar collector performance without flow measurement p0223 A81-24984
- Effects of dust on the performance of thermal and photovoltaic flat plate collectors in Saudi Arabia - Preliminary results p0223 A81-24985
- Solar image characteristics of concentrators p0223 A81-24986
- Analysis of a high-performance tubular solar collector p0223 A81-24987
- Development and study of a flat mirror multivalent concentrator p0223 A81-24988
- Investigations on the prediction of thermal performance of compound parabolic concentrators p0223 A81-24989
- Dynamic response analysis of a solar powered heliostropic fluid-mechanical drive system p0223 A81-24990
- Thermal energy storage in aquifers for a solar power plant. p0224 A81-24992
- Thermal storage cell for high temperature solar systems p0224 A81-24993
- Sensitivity analysis of a community solar system using annual cycle thermal energy storage p0224 A81-24998
- Membrane-lined thermal storage systems p0224 A81-25000
- Method of on site testing for performance rating of solar water heating systems p0225 A81-25014
- Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors p0225 A81-25015
- The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction p0225 A81-25016
- Bi-coolant flat plate solar collector p0226 A81-25023
- Convertible, tri-mode solar conversion system p0226 A81-25031
- Performance of a solar heating system on the LSU Field House determined from test data p0226 A81-25033
- Domestic utilization of solar energy in the Michigan area p0226 A81-25034
- Solar installation for process steam generation for a refinery p0227 A81-25038
- New solar still /the wiping spherical still/ - Design and experimentation p0227 A81-25042
- Solar energy power generators with advanced thermionic converters for spacecraft applications p0228 A81-25058
- Domestic solar water preheating versus solar water heating An economic evaluation p0229 A81-25064
- Feasibility study on the Porsche - Optimum design of solar collection on a fluctuating base p0288 A81-25149
- Performance test of a non-parabolic asymmetrical solar concentrator p0230 A81-26473
- The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport p0232 A81-27091
- Thick film conductive ink contacts for concentrator cells p0238 A81-27155
- Polka Dot Solar Cell p0238 A81-27157
- Cells and modules for linear P.V. concentrator systems with forced cooling p0242 A81-27186
- Efficiency and stability of experimental fluorescent planar concentrators /FPC/ p0242 A81-27190
- Minimizing end shadowing effects on parabolic concentrator arrays p0242 A81-27191
- Design and operation of the Solarex two-axis tracking linear concentrating collector system p0243 A81-27193
- Photovoltaic concentrators p0246 A81-27230
- Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234
- Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems p0247 A81-27244
- Solar input and solar data computation for the engineering of solar systems - Transients' simulation p0250 A81-27274
- A comparison of theory and experiment for photovoltaic/thermal collector performance p0250 A81-27276
- Second law analysis and synthesis of solar collector systems p0253 A81-27554
- Experimental comparison of control strategies for solar energy systems incorporating dual storage tanks p0253 A81-27556
- A non-linear flat-plate collector model p0254 A81-27571

- Digital holographic interferometry of convective heat transport p0254 A81-28737
- Optimization of fin and tube parameters in a flat-plate collector p0255 A81-29032
- The state of solar technology p0255 A81-29196
- Design and performance of a concentrating solar collector p0255 A81-29253
- Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums p0255 A81-29254
- A numerical approach for the prediction of the front losses of a flat-plate solar collector p0255 A81-29255
- Concentrating solar collectors for thermal and photovoltaic application p0256 A81-29256
- Dynamic behavior of a natural circulation loop for a solar collector p0256 A81-29261
- Central solar heating plants - Optimal ratio between solar collector area and heat storage volume p0256 A81-29262
- Solar selective surfaces --- Book p0256 A81-29684
- Small gas turbine with large parabolic dish collectors [ASME PAPER 81-GT-201] p0349 A81-30091
- Energy transport system optimization for distributed networks of solar collectors [ASME PAPER 81-SOL-1] p0365 A81-30109
- Storage requirement definition study [NASA-CR-163882] p0257 A81-16572
- Photovoltaic module soiling studies, May 1978 - October 1980 [DOE/JPL-1012-49] p0258 A81-16580
- Criteria for evaluation of reflective surface for parabolic dish concentrators [NASA-CR-163898] p0258 A81-16581
- Development and testing of heat transport fluids for use in active solar heating and cooling systems [NASA-TM-82395] p0368 A81-16584
- Environmental influences in the simulation of a solar space heating system [AD-A092436] p0190 A81-16587
- Comparative analysis of combined flat-plate PV/T collectors with separate PV/T collectors [SAND-80-1494] p0259 A81-16608
- Solar energy receiver for a Stirling engine [NASA-CASR-WFO-14619-1] p0259 A81-17518
- A conceptual design study of a high temperature solar thermal receiver (added tasks 6 and 7) [NASA-CR-163944] p0259 A81-17523
- Solar Energy Program: Protective solar collector systems from corrosion [NP-25154] p0264 A81-17605
- Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany [BMFT-FB-T-79-94] p0264 A81-17609
- Effect of wall suction on laminar entrance flow with application to solar air heaters p0265 A81-18488
- Thermal processes in flat plate solar collectors --- conduction, convective radiative heat transfer p0266 A81-18503
- Description and thermal performance of corrugated solar collectors --- made of extruded aluminum p0266 A81-18504
- Advanced solar collectors (concentrating troughs) --- paraboloid mirrors, mathematical models p0267 A81-18505
- Omnium-G parabolic dish optical efficiency: A comparison of two independent measurement techniques [SERI/TR-631-544] p0267 A81-18520
- Barstow heliostat mirror glass characterization [FNL-3576] p0267 A81-18522
- Development of an automatic heliostat cleaning system [SAND-79-8184] p0268 A81-18532
- Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors [DOE/AL-04266/T1] p0268 A81-18537
- Thin-film flat-plate solar collectors for low cost manufacture and installation [BNL-51124] p0269 A81-18545
- Midtemperature Solar Systems Test Facility Program for predicting thermal performance of line-focusing, concentrating solar collectors [SAND-80-1964] p0269 A81-18551
- Thermal performance predictions of flat-plate solar collector air heaters p0270 A81-18566
- Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study [UCLA-12/1268] p0197 A81-18576
- Advanced solar concentrator mass production, operation, and maintenance cost assessment [NASA-CR-164039] p0271 A81-19571
- CSU Solar House 3 solar heating and cooling system performance [DOE/CS-30122/T1] p0272 A81-19587
- Development of a combined photovoltaic/thermal linear receiver for a parabolic trough concentrator [SAND-80-7138] p0272 A81-19595
- Fatigue-creep lifetime analysis of four advanced central receiver concepts [SAND-80-8047] p0273 A81-19612
- Development of sheet molding compound solar collectors with molded-in silvered glass reflective surfaces [SAND-80-0702] p0273 A81-19613
- Pump heat loss test report --- solar collector systems [SAND-80-2526] p0273 A81-19614
- Cost-performance comparison of water-steam receivers for solar central electric power plants [SAND-80-8245] p0273 A81-19615
- Transparent glass honeycomb structures for energy loss control [UCLA-ENG-8039] p0274 A81-19622
- A solar heating plant in Studsvik: Design and first year operational performance [PB81-114480] p0275 A81-19640
- Evaluation of solar collectors for heat pump applications [DOE/CS-35351/T1] p0278 A81-20568
- Solar collector foundation designs [SAND-80-7070] p0279 A81-20582
- Flat plate thermal solar collectors: A physical background [PB81-135741] p0280 A81-20605
- Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980 [SOLAR/1014-80/14] p0281 A81-21557
- Handbook of experiences in the design and installation of solar heating and cooling systems [DOE/CS-32224/T1] p0282 A81-21566
- Midtemperature solar systems test facility predictions for thermal performance of the Acurex solar collector with PER 244 reflector surface [SAND-80-1964/3] p0282 A81-21568
- Photovoltaic concentrator technology development project [SAND-80-2373] p0282 A81-21571
- Photovoltaic concentrator array production process study. Volume 2: Study results [SAND-79-7055/2] p0282 A81-21574
- Yearly average performance of the principal solar collector tapes [SERI/TR-631-716] p0282 A81-21579
- Line-Focus Solar Central Power System, phase 1. Volume 1: Executive summary [DOE/ET-20550/2-VOL-1] p0283 A81-21598
- Line-Focus Solar Central Power System, phase 1. Volume 2: Text [DOE/ET-20550/2-VOL-2] p0283 A81-21599
- Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1 [FNL-3533-VOL-1] p0283 A81-21605

# SOLAR ELECTRIC PROPULSION

# SUBJECT INDEX

## SOLAR COOLING

- Capacity modulation of solar-fired absorption chillers with single and multi-temperature energizing sources p0210 A81-20493
- Analysis and design of hybrid double-absorption cooling systems for low grade thermal energy applications [ASME PAPER 80-WA/HT-44] p0211 A81-21113
- The parallel heat pump and photovoltaic heating and cooling - Phase II [ASME PAPER 80-WA/SOL-40] p0214 A81-21160
- PREHEAT - A passive solar system simulation program p0216 A81-22212
- Thermochemical storage for solar heating and cooling p0219 A81-23702
- Solar-powered saline sorbent-solution heat pump/storage system p0224 A81-25001
- Solar air conditioning with solid absorbents and earth cooling p0226 A81-25025
- Solar air conditioning in a hot arid climate p0226 A81-25027
- Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems p0226 A81-25028
- Design improvements in LiBr absorption chillers for solar applications p0253 A81-27558
- Development and testing of heat transport fluids for use in active solar heating and cooling systems [NASA-TN-82395] p0368 A81-16584
- Energy: Solar energy programme of the Commission of the European Communities [EUR-6959-EN] p0263 A81-17593
- Passive solar energy information user study [SERI/TR-751-746] p0273 A81-19607
- Solar/performance goals for solar and ground-coupled heat pump systems [BNL-51259] p0273 A81-19609
- Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study [DOE/CS-30108/T3] p0278 A81-20567
- Analysis of field test data on residential heating and cooling [EPRI-EA-1649] p0204 A81-21561
- Handbook of experiences in the design and installation of solar heating and cooling systems [DOE/CS-32224/T1] p0282 A81-21566

## SOLAR ELECTRIC PROPULSION

- Solar electric propulsion systems - A survey p0211 A81-20910
- Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions p0248 A81-27254
- Prospects for enhancing SEF array performance p0262 A81-17572

## SOLAR ENERGY

- Temperature stratification in hot water solar thermal storage tanks [AIAA PAPER 81-0368] p0210 A81-20787
- Frameworks for modeling learning on the supply side of solar technology market penetration studies p0215 A81-21958
- Solar energy market penetration models - Science or number mysticism p0218 A81-23026
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1 - Solar energy p0222 A81-24976
- Advanced solar thermal storage medium test data and analysis p0224 A81-24994
- Solar standards and testing activities in developed and developing countries p0229 A81-25096
- Energy accounting for solar and alternative energy sources p0382 A81-25165

- Solar input and solar data computation for the engineering of solar systems - Transients' simulation p0250 A81-27274
  - Fundamentals and applications of solar energy; Proceedings of the Seventy-Second Annual Meeting, San Francisco, Calif., November 25-29, 1979 p0382 A81-29251
  - Central station market development strategies for photovoltaics [NASA-CR-163947] p0193 A81-17520
  - Solar power B and D for Air Force space requirements p0260 A81-17533
  - Fuels and chemicals made from solar energy: Options for the 1990's and beyond [DOE/CS-21051/01] p0263 A81-17586
  - Construction of a complete all season conditioning with solar energy of an office building of 260 m2 and its operation [EUR-6702-EN] p0263 A81-17589
  - Survey of EPA facilities for solar thermal energy applications [NASA-CR-162469] p0265 A81-17617
  - Introduction to meteorological measurements and data handling for solar energy applications [DOE/ER-0084] p0265 A81-17681
  - High temperature thermal energy storage in aquifers with a solar power plant application p0377 A81-18486
  - Heat exchange and solar energy, volume 1 --- conference proceedings, Rhode-Saint-Genese, Belgium, 18 Jan. - 1 Feb. 1980 [VKI-LS-1980-2-VOL-1] p0266 A81-18499
  - Boston solar retrofits: Studies of solar access and economics [DOE/CS-10047/T5] p0268 A81-18538
  - Terrestrial photovoltaic system analysis [AD-A094827] p0272 A81-19578
  - Passive solar energy information user study [SERI/TR-751-746] p0273 A81-19607
  - Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings [ANL/EES-TN-116] p0383 A81-19611
  - A solar heating plant in Studsvik: Design and first year operational performance [PB81-114480] p0275 A81-19640
  - Hot water from the Sun: A consumer guide to solar water heating [PB81-128597] p0275 A81-19647
  - Heat exchange and solar energy, volume 2 --- conference proceedings, Rhode Saint Genese, Belgium [VKI-LS-1980-2-VOL-2] p0277 A81-20549
  - Latent and chemical storage --- solar energy, thermochemical storage p0277 A81-20550
  - The benefits of advanced heat storage systems --- solar energy, phase changes, encapsulation, heat of fusion p0277 A81-20551
  - The a priori decision in solar energy and conservation economics p0278 A81-20558
  - Photovoltaics information user study [SERI/TR-751-652] p0278 A81-20570
  - Solar options in central Europe. A synthesis of solar technology assessment and contemporary criteria in 1978-1979 [IIASA-RR-79-14] p0280 A81-21489
  - Current and future industrial energy service characterizations, volume 1 [SERI/TR-733-790-VOL-1] p0206 A81-21618
  - Survey of US industrial process heat usage distributions [SAND-80-8234] p0206 A81-21622
- ## SOLAR ENERGY ABSORBERS
- The controlling influence of the Cu2S optical absorption coefficient on the short-circuit currents of Cu2S/CdS solar cells p0209 A81-20007
  - Capacity modulation of solar-fired absorption chillers with single and multi-temperature energizing sources p0210 A81-20493
  - Temperature variation in the absorber plate of an air heating flat plate solar collector [ASME PAPER 80-WA/SOL-2] p0211 A81-21130



- Nocturnal radiation from a solar collector  
[ASME PAPER 80-WA/SOL-35] p0214 A81-21155
- Design of solar cells for use in photovoltaic/thermal collectors  
[ASME PAPER 80-WA/SOL-37] p0214 A81-21157
- Parametric analysis of louvered air-heating solar collectors  
[ASME PAPER 80-WA/SOL-38] p0214 A81-21158
- A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques  
p0215 A81-21956
- Static endo-absorbent flat solar collector  
p0222 A81-24979
- A figure of merit for solar collectors with several separate absorber segments  
p0222 A81-24980
- Performance comparison of flat plate collector absorber coatings utilizing HBS Standard 74-635 and the ASHRAE Collector Performance Method  
p0222 A81-24981
- Performance of a flat type solar collector composed of the selective transparent and absorbing plates  
p0223 A81-24982
- Solar image characteristics of concentrators  
p0223 A81-24986
- Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages  
p0225 A81-25021
- Heterojunction solar cell design and evaluation  
p0239 A81-27163
- High-flux solar absorber concept for central receiver power plants  
p0253 A81-27557
- Design improvements in LiBr absorption chillers for solar applications  
p0253 A81-27558
- Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums  
p0255 A81-29254
- A numerical approach for the prediction of the front losses of a flat-plate solar collector  
p0255 A81-29255
- Solar selective surfaces --- Book  
p0256 A81-29684
- Technical evaluation of gaseous suspensions of graphite for the absorption of concentrated solar radiation  
[EPFL-ITA-6] p0272 A81-19574
- Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating  
[LA-OR-80-2930] p0280 A81-20936
- SOLAR ENERGY CONVERSION**
- On the possible use of MHD generators in solar energy systems  
p0209 A81-19813
- Efficiency of energy storage in photochemical electron transfer reactions  
p0371 A81-19897
- Solar Energy Management System  
p0210 A81-20492
- Solar-pumped gas laser development  
[AIAA PAPER 81-0098] p0210 A81-20600
- Design of self-calibrating controllers for heliostats in a solar power plant  
p0211 A81-21030
- Binary Rankine-cycle engines for solar-thermal power systems  
[ASME PAPER 80-WA/SOL-19] p0332 A81-21143
- High temperature solar thermal technology  
[ASME PAPER 80-WA/SOL-20] p0213 A81-21144
- Comparison of several models for long term monthly average daily insolation on horizontal surfaces and the estimation of horizontal surface insolation for 16 U. S. locations  
[ASME PAPER 80-WA/SOL-28] p0213 A81-21152
- Heat transfer and the future of solar energy utilization  
[ASME PAPER 80-WA/SOL-41] p0215 A81-21161
- Electrochemical semiconductor solar energy converters  
p0215 A81-21674
- Surface charge and specific ion adsorption effects in photoelectrochemical devices  
p0215 A81-22148
- Solar energy conversion by chloroplast photoelectrochemical cells  
p0216 A81-22349
- Mapping of solar radiation for use in the Sudanese-Sahelian region of Africa  
p0217 A81-23007
- Solar input and solar energy resources  
p0217 A81-23008
- Identification of a solar pumping installation  
p0218 A81-23012
- A solar biotechnology based on microalgae  
p0218 A81-23015
- Solar energy research and applications in China  
p0219 A81-23703
- Solar satellites - The trillion dollar question  
p0219 A81-23724
- A consideration of possible receiver designs for solar tower plants  
p0220 A81-24426
- Solar radiation estimates in Malaysia  
p0220 A81-24428
- An assessment of solar energy availability in different regions of the solar spectrum  
p0220 A81-24429
- Solar energy breeders  
p0220 A81-24430
- Availability modeling methodology applied to solar power systems  
p0220 A81-24431
- Irradiance estimates for Zambia  
p0220 A81-24434
- Sede Boger shallow pond project  
p0220 A81-24448
- Fluids for energy transport and conversion in solar power stations  
p0220 A81-24616
- Modeling of a solar-pumped iodine laser  
p0221 A81-24618
- Optimum cell size for concentrated-sunlight silicon solar cells  
p0221 A81-24802
- Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq  
p0222 A81-24977
- A figure of merit for solar collectors with several separate absorber segments  
p0222 A81-24980
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2 - Solar Energy 2  
p0381 A81-25004
- Numerical resolution of the heat transfer equations in a latent heat solar energy storage system  
p0224 A81-25005
- Heat transfer through a paraffin wax solar energy storage characterized by a temperature dependent specific heat  
p0224 A81-25006
- Enhancement of low grade heat via the HYSOS chemical heat pump --- Hydride Conversion and Storage System  
p0225 A81-25018
- Convertible, tri-mode solar conversion system  
p0226 A81-25031
- Domestic utilization of solar energy in the Michigan area  
p0226 A81-25034
- Solar installation for process steam generation for a refinery  
p0227 A81-25038
- Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy  
p0227 A81-25039
- Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3 - Solar energy 3  
p0381 A81-25040
- Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills  
p0227 A81-25041
- New solar still /the wiping spherical still/ - Design and experimentation  
p0227 A81-25042

## SOLAR ENERGY CONVERSION CONTD

## SUBJECT INDEX

- Solar desalination by freezing and distillation p0227 A81-25043
- More on dual purpose solar-electric power plants p0227 A81-25045
- A solar-powered organic vapour power cycle with electricity generation p0228 A81-25047
- Combined solar and fossil fuel systems for electric power generation p0381 A81-25048
- Thin film photovoltaic solar energy conversion p0228 A81-25054
- Solar thermionic power plant. II p0228 A81-25057
- Solar energy power generators with advanced thermionic converters for spacecraft applications p0228 A81-25058
- Study of combined /photovoltaic-thermal/ solar energy systems p0228 A81-25059
- An analysis of macroeconomic effects of increased market penetration by solar energy technologies p0229 A81-25060
- Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices p0187 A81-25061
- Overall efficiencies for conversion of solar energy to a chemical fuel p0288 A81-25148
- Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage p0288 A81-25151
- Development of solar-hydrogen systems using metal hydrides p0289 A81-25158
- Solar perspectives - Solar pond power, the Israel-California connection p0230 A81-26402
- High efficiency wraparound contact solar cells /BEWACS/ p0232 A81-27094
- ZnSe solar spectrum converter for GaAs solar cells p0237 A81-27143
- Low-cost conversion of polycrystalline silicon into sheet by HEM and FAST --- Heat Exchanger Method and Fixed Abrasive Slicing Technique p0238 A81-27145
- Efficiency and stability of experimental fluorescent planar concentrators /FPC/ p0242 A81-27190
- Photovoltaic intermediate applications p0247 A81-27246
- Second law analysis and synthesis of solar collector systems p0253 A81-27554
- An algorithm for calculating monthly-average radiation on inclined surfaces p0253 A81-27555
- Dependence of efficiency of shallow junction silicon solar cells on substrate doping p0254 A81-28216
- Theoretical analysis of simplified four wavelength division solar cell system p0254 A81-28926
- Chlorophyll sensitized solar photovoltaic cell with cuprous iodide electrode p0254 A81-28936
- Review of conductor-insulator-semiconductor /CIS/ solar cells p0254 A81-28954
- Solar selective surfaces --- Book p0256 A81-29684
- Solar-pumped gas laser development [NASA-TM-81894] p0257 A81-16437
- Storage requirement definition study [NASA-CR-163882] p0257 A81-16572
- Dish Stirling solar receiver program [NASA-CR-163889] p0257 A81-16574
- Central station market development strategies for photovoltaics [NASA-CR-163947] p0193 A81-17520
- Automated array assembly task development of low-cost polysilicon solar cells [NASA-CR-163939] p0259 A81-17521
- Evaluation of a two-phase turbine for solar electric power generation [DOE/ET-20431/T1] p0263 A81-17587
- US solar energy policy for less developed countries [DOE/CS-10048/T1] p0194 A81-17598
- Appropriate sizing of solar heating systems [SERI/TR-333-320] p0264 A81-17600
- Residential use of photovoltaics [DOE/ET-20279/109] p0264 A81-17604
- Flash photolysis studies of the semiconductor/electrolyte interface p0265 A81-18114
- Closed-cycle helium gas turbine for solar tower power plant p0353 A81-18247
- Design study of a kinematic Stirling engine for dispersed solar electric power systems [NASA-CR-159588] p0265 A81-18492
- Coplanar back contacts for thin silicon solar cells [NASA-CR-165272] p0266 A81-18495
- General introduction to thermal conversion of solar energy p0266 A81-18500
- Development of economic house type based upon passive solar energy utilization and energy conservation for high density urban planning [DOE/R5-10104/1] p0196 A81-18514
- Electrochemical photovoltaic cells [SERI/PR-9175-1-T2] p0267 A81-18521
- Solar central receiver systems comparative economics [SERI/SP-633-637] p0267 A81-18523
- Assessment of solar options for large power applications [PNL-SA-8968] p0268 A81-18542
- Solar/hydro integration study [DOE/SP-10505/4] p0355 A81-18558
- Photochemical solar energy conversion in surfactant vehicles [DOE/R5-10601/1] p0269 A81-18560
- Copper doped polycrystalline silicon solar cell [NASA-CASE-NPO-14670-1] p0270 A81-19558
- Development of megasonic cleaning for silicon wafers [NASA-CR-164011] p0271 A81-19569
- Technical evaluation of gaseous suspensions of graphite for the absorption of concentrated solar radiation [EPFL-ITA-6] p0272 A81-19574
- Electrochemical photovoltaic cells [SERI/TR-8002-5-T1] p0272 A81-19582
- Review of activities and plans for solar energy in Federal buildings [DOE/CR-10001/T2] p0200 A81-19590
- Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results [SERI/TR-351-461-VOL-1] p0273 A81-19618
- Project SAGE: Solar assisted gas energy [DOE/TIC-11105] p0274 A81-19624
- A 10 kW small solar power station and operations optimization [BHPT-PB-T-79-139] p0275 A81-19638
- Residential solar design review: A manual on community architectural controls and solar energy use [PB81-128605] p0275 A81-19648
- Environmental data for sites in the National Solar Data Network [SOLAR/0010-80/12] p0276 A81-19665
- Considerations in the design of solar engines p0276 A81-20536
- LSA field test [NASA-CR-164083] p0276 A81-20544
- Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 A81-20572
- October 1980 environmental data for sites in the National Solar Data Network [SOLAR/0010-80/10] p0279 A81-20588
- High concentration silicon photovoltaic cell development [SAND-80-7068] p0279 A81-20595
- Direct thermal water splitting by concentrated solar radiation for hydrogen production. Phase 0: Proof of concept experiment [NASA-CR-164137] p0291 A81-21210
- Solar hot water system installed at Las Vegas, Nevada [NASA-CR-161642] p0281 A81-21535
- Silicon solar cell process development, fabrication and analysis [NASA-CR-164164] p0281 A81-21541

# SUBJECT INDEX

# SOLAR HEATING

- Solar energy in Italy: A profile of renewable energy activity in its national context [SEBI/SP-763-718] p0204 N81-21576
- Alternate sources of energy [COBF-8009109] p0384 N81-21580
- Line-Focus Solar Central Power System, phase 1. Volume 1: Executive summary [DOE/ET-20550/2-VOL-1] p0283 N81-21598
- Line-Focus Solar Central Power System, phase 1. Volume 2: Text [DOE/ET-20550/2-VOL-2] p0283 N81-21599
- Line-Focus Solar Central Power System, phase 1. Volume 3: Appendices [DOE/ET-20550/2-VOL-3] p0283 N81-21600
- The 10 kilowatt photovoltaic concentrator system as installed at Sandia Laboratories, 1979 [SAND-80-7063] p0283 N81-21601
- Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1 [PNL-3533-VOL-1] p0283 N81-21605
- Construction of a photovoltaic power system at Natural Bridges National Monument [DOE/ET-20279/94] p0283 N81-21607
- Measuring dirt on photovoltaic modules, part 2 [COO-4094-86-PT-2] p0284 N81-21609
- Methodology for estimating future market values of solar thermal technologies [SAND-80-8248] p0284 N81-21617
- Photovoltaics industry profile [DOE/RL-01830/T3] p0284 N81-21619
- Preparation of monthly maps of solar availability for New Mexico based on satellite photography [END-78-2131] p0284 N81-21668
- Environmental data for sites in the National Solar Data Network, January 1981 [SOLAR/0010-81/01] p0284 N81-21710
- SOLAR FLUX**
- High-flux solar absorber concept for central receiver power plants p0253 N81-27557
- Thermal performance predictions of flat-plate solar collector air heaters p0270 N81-18566
- SOLAR FLUX DENSITY**
- Energy collected by flat-plate collectors, not oriented toward the south p0218 N81-23010
- Experimental apparatus for cooling of photovoltaic cells at high concentration p0218 N81-23011
- SOLAR FURNACES**
- Solar coal gasification [DOE/TIC-11384] p0279 N81-20587
- SOLAR GENERATORS**
- Thermal storage requirements for parabolic dish solar power plants [ASME PAPER 80-WA/SOL-21] p0213 N81-21145
- Operational characterization of the solar-thermal power system near Willard, New Mexico [ASME PAPER 80-WA/SOL-39] p0214 N81-21159
- The photovoltaic-aeolian plant at Passo Mandrioli /Italy/ p0218 N81-23013
- Solar energy breeders p0220 N81-24430
- High temperature solar power tower plants - Concept considerations and operational criteria p0227 N81-25044
- Solar power generation by ground thermal energy conversion p0227 N81-25046
- The construction cost of thermal storage for solar systems p0229 N81-25062
- Photovoltaic research and development projects in Germany p0245 N81-27213
- The aerodynamics of heliostats for solar power plant applications p0253 N81-27310
- Development and study of a lead telluride/germanium telluride solar thermoelectric generator p0254 N81-28588
- Active cooling system alternatives for concentrating photovoltaic systems p0256 N81-29265
- On the safety to solar electric power generation p0256 A81-29269
- Combined gas and steam cycle for a gas-cooled solar tower power plant [ASME PAPER 81-GT-102] p0348 A81-30008
- Small gas turbine with large parabolic dish collectors [ASME PAPER 81-GT-201] p0349 A81-30091
- Task report no. 3. Systems analysis of organic Rankine bottoming cycles [PSI-TR-245] p0354 N81-18529
- Satellite Power Systems (SPS) space transportation cost analysis and evaluation [NASA-CR-164020] p0273 N81-19610
- Satellite Power System (SPS) public outreach experiment [NASA-CR-164022] p0275 N81-19635
- Thermomechanical solar power/electricity generation. Technico-economic problems and prospectives of development and application p0277 N81-20556
- Experimental study to define developments for terrestrial solar cell generators [BMFT-FB-T-79-143] p0279 N81-20600
- An acoustic measurement of boiling instabilities in a solar receiver [SAND-80-2409] p0284 N81-21621
- SOLAR HEATING**
- Use of the ATOP system in the control of an off-peak storage device --- Ambient Temperature Observer/Predictor in heating system p0371 A81-20491
- Design procedure and application of solar-assisted series heat pump systems [ASME PAPER 80-WA/SOL-9] p0212 A81-21135
- Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems [ASME PAPER 80-WA/SOL-10] p0212 A81-21136
- Economic analysis and optimization of solar residential space heating [ASME PAPER 80-WA/SOL-11] p0212 A81-21137
- Comparison of liquid solar thermal storage subsystems in the national solar data network [ASME PAPER 80-WA/SOL-36] p0214 A81-21156
- The parallel heat pump and photovoltaic heating and cooling - Phase II [ASME PAPER 80-WA/SOL-40] p0214 A81-21160
- Performance study of air-heated packed-bed solar-energy collectors p0215 A81-21957
- PREHEAT - A passive solar system simulation program p0216 A81-22212
- A dish-Stirling solar-thermal power system p0217 A81-22897
- The potential for solar space heating in Scotland p0217 A81-22898
- Thermochemical storage for solar heating and cooling p0219 A81-23702
- Solar collector performance without flow measurement p0223 A81-24984
- Effects of dust on the performance of thermal and photovoltaic flat plate collectors in Saudi Arabia - Preliminary results p0223 A81-24985
- Analysis of a high-performance tubular solar collector p0223 A81-24987
- Dynamic response analysis of a solar powered heliostatic fluid-mechanical drive system p0223 A81-24990
- A cycle life tester for the long-term stability of phase change materials for thermal energy storage p0372 A81-24997
- Sensitivity analysis of a community solar system using annual cycle thermal energy storage p0224 A81-24998
- The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building p0224 A81-24999
- Membrane-lined thermal storage systems p0224 A81-25000
- Solar-powered saline sorbent-solution heat pump/storage system p0224 A81-25001
- Trombe-Michel wall using phase change materials --- for solar heating of buildings p0224 A81-25007

- Experimental results from the first year of operation of the solar ground coupling research facility of Brookhaven National Laboratory  
p0225 A81-25009
- A new formal graphic language for the representation of complex energy distribution systems  
p0225 A81-25010
- Solar water heating demonstration program for public schools in New Mexico  
p0225 A81-25013
- Method of on site testing for performance rating of solar water heating systems  
p0225 A81-25014
- Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors  
p0225 A81-25015
- The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction  
p0225 A81-25016
- Enhancement of low grade heat via the HXCSOS chemical heat pump --- Hydride Conversion and Storage System  
p0225 A81-25018
- Ammoniated salt heat pump --- using solar energy or industrial waste energy for space heating and cooling  
p0372 A81-25019
- The series solar heat pump and energy conservation  
p0186 A81-25020
- Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages  
p0225 A81-25021
- Direct solar air heating in Denmark /56 deg N/- Heating strategies in theory and practice  
p0225 A81-25022
- Bi-coolant flat plate solar collector  
p0226 A81-25023
- Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems  
p0226 A81-25028
- A simple method for computing the dynamic response of passive solar buildings to design weather conditions  
p0226 A81-25029
- Report on the measuring data evaluation of the first large-scale solar heated building in Austria  
p0226 A81-25032
- Performance of a solar heating system on the LSU Field House determined from test data  
p0226 A81-25033
- A 'two-tank' seasonal storage concept for solar space heating of buildings  
p0372 A81-25035
- A non-conventional reversible total energy system --- solar heating and electric power  
p0186 A81-25036
- Solar energy assisted fluidized bed fruit drying  
p0227 A81-25037
- Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy  
p0227 A81-25039
- Study of combined /photovoltaic-thermal/ solar energy systems  
p0228 A81-25059
- Solar energy for multi-residential water heating - An economic approach  
p0229 A81-25063
- Domestic solar water preheating versus solar water heating An economic evaluation  
p0229 A81-25064
- The Total Solar House  
p0230 A81-26401
- The state of solar technology  
p0255 A81-29196
- Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums  
p0255 A81-29254
- A numerical approach for the prediction of the front losses of a flat-plate solar collector  
p0255 A81-29255
- Dynamic behavior of a natural circulation loop for a solar collector  
p0256 A81-29261
- Central solar heating plants - Optimal ratio between solar collector area and heat storage volume  
p0256 A81-29262
- Production of fuels from high temperature solar thermal systems - Economic analysis  
p0256 A81-29268
- Heat transport in groundwater systems. Volume 2: Laboratory model  
[PB81-104135]  
p0375 A81-16523
- Development and testing of heat transport fluids for use in active solar heating and cooling systems  
[NASA-TM-82395]  
p0368 A81-16584
- Performance of a solar-heated assembly building at Sandia National Laboratories  
[SAND-80-0599]  
p0258 A81-16593
- Energy: Solar energy programme of the Commission of the European Communities  
[EUR-6959-EE]  
p0263 A81-17593
- Program plan for reliability and maintainability in active solar heating and cooling systems  
[DOE/CS-36010/01]  
p0264 A81-17596
- Appropriate sizing of solar heating systems  
[SERI/TR-333-320]  
p0264 A81-17600
- Solar coal gasification: Plant design and economics  
[UCML-84610]  
p0265 A81-18225
- Effect of wall suction on laminar entrance flow with application to solar air heaters  
p0265 A81-18488
- Boston solar retrofits: Studies of solar access and economics  
[DOE/CS-10047/T5]  
p0268 A81-18538
- The US Air Force Academy solar energy research project summary report  
[AD-A094802]  
p0199 A81-19576
- Terrestrial photovoltaic system analysis  
[AD-A094827]  
p0272 A81-19578
- Computer simulation of solar air heating systems using rock bed thermal storage units  
[AD-A094771]  
p0377 A81-19580
- Solar gasification of carbonaceous materials  
[UCRL-53063]  
p0272 A81-19605
- Passive solar energy information user study  
[SERI/TR-751-746]  
p0273 A81-19607
- Solar/performance goals for solar and ground-coupled heat pump systems  
[BNL-51259]  
p0273 A81-19609
- Project SA68: Solar assisted gas energy  
[DOE/TIC-11105]  
p0274 A81-19624
- Solar production of industrial process hot water: Operation and evaluation of the Campbell Scup hot water solar facility  
[SAND-1218-4]  
p0274 A81-19626
- Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California  
[EPRI-EM-1654]  
p0275 A81-19630
- A solar heating plant in Studsvik: Design and first year operational performance  
[PB81-114480]  
p0275 A81-19640
- A method to tune the various components of a solar heating system --- economic factors and cost analysis  
p0277 A81-20552
- Water systems modeling --- solar collectors and heating systems  
p0277 A81-20554
- System modeling using THERSYS computer simulation --- solar heating  
p0277 A81-20555
- A life-cycle model for solar heating system design and economic evaluation Michigan Economic Model for Solar Heating (MESM)  
p0278 A81-20559
- Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study  
[DOE/CS-30108/T3]  
p0278 A81-20567
- Optimization of storage in passive solar heating systems  
[DOE/CS-35405/T1]  
p0278 A81-20574
- Handbook for calculating solar-influenced building heat losses  
[SAND-79-2173]  
p0279 A81-20583
- Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating  
[LA-UR-80-2930]  
p0280 A81-20936

# SUBJECT INDEX

# SOLAR POWER SATELLITES

- Solar hot water system installed at Las Vegas, Nevada  
[NASA-CR-161642] p0281 N81-21535
- Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana  
[SOLAR/1001-80/14] p0363 N81-21552
- Hulco Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980  
[SOLAR/1043-80/14] p0281 N81-21553
- Solar energy system performance evaluation: Kalwall Corporation, Manchester, New Hampshire  
[SOLAR/2015-80/14] p0281 N81-21554
- Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation  
[SOLAR/2029-80/14] p0281 N81-21555
- Performance of active solar domestic hot water heating systems  
[SOLAR/0024-80/41] p0281 N81-21556
- Solar energy system performance evaluation: Hea Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980  
[SOLAR/1014-80/14] p0281 N81-21557
- Analysis of field test data on residential heating and cooling  
[EPRI-EA-1649] p0204 N81-21561
- Handbook of experiences in the design and installation of solar heating and cooling systems  
[DOE/CS-32224/T1] p0282 N81-21566
- Solar space and water heating system at Stanford University, Central Food Services Building  
[DOE/CS-31522/T1] p0283 N81-21603
- SOLAR HOUSES**
- Use of the ATOP system in the control of an off-peak storage device --- Ambient Temperature Observer/Predictor in heating system  
p0371 N81-20491
- Radiation and free convection shield for passive thermal control --- in solar buildings  
[ASME PAPER 80-WA/SOL-7] p0212 N81-21134
- The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building  
p0224 N81-24999
- Performance of a solar heating system on the LSU Field House determined from test data  
p0226 N81-25033
- A solar-powered organic vapour power cycle with electricity generation  
p0228 N81-25047
- The Total Solar House  
p0230 N81-26401
- Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30384/1] p0263 N81-17592
- A natural convection solar house system --- air heating  
p0267 N81-18506
- Development of economic house type based upon passive solar energy utilization and energy conservation for high density urban planning  
[DOE/R5-10104/1] p0196 N81-18514
- Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30371/1] p0267 N81-18515
- Performance of air collector house heating systems with rock bed storage --- solar heating  
p0277 N81-20553
- Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana  
[SOLAR/1001-80/14] p0363 N81-21552
- Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence  
[SAND-80-7148] p0282 N81-21575
- SOLAR MAXIMUM MISSION**
- Solar Maximum Mission (SMM) in-flight performance  
p0281 N81-21523
- SOLAR PONDS (HEAT STORAGE)**
- Simple transient thermal model for solar collector/storage water heaters  
p0218 N81-23498
- The solar pond - A collector and store of solar energy  
p0219 N81-23701
- A solar-pond power plant  
p0219 N81-24056
- Sede Boquer shallow pond project  
p0220 N81-24448
- Solar perspectives - Solar pond power, the Israel-California connection  
p0230 N81-26402
- Construction and startup performance of the Miamasbury salt-gradient solar pond  
p0253 N81-27552
- Salt gradient solar pond with reflective bottom - Application to the 'saturated' pond  
p0254 N81-27570
- Some basic considerations and possible improvements on the solar pond  
[ANL-CT-80-23] p0268 N81-18540
- World activity in solar ponds  
[UCID-18900] p0282 N81-21564
- SOLAR POWER SATELLITES**
- Environmental assessment for the satellite power system concept development and evaluation program  
[AIAA PAPER 81-0244] p0185 N81-20695
- Preliminary environmental assessment for the satellite power system /SPS/  
p0186 N81-22548
- Utility of and technology for a space central power station  
[AIAA PAPER 81-0449] p0216 N81-22763
- Effects of a satellite power system on ground-based radio and radar astronomy  
p0216 N81-22838
- Solar satellites - The trillion dollar question  
p0219 N81-23724
- Energy from space - A survey of activities for power generation using space technology  
p0219 N81-23861
- SPS design with solid-state transmitter  
p0365 N81-24831
- Workshop on the microwave power transmission system for the solar power satellite - Review panel report  
p0365 N81-24832
- An assessment of the atmospheric effects of a Satellite Power System  
p0187 N81-25053
- Solar energy power generators with advanced thermionic converters for spacecraft applications  
p0228 N81-25058
- Solar Power Satellite Microwave Transmission and Reception  
[NASA-CR-2141] p0365 N81-16533
- Solar power satellite microwave power transmission system description executive summary  
p0365 N81-16535
- SPS large array simulation --- spacetennas  
p0365 N81-16537
- Design and breadboard evaluation of the SPS reference phase control system concept  
p0366 N81-16543
- Coherent multiple tone technique for ground based SPS control  
p0366 N81-16544
- An interferometer-based phase control system  
p0366 N81-16545
- A sonic satellite power system microwave power transmission simulation  
p0366 N81-16546
- SPS phase control studies  
p0366 N81-16547
- SPS fiber optic link assessment  
p0366 N81-16548
- Ionospheric effects in active retrodirective array and mitigating system design  
p0366 N81-16549
- High efficiency SPS klystron design  
p0366 N81-16550
- High efficiency klystron for the SPS application  
p0366 N81-16551
- Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies  
p0367 N81-16552
- The adapting of the crossed-field directional amplifier to the requirements of the SPS  
p0367 N81-16553
- Reference System Description  
p0367 N81-16554
- The history of the development of the rectenna --- solar power satellites  
p0257 N81-16558

## SOLAR RADIATION

## SUBJECT INDEX

Rectenna system design --- energy conversion solar power satellites p0257 N81-16559

Modified reference SPS with solid state transmitting antenna p0367 N81-16564

SPS solid state antenna power combiner p0367 N81-16565

Solid state systems concepts --- solar power satellite transmission p0367 N81-16566

Solid state device technology for Solar Power Satellite p0368 N81-16567

Solid state sandwich concept: Designs, considerations and issues --- solar power satellite transmission p0368 N81-16568

Satellite Power System (SPS) magnetron tube assessment study [NASA-CR-3383] p0368 N81-18490

Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 N81-18493

Summary of LSST systems analysis and integration task for SPS flight test articles p0270 N81-19177

A theoretical study of microwave beam absorption by a rectenna [NASA-CR-160921] p0369 N81-20328

A theoretical study of microwave beam absorption by a rectenna, introduction --- solar power satellites p0369 N81-20329

Tropospheric/ionospheric transmission tests p0369 N81-20335

Analysis of the utilization of lunar resources for space power systems. Part 1: System definition and model structure [ILR-MITT-73/1980-PT-1] p0284 N81-21628

**SOLAR RADIATION**

Solar radiation estimates in Malaysia p0220 A81-24428

An assessment of solar energy availability in different regions of the solar spectrum p0220 A81-24429

Irradiance estimates for Zambia p0220 A81-24434

Static endo-absorbent flat solar collector p0222 A81-24979

Solar collector performance without flow measurement p0223 A81-24984

Solar image characteristics of concentrators p0223 A81-24986

Dynamic response analysis of a solar powered heliostatic fluid-mechanical drive system p0223 A81-24990

An algorithm for calculating monthly-average radiation on inclined surfaces p0253 A81-27555

Meteorological data: Measurement techniques and solar components --- solar radiation, meteorological data p0266 N81-18501

Meteorological data: Treatment of radiation data, test reference year --- solar radiation p0266 N81-18502

Considerations in the design of solar engines p0276 N81-20536

Preparation of monthly maps of solar availability for New Mexico based on satellite photography [SND-78-2131] p0284 N81-21668

**SOLAR REFLECTORS**

Optical analysis of point focus parabolic radiation concentrators p0219 A81-24332

Solar image characteristics of concentrators p0223 A81-24986

Development and study of a flat mirror multivalent concentrator p0223 A81-24988

Simplified methods for analyzing the performance of parabolic dish systems p0255 A81-29252

Solar selective surfaces --- Book p0256 A81-29684

Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 N81-20572

## SOLAR SIMULATORS

Design and evaluation of a computer controlled solar collector simulator [ASME PAPER 80-WA/SOL-6] p0212 A81-21133

Theoretical and experimental investigation of a flat-plate solar collector performance with the use of a solar simulator p0223 A81-24983

The spectral irradiance of some solar simulators and its effect on cell measurements p0238 A81-27147

## SOLAR SPECTRA

An assessment of solar energy availability in different regions of the solar spectrum p0220 A81-24429

Theoretical analysis of simplified four wavelength division solar cell system p0254 A81-26926

## SOLAR TERRESTRIAL INTERACTIONS

Solar input and solar data computation for the engineering of solar systems - Transients' simulation p0250 A81-27274

Research and Technology: Annual report [NASA-TN-82314] p0384 N81-21949

## SOLAR THERMAL PROPULSION

Energy: Solar energy programme of the Commission of the European Communities [EUR-6959-EN] p0263 N81-17593

## SOLAR TOTAL ENERGY SYSTEMS

High temperature solar thermal technology [ASME PAPER 80-WA/SOL-20] p0213 A81-21144

The Solar-Meteorological Research Program for the South-Central U.S. [ASME PAPER 80-WA/SOL-24] p0213 A81-21148

Convertible, tri-mode solar conversion system p0226 A81-25031

A non-conventional reversible total energy system --- solar heating and electric power p0186 A81-25036

Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy p0227 A81-25039

The Total Solar House p0230 A81-26401

Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems p0247 A81-27244

The state of solar technology p0255 A81-29196

Energy transport system optimization for distributed networks of solar collectors [ASME PAPER 81-SOL-1] p0365 A81-30109

Gallium arsenide photovoltaic dense array for concentrator applications [SAND-78-7056] p0267 N81-18530

CSU Solar House 3 solar heating and cooling system performance [DOE/CS-30122/T1] p0272 N81-19587

Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation [SOLAR/2029-80/14] p0281 N81-21555

Interim performance criteria for photovoltaic energy systems [SEI/TR-742-654] p0282 N81-21577

## SOLDEBS

Nickel contacts for low cost solar cells p0245 A81-27223

## SOLENOIDS

Superconductive energy storage for diurnal use by electric utilities p0371 A81-23440

Shape optimization study for a three-tunnel superconductive energy storage magnet p0374 A81-26861

## SOLID ELECTRODES

Electrical effects of coal slag in a diffuse mode MHD generator [AIAA PAPER 81-0176] p0329 A81-26651

Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips p0337 A81-23747

On the flow of an ionized gas in a MHD generator with segmented electrodes p0337 A81-24811

# SUBJECT INDEX

# SPACE FLIGHT

- Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode  
p0372 A81-25322
- Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance  
p0372 A81-25323
- Flat-plate tubular TP lead-acid traction battery for electric vehicles  
p0373 A81-25603
- Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte  
p0343 A81-25611
- SOLID ELECTROLYTES**  
High temperature batteries  
p0373 A81-25567  
Room temperature cells with solid electrolytes  
p0373 A81-25568
- SOLID PHASES**  
Solid source diffusion process for silicon solar cells  
p0243 A81-27199
- SOLID STATE DEVICES**  
SPS design with solid-state transmitter  
p0365 A81-24831  
Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis  
p0347 A81-29243  
Microwave power transmission system workshop, session on solid state  
p0367 A81-16563  
Modified reference SPS with solid state transmitting antenna  
p0367 A81-16564  
SPS solid state antenna power combiner  
p0367 A81-16565  
Solid state systems concepts --- solar power satellite transmission  
p0367 A81-16566  
Solid state device technology for Solar Power Satellite  
p0368 A81-16567  
Solid state sandwich concept: Designs, considerations and issues --- solar power satellite transmission  
p0368 A81-16568
- SOLID STATE PHYSICS**  
Optimum design and device physics of the horizontally multilayered high voltage solar cells produced by plasma deposited amorphous silicon  
p0247 A81-27238
- SOLID SURFACES**  
An algorithm for calculating monthly-average radiation on inclined surfaces  
p0253 A81-27555
- SOLID SUSPENSIONS**  
Combustion of coal suspension fuels using air atomizers  
p0299 A81-25129
- SOLID WASTES**  
Trash to energy  
p0300 A81-25162  
The Bridgeport resource recovery system  
p0300 A81-25163  
Design and management for resource recovery. Volume 2 - High technology & failure analysis --- Book on materials and energy reclamation projects from solid wastes  
p0300 A81-25225  
Design and management for resource recovery. Volume 1 - Energy from waste --- Book  
p0300 A81-25551  
Methane production from the Mountain View landfill  
p0300 A81-25553  
The Pompano Beach RefCOM facility  
p0300 A81-25554  
The Niagara Falls resource recovery system  
p0301 A81-25557  
The Ames Resource Recovery facility  
p0301 A81-25558  
Municipal solid waste comminution by steam explosion  
p0301 A81-25561  
An investigation on Tehran municipal solid waste with the view of electricity generation  
p0302 A81-26474
- Municipal solid waste to energy act of 1979 [GPO-60-684]  
p0192 A81-16956
- Characterization of solid waste conversion and cogeneration systems  
[DOE/EV-0105]  
p0307 A81-17585
- Environmental impact assessment guidelines for new source coal gasification facilities  
[EB81-114555]  
p0195 A81-17635
- Military wastes-to-energy applications  
p0314 A81-18483
- SOLID-SOLID INTERFACES**  
The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states  
p0215 A81-22155
- SOLUBILITY**  
Salt gradient solar pond with reflective bottom - Application to the 'saturated' pond  
p0254 A81-27570
- SOLVENT EXTRACTION**  
Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments  
p0309 A81-18211  
Fuel alcohol extraction technology commercialization conference [CONF-801212]  
p0311 A81-18233
- SOLVENT REFINED COAL**  
Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions  
p0294 A81-23495  
Exxon donor solvent liquefaction process  
p0304 A81-28998  
Stress corrosion studies in solvent refined coal liquefaction pilot plants  
[OBNL/TE-7513]  
p0321 A81-21179
- SOLVENTS**  
EDS coal liquefaction process development, phase 4-5 --- donor solvent technique  
[FE-2893-53]  
p0312 A81-18240
- SONIC BOOMS**  
Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site  
[LBL-11978]  
p0270 A81-18572
- SORGHUM**  
Development of sweet sorghum as an energy crop. Volume 3: Integration concepts  
[BRI-2054-VOL-3]  
p0316 A81-19334
- SPACE COOLING (BUILDINGS)**  
Analysis and design of hybrid double-absorption cooling systems for low grade thermal energy applications  
[ASME PAPER 80-WA/HT-44]  
p0211 A81-21113  
Thermal energy storage in aquifers for a solar power plant  
p0224 A81-24992  
Engineering development of a HYSOS chemical heat pump --- Hydride Conversion and Storage System  
p0287 A81-25017  
Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems  
p0226 A81-25028  
The Total Solar House  
p0230 A81-26401  
Program plan for reliability and maintainability in active solar heating and cooling systems  
[DOE/CS-36010/01]  
p0264 A81-17596  
Development of an improved degree-day concept by analysis of historical weather data for predicting energy requirements of buildings  
p0198 A81-18620  
Analysis of alternative strategies for energy conservation in new buildings  
[FNL-3309]  
p0199 A81-15353  
CSU Solar House 3 solar heating and cooling system performance  
[DOE/CS-30122/T1]  
p0272 A81-15587  
Review of activities and plans for solar energy in Federal buildings  
[DOE/CR-10001/22]  
p0200 A81-19590
- SPACE FLIGHT**  
The boundless dimension - Space flight. Volume 1 - Prospects and problems --- German book  
p0383 A81-29688

## SPACE HEATING (BUILDINGS)

Use of the ATOP system in the control of an off-peak storage device --- Ambient Temperature Observer/Predictor in heating system p0371 A81-20491

Radiation and free convection shield for passive thermal control --- in solar buildings [ASME PAPER 80-WA/SOL-7] p0212 A81-21134

Design procedure and application of solar-assisted series heat pump systems [ASME PAPER 80-WA/SOL-9] p0212 A81-21135

Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems [ASME PAPER 80-WA/SOL-10] p0212 A81-21136

Economic analysis and optimization of solar residential space heating [ASME PAPER 80-WA/SOL-11] p0212 A81-21137

Comparison of liquid solar thermal storage subsystems in the national solar data network [ASME PAPER 80-WA/SOL-36] p0214 A81-21156

Performance study of air-heated packed-bed solar-energy collectors p0215 A81-21957

The potential for solar space heating in Scotland p0217 A81-22898

The absorption process for heating, cooling and energy storage - An historical survey p0381 A81-23496

Thermochemical storage for solar heating and cooling p0219 A81-23702

Thermal energy storage in aquifers for a solar power plant p0224 A81-24992

Sensitivity analysis of a community solar system using annual cycle thermal energy storage p0224 A81-24998

The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building p0224 A81-24999

Membrane-lined thermal storage systems p0224 A81-25000

Trombe-Michel wall using phase change materials --- for solar heating of buildings p0224 A81-25007

Solar water heating demonstration program for public schools in New Mexico p0225 A81-25013

Engineering development of a HYCSOS chemical heat pump --- Hydride Conversion and Storage System p0287 A81-25017

The series solar heat pump and energy conservation p0186 A81-25020

Direct solar air heating in Denmark /56 deg N/ - Heating strategies in theory and practice p0225 A81-25022

Bi-coolant flat plate solar collector p0226 A81-25023

A simple method for computing the dynamic response of passive solar buildings to design weather conditions p0226 A81-25029

Report on the measuring data evaluation of the first large-scale solar heated building in Austria p0226 A81-25032

Performance of a solar heating system on the LSU Field House determined from test data p0226 A81-25033

A 'two-tank' seasonal storage concept for solar space heating of buildings p0372 A81-25035

Study of combined /photovoltaic-thermal/ solar energy systems p0228 A81-25059

Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices p0187 A81-25061

Trash to energy p0300 A81-25162

The Total Solar House p0230 A81-26401

Central solar heating plants - Optimal ratio between solar collector area and heat storage volume p0256 A81-29262

Environmental influences in the simulation of a solar space heating system [AD-A092436] p0190 A81-16587

Performance of a solar-heated assembly building at Sandia National Laboratories [SAND-80-0599] p0258 A81-16593

Construction of a complete all season conditioning with solar energy of an office building of 260 m2 and its operation [EUR-6702-EN] p0263 A81-17589

Program plan for reliability and maintainability in active solar heating and cooling systems [DOE/CS-36010/01] p0264 A81-17596

Development of an improved degree-day concept by analysis of historical weather data for predicting energy requirements of buildings p0198 A81-18620

Analysis of alternative strategies for energy conservation in new buildings [FNL-3309] p0199 A81-19353

The US Air Force Academy solar energy research project summary report [AD-A094802] p0199 A81-19576

CSU Solar House 3 solar heating and cooling system performance [DOE/CS-30122/T1] p0272 A81-19587

Review of activities and plans for solar energy in Federal buildings [DOE/CR-10001/T2] p0200 A81-19590

Surface-heating greenhouses with waste heated water [DOE/R5-10107/T1] p0200 A81-19620

Performance of air collector house heating systems with rock bed storage --- solar heating p0277 A81-20553

Groundwater as an alternative energy source for space heating and cooling, geothermal heat extraction [DOE/TIC-11357] p0320 A81-20571

Handbook for calculating solar-influenced building heat losses [SAND-79-2173] p0279 A81-20583

Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating [LA-UR-80-2930] p0280 A81-20936

Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana [SOLAR/1001-80/14] p0363 A81-21552

Hulco Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980 [SOLAR/1043-80/14] p0281 A81-21553

Solar energy system performance evaluation: Kalwall Corporation, Manchester, New Hampshire [SOLAR/2015-80/14] p0281 A81-21554

Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation [SOLAR/2029-80/14] p0281 A81-21555

Municipal geothermal heat utilization plan for Glenwood Springs, Colorado [DOE/ID-12049-3] p0324 A81-21585

Solar space and water heating system at Stanford University, Central Food Services Building [DOE/CS-31522/T1] p0283 A81-21603

The economics of residential energy efficiency [FNL-SA-8696] p0206 A81-21624

**SPACE INDUSTRIALIZATION**

Utility of air and technology for a space central power station [ATIA PAPER 81-0449] p0216 A81-22763

Extraction of oxygen and metals from lunar ores p0222 A81-24827

**SPACE LOGISTICS**

Space construction technology needs [ATIA PAPER 81-0442] p0381 A81-22757

**SPACE MANUFACTURING**

Extraction of oxygen and metals from lunar ores p0222 A81-24827

**SPACE MISSIONS**

Space platform reference mission studies overview p0383 A81-19174

**SPACE PLATFORMS**

Space platform reference mission studies overview p0383 A81-19174

Summary of LSST systems analysis and integration task for SPS flight test articles p0270 A81-19177

**SPACE PROGRAMS**

The boundless dimension - Space flight. Volume 1 - Prospects and problems --- German book p0383 A81-29688



- SPACE SHUTTLE PAYLOADS**  
Space construction technology needs  
[AIAA PAPER 81-0442] p0381 A81-22757
- SPACE TRANSPORTATION**  
Satellite Power Systems (SPS) space transportation  
cost analysis and evaluation  
[NASA-CR-164020] p0273 N81-19610
- SPACE TRANSPORTATION SYSTEM**  
Research and Technology: Annual report  
[NASA-TN-82314] p0384 N81-21949
- SPACEBORNE EXPERIMENTS**  
Three year performance of the NTS-2 solar cell  
experiment  
p0262 N81-17559
- SPACECRAFT POWER SUPPLIES**  
Radiatively coupled thermionic and thermoelectric  
power system concept  
[AIAA PAPER 81-0217] p0329 A81-20683  
High power silver zinc and thermal batteries for  
missiles and aviation applications  
p0373 A81-25612  
Space solar cells - High efficiency and radiation  
damage  
p0240 A81-27174  
Summary results of the ATS-6 solar cell flight  
experiment  
p0244 A81-27209  
Review of in-orbit performance of ESA's spacecraft  
solar arrays  
p0249 A81-27267  
NTS-2 solar cell experiment after two years in orbit  
p0249 A81-27268  
Integral glass covering of spacecraft solar cells  
by electrostatic bonding  
p0250 A81-27269  
Concentrator designs for space photovoltaic arrays  
p0250 A81-27271  
Commercial (terrestrial) and modified solar array  
design studies for low cost, low power space  
applications  
[NASA-TN-81622] p0259 N81-17266  
Efficient structures for geosynchronous spacecraft  
solar arrays  
p0262 N81-17573  
Blanket technology workshop report  
p0263 N81-17576  
Satellite Power System (SPS) utility integration:  
Institutional, planning and operational issues  
[EAC-R-4015] p0279 N81-20596  
High energy density batteries for satellite  
applications  
p0379 N81-21505  
Solar Maximum Mission (SMM) in-flight performance  
p0281 N81-21523  
RCA Satcom in-orbit experience  
p0379 N81-21526
- SPACECRAFT PROPULSION**  
Radiatively coupled thermionic and thermoelectric  
power system concept  
[AIAA PAPER 81-0217] p0329 A81-20683
- SPACETENNAS**  
SPS large array simulation --- spacetennas  
p0365 N81-16537
- SPAIN**  
Thermal mapping, geothermal source location,  
natural effluents and plant stress in the  
Mediterranean coast of Spain  
[E81-10119] p0323 N81-21423
- SPECIFIC HEAT**  
Heat transfer through a paraffin wax solar energy  
storage characterized by a temperature dependent  
specific heat  
p0224 A81-25006
- SPECTRAL CORRELATION**  
The correction for spectral mismatch effects on  
the calibration of a solar cell when using a  
solar simulator  
[NASA-CR-164074] p0276 N81-20546
- SPECTRAL ENERGY DISTRIBUTION**  
The spectral irradiance of some solar simulators  
and its effect on cell measurements  
p0238 A81-27147
- SPECTRAL LINE WIDTH**  
Wide band wide angle reflection-reducing coatings  
for silicon cells  
p0221 A81-24807
- SPECTRAL REFLECTANCE**  
Coatings with induced transmission  
p0211 A81-20973
- Method for evaluation of antireflection coatings  
p0221 A81-24804  
Design and qualification of ESR-solar cells for  
future solar arrays --- Back-Side-Reflection  
p0248 A81-27250
- SPECTRAL SENSITIVITY**  
Design of solar cells for use in  
photovoltaic/thermal collectors  
[ASME PAPER 80-WA/SOL-37] p0214 A81-21157  
Short wavelength spectral response of the tandem  
junction solar cell  
p0221 A81-24808  
Performance of a flat type solar collector  
composed of the selective transparent and  
absorbing plates  
p0223 A81-24982  
Short circuit currents and collection efficiencies  
in a-SiH<sub>x</sub> solar cells  
p0246 A81-27235  
High temperature properties of GaInAs/GaAs  
heteroface solar cells  
p0247 A81-27242
- SPECULAR REFLECTION**  
Heliostats and concentrators with variable  
reflecting-surface geometry  
p0211 A81-20908
- SPEED CONTROL**  
The characteristics of two, simple, automatic  
speed-control devices for horizontal axis  
wind-turbines  
p0338 A81-25070
- SPHERES**  
New solar still /the wiping spherical still/ -  
Design and experimentation  
p0227 A81-25042
- SPLITTING**  
Development of multistep processes for  
thermochemical hydrogen production using nuclear  
heat. A summary --- and water splitting  
technology  
[BNFT-FB-T-79-121] p0291 N81-19339
- SPRAYED COATINGS**  
Titanium dioxide antireflection coating for  
silicon solar cells by spray deposition  
p0209 A81-19766  
Cu<sub>x</sub>/S/Cd<sub>y</sub>/Zn<sub>1-y</sub>/S and Cu<sub>x</sub>/S/Cd<sub>y</sub>/Zn<sub>1-y</sub>/S, CdS  
thin film solar cells using chemically sprayed  
films  
p0229 A81-26355  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181  
Cost effective, high throughput, junction  
formation techniques using spray-on dopants  
p0245 A81-27220  
Low cost sprayed CdTe solar cell research  
[DSE-4042-T34] p0275 N81-19631  
Low cost, sprayed CdTe solar cell research  
[SERI/PR-8104-3-T2] p0279 N81-20585
- SPUTTERING**  
CO-sputtered doped amorphous silicon as a  
photovoltaic material  
p0249 A81-27264  
The CdSiAs<sub>2</sub> thin films for solar cell applications  
[DOE/ET-23007/4] p0270 N81-18561  
Chalcogenide-glass solar cells  
[DOE/ET-23043/T1] p0284 N81-21608
- STABILITY TESTS**  
Aeroelastic stability and response analysis of  
large horizontal-axis wind turbines  
p0335 A81-23697  
Efficiency and stability of experimental  
fluorescent planar concentrators /FPC/  
p0242 A81-27190
- STACKS**  
Improvement of phosphoric acid fuel cell stacks  
[AD-A092814] p0351 N81-16589  
Cell module and fuel conditioner  
[NASA-CR-165189] p0354 N81-18494  
Cell module and fuel conditioner development  
[NASA-CR-165190] p0357 N81-19573
- STANDARDS**  
Solar standards and testing activities in  
developed and developing countries  
p0229 A81-25096  
Verification test of jet industries Electra-Van  
1000P  
[AD-A093738] p0376 N81-17961

# **STATIC LOADS**

# **SUBJECT INDEX**

Alternative fuels utilization and the automotive emission certification process  
[DOE/CS-56051/T1] p0316 N81-19336

A reference building approach to building energy performance standards for single-family residences [PB81-135642] p0201 N81-20318

Results of the 1980 NASA/JPL balloon flight solar cell calibration program  
[NASA-CR-164078] p0277 N81-20548

Dimensions/NBS. Volume 64, no. 8, October 1980 [PB81-133654] p0384 N81-21007

Improved data and procedures needed for development and implementation of building energy performance standards [PB81-138422] p0206 N81-21630

**STATIC LOADS**

Static deflection and eigenfrequency analysis of the Nibe wind turbine rotors. Theoretical background --- structural vibration [RISOE-M-2199] p0357 N81-19497

**STATIONKEEPING**

Preliminary designs for modular OTEC platforms' station-keeping subsystems, volume 3 [DOE/NOAA/OTEC-30-VOL-3] p0363 N81-21592

**STATISTICAL ANALYSIS**

Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3 p0293 N81-22278

A statistical study of coal sulfur variability and related factors [PB81-111585] p0195 N81-17644

Oil ganglion dynamics in flow through porous media p0313 N81-18314

**STATISTICAL DISTRIBUTIONS**

The estimation of the parameters of the distribution of wind speed and direction p0294 N81-23069

**STEAM**

Suppression of steam condensate corrosion at Wairakei Geothermal Project p0294 N81-22774

Trash to energy p0300 N81-25162

Heavy oil reservoirs recoverable by thermal technology --- steam injection [DOE/ET-12380/1-VOL-3] p0317 N81-19540

**STEAM FLOW**

Solar installation for process steam generation for a refinery p0227 N81-25038

Development status of the Steam-Iron Process for hydrogen production p0287 N81-25142

Municipal solid waste comminution by steam explosion p0301 N81-25561

Geothermal reservoir engineering computer code comparison and validation using the GEONZ simulator program [DOE/SF-11450/1] p0314 N81-18478

**STEAM TURBINES**

Combined gas-steam turbine cycle using coal derived liquid fuel - A viable alternative to direct combustion of coal p0341 N81-25119

Comparison of the HTTT reheat-gas-turbine combined cycle with the HTTT nonreheat gas-turbine combined cycle --- High-Temperature Turbine Technology [ASME PAPER 81-GT-69] p0348 N81-29978

Combined gas and steam cycle for a gas-cooled solar tower power plant [ASME PAPER 81-GT-102] p0348 N81-30008

Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels [NASA-TN-81611] p0351 N81-16571

Steam turbines for large power outputs p0360 N81-20427

Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 1: Main report [NP-25187-VOL-1] p0203 N81-20563

Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 2: Economic potential [NP-25187-VOL-2] p0360 N81-20564

**STILLS**

New solar still /the wiping spherical still/ - Design and experimentation p0227 N81-25042

**STIRLING CYCLE**

A dish-Stirling solar-thermal power system p0217 N81-22897

The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources p0342 N81-25131

Calculation of the internal heat exchange cycle of a Stirling engine --- Russian book p0343 N81-25625

Dish Stirling solar receiver program [NASA-CR-163889] p0257 N81-16574

Solar energy receiver for a Stirling engine [NASA-CASE-NPO-14619-1] p0259 N81-17518

Design study of a kinematic Stirling engine for dispersed solar electric power systems [NASA-CR-159588] p0265 N81-18492

Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range [DOE/ET-15208/1] p0355 N81-18562

Advanced propulsion system concept for hybrid vehicles [NASA-CR-159772] p0198 N81-18935

Automotive technology development program [DOE/CS-0069/1] p0356 N81-19464

Considerations in the design of solar engines p0276 N81-20536

Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range, volume 1 [DOE/ET-15207/T2-VOL-1] p0363 N81-21581

Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1 [PNL-3533-VOL-1] p0283 N81-21605

**STOCKPILING**

Observations on test stockpiles of dried lignite and subbituminous coals [DOE/GPETC/RI-80/5] p0321 N81-21217

**STORAGE BATTERIES**

Electrochemical power sources: Primary and secondary batteries --- Book p0373 N81-25565

Alkaline storage batteries p0373 N81-25566

Recent developments in secondary batteries for use in electric vehicles p0373 N81-25606

Major electrochemical developments related to the energy problem p0382 N81-25610

Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte p0374 N81-25613

A preliminary investigation of an Al/FeS2 secondary cell p0374 N81-25615

On the dynamic optimal coupling of a solar cell array to a load and storage batteries p0229 N81-26372

Development of sodium/sulfur batteries --- as storage batteries [BMFT-PB-T-79-60] p0376 N81-17607

Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCRL-15259] p0376 N81-17963

**STORAGE STABILITY**

A cycle life tester for the long-term stability of phase change materials for thermal energy storage p0372 N81-24997

Coal conservation and stabilization during storage p0299 N81-25126

**STORAGE TANKS**

Temperature stratification in hot water solar thermal storage tanks [AIAA PAPER 81-0368] p0210 N81-20787

A 'two-tank' seasonal storage concept for solar space heating of buildings p0372 N81-25035

Experimental comparison of control strategies for solar energy systems incorporating dual storage tanks p0253 N81-27556

A liquid-hydrogen-fueled buick [LA-8605-MS] p0291 N81-16483

# SUBJECT INDEX

# SULFATES

Liquid-hydrogen automotive onboard storage and servicing system project [LA-UR-80-3491] p0291 N81-19971

**STRATIFIED FLOW**  
Temperature stratification in hot water solar thermal storage tanks [AIAA PAP88 81-0368] p0210 A81-20787

**STRATIGRAPHY**  
Evaluation and targeting of geothermal energy resources in the southeastern United States [DOE/ET-27001/8] p0314 N81-18480

**STRATOCUMULUS CLOUDS**  
Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra p0188 A81-28478

**STRESS CONCENTRATION**  
Reliability of large superconducting magnets through design p0335 A81-23452

**STRESS CORROSION**  
Stress corrosion studies in solvent refined coal liquefaction pilot plants [ORNL/TM-7513] p0321 N81-21179

**STRESSES**  
Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells [NASA-CR-164012] p0271 N81-19568

**STRIP MINING**  
Evaluating the environmental effects of past and present surface mining - A remote sensing applied research review p0186 A81-23555

The Indian Lands Study: An example of the application of geographic research to the analysis of complex energy and environmental policy issues --- strip mining and oil exploration effects on tribal culture and economics p0189 N81-16510

**STRIP TRANSMISSION LINES**  
Excitation of a superconducting strip resonator by a system of point Josephson contacts p0365 A81-21295

**STRUCTURAL DESIGN**  
The design of a tapered bore superconducting MHD magnet system p0334 A81-23442

ETF magnet design alternatives for the national MHD program p0334 A81-23443

Reliability of large superconducting magnets through design p0335 A81-23452

Commercial, or usable, size Campbell Chinese type windmill p0338 A81-25073

Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator [NASA-CR-164038] p0271 N81-19567

Residential solar design review: A manual on community architectural controls and solar energy use [PB81-128605] p0275 N81-19648

Large wind energy converter: Growian 3 MW [NASA-TM-75404] p0360 N81-20543

**STRUCTURAL DESIGN CRITERIA**  
Photovoltaic system sizing analysis p0248 A81-27249

Initial MPTS study results: Design considerations and issues p0365 N81-16536

Satellite Power Systems (SPS). LSST systems and integration task for SPS flight test article [NASA-CR-3375] p0271 N81-19564

Environmental exposure and design criteria for offshore and gas structures [AD-A094651] p0201 N81-19652

**STRUCTURAL ENGINEERING**  
OTEC cold water pipe design for problems caused by vortex-excited oscillations p0347 A81-29200

Applied research activities for 1979 --- Finnish technology development and transfer p0384 N81-20004

**STRUCTURAL PROPERTIES (GEOLOGY)**  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content p0302 A81-26895

**STRUCTURAL RELIABILITY**  
Commercial, or usable, size Campbell Chinese type windmill p0338 A81-25073

**STRUCTURAL STABILITY**  
Stability of large horizontal-axis axisymmetric wind turbines p0333 A81-22526

A superconducting magnet for Stanford University p0334 A81-23441

Aeroelastic stability of wind turbine rotors p0345 A81-26975

**STRUCTURAL VIBRATION**  
Static deflection and eigenfrequency analysis of the Nibe wind turbine rotors. Theoretical background --- structural vibration [RISOE-R-2199] p0357 N81-19497

**STRUCTURAL WEIGHT**  
Efficient structures for geosynchronous spacecraft solar arrays p0262 N81-17573

**SUBMARINES**  
National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary [PB81-105033] p0368 N81-17289

**SUBMERGED BODIES**  
Wave-energy extraction by a submerged cylindrical resonant duct p0303 A81-28680

**SUBSONIC FLOW**  
Preliminary results of analytical modeling of subsonic MHD diffusers [AIAA PAP88 81-0177] p0329 A81-20652

**SUBSTITUTES**  
Comments on long-term aspects of renewable versus nonrenewable resource substitution [CONF-801158-1] p0313 N81-18477

**SUBSTRATES**  
Substrate related problems in RAD solar cells --- Ribbon Against Drop p0231 A81-27084

Epitaxial solar cells on metallurgical grade silicon substrates p0231 A81-27085

Contiguous capillary coating of silicon on porous carbon substrates p0236 A81-27129

Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing p0244 A81-27200

MIS silicon grating solar cells on BSF substrates p0252 A81-27293

Improved PCG-1 cell technology [EPRI-EM-1566] p0351 N81-16598

GaAs workshop report p0261 N81-17547

**SUBSTRUCTURES**  
A superconducting magnet for Stanford University p0334 A81-23441

**SUCTION**  
Effect of wall suction on laminar entrance flow with application to solar air heaters p0265 N81-18488

**SUGAR BEETS**  
Ethanol: A brief economic evaluation [DOE/ET-27256/T7] p0316 N81-19331

**SUGAR CANE**  
Development of sweet sorghum as an energy crop. Volume 3: Integration concepts [BNI-2054-VOL-3] p0316 N81-19334

**SULFATES**  
Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City p0186 A81-23073

Sulfur pollution from coal combustion - Effect of the mineral components of coal on the thermal stabilities of sulfated ash and calcium sulfate p0186 A81-24622

Acid rain: The impact of local sources [DOE/ETC-14787/103] p0197 N81-18573

## SULFUR

## SUBJECT INDEX

## SULFUR

The sulfur-cycle hydrogen production process  
p0286 A81-24024

A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program  
[PB81-111593] p0306 A81-17287

A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 A81-17644

Coal gasification systems engineering and analysis. Appendix B: Medium B+U gas design  
[NASA-CR-161656] p0309 A81-18215

Lubricants for combating effects of high-sulfur fuel  
[AD-A094900] p0315 A81-19312

**SULFUR COMPOUNDS**

Sulfur pollution from coal combustion - Effect of the mineral components of coal on the thermal stabilities of sulfated ash and calcium sulfate  
p0186 A81-24622

**SULFUR DIOXIDES**

Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City  
p0186 A81-23073

Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants  
p0188 A81-28993

Aerosol formation from diesel exhaust and SO<sub>2</sub>, a chamber study  
[PB81-121147] p0201 A81-19674

**SULFURIC ACID**

Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes --- in fuel cells  
p0342 A81-25325

**SUNLIGHT**

Boston solar retrofits: Studies of solar access and economics  
[DOE/CS-10047/T5] p0268 A81-18538

**SUPERCHARGERS**

Emissions and fuel economy of a Comprex Pressure Wave Supercharged Diesel  
[PB81-133399] p0204 A81-21371

**SUPERCONDUCTING MAGNETS**

Applied Superconductivity Conference, Santa Fe, N. Mex., September 29-October 2, 1980, Proceedings  
p0334 A81-23426

Flux pump excited brushless alternator  
p0334 A81-23436

An evaluation of superconducting magnetic energy storage  
p0371 A81-23439

Superconductive energy storage for diurnal use by electric utilities  
p0371 A81-23440

A superconducting magnet for Stanford University  
p0334 A81-23441

The design of a tapered bore superconducting MHD magnet system  
p0334 A81-23442

ETF magnet design alternatives for the national MHD program  
p0334 A81-23443

A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet  
p0334 A81-23447

Design of the EPA superconducting 30 MJ energy storage coil  
p0371 A81-23450

Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility  
p0334 A81-23451

Reliability of large superconducting magnets through design  
p0335 A81-23452

Superconducting MHD magnet engineering program  
p0344 A81-26852

Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications  
p0344 A81-26853

Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854

Cryogenic aspects of the UTSI-CPPF superconducting dipole magnet for MHD research  
p0345 A81-26855

Safety analysis of the UTSI-CPPF superconducting magnet  
p0345 A81-26856

Energy transfer in a system of superconductive magnets  
p0374 A81-26858

Shape optimization study for a three-tunnel superconductive energy storage magnet  
p0374 A81-26861

**SUPERCONDUCTING POWER TRANSMISSION**

Excitation of a superconducting strip resonator by a system of point Josephson contacts  
p0365 A81-21295

**SUPERCONDUCTIVITY**

Applied Superconductivity Conference, Santa Fe, N. Mex., September 29-October 2, 1980, Proceedings  
p0334 A81-23426

Superconducting generators - Economics, technical considerations and ancillary technology  
p0335 A81-23466

Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, University of Wisconsin, Madison, Wis., August 21-24, 1979  
p0344 A81-26851

**SUPERCONDUCTORS**

Excitation of a superconducting strip resonator by a system of point Josephson contacts  
p0365 A81-21295

Superconductive energy storage for diurnal use by electric utilities  
p0371 A81-23440

**SUPERCritical PRESSURES**

Natural convection heat leak in supercritical hydrogen tanks  
p0290 A81-26872

**SUPPLYING**

October report on the current fuel situation from the Energy Information Administration  
[GPO-60-871] p0189 A81-16311

Energy supply and demand properties from engineering process models  
[EPRI-BA-1568] p0191 A81-16603

Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage  
[PB81-114324] p0376 A81-17618

Future US energy supply: Constraints by nonfuel mineral resources  
[ORNL-5656] p0204 A81-21467

**SUPPORT SYSTEMS**

Space construction technology needs  
[AIAA PAPER 81-0442] p0381 A81-22757

ETF magnet design alternatives for the national MHD program  
p0334 A81-23443

**SURFACE DIFFUSION**

A new method of measuring diffusion length and surface recombination velocity --- for materials effects on solar cell efficiency  
p0239 A81-27164

Silicon solar cells with screen printed diffusion and metallization  
p0245 A81-27221

**SURFACE FINISHING**

Solar Energy Program: Protective solar collector systems from corrosion  
[NP-25154] p0264 A81-17605

Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors  
[DOE/AL-04266/T1] p0268 A81-18537

The CdSiAs<sub>2</sub> thin films for solar cell applications  
[DOE/ET-23007/4] p0270 A81-18561

Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project  
[NASA-CR-164134] p0281 A81-21546

**SURFACE GEOMETRY**

Comparison of several models for long term monthly average daily insolation on horizontal surfaces and the estimation of horizontal surface insolation for 16 U. S. locations  
[ASME PAPER 80-WA/SOL-28] p0213 A81-21152

## SUBJECT INDEX

## SYNTHETIC FUELS.

## SURFACE IONIZATION

High efficiency silicon solar cells p0240 A81-27175

## SURFACE LAYERS

Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance p0372 A81-25323

A two-dimensional model of an MIS inversion layer solar cell p0232 A81-27088

## SURFACE PROPERTIES

Surface charge and specific ion adsorption effects in photoelectrochemical devices p0215 A81-22148

Theoretical design considerations for back surface field solar cells p0239 A81-27160

Hydrogen-methane separation processes and related phenomena [DOE/ETC-14386/106] p0321 A81-21153

## SURFACE REACTIONS

Hydrogen/metal interactions with special reference to electrochemical approaches p0286 A81-24556

Non-noble catalysts and catalyst supports for phosphoric acid fuel cells [NASA-CR-165221] p0354 A81-18497

Amorphous thin films for solar-cell applications [SEI/PR-0-8254-F] p0283 A81-21591

## SURFACE ROUGHNESS EFFECTS

Wind-tunnel simulation of the flow over hills and complex terrain --- for wind energy conversion applications p0295 A81-23693

## SURFACE TEMPERATURE

Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution p0293 A81-22207

## SURFACE VEHICLES

An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine --- thermal energy storage with water lithium salts solution p0342 A81-25132

## SURFACE WAVES

Wave-energy extraction by a submerged cylindrical resonant duct p0303 A81-28680

## SURFACTANTS

Fuel alcohol extraction technology commercialization conference [CONF-801212] p0311 A81-18233  
Photochemical solar energy conversion in surfactant vehicles [DOE/EE-10601/1] p0269 A81-18560

## SURVIVIS

Passive solar energy information user study [SEI/TR-751-746] p0273 A81-19607  
Western Coal Survey: A survey of coal mining capacity in the west [DOE/EA-0045/1] p0323 A81-21464  
Wind energy systems information user study [SEI/TR-751-749] p0363 A81-21578

## SWEAT COOLING

Transpiration air cooled turbine blade - A technology for future generation aircraft and industrial gas turbine engines using coal or coal derived fuels p0347 A81-29115

## SWEDEN

A solar heating plant in Studsvik: Design and first year operational performance [PB81-114480] p0275 A81-19640

Swedish energy storage projects 1979: Research-development-full-scale experiments supported by governmental organizations [PB81-122947] p0378 A81-19644

Production of a raw material for energy production in agriculture [DPE-31] p0324 A81-21550

## SWITCHING CIRCUITS

Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis p0347 A81-29243  
Highly efficient welding power supply [DOE/CS-40023/T2] p0199 A81-19404

Highly efficient welding power supply

[DOE/CS-40023/T1] p0202 A81-20441

## SYNTHANE

Carbon monoxide: Resource of the future [BNL-28576] p0307 A81-17603

## SYNTHESIS (CHEMISTRY)

Photochemical solar energy conversion in surfactant vehicles [DOE/EE-10601/1] p0269 A81-18560

Survey of electrochemical production of inorganic compounds --- production of synthetic fuels [ANL/OEPH-80-3] p0318 A81-20226

## SYNTHETIC FUELS

Synthetic gas production for methanol - Current and future trends p0295 A81-24016

Technical and economic advances in steam reforming of hydrocarbons p0285 A81-24017

Hydrogen requirements in shale oil and synthetic crude from coal p0295 A81-24020

Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion p0296 A81-24427

Geothermal energy and biofuel production in agriculture p0297 A81-25093

Synthetic fuel production in a particle-beam driven fusion reactor p0297 A81-25107

Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources p0297 A81-25108

Alternative energy sources II: Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7 - Hydrocarbon conversion p0297 A81-25109

Gasification of biomass as a source of synfuels for developing countries p0298 A81-25118

Production of liquid fuels with a high-temperature gas-cooled reactor p0298 A81-25120

Future of alcohol fuels programs in Brazil p0299 A81-25121

Advanced synfuels production/power systems utilizing laser particulate control p0299 A81-25127

Fusion reactors for hydrogen production via electrolysis p0287 A81-25139

The Bridgeport resource recovery system p0300 A81-25163

Commercialization potential of the China Lake trash-to-gasoline process p0301 A81-25560

Problems due to multifuel operation of gas turbine combustors p0343 A81-26009

Residual fuel combustion in industrial gas turbines p0343 A81-26010

Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/ p0302 A81-26195

Alcohols as fuels - The global picture p0303 A81-27572

Royal Society, Discussion on New Coal Chemistry, London, England, May 21, 22, 1980, Proceedings p0303 A81-28992

Motor fuels and chemicals from coal via the Sasol Synthol route p0303 A81-28994

Development of the Shell-Koppers coal gasification process p0303 A81-28995

Combined aquatic-terrestrial biomass systems p0304 A81-29267

Private sector initiatives - A case history p0188 A81-29681

## SYSTEM EFFECTIVENESS

## SUBJECT INDEX

- Synfuels from coal p0304 A81-29682
- Effect of water injection for NOx reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor [ASME PAPER 81-GT-51] p0348 A81-29964
- Modified Brayton cycles utilizing alcohol fuels [ASME PAPER 81-GT-103] p0348 A81-30009
- Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels [ASME PAPER 81-GT-157] p0188 A81-30056
- Methanol - The efficient conversion of valueless fuels into a versatile fuel and chemical feedstock [ASME PAPER 81-PID-1] p0305 A81-30110
- Engine fuels from biomass [ASME PAPER 81-DGP-4] p0305 A81-30116
- Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [CONF-8010106-7] p0189 A81-16314
- Fusion energy research, development, and demonstration act of 1980 [H-REPT-96-1096] p0352 A81-16898
- HYFIRE: A Tokamak high temperature electrolysis system --- synfuel production [BNL-28679] p0352 A81-16908
- Molten salt pyrolysis of latex --- synthetic hydrocarbon fuel production using the Guayule shrub [NASA-CASE-WFO-14315-1] p0306 A81-17261
- Life Sciences Synthetic Fuels program at Oak Ridge National Lab. [CONF-801039-3] p0192 A81-17285
- Hydrogasification of oil shale [PB81-114092] p0306 A81-17292
- Obtaining improved products from the fraction of municipal solid waste [PB81-110918] p0307 A81-17295
- Fuels and chemicals made from solar energy: Options for the 1990's and beyond [DOE/CS-21051/01] p0263 A81-17586
- Proceedings: EPA/Industry Forum on Coal-Liquefaction [PB81-113052] p0195 A81-17645
- Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes [FE-2315-55] p0311 A81-18231
- Fuel alcohol extraction technology commercialization conference [CONF-801212] p0311 A81-18233
- Energy balances in the production and end-use of methanol derived from coal [DOE/PE-70151/T4] p0312 A81-18234
- Gas turbine combustor performance on synthetic fuels, volume 1 [EPRI-AP-1623-VOL-1] p0356 A81-19259
- Use of non-petroleum fuels to reduce military energy vulnerabilities: Self-sufficient bases and new weapon propulsion systems [LA-UR-80-3445] p0199 A81-19329
- Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TM-7525] p0316 A81-19332
- Alternative fuels utilization and the automotive emission certification process [DOE/CS-56051/T1] p0316 A81-19336
- Some long-term energy options [LA-9628-MS] p0200 A81-19596
- Survey of electrochemical production of inorganic compounds --- production of synthetic fuels [ANL/OEPR-80-3] p0318 A81-20226
- Improvements in the electrolytic generation of hydrogen p0291 A81-20287
- The development of synthetic fuels: Department of Defense logistics implications [AD-A095713] p0319 A81-20290
- Review of fusion synfuels [BNL-28627] p0291 A81-20300
- Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [ORNL/TM-7428] p0320 A81-20305
- Catalytic combustion of synthetic fuels [DOE/PC-30220/T1] p0321 A81-21154
- Alternative fuels production program [DOE/EA-0058/2] p0321 A81-21220
- Energy from biological processes. Volume 2: Technical and environmental analyses [PB81-134769] p0323 A81-21233
- Alternate sources of energy [CONF-8009109] p0384 A81-21580
- SYSTEM EFFECTIVENESS
- Performance of MHD generators with electrode current control [AIAA PAPER 81-0249] p0330 A81-20699
- Off-design study of an open cycle MHD power plant with oxygen enrichment [AIAA PAPER 81-0319] p0330 A81-20748
- A dish-Stirling solar-thermal power system p0217 A81-22897
- Performance of active solar domestic hot water heating systems [SOLAR/0024-80/41] p0281 A81-21556
- SYSTEMS ANALYSIS
- Solar input and solar energy resources p0217 A81-23008
- SOLCEL II - An improved photovoltaic system analysis computer program p0250 A81-27272
- Comparative analysis of combined flat-plate PV/T collectors with separate PV/T collectors [SAND-80-1494] p0259 A81-16608
- Technology assessments in transportation: Survey of recent literature --- and bibliography [ANL/CMSV/TM-44] p0192 A81-16558
- National petroleum reserve - Alaska: Marine transportation system analysis [PB81-105041] p0368 A81-17288
- National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary [PB81-105033] p0368 A81-17289
- Characterization of solid waste conversion and cogeneration systems [DOE/EV-0105] p0307 A81-17585
- Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCRL-15259] p0376 A81-17963
- Development of a system for off-peak electrical energy use by air conditioners and heat pumps [TVA-EDT-122] p0377 A81-16509
- Task report no. 3. Systems analysis of organic Rankine bottoming cycles [PSI-TR-245] p0354 A81-16529
- Satellite Power Systems (SPS). LSST systems and integration task for SPS flight test article [NASA-CR-3375] p0271 A81-19564
- Satellite Power Systems (SPS) concept definition study (Exhibit D). Volume 3: Transportation analysis [NASA-CR-3394] p0271 A81-19565
- Evaluation of solar collectors for heat pump applications [DOE/CS-35351/T1] p0278 A81-20568
- Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2 [NASA-CR-161692] p0362 A81-21539
- SYSTEMS ENGINEERING
- High temperature solar thermal technology [ASME PAPER 80-WA/SOL-20] p0213 A81-21144
- Systems engineering - Fundamental limits and future prospects p0381 A81-22877
- Design and efficiency estimation of a thermochemical system of hydrogen production p0285 A81-23531
- Energy from space - A survey of activities for power generation using space technology p0219 A81-23861
- Workshop on the microwave power transmission system for the solar power satellite - Review panel report p0365 A81-24832
- High temperature solar power tower plants - Concept considerations and operational criteria p0227 A81-25044
- Design of a 100 kW photovoltaic flat panel system at a Washington, D.C. area waste treatment plant p0228 A81-25056
- New developments in wind systems technology p0338 A81-25067
- Feasibility study on the Porsche - Optimum design of solar collection on a fluctuating base p0288 A81-25149

# SUBJECT INDEX

# TECHNOLOGICAL FORECASTING

System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications p0375 A81-27232

Design and performance of a concentrating solar collector p0255 A81-29253

Complex computation of flywheel power systems for flight vehicles p0375 A81-30158

Solar Power Satellite Microwave Transmission and Reception [NASA-CP-2141] p0365 A81-16533

Solar power satellite microwave power transmission system description executive summary p0365 A81-16535

Initial MPTS study results: Design considerations and issues p0365 A81-16536

Rectenna system design --- energy conversion solar power satellites p0257 A81-16559

Evaluation of a two-phase turbine for solar electric power generation [DOE/ET-20431/T1] p0263 A81-17587

Construction of a complete all season conditioning with solar energy of an office building of 260 m2 and its operation [EUR-6702-BN] p0263 A81-17589

Program plan for reliability and maintainability in active solar heating and cooling systems [DOE/CS-36010/01] p0264 A81-17596

Coal gasification systems engineering and analysis. Volume 1: Executive summary [NASA-CR-161653] p0309 A81-18212

Coal gasification systems engineering and analysis, volume 2 [NASA-CR-161654] p0309 A81-18213

Coal gasification systems engineering and analysis. Appendix A: Coal gasification catalog [NASA-CR-161655] p0309 A81-18214

Coal gasification systems engineering and analysis. Appendix B: Medium B+U gas design [NASA-CR-161656] p0309 A81-18215

Coal gasification systems engineering and analysis. Appendix C: Alternate product facility designs [NASA-CR-161657] p0309 A81-18216

Coal gasification systems engineering and analysis. Appendix D: Cost and economic studies [NASA-CR-161658] p0310 A81-18217

Coal gasification systems engineering and analysis. Appendix E: Cost estimation and economic evaluation methodology [NASA-CR-161659] p0310 A81-18218

Coal gasification systems engineering and analysis. Appendix F: Critical technology items/issues [NASA-CR-161660] p0310 A81-18219

Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation [NASA-CR-161661] p0310 A81-18220

Coal gasification systems engineering and analysis. Appendix H: Work breakdown structure [NASA-CR-161662] p0310 A81-18221

Studies of the mechanism of coal hydrogenation by electron spin resonance [DOE/PC-30072/T2] p0313 A81-18241

Disk MHD generator study [NASA-CR-159872] p0354 A81-18491

Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 A81-18493

Array automated assembly task low cost silicon solar array project, phase 2 [NASA-CR-164037] p0272 A81-19572

Development of high-temperature turbine subsystem technology to a technology readiness status, phase 2 [FE-1806-96] p0360 A81-20440

Critical parameters for coarse coal underground slurry haulage systems [JPL-PUB-81-11] p0369 A81-20495

Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 2, appendix A: Selected DSG technologies and their general control requirements [NASA-CR-164052] p0202 A81-20539

Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148] p0282 A81-21575

The 10 kilowatt photovoltaic concentrator system as installed at Sandia Laboratories, 1979 [SAND-80-7063] p0283 A81-21601

Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1 [PNL-3533-VOL-1] p0283 A81-21605

Preliminary design procedure for high power density MHD generators [AD-A096144] p0364 A81-21916

**SYSTEMS INTEGRATION**

Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234

Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1 [NASA-CR-164051] p0202 A81-20538

**SYSTEMS SIMULATION**

Summer Computer Simulation Conference, Toronto, Canada, July 16-18, 1979, Proceedings p0381 A81-21701

Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings. Volumes 1 & 2 p0381 A81-22208

FREEHEAT - A passive solar system simulation program p0216 A81-22212

Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234

Water systems modeling --- solar collectors and heating systems p0277 A81-20554

System modeling using TRNSYS computer simulation --- solar heating p0277 A81-20555

**SYSTEMS STABILITY**

Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit [EPRI-CS-1444-VOL-4] p0351 A81-16602

# T

**TABLES (DATA)**

Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/ p0302 A81-26195

**TANKER SHIPS**

National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary [PB81-105033] p0368 A81-17289

**TANTALUM OXIDES**

High efficiency MIS/inversion layer silicon solar cells p0252 A81-27290

**TAYLOR INSTABILITY**

Nonlinear evolution of ablation-driven Rayleigh-Taylor instability --- behavior of laser fusion targets p0332 A81-21466

**TEARING MODE (PLASMAS)**

Effects of toroidal coupling on the stability of tearing modes p0332 A81-21480

**TECHNOLOGICAL FORECASTING**

Space construction technology needs [AIAA PAPER 81-0442] p0381 A81-22757

Systems engineering - Fundamental limits and future prospects p0381 A81-22877

Solar energy market penetration models - Science or number mysticism p0218 A81-23026

A UK view on future fuels --- for aircraft [ASME PAPER 81-GT-87] p0304 A81-29994

Fuels and chemicals made from solar energy: Options for the 1990's and beyond [DOE/CS-21051/01] p0263 A81-17586

Energy policy and research planning. Citations from the NTIS data base [PB81-800112] p0195 A81-17620

# TECHNOLOGY ASSESSMENT

# SUBJECT INDEX

Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report [AD-A094225] p0196 N81-18051  
 General reflections on the theme of innovations --- evolution and inventions p0383 N81-18940  
 Europe in face of the future p0383 N81-18955  
**TECHNOLOGY ASSESSMENT**  
 Solar electric propulsion systems - A survey p0211 N81-20910  
 Prospective energy sources and their comparison with current supplies p0185 N81-21063  
 Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory p0294 N81-22511  
 Limits to plasma science p0333 N81-22876  
 Systems engineering - Fundamental limits and future prospects p0381 N81-22877  
 The potential for solar space heating in Scotland p0217 N81-22898  
 Superconducting generators - Economics, technical considerations and ancillary technology p0335 N81-23466  
 Trends and developments in magnetic confinement fusion reactor concepts p0336 N81-23711  
 Hydrogen technology - An overview p0285 N81-24014  
 Synthetic gas production for methanol - Current and future trends p0295 N81-24016  
 Production and application of electrolytic hydrogen - Present and future p0286 N81-24019  
 Closing the loop for the sulfur-iodine cycle --- for thermochemical hydrogen production p0286 N81-24022  
 The economics of advanced technologies for electricity generation from coal p0300 N81-25134  
 Fixed site hydrogen storage. II - Comparison of technologies and economics p0289 N81-25160  
 Energy accounting for solar and alternative energy sources p0382 N81-25165  
 Design and management for resource recovery. Volume 2 - High technology A failure analysis --- Book on materials and energy reclamation projects from solid wastes p0300 N81-25225  
 Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations --- Epitaxial Film Growth p0230 N81-27078  
 High efficiency wraparound contact solar cells /HEWACS/ p0232 N81-27094  
 Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology p0234 N81-27113  
 Photovoltaic applications - Past and future p0246 N81-27231  
 The boundless dimension - Space flight. Volume 1 - Prospects and problems --- German book p0383 N81-29688  
 The history of the development of the rectenna --- solar power satellites p0257 N81-16558  
 Automated array assembly, phase 2 [NASA-CR-163878] p0258 N81-16578  
 Radioisotope powered light sources [CONF-801157-1] p0351 N81-16597  
 Operational analysis of open-cycle MHD [RPRI-AP-1463] p0352 N81-16909  
 Technology assessments in transportation: Survey of recent literature --- and bibliography [ANL/CNSV/TR-44] p0192 N81-16958  
 Commercial (terrestrial) and modified solar array design studies for low cost, low power space applications [NASA-TM-81622] p0259 N81-17266

Farm and cooperative alcohol plant study: Technical and economic assessment as a commercial venture [PB81-112641] p0306 N81-17290  
 Central station market development strategies for photovoltaics [NASA-CR-163947] p0193 N81-17520  
 The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology [NASA-TM-58229] p0193 N81-17526  
 Solar power R and D for Air Force space requirements p0260 N81-17533  
 Silicon Research and Technology Workshop report p0260 N81-17541  
 Blanket technology workshop report p0263 N81-17576  
 Energy/economic model analysis. Volume 1: Gas technology assessments using three energy supply/demand integrating models [PB81-114225] p0194 N81-17611  
 Energy/economic model analysis. Volume 2: Evaluation of energy supply/demand integrating models [PB81-114233] p0194 N81-17612  
 Energy/economic model analysis. Energy economic modeling system [PB81-114274] p0194 N81-17614  
 Energy/economic model analysis. Livermore energy policy model [PB81-114266] p0194 N81-17616  
 Survey of EPA facilities for solar thermal energy applications [NASA-CR-162469] p0265 N81-17617  
 Coal gasification systems engineering and analysis. Appendix F: Critical technology items/issues [NASA-CR-161660] p0310 N81-18219  
 Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation [NASA-CR-161661] p0310 N81-18220  
 Generator gas operation of motor vehicles [DOE-TR-219] p0310 N81-18224  
 Fuel-cells for electric utility and transportation applications [BRL-28696] p0354 N81-18518  
 Task report no. 3. Systems analysis of organic Rankine bottoming cycles [PSI-TR-245] p0354 N81-18529  
 Assessment of solar options for large power applications [PNL-SA-8968] p0268 N81-18542  
 Fuel cells feasibility p0356 N81-18998  
 Recent advances in the sciences of electrocatalysis [AD-A095095] p0356 N81-19257  
 Classification and evaluation of electric motors and pumps [DOE/TIC-11339] p0199 N81-19463  
 Small wind systems technology assessment. State of the art and near term goals [BPP-3136/3533/80/18] p0358 N81-19600  
 Aquifer thermal energy storage: A survey [LBL-10441] p0378 N81-19606  
 Near-term implementation of projection cost reductions for photovoltaic concentrator array [SAND-80-7073] p0274 N81-19628  
 Development of high-temperature turbine subsystem technology to a technology readiness status, phase 2 [FE-1806-96] p0360 N81-20440  
 Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 2, appendix A: Selected DSG technologies and their general control requirements [NASA-CR-164052] p0202 N81-20539  
 Proceedings of the 16th Project Integration Meeting [NASA-CR-164073] p0276 N81-20545  
 Wind energy resource atlas. Volume 4: The Northeast region [PNL-3195-WERA-4] p0321 N81-20592  
 High concentration silicon photovoltaic cell development [SAND-80-7068] p0279 N81-20595  
 Environmental consideration for TVA's ammonia from coal project [CONF-8004137-1] p0203 N81-21216



## SUBJECT INDEX

## TEMPERATURE PROBES

- Solar options in central Europe. A synthesis of solar technology assessment and contemporary criteria in 1978-1979  
[IIASA-BB-79-14] p0280 N81-21489
- High energy density batteries for satellite applications  
p0379 N81-21505
- Technology development for phosphoric acid fuel cell powerplant, phase 2  
[NASA-CR-165317] p0362 N81-21536
- Applications study of advanced power generation systems utilizing coal-derived fuels. Volume 1: Executive summary  
[NASA-CR-161691] p0362 N81-21538
- Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2  
[NASA-CR-161692] p0362 N81-21539
- Technology development for phosphoric acid fuel cell powerplant (phase 2)  
[NASA-CR-165316] p0362 N81-21547
- Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles  
[LA-UR-81-293] p0363 N81-21572
- Satellite Power System (SPS) societal assessment  
[NASA-CR-164153] p0205 N81-21590
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 2: Hydroelectric development  
[DOE/EV-73002/1-VOL-2] p0205 N81-21596
- Environmental assessment for the Satellite Power System concept development and evaluation program: Nonmicrowave health and ecological effects  
[DOE/EV-0089] p0205 N81-21613
- Management plan for fiscal year 1981: Environmental Control Technology Project geothermal development  
[UCRD-18903] p0206 N81-21640
- TECHNOLOGY TRANSFER**
- US solar energy policy for less developed countries  
[DOE/CS-10048/T1] p0194 N81-17598
- Proceedings of the Vertical Axis Wind Turbine (VAWT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 N81-18550
- TECHNOLOGY UTILIZATION**
- Applied Superconductivity Conference, Santa Fe, N. Mex., September 29-October 2, 1980, Proceedings  
p0334 A81-23426
- China starts tapping rich geothermal resources  
p0296 A81-24750
- Photovoltaic applications - Past and future  
p0246 A81-27231
- Photovoltaic intermediate applications  
p0247 A81-27246
- Municipal solid waste to energy act. of 1979  
[GPO-O-684] p0192 N81-16956
- Characterization of solid waste conversion and cogeneration systems  
[DOE/EV-0105] p0307 N81-17585
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix B: State of the art, trends, and potential growth of selected DSG technologies  
[NASA-CR-164054] p0202 N81-20540
- Effects of accounting rules on utility choices of energy technologies in the United States  
[IIASA-BB-80-27] p0204 N81-21490
- Solar energy in Italy: A profile of renewable energy activity in its national context  
[SERI/SP-763-718] p0204 N81-21576
- Guidelines for conceptual design and evaluation of aquifer thermal energy storage  
[PNL-3581] p0380 N81-21587
- Amorphous thin films for solar-cell applications  
[SERI/PR-80-8254-P] p0283 N81-21591
- Max Planck Institute for Plasma Physics --- energy technology utilization of nuclear fusion  
[LA-TR-80-25] p0364 N81-21919
- TECHNICS**
- Remote sensing techniques for identification and evaluation of geothermal areas  
p0294 A81-23587
- Hydrothermal metamorphism in the Larderello geothermal field  
p0296 A81-24306
- TEFLON (TRADEMARK)**
- Optimization of carbon-supported platinum catalysts for fuel cell electrodes  
[AD-A094714] p0357 N81-19579
- TEMPERATURE CONTROL**
- A review of the application of modern control theory to solar energy systems  
p0210 A81-20490
- Radiation and free convection shield for passive thermal control --- in solar buildings  
[ASME PAPER 80-WA/SOL-7] p0212 A81-21134
- Frequency response analysis of fluid control systems for parabolic-trough solar collectors  
[ASME PAPER 80-WA/SOL-15] p0213 A81-21140
- Experimental comparison of control strategies for solar energy systems incorporating dual storage tanks  
p0253 A81-27556
- Satellite Power System (SPS) concept definition study (Exhibit D). Volume 2: Systems/subsystems analyses  
[NASA-CR-3393] p0280 N81-21491
- TEMPERATURE DEPENDENCE**
- A superconducting magnet for Stanford University  
p0334 A81-23441
- Temperature dependence for the power outputs of n-CdSe liquid junction cells  
p0222 A81-24823
- TEMPERATURE DISTRIBUTION**
- On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution  
[ASME PAPER 80-WA/HT-11] p0331 A81-21105
- Analysis of a high-performance tubular solar collector  
p0223 A81-24987
- TEMPERATURE EFFECTS**
- Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size  
p0293 A81-22273
- Effects of temperature variation in concentrator cell series resistance measurements  
p0237 A81-27138
- Improved PCG-1 cell technology  
[EPRI-EH-1566] p0351 N81-16598
- Cell module and fuel conditioner  
[NASA-CR-165189] p0354 N81-18494
- TEMPERATURE GRADIENTS**
- Temperature variation in the absorber plate of an air heating flat plate solar collector  
[ASME PAPER 80-WA/SOL-2] p0211 A81-21130
- Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution  
p0293 A81-22207
- Solar power generation by ground thermal energy conversion  
p0227 A81-25046
- The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey  
p0297 A81-25090
- A non-linear flat-plate collector model  
p0254 A81-27571
- Thermal studies in a geothermal area. Report 1: Thermal studies at Roosevelt Hot Springs, Utah. Report 2: Heat flow above an arbitrarily dipping plane of heat sources. Report 3: A datum correction for heat flow measurements made on an arbitrary surface  
[DOE/ID-12079/19] p0314 N81-18479
- TEMPERATURE MEASUREMENT**
- Solar collector performance without flow measurement  
p0223 A81-24984
- Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition  
p0346 A81-28217
- Monitoring temperatures in coal conversion and combustion processes via ultrasound  
[ANL-FE-49622-TM09] p0325 N81-21875
- TEMPERATURE PROBES**
- Construction of a probe for measuring temperature and pressure in deep wells --- geothermal energy application  
p0296 A81-24304

## TEMPERATURE PROFILES

## SUBJECT INDEX

### TEMPERATURE PROFILES

The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight

p0237 A81-27135

### TENNESSEE

Wind energy resource atlas. Volume 5: The East Central region  
[PNL-3195-VOL-5]

p0325 N81-21712

### TERMINAL AREA ENERGY MANAGEMENT

Integration of fuel conservative procedures in the high density terminal area

p0185 A81-20468

### THERMIST ALLOYS

Hydrides of ternary TiFe<sub>x</sub>Ni<sub>1-x</sub>/B = Cr, Mn, Co, Bi/ intermetallics --- for hydrogen storage applications

p0290 A81-26584

### TERRAIN

Wind-tunnel simulation of the flow over hills and complex terrain --- for wind energy conversion applications

p0295 A81-23693

### TEST EQUIPMENT

A cycle life tester for the long-term stability of phase change materials for thermal energy storage

p0372 A81-24997

### TEST FACILITIES

Utilization of staged combustion for controlling NO<sub>x</sub> emissions from a test facility simulating a coal-fired MHD power plant

[AIAA PAPER 81-0101] p0328 A81-20603

ETP magnet design alternatives for the national MHD program

p0334 A81-23443

Photovoltaic advanced systems test facility: Description and operations plan

[SAND-80-1612] p0259 N81-16607

Test stations for flat plate collectors in Iran, Brazil and India --- a program for international cooperation in solar energy research sponsored by Germany

[BMFT-PB-T-79-94] p0264 N81-17609

Environmental data for sites in the National Solar Data Network, January 1981

[SOLAR/0010-81/01] p0284 N81-21710

### TEXAS

Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas

[DOE/ET-27127/1] p0207 N81-21646

### TF-41 ENGINE

Progress in the development of the Marine Spey, SM1A

[ASME PAPER 81-GT-186] p0349 A81-30080

### THERMATIC MAPPING

Mapping of solar radiation for use in the Sudanese-Sahelian region of Africa

p0217 A81-23007

### THERMAL ABSORPTION

Analytical predictions of liquid and air photovoltaic/thermal flat-plate collector performance

[ASME PAPER 80-WA/SOL-3] p0212 A81-21131

Design of solar cells for use in photovoltaic/thermal collectors

[ASME PAPER 80-WA/SOL-37] p0214 A81-21157

The absorption process for heating, cooling and energy storage - An historical survey

p0381 A81-23496

Description and thermal performance of corrugated solar collectors --- made of extruded aluminum

p0266 N81-18504

Development of method and equipment for energy recovery from the exhaust gases of the oil-fueled smelting and holding furnaces

[STU-78-6895] p0203 N81-20573

Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating

[LA-UR-80-2930] p0280 N81-20936

### THERMAL BATTERIES

High power silver zinc and thermal batteries for missiles and aviation applications

p0373 A81-25612

Energy analysis of high temperature batteries

p0374 A81-25614

Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics

p0374 A81-25837

### THERMAL CONDUCTIVITY

Midtemperature solar systems test facility predictions for thermal performance of the Acurex solar collector with PER 244 reflector surface

[SAND-80-1964/3] p0282 N81-21568

### THERMAL DEGRADATION

Degradation of ITO/p-Si solar cells --- Indium Tin Oxide

p0248 A81-27257

### THERMAL DIFFUSION

Silicon solar cells realized by laser induced diffusion of deposited antimony

p0244 A81-27202

### THERMAL EMISSION

Low-temperature thermal emission rectifier with an oxidized titanium collector

p0337 A81-24209

### THERMAL ENERGY

Analysis and design of hybrid double-absorption cooling systems for low grade thermal energy applications

[ASME PAPER 80-WA/HT-44] p0211 A81-21113

High temperature solar thermal technology

[ASME PAPER 80-WA/SOL-20] p0213 A81-21144

Sede Boquer shallow pond project

p0220 A81-24448

Thermal storage cell for high temperature solar systems

p0224 A81-24993

Physical and chemical processes for latent heat storage at low temperatures

p0372 A81-24995

An assessment of the use of chemical reaction systems for thermal energy transport

p0365 A81-25011

Fuels and chemicals made from solar energy: Options for the 1990's and beyond

[DOE/CS-21051/01] p0263 N81-17586

Capital cost estimates of selected advanced thermal energy storage technologies

[ANL/SPG-11] p0376 N81-17590

Seasonal Thermal Energy Storage Program

[PNL-SA-9030] p0376 N81-17602

Survey of RPA facilities for solar thermal energy applications

[NASA-CR-162469] p0265 N81-17617

Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage

[PB81-114324] p0376 N81-17618

Fuel cell support studies: On-site molten carbonate systems

[PB81-113672] p0353 N81-17619

US Department of Energy thermal energy storage program

[CONP-801154-1] p0196 N81-18510

Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region

[DOE/ET-28392/T2] p0315 N81-18547

Energy out of groundwater

[NE/HETV-80/9] p0320 N81-20565

World activity in solar ponds

[UCID-18900] p0282 N81-21564

Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence

[SAND-80-7148] p0282 N81-21575

Methodology for estimating future market values of solar thermal technologies

[SAND-80-8248] p0284 N81-21617

Survey of US industrial process heat usage distributions

[SAND-80-8234] p0206 N81-21622

### THERMAL EXPANSION

Bed expansion and attrition studies in a coal-fired fluidized bed

p0299 A81-25128

### THERMAL INSTABILITY

On the magnetoacoustic thermal instability

[AIAA PAPER 81-0248] p0330 A81-20698

**THERMAL INSULATION**

Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium --- application to solar energy collection p0215 A81-21584

Passive and hybrid solar manufactured housing and buildings [DOR/CS-30384/1] p0263 A81-17592

**THERMAL MAPPING**

Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goias - Brazil p0295 A81-23630

Evaluation and targeting of geothermal energy resources in the southeastern United States [DOE/ET-27001/8] p0314 A81-18480

Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain [E81-10119] p0323 A81-21423

**THERMAL REACTORS**

The fusion-supported decentralized nuclear energy system p0337 A81-23848

**THERMAL SIMULATION**

Design and evaluation of a computer controlled solar collector simulator [ASME PAPER 80-WA/SOL-6] p0212 A81-21133

**THERMAL STABILITY**

Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy [DOE/ET-20417/4] p0378 A81-19633

The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties p0280 A81-20912

**THERMAL STRESSES**

MHD air heater development technology [DOE/ET-15602/T2] p0360 A81-20590

**THERMIONIC CATHODES**

Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies p0367 A81-16552

**THERMIONIC CONVERTERS**

Radiatively coupled thermionic and thermoelectric power system concept [AIAA PAPER 81-0217] p0329 A81-20683

Low-temperature thermal emission rectifier with an oxidized titanium collector p0337 A81-24209

Solar thermionic power plant. II p0228 A81-25057

Solar energy power generators with advanced thermionic converters for spacecraft applications p0228 A81-25058

Radiatively coupled thermionic power system concept p0346 A81-28219

Construction and properties of a quadrupole mass spectrometer device, developed for the investigation of a thermionic barium-cesium-diode vapor atmosphere p0361 A81-21308

**THERMIONIC EMITTERS**

Radiatively coupled thermionic power system concept p0346 A81-28219

**THERMIONIC POWER GENERATION**

Improved thermionic energy converters [NASA-CASE-LEW-12443-1] p0357 A81-19561

Thermionic Energy Conversion (TEC) topping thermoelectrics [NASA-TN-81677] p0359 A81-19920

**THERMOCHEMICAL PROPERTIES**

Thermochemical storage for solar heating and cooling p0219 A81-23702

Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates p0287 A81-25143

Non-corrosive, two-reaction, low temperature T/C cycles p0287 A81-25144

Solids circulation around a jet in a fluidized bed gasifier [DOE/ET-12229/T1] p0313 A81-18343

Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary --- and water splitting technology [BMFT-FB-T-79-121] p0291 A81-19339

Latent and chemical storage --- solar energy, thermochemical storage p0277 A81-20550

**THERMOCHEMISTRY**

A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques p0215 A81-21956

Closing the loop for the sulfur-iodine cycle --- for thermochemical hydrogen production p0286 A81-24022

The sulfur-cycle hydrogen production process p0286 A81-24024

An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical p0287 A81-25140

Status of the development of the general atomic thermochemical water-splitting cycle p0287 A81-25141

Thermoelectrochemical hydrogen production using sodium chloride p0288 A81-25145

Coal liquefaction: The chemistry and technology of thermal processes --- Book p0304 A81-29692

Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-1] p0318 A81-19616

Heavy oil reservoirs recoverable by thermal technology [DOE/ET-12380/1-VOL-2] p0318 A81-19617

Energy from biological processes. Volume 3: Appendixes. Part C: Selected conversion technologies and end use [PB81-134793] p0323 A81-21236

**THERMODYNAMIC CYCLES**

Gasification combined cycle R&A assessment p0295 A81-24265

A non-conventional reversible total energy system --- solar heating and electric power p0186 A81-25036

Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants p0340 A81-25087

Non-corrosive, two-reaction, low temperature T/C cycles p0287 A81-25144

Economics of heavy fuels in gas turbines and combined cycles [ASME PAPER 81-GT-45] p0347 A81-29959

Comparison of the HTT reheat-gas-turbine combined cycle with the HTT nonreheat gas-turbine combined cycle --- High-Temperature Turbine Technology [ASME PAPER 81-GT-69] p0348 A81-29978

Combined gas and steam cycle for a gas-cooled solar tower power plant [ASME PAPER 81-GT-102] p0348 A81-30008

Engine cycle selection for advanced technology engine studies [ASME PAPER 81-GT-191] p0349 A81-30084

High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1599-VOL-1] p0357 A81-19466

High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendixes [EPRI-AP-1599-VOL-2] p0360 A81-20434

**THERMODYNAMIC EFFICIENCY**

The rebirth of the Rankine cycle p0327 A81-20225

Analysis of two-phase flow solar collectors with application to heat pumps [ASME PAPER 80-WA/SOL-32] p0214 A81-21153

Hydrogen and oxygen from water. V - The ROC system p0285 A81-21955

A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques p0215 A81-21956

Performance study of air-heated packed-bed solar-energy collectors p0215 A81-21957

# THERMODYNAMIC PROPERTIES

# SUBJECT INDEX

- Motor fuels from coal - Technology and economics  
p0293 A81-22275
- Analysis of a high-performance tubular solar collector  
p0223 A81-24987
- Investigations on the prediction of thermal performance of compound parabolic concentrators  
p0223 A81-24989
- High temperature storage for a wind energy system  
p0372 A81-25002
- Enhancement of low grade heat via the HYCSOS chemical heat pump --- Hydride Conversion and Storage System  
p0225 A81-25018
- Report on the measuring data evaluation of the first large-scale solar heated building in Austria  
p0226 A81-25032
- Thermodynamic calculations for Otto cycle engines using methanol as a fuel  
p0342 A81-25123
- An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine --- thermal energy storage with water lithium salts solution  
p0342 A81-25132
- An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical  
p0287 A81-25140
- Status of the development of the general atomic thermochemical water-splitting cycle  
p0287 A81-25141
- Efficiency of hydrogen compression by means of hydrides  
p0289 A81-25157
- A comparison of theory and experiment for photovoltaic/thermal collector performance  
p0250 A81-27276
- A non-linear flat-plate collector model  
p0254 A81-27571
- Simplified methods for analyzing the performance of parabolic dish systems  
p0255 A81-29252
- Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums  
p0255 A81-29254
- Modified Brayton cycles utilizing alcohol fuels [ASME PAPER 81-GT-103]  
p0348 A81-30009
- A baseload gas turbine to meet utility requirements for reliability and availability [ASME PAPER 81-GT-127]  
p0349 A81-30031
- Design analysis of high-efficiency low-stress ceramic gas turbines [ASME PAPER 81-GT-130]  
p0349 A81-30034
- A market research effort leading to the development of a high efficiency 10,000 shp gas turbine system [ASME PAPER 81-GT-190]  
p0349 A81-30083
- Coal-fired heaters for CCGT cogeneration service --- Closed-Cycle Gas Turbine [ASME PAPER 81-GT-212]  
p0350 A81-30101
- Performance calculations for 1000 MWe MHD/steam power plants [NASA-TM-81667]  
p0351 A81-16570
- General introduction to thermal conversion of solar energy  
p0266 A81-18500
- A 10 kW small solar power station and operations optimization [BEPF-PB-T-79-139]  
p0275 A81-19638
- THERMODYNAMIC PROPERTIES**
- Thermodynamic calculations for coal gasification processes  
p0294 A81-22849
- Hydrogen in LaNi5 intermetallic compound  
p0290 A81-25496
- Calculation of the internal heat exchange cycle of a Stirling engine --- Russian book  
p0343 A81-25625
- Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/  
p0302 A81-26195
- Second law analysis and synthesis of solar collector systems  
p0253 A81-27554
- Coal liquefaction: The chemistry and technology of thermal processes --- Book  
p0304 A81-29692
- THERMODYNAMICS**
- Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills  
p0227 A81-25041
- Thermal processes in flat plate solar collectors --- conduction, convective radiative heat transfer  
p0266 A81-18503
- THERMOELECTRIC GENERATORS**
- Development and study of a lead telluride/germanium telluride solar thermoelectric generator  
p0254 A81-28588
- Dish Stirling solar receiver program [NASA-CR-163889]  
p0257 A81-16574
- THERMOELECTRIC POWER GENERATION**
- Radiatively coupled thermionic and thermoelectric power system concept [AIAA PAPER 81-0217]  
p0329 A81-20683
- Thermionic Energy Conversion (TEC) topping thermoelectrics [NASA-TM-81677]  
p0359 A81-19920
- THERMOELECTRICITY**
- Thermoelectrochemical hydrogen production using sodium chloride  
p0288 A81-25145
- THERMOGRAVIMETRY**
- A non-conventional reversible total energy system --- solar heating and electric power  
p0186 A81-25036
- THERMOHYDRAULICS**
- Fluids for energy transport and conversion in solar power stations  
p0220 A81-24616
- THERMONUCLEAR POWER GENERATION**
- The future of fusion power comes into focus  
p0341 A81-25101
- THERMOPHYSICAL PROPERTIES**
- Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/  
p0302 A81-26195
- THERMOSIPHONS**
- Solar energy system performance evaluation: Hei Mai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980 [SOLAR/1014-80/14]  
p0281 A81-21557
- THIN FILMS**
- Continuous capillary coating of silicon on porous carbon substrates  
p0236 A81-27129
- Thin film conductive ink contacts for concentrator cells  
p0238 A81-27155
- Screenable silver and base metal solar cell contacts  
p0243 A81-27195
- Silicon solar cells with screen printed diffusion and metallization  
p0245 A81-27221
- THICKNESS**
- Development of a high efficiency thin silicon solar cell [NASA-CR-163931]  
p0259 A81-17522
- THIN BODIES**
- Advanced module technique with thin solar cells  
p0248 A81-27251
- THIN FILMS**
- Coatings with induced transmission  
p0211 A81-20973
- Thin film photovoltaic solar energy conversion  
p0228 A81-25054
- Hydrogen in thin film hydriding alloys  
p0289 A81-25155
- Cu<sub>x</sub>/S/Cd<sub>y</sub>/Zn/1-y/S and Cu<sub>x</sub>/S/Cd<sub>y</sub>/Zn/1-y/S, CdS thin film solar cells using chemically sprayed films  
p0229 A81-26355
- Thin n-i-p silicon solar cell  
p0232 A81-27097
- Improved performance from thin film dielectric wraparound solar cells  
p0233 A81-27100

# SUBJECT INDEX

# TITANIUM OXIDES

An overview of thin-film polycrystalline silicon research and development p0233 A81-27109

Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110

A low-cost manufacturing process for thin-film solar cells p0235 A81-27121

Thin film polycrystalline solar cells prepared by electrodeposition p0237 A81-27142

Progress toward large area amorphous silicon solar cells p0240 A81-27167

The CdSe thin-film solar cell p0240 A81-27168

Thin polycrystalline Zn<sub>3</sub>P<sub>2</sub> films for photovoltaic cells p0240 A81-27170

Indium phosphide films for photovoltaic devices p0240 A81-27173

An investigation of the Cu<sub>x</sub>/S-CdS structure for photovoltaic conversion using an Al film vacuum deposited process p0241 A81-27178

Growth and evaluation of CdS and Cd<sub>2</sub>S/S films for the fabrication of high performance photovoltaic devices p0241 A81-27180

Cu<sub>x</sub>/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements p0241 A81-27184

Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing p0244 A81-27200

Design of monolithic, multiple-gap, amorphous Si-Ge solar cells p0247 A81-27236

Proposed design of a-Si:H solar cells using ultrathin active layer to increase conversion efficiency p0247 A81-27237

Improved polycrystalline thin film gallium arsenide MOS solar cells p0251 A81-27281

The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells p0251 A81-27283

Grain boundary edge passivated solar cells on thin film GaAs p0251 A81-27284

Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287

The ecliptic-align v-grooved hyperjunction cell p0252 A81-27296

Stacked multiple-bandgap solar cells prepared by CVD techniques p0253 A81-27297

Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses p0253 A81-27299

High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD p0261 A81-17543

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions [SERI/PR-8031-1-T2] p0264 A81-17595

Indium phosphide/cadmium sulfide thin-film solar cells [SERI/PR-8170-1-T2] p0268 A81-18533

Thin film electrochromic materials for energy efficient windows [LBL-10862] p0197 A81-18549

Fabrication and testing of MIS solar cells on a-Si:F:H [SERI/TR-8041-9-T1] p0269 A81-18552

Thin film polycrystalline silicon solar cells [SERI/PR-9192-1-T2] p0269 A81-18557

Development of copper sulfide/cadmium sulfide thin film solar cells [SERI/PR-8143-1-T2] p0269 A81-18559

The CdS<sub>1-x</sub>As<sub>2</sub> thin films for solar cell applications [DOE/ET-23007/4] p0270 A81-18561

Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells [SAN-3045-3] p0275 A81-19634

Low cost, sprayed CdTe solar cell research [SERI/PR-8104-3-T2] p0279 A81-20585

Chalcogenide-glass solar cells [DOE/ET-23043/T1] p0284 A81-21608

**THIN PLATES**

The outlook for thin solar cells p0245 A81-27217

**THREE DIMENSIONAL FLOW**

Three-dimensional analysis of MHD generators - Development of electrical solution [AIAA PAPER 81-0175] p0329 A81-20650

**THRUST-WEIGHT RATIO**

Efficient structures for geosynchronous spacecraft solar arrays p0262 A81-17573

**TIDE POWERED GENERATORS**

Tides and turbines p0336 A81-23719

The sea trial of the wave power generator 'Kaimei' p0338 A81-24975

Some new conceptions in the approach to harnessing tidal energy p0339 A81-25082

Korea tidal power and beyond p0340 A81-25084

An evaluation of alternate energy sources for the Guyana energy crisis p0340 A81-25097

An environmental appraisal of tidal power stations: With particular reference to the Severn barrage --- Book p0187 A81-26196

**TIDE POWERED MACHINES**

The utilization of the free and at present dissipated gravitational force inherent in tidal motion by conversion to electrical energy, using compressed air as the active intermediary p0339 A81-25083

**TIDEPower**

Some new conceptions in the approach to harnessing tidal energy p0339 A81-25082

**TIN OXIDES**

Pigmented tin oxide solar cell p0235 A81-27124

SnO<sub>2</sub>/polycrystalline silicon solar cells p0248 A81-27255

Degradation of ITO/p-Si solar cells --- Indium Tin Oxide p0248 A81-27257

Low-cost high-efficiency SnO<sub>2</sub>/n<sup>+</sup>/p Si heteroface solar cell fabricated by paint-on-diffusant method p0249 A81-27259

Chemistry and preparation of III-V heterojunction solar cells p0252 A81-27288

Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon p0252 A81-27295

**TITANIUM**

The properties of polycrystalline silicon solar cells with controlled titanium additions p0209 A81-20010

POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells p0245 A81-27216

**TITANIUM ALLOYS**

Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493

Hydrogen storage properties of FeTi/1+x/ p0290 A81-25494

Hydrides of ternary TiFe<sub>x</sub>/M/1-x/M = Cr, Mn, Co, Ni/ intermetallics --- for hydrogen storage applications p0290 A81-26584

**TITANIUM OXIDES**

Titanium dioxide antireflection coating for silicon solar cells by spray deposition p0209 A81-19766

Low-temperature thermal emission rectifier with an oxidized titanium collector p0337 A81-24209

# TOKAMAK DEVICES

# SUBJECT INDEX

- Majority carrier conduction effects in ITO/SIS solar cells --- Indium Titanium Oxide/Semiconductor-Insulator-Semiconductors p0239 A81-27166
- TOKAMAK DEVICES**
- Effects of toroidal coupling on the stability of tearing modes p0332 A81-21480
- The development of advanced structural materials for fusion power p0333 A81-22659
- Preliminary skyshine calculations for the Poloidal Divertor Tokamak Experiment --- for plasma impurities control p0336 A81-23713
- The fusion-supported decentralized nuclear energy system p0337 A81-23848
- The future of fusion power comes into focus p0341 A81-25101
- Energy transfer in a system of superconductive magnets p0374 A81-26858
- HYFIRE: A Tokamak high temperature electrolysis system --- synfuel production [BNL-28679] p0352 A81-16908
- STARFIRE: A commercial Tokamak fusion power plant study, volume 2 [ANL/PPF-80-1-VOL-2] p0363 A81-21612
- TOROIDAL FLASHES**
- Effects of toroidal coupling on the stability of tearing modes p0332 A81-21480
- TORQUE**
- Torque ripple in a Darrieus, vertical axis wind turbine [ASME PAPER 80-WA/SOL-13] p0331 A81-21138
- TORQUE MOTORS**
- The nutating traction drive [ASME PAPER 80-GT-99] p0332 A81-21163
- TOWERS**
- An unconventional wind machine p0338 A81-25072
- TOXICITY AND SAFETY HAZARD**
- Long-Range Environmental Outlook [PB81-114977] p0198 A81-18580
- TRACE ELEMENTS**
- The detection of trace element species in solvent refined coal p0308 A81-18117
- TRACKING (POSITION)**
- Design and operation of the Solarex two-axis tracking linear concentrating collector system p0243 A81-27193
- TRACTION**
- The nutating traction drive [ASME PAPER 80-GT-99] p0332 A81-21163
- TRADEOFFS**
- Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 A81-18493
- Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report [RFP-3007-VOL-2] p0357 A81-19581
- TRANSFERRED ELECTRON DEVICES**
- Concepts for GaAs//AlGa/As solar cells with valley-transferred electrons for voltage and efficiency enhancement p0238 A81-27154
- TRANSFERRING**
- Investigation of mechanism of hydrogen transfer in coal hydrogenation [DOE/PC-30080/T2] p0305 A81-16318
- TRANSFORMERS**
- Inductive energy transfer in transportation [UCRL-85141] p0368 A81-18962
- Optimization of distribution transformer efficiency characteristics [DOE/ET-29298/T1] p0356 A81-19402
- TRANSIENT RESPONSE**
- Simple transient thermal model for solar collector/storage water heaters p0216 A81-23498
- An acoustic measurement of boiling instabilities in a solar receiver [SAND-80-2409] p0284 A81-21621
- TRANSITION METALS**
- Hydrides of ternary TiFe/xM/1-x//M = Cr, Mn, Co, Ni/ intermetallics --- for hydrogen storage applications p0290 A81-26584
- TRANSMISSION**
- Thin film electrochromic materials for energy efficient windows [LBL-10862] p0197 A81-18549
- TRANSMISSION FLUIDS**
- Fluids for energy transport and conversion in solar power stations p0220 A81-24616
- TRANSMISSION LINES**
- Voltage and current sensors for a high-density z-pinch experiment p0332 A81-21641
- TRANSMISSION LOSS**
- Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency p0221 A81-24803
- TRANSMISSIONS (MACHINE ELEMENTS)**
- The nutating traction drive [ASME PAPER 80-GT-99] p0332 A81-21163
- Advanced continuously variable transmissions for electric and hybrid vehicles [NASA-TN-81718] p0368 A81-19459
- TRANSMITTANCE**
- Coatings with induced transmission p0211 A81-20973
- TRANSPARENCY**
- Transparent heat mirrors - Influence of the materials on the optical characteristics p0215 A81-21939
- Optimization of transparent electrode for solar cells [SEEL/PE-9318-1-T1] p0274 A81-19621
- Transparent glass honeycomb structures for energy loss control [UCLA-ENG-8039] p0274 A81-19622
- TRANSPORT THEORY**
- Development and testing of heat transport fluids for use in active solar heating and cooling systems [NASA-TN-82395] p0368 A81-16584
- TRANSPORTATION ENERGY**
- Liquid nitrogen as an energy source for an automotive vehicle p0345 A81-26881
- Technology assessments in transportation: Survey of recent literature --- and bibliography [ANL/CHSV/TN-44] p0192 A81-16958
- End use energy consumption data base: Transportation sector [PB81-112203] p0194 A81-17610
- Automotive fuel economy program [DOT-HS-805-279] p0195 A81-17959
- Energy balances in the production and end-use of methanol derived from coal [DOE/PE-70151/T4] p0312 A81-18234
- Hybrid fuels for highway transportation [DOE/CS-54240/T1] p0313 A81-18242
- The effect of economic regulation on fuel use efficiency in private trucking-operations [PB81-114753] p0198 A81-18931
- TRAVELING WAVES**
- Fluctuations in combustion-driven MHD generators p0356 A81-18877
- TRENDS**
- General reflections on the theme of innovations --- evolution and inventions p0383 A81-18940
- TRITIUM**
- Radioisotope powered light sources [CONF-801157-1] p0351 A81-16597
- TROMBE WALLS**
- Trombe-Michel wall using phase change materials --- for solar heating of buildings p0224 A81-25007
- Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices p0187 A81-25061
- TROPICAL REGIONS**
- Solar air conditioning with solid absorbents and earth cooling p0226 A81-25025

- TROUGHS**  
Advanced solar collectors (concentrating troughs)  
--- paraboloid mirrors, mathematical models  
p0267 N81-18505
- TRUCKS**  
The rotating traction drive  
[ASME PAPER 80-GT-99] p0332 A81-21163  
III GT601 - A new approach to vehicular gas  
turbine power unit design  
[ASME PAPER 81-GT-152] p0349 A81-30051  
Automotive fuel economy program  
[DOT-HS-805-279] p0195 N81-17959  
Verification test of jet industries Electra-Van  
1000P  
[AD-A093738] p0376 N81-17961  
The effect of economic regulation on fuel use  
efficiency in private trucking-operations  
[PB81-114753] p0198 N81-18931
- TUBE HEAT EXCHANGERS**  
Optimization of fin and tube parameters in a  
flat-plate collector  
p0255 A81-29032  
Solar energy receiver for a Stirling engine  
[NASA-CASE-WPO-14619-1] p0259 N81-17518  
A conceptual design study of a high temperature  
solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523  
Ocean Thermal Energy Conversion Power System  
Development: PSD-I, phase 2  
[DOE/ET-21039/1] p0353 N81-17594
- TUNGSTEN**  
Ceramic heat pipe development  
[DOE/TIC-11389] p0205 N81-21611
- TUNGSTEN CARBIDES**  
Tungsten carbide/platinum fuel cell with  
phosphoric acid electrolyte  
p0343 A81-25611
- TUNNEL DIODES**  
Results of the Air Force high efficiency cascaded  
multiple bandgap solar cell programs  
p0261 N81-17548
- TURBINE BLADES**  
A performance analysis for horizontal axis wind  
turbines applicable to variable pitch or  
airbrake control  
p0333 A81-23067  
Aeroelastic stability and response analysis of  
large horizontal-axis wind turbines  
p0335 A81-23697  
The flow field about a vertical axis wind turbine  
p0338 A81-25069  
The possibilities of improving the efficiency of  
gas turbines  
p0346 A81-28614  
Transpiration air cooled turbine blade - A  
technology for future generation aircraft and  
industrial gas turbine engines using coal or  
coal derived fuels  
p0347 A81-29115  
Steam turbines for large power outputs  
p0360 N81-20427  
Aerodynamic characteristics of the TARP (Toroidal  
Accelerator Rotor Platform) wind energy  
conversion system  
[PB81-140675] p0364 N81-21632  
The Leboest Wind Turbine experimental program  
[PB81-141467] p0364 N81-21634
- TURBINE ENGINES**  
Performance assessment of a Flettner wind turbine  
p0327 A81-20025  
Analytical design of an advanced radial turbine  
--- automobile engines  
[NASA-CR-165170] p0361 N81-20958
- TURBINE PUMPS**  
Assessment of high-head turbomachinery for  
underground pumped hydroelectric storage plants  
p0372 A81-25003
- TURBINE WHEELS**  
An analysis for aerodynamic performance of the  
vertical axis 'phi' type rotor wind turbine  
p0338 A81-25068  
A new concept in horizontal axis wind turbine rotors  
p0338 A81-25071  
Dynamic response of power generating wind turbines  
p0339 A81-25077  
Ultra headless hydro power  
[SLAC-PUB-2613] p0352 N81-16609
- TURBINES**  
Torque ripple in a Darrieus, vertical axis wind  
turbine  
[ASME PAPER 80-WA/SOL-13] p0331 A81-21138  
VANTDYN - A numerical package for the dynamic  
analysis of vertical axis wind turbines  
[ASME PAPER 80-WA/SOL-18] p0331 A81-21142  
Large wind-turbine projects in the United States  
wind energy program  
p0335 A81-23694  
Overview of wind energy systems - Issues in  
development and application  
p0345 A81-27551  
Flow field analysis and performance of wind  
turbines employing slotted diffusers  
p0345 A81-27553  
Small wind systems technology assessment. State  
of the art and near term goals  
[BPP-3136/3533/80/18] p0358 N81-19600  
The NASA-LeRC wind turbine sound prediction code  
[NASA-TN-81737] p0362 N81-21537  
The Leboest Wind Turbine experimental program  
[PB81-141467] p0364 N81-21634
- TURBOFAN ENGINES**  
An assessment of the use of antimisting fuel in  
turbofan engines  
[NASA-CR-165258] p0315 N81-19316
- TURBOGENERATORS**  
Superconducting generators - Economics, technical  
considerations and ancillary technology  
p0335 A81-23466  
Tides and turbines  
p0336 A81-23719  
An analysis for aerodynamic performance of the  
vertical axis 'phi' type rotor wind turbine  
p0338 A81-25068  
Small scale power generation utilizing wave energy  
p0339 A81-25080  
The design and analysis of a vertical axis ocean  
current power plant  
p0339 A81-25081  
A study of a commercial MHD power plant scheme  
p0342 A81-25381  
A baseload gas turbine to meet utility  
requirements for reliability and availability  
[ASME PAPER 81-GT-127] p0349 A81-30031  
Small gas turbine with large parabolic dish  
collectors  
[ASME PAPER 81-GT-201] p0349 A81-30091  
Development of an 8 kilowatt wind turbine  
generator for residential type applications.  
Phase 1: Design and analysis. Volume 2:  
Technical report  
[BPP-3007-VOL-2] p0357 N81-19581  
High-reliability gas turbine combined-cycle  
development program, phase 1  
[EPRI-AR-1598] p0358 N81-19632
- TURBOMACHINERY**  
Assessment of high-head turbomachinery for  
underground pumped hydroelectric storage plants  
p0372 A81-25003
- TURBOSHAPTS**  
Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 N81-21080
- TURBULENCE MIXING**  
Coalescence/dispersion modeling of gas turbine  
combustors  
p0344 A81-26018
- TURKEY**  
Wind energy utilization possibilities in Turkey  
p0338 A81-25075
- TWO DIMENSIONAL FLOW**  
Two-dimensional MHD generator model  
[ANL/MHD-80-11] p0359 N81-19932
- TWO PHASE FLOW**  
Two-phase liquid-metal MHD generator experiments  
and pressure-gradient correlations  
p0327 A81-19810  
Analysis of two-phase flow solar collectors with  
application to heat pumps  
[ASME PAPER 80-WA/SOL-32] p0214 A81-21153
- TWO STAGE TURBINES**  
Evaluation of a two-phase turbine for solar  
electric power generation  
[DOE/ET-20431/T1] p0263 N81-17587

## U

## ULTRASONIC CLEANING

Development of megasonic cleaning for silicon wafers  
[NASA-CR-164011] p0271 N81-19569

## ULTRASONIC RADIATION

Monitoring temperatures in coal conversion and  
combustion processes via ultrasound  
[ANL-FE-49622-TM09] p0325 N81-21875

## ULTRASONICS

Efficient ultrasonic grinding: A new technology  
for micron-sized coal  
[DOE/ER-10466/T1] p0315 N81-19317  
Monitoring temperatures in coal conversion and  
combustion processes via ultrasound  
[ANL-FE-49622-TM09] p0325 N81-21875

## UNDERGROUND STORAGE

Assessment of high-head turbomachinery for  
underground pumped hydroelectric storage plants  
p0372 N81-25003  
Fixed site hydrogen storage. I - Applications impact  
p0289 N81-25159  
Shape optimization study for a three-tunnel  
superconductive energy storage magnet  
p0374 N81-26861  
Heat exchanger for in-ground heat storage  
p0375 N81-29260  
Continuous heat source model for ground heat storage  
[PB81-122889] p0378 N81-19643

## UNDERGROUND STRUCTURES

Statistical model fitting of remote induction  
sounding data from underground coal gasification  
site - Hanna II, phases 2 and 3  
p0293 N81-22278

## URBAN DEVELOPMENT

Poresight. Volume 2: Energy conservation in cities  
[GPO-47-454] p0190 N81-16527

## URBAN PLANNING

Eco-Fuel and the Bridgeport facility  
p0301 N81-25556  
Housing authority of Baltimore City-Public Housing  
Energy Workshop  
[NASA-TM-82050] p0190 N81-16569  
Community energy auditing: Experience with the  
comprehensive community energy management program  
[ANL/CHSV/TM-43] p0193 N81-17588  
Development of economic house type based upon  
passive solar energy utilization and energy  
conservation for high density urban planning  
[DOE/R5-10104/1] p0196 N81-18514  
Energy choices in a democratic society  
[PB81-114852] p0197 N81-18563  
Alternative energy facility siting policies for  
urban coastal areas: Executive summary of  
findings and policy recommendations  
[DOE/EV-01528/T1] p0204 N81-21559

## URBAN RESEARCH

Characterization of sulfate emissions from  
nonutility boilers firing low-S residual oils in  
New York City  
p0186 N81-23073  
Municipal solid waste comminution by steam explosion  
p0301 N81-25561

## URBAN TRANSPORTATION

GE's electric powered automobile  
p0373 N81-25605  
Fuel-cells for electric utility and transportation  
applications  
[BNL-28696] p0354 N81-18518  
Energy emergency contingency plan  
[PB81-128704] p0203 N81-20604  
Change-of-pace electric automobile user  
demonstration (CONCAR 2)  
[DOE/TIC-11373] p0379 N81-21359

## USER MANUALS (COMPUTER PROGRAMS)

Strategic petroleum reserve data acquisition system  
[SAND-80-2143] p0317 N81-19539  
Analysis of field test data on residential heating  
and cooling  
[EPRI-BA-1649] p0204 N81-21561

## USER REQUIREMENTS

Wind energy systems information user study  
[SERI/TR-751-749] p0363 N81-21578

## UTAH

Thermal studies in a geothermal area. Report 1:  
Thermal studies at Roosevelt Hot Springs, Utah.  
Report 2: Heat flow above an arbitrarily  
dipping plane of heat sources. Report 3: A  
datum correction for heat flow measurements made  
on an arbitrary surface  
[DOE/ID-12079/19] p0314 N81-18479  
Construction of a photovoltaic power system at  
Natural Bridges National Monument  
[DOE/ET-20279/94] p0283 N81-21607

## UTILITIES

Status of commercial phosphoric acid fuel cell  
system development  
[AIAA PAPER 81-0396] p0330 N81-20805  
Superconductive energy storage for diurnal use by  
electric utilities  
p0371 N81-23440  
Lifting hydro's potential  
p0335 N81-23515  
More on dual purpose solar-electric power plants  
p0227 N81-25045  
Design of a 100 kW photovoltaic flat panel system  
at a Washington, D.C. area waste treatment plant  
p0228 N81-25056  
The Niagara Falls resource recovery system  
p0301 N81-25557  
Pacific Northwest geothermal - Review and outlook  
p0188 N81-28549  
Overview of unconventional energy projects in the  
public power sector  
[ASME PAPER 81-DGP-1] p0189 N81-30118  
Mathematical programming applied to power systems  
expansion planning with pumped storage  
p0377 N81-18485  
Regional conversion to coal  
[FE-2468-63] p0314 N81-18517  
Fuel-cells for electric utility and transportation  
applications  
[BNL-28696] p0354 N81-18518  
Comparative ranking of 0.1 to 10 MW sub e solar  
thermal electric power systems. Volume 1:  
Summary of results  
[SERI/TR-351-461-VOL-1] p0273 N81-19618  
Monitoring and control requirement definition  
study for Dispersed Storage and Generation  
(DSG). Volume 5, appendix D: Cost-benefit  
considerations for providing dispersed storage  
and generation for electric utilities  
[NASA-CR-164053] p0202 N81-20542  
Comparative analysis of coal use options for  
reducing the dependence of utilities on imported  
oil  
[DOE/EA-12301-T1] p0322 N81-21230  
Study of fuel cell on-site, integrated energy  
systems in residential/commercial applications  
[NASA-CR-165144] p0361 N81-21533

## V

## VACANCIES (CRYSTAL DEFECTS)

Radiation damage annealing mechanisms and possible  
low temperature annealing in silicon solar cells  
p0244 N81-27207

## VACUUM DEPOSITION

Vacuum deposited polycrystalline silicon solar  
cells for terrestrial use  
p0236 N81-27128  
An investigation of the Cu<sub>x</sub>/S-CdS structure for  
photovoltaic conversion using an Al film vacuum  
deposited process  
p0241 N81-27178  
Silicon solar cells realized by laser induced  
diffusion of deposited antimony  
p0244 N81-27202

## VACUUM TUBES

Analysis of a high-performance tubular solar  
collector  
p0223 N81-24987

## VALVES

Everlasting sliding-disc valve METC SOA test valve  
No. B-J, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 N81-21361

## VAPOR DEPOSITION

Improved performance from thin film dielectric  
wraparound solar cells  
p0233 N81-27100



# SUBJECT INDEX

# VOLT-AMPERE CHARACTERISTICS

- The CdSe thin-film solar cell p0240 A81-27168
- Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287
- Stacked multiple-bandgap solar cells prepared by CVD techniques p0253 A81-27297
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD p0261 A81-17543
- OM-VPE grown materials for high efficiency solar cells p0262 A81-17552
- Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells [SAN-3045-3] p0275 A81-19634
- The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties p0280 A81-20912
- VAPORIZING**
- AGT-1500 combustor and fuel effects modeling [AD-A092255] p0350 A81-16061
- VARIABILITY**
- Variable speed constant frequency constant voltage alternator --- converting wind power to usable 60 hertz power [DOE/ET-29246-11] p0361 A81-21298
- VARIABLE PITCH PROPELLERS**
- Dynamic response of power generating wind turbines p0339 A81-25077
- VARIATIONS**
- Fluctuations in combustion-driven MHD generators p0356 A81-18877
- VEGETATION**
- Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas [DOE/ET-27127/1] p0207 A81-21646
- VELOCITY DISTRIBUTION**
- The estimation of the parameters of the distribution of wind speed and direction p0294 A81-23069
- The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [FFA-133] p0359 A81-20037
- The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [PB81-142184] p0364 A81-21635
- VERTICAL DISTRIBUTION**
- Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution p0293 A81-22207
- VERTICAL ORIENTATION**
- An analysis for aerodynamic performance of the vertical axis 'phi' type rotor wind turbine p0338 A81-25068
- The flow field about a vertical axis wind turbine p0338 A81-25069
- The design and analysis of a vertical axis ocean current power plant p0339 A81-25081
- VIBRATION TESTS**
- Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-HW unit [EPRI-CS-1444-VOL-4] p0351 A81-16602
- VIBRATIONAL STRESS**
- OTEC cold water pipe design for problems caused by vortex-excited oscillations p0347 A81-29200
- VIRGINIA**
- Wind energy resource atlas. Volume 5: The East Central region [PBL-3195-VOL-5] p0325 A81-21712
- VOLCANOES**
- Kilauea Iki lava lake experiment plans [SAND-80-1653] p0318 A81-19699
- VOLT-AMPERE CHARACTERISTICS**
- New method for maximum power consideration in solar cells with and without resistive losses p0209 A81-19951
- The properties of polycrystalline silicon solar cells with controlled titanium additions p0209 A81-20010
- Electrical effects of coal slag in a diffuse mode MHD generator [AIAA PAPER 81-0176] p0329 A81-20651
- Identification of a solar pumping installation p0218 A81-23012
- Theoretical efficiency of S/p+ -n/IS solar cells p0221 A81-24801
- An analytical model for solar cells p0221 A81-24806
- Ultra high speed growth of silicon ribbons for solar cells p0231 A81-27081
- Substrate related problems in RAD solar cells --- Ribbon Against Drop p0231 A81-27084
- Epitaxial solar cells on metallurgical grade silicon substrates p0231 A81-27085
- Behavior of interdigitated back-contact solar cells p0231 A81-27086
- A two-dimensional model of an MIS inversion layer solar cell p0232 A81-27088
- Silicon solar cells with high open-circuit voltage p0232 A81-27089
- The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells p0233 A81-27101
- Evaluation and optimization of silicon sheet solar cells p0234 A81-27114
- Solar cells and modules from dentritic web silicon p0234 A81-27117
- Pigmented tin oxide solar cell p0235 A81-27124
- Ion implanted grating type Si solar cells - Junction depth dependence p0235 A81-27126
- Design considerations for high efficiency polycrystalline silicon MIS solar cells p0236 A81-27127
- Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells p0236 A81-27130
- High efficiency silicon concentrator cells p0236 A81-27132
- Characterization of p+/nn+/+ BSF silicon concentrator solar cells --- Back Surface Field p0236 A81-27133
- Effects of temperature variation in concentrator cell series resistance measurements p0237 A81-27138
- Cuprous oxide MIS solar cells p0237 A81-27139
- Polka Dot Solar Cell p0238 A81-27157
- A monolithic series-connected Al-.93/Ga-.07/As/GaAs solar cell array p0239 A81-27158
- Two modified single diode models for simulating solar cells with distributed series resistance p0239 A81-27161
- Heterojunction solar cell design and evaluation p0239 A81-27163
- A new method of measuring diffusion length and surface recombination velocity --- for materials effects on solar cell efficiency p0239 A81-27164
- Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study p0239 A81-27165
- Majority carrier conduction effects in ITO/SIS solar cells --- Indium Titanium Oxide/Semiconductor-Insulator-Semiconductors p0239 A81-27166
- Indium phosphide films for photovoltaic devices p0240 A81-27173
- Space solar cells - High efficiency and radiation damage p0240 A81-27174
- High efficiency silicon solar cells p0240 A81-27175
- The role of deep levels in controlling the photovoltaic properties of Cu2S/CdS heterojunction p0241 A81-27182

Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar cell with an interdigitated grid p0242 A81-27185

Nuclear radiation effects on the photovoltaic performance and interface states of Cr, p-type, single crystal, MISi solar cells p0244 A81-27208

Summary results of the ATS-6 solar cell flight experiment p0244 A81-27209

Development of glass encapsulation techniques for terrestrial photovoltaic arrays p0246 A81-27227

High temperature properties of GaAs/GaAs heteroface solar cells p0247 A81-27242

Degradation of ITO/p-Si solar cells --- Indium Tin Oxide p0248 A81-27257

Grain size dependence of silicon solar cell parameters p0249 A81-27261

Photovoltaic behavior of amorphous silicon-based alloys p0249 A81-27263

Optical absorption by gap states in amorphous silicon p0249 A81-27265

Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics p0249 A81-27266

Integral glass covering of spacecraft solar cells by electrostatic bonding p0250 A81-27269

Performance and reliability of photovoltaic modules at various MIT LL test sites p0251 A81-27277

Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280

Improved polycrystalline thin film gallium arsenide MOS solar cells p0251 A81-27281

Efficient large-grained GaAs homojunction solar cells p0251 A81-27285

Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287

A numerical study of the nonuniform loading of a segmented MHD channel p0346 A81-27967

Review of conductor-insulator-semiconductor /CIS/ solar cells p0254 A81-28954

**VOLTAGE GENERATORS**

Linear induction-type MHD machine with a winding connected to the voltage source p0346 A81-27966

**VORTEX FILAMENTS**

The flow field about a vertical axis wind turbine p0338 A81-25069

**VORTEX RINGS**

Flow field analysis and performance of wind turbines employing slotted diffusers p0345 A81-27553

**VORTICES**

OTEC cold water pipe design for problems caused by vortex-excited oscillations p0347 A81-29200

**WAFERS**

Development of a high efficiency thin silicon solar cell [NASA-CR-163931] p0259 A81-17522

Development of megasonic cleaning for silicon wafers [NASA-CR-164011] p0271 A81-19569

**WAKES**

MHD effects on viscous and thermal wakes and their influence on the performance of MHD generators [LOG-E281] p0352 A81-16899

Aerodynamic analysis of propeller-type windmills with helical trailing vortices p0355 A81-18565

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [FFA-133] p0359 A81-20037

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect [PB81-142184] p0364 A81-21635

**WALL FLOW**

Three-dimensional analysis of MHD generators - Development of electrical solution [AIAA PAPER 81-0175] p0329 A81-20650

**WALL TEMPERATURE**

Radiation and free convection shield for passive thermal control --- in solar buildings [ASME PAPER 80-WA/SOL-7] p0212 A81-21134

**WASHERS (CLEANERS)**

Development of an automatic heliostat cleaning system [SAND-79-8184] p0268 A81-18532

**WASTE DISPOSAL**

Methane production from the Mountain View landfill p0300 A81-25553

The Ames Resource Recovery facility p0301 A81-25558

Environmental impact assessment guidelines for new source coal gasification facilities [PB81-114555] p0195 A81-17635

**WASTE ENERGY UTILIZATION**

The rebirth of the Rankine cycle p0327 A81-20225

An assessment of the use of chemical reaction systems for thermal energy transport p0365 A81-25011

Ammoniated salt heat pump --- using solar energy or industrial waste energy for space heating and cooling p0372 A81-25019

Coupling Ocean Thermal Energy Conversion technology /OTEC/ with nuclear power plants p0340 A81-25087

Military wastes-to-energy applications [AD-A093042] p0193 A81-17578

Capital cost estimates of selected advanced thermal energy storage technologies [ANL/SPG-11] p0376 A81-17590

US Department of Energy thermal energy storage program [CONF-801154-1] p0196 A81-18510

High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1599-VOL-1] p0357 A81-19466

Surface-heating greenhouses with waste heated water [DOE/R5-10107/T1] p0200 A81-19620

High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendixes [EPRI-AP-1599-VOL-2] p0360 A81-20434

Development of method and equipment for energy recovery from the exhaust gases of the oil-fueled smelting and holding furnaces [STU-78-6895] p0203 A81-20573

Energy production from waste heat by means of elastomers or memory metals [STU-79-6394] p0362 A81-21551

Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range, volume 1 [DOE/ET-15207/T2-VOL-1] p0363 A81-21581

Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update [DOE/EV-73002/1-VOL-3] p0205 A81-21597

**WASTE UTILIZATION**

Ethanol from municipal cellulosic wastes p0299 A81-25124

An update in the 'development of alternate liquid fuels' p0299 A81-25125

Trash to energy p0300 A81-25162

The Bridgeport resource recovery system p0300 A81-25163

Design and management for resource recovery. Volume 2 - High technology A failure analysis --- Book on materials and energy reclamation projects from solid wastes p0300 A81-25225

W

# SUBJECT INDEX

# WATER HEATING

- Design and management for resource recovery.  
Volume 1 - Energy from waste --- Book p0300 A81-25551
- The Chicago Southwest Supplemental Fuel Processing Facility p0300 A81-25552
- The Pompano Beach RefCON facility p0300 A81-25554
- Wisconsin Electric's characterization of Americology's refuse-derived fuel p0301 A81-25555
- The Niagara Falls resource recovery system p0301 A81-25557
- Technology for powdered fuel preparation from solid waste p0301 A81-25559
- Municipal solid waste comminution by steam explosion p0301 A81-25561
- Albany biomass-to-oil project p0301 A81-25562
- Conversion of organic wastes to oil by reductive formylation p0302 A81-25563
- An investigation on Tehran municipal solid waste with the view of electricity generation p0302 A81-26474
- Energy from biomass: The simplex process for the gasification of coal and forest pulp [PB81-110512] p0305 A81-16324
- Municipal solid waste to energy act of 1979 [GPO-60-684] p0192 A81-16956
- Pyrolytic oils: Characterization and data development for continuous processing [PB81-110959] p0306 A81-17294
- Obtaining improved products from the organic fraction of municipal solid waste [PB81-110918] p0307 A81-17295
- Military wastes-to-energy applications [AD-A093042] p0193 A81-17578
- Characterization of solid waste conversion and cogeneration systems p0307 A81-17585
- Seasonal Thermal Energy Storage Program [PWL-SA-9030] p0376 A81-17602
- Military wastes-to-energy applications p0314 A81-18483
- Ethanol: A brief economic evaluation [DOE/ET-27256/T7] p0316 A81-19331
- Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs [DOE/EV-0115] p0201 A81-19655
- Conversion of cellulosic wastes to liquid fuels [COO-2982-57] p0320 A81-20306
- Engineering study of pelleting waste paper for energy recovery [NBERDC-53] p0320 A81-20562
- Energy from biological processes. Volume 2: Technical and environmental analyses [PB81-134769] p0323 A81-21233
- Alternate sources of energy [CONF-8009109] p0384 A81-21580
- WASTES**
- Obtaining improved products from the organic fraction of municipal solid waste [PB81-110918] p0307 A81-17295
- Proceedings: EPA/Industry Forum on Coal-Liquefaction [PB81-113052] p0195 A81-17645
- WATER**
- Hydrogen and oxygen from water. V - The ROC system p0285 A81-21955
- H<sub>2</sub> as an energy vector - Hydrogen production by the HLOFLUX electrolytic cell p0285 A81-23014
- Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary --- and water splitting technology [BNFT-PB-T-79-121] p0291 A81-19339
- WATER FLOW**
- Geothermal reservoir engineering computer code comparison and validation using the GEON3 simulator program [DOE/SP-11450/1] p0314 A81-18478
- WATER HEATING**
- Design procedure and application of solar-assisted series heat pump systems [ASME PAPER 80-WA/SOL-9] p0212 A81-21135
- Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems [ASME PAPER 80-WA/SOL-10] p0212 A81-21136
- Economic analysis and optimization of solar residential space heating [ASME PAPER 80-WA/SOL-11] p0212 A81-21137
- Comparison of liquid solar thermal storage subsystems in the national solar data network [ASME PAPER 80-WA/SOL-36] p0214 A81-21156
- Simple transient thermal model for solar collector/storage water heaters p0218 A81-23498
- Comparison of commercial and do-it-yourself solar collectors p0219 A81-23704
- Sede Boger shallow pond project p0220 A81-24448
- Solar water heating demonstration program for public schools in New Mexico p0225 A81-25013
- Method of on site testing for performance rating of solar water heating systems p0225 A81-25014
- Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors p0225 A81-25015
- The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction p0225 A81-25016
- Enhancement of low grade heat via the HYSOS chemical heat pump --- Hydride Conversion and Storage System p0225 A81-25018
- Direct solar air heating in Denmark /56 deg N/- Heating strategies in theory and practice p0225 A81-25022
- Bi-coolant flat plate solar collector p0226 A81-25023
- Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy p0227 A81-25039
- Solar energy for multi-residential water heating - An economic approach p0229 A81-25063
- Domestic solar water preheating versus solar water heating An economic evaluation p0229 A81-25064
- The Total Solar House p0230 A81-26401
- Construction and startup performance of the Hiamisburg salt-gradient solar pond p0253 A81-27552
- Central solar heating plants - Optimal ratio between solar collector area and heat storage volume p0256 A81-29262
- Boston solar retrofits: Studies of solar access and economics [DOE/CS-10047/T5] p0268 A81-18538
- Review of activities and plans for solar energy in Federal buildings [DOE/CR-10001/T2] p0200 A81-19590
- Project SAGE: Solar assisted gas energy [DOE/TIC-11105] p0274 A81-19624
- Solar production of industrial process hot water: Operation and evaluation of the Campbell Soup hot water solar facility [SAB-1218-4] p0274 A81-19626
- Hot water from the Sun: A consumer guide to solar water heating [PB81-128597] p0275 A81-19647
- Water systems modeling --- solar collectors and heating systems p0277 A81-20554
- Solar hot water system installed at Las Vegas, Nevada [NASA-CR-161642] p0281 A81-21535
- Performance of active solar domestic hot water heating systems [SOLAR/0024-80/41] p0281 A81-21556
- Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980 [SOLAR/1014-80/14] p0281 A81-21557

## WATER INJECTION

Solar space and water heating system at Stanford University, Central Food Services Building  
[DOE/CS-31522/T1] p0283 N81-21603

## WATER INJECTION

Effect of water injection for NOx reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor  
[ASME PAPER 81-GT-51] p0348 N81-29964

## WATER POLLUTION

Report to the Congress on ocean pollution and offshore development  
[PB81-118333] p0195 N81-17630  
Methodology to evaluate the potential for ground water contamination from geothermal fluid releases  
[PB81-111114] p0195 N81-17641  
The environmental assessment of a contemporary coal mining system  
[NASA-CR-163974] p0197 N81-18571

## WATER QUALITY

Ground Water and Energy: Proceedings of the US Department of Energy's National Workshop  
[CONF-800137] p0199 N81-19584  
Environmental development plan: Coal liquefaction  
[DOE/EDP-0044] p0206 N81-21641

## WATER RESOURCES

A comparison of environmental issues related to development of small hydropower resources at new versus existing sites  
[CONF-801210-13] p0197 N81-18577  
Water supply and demand in an energy supply model  
[DOE/EV-10180/2] p0204 N81-21560  
Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas  
[DOE/ET-27127/1] p0207 N81-21646

## WATER TEMPERATURE

Capacity modulation of solar-fired absorption chillers with single and multi-temperature energizing sources  
p0210 N81-20493  
Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goias - Brazil  
p0295 N81-23630

The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey  
p0297 N81-25090

Heat transport in groundwater systems. Volume 2: Laboratory model  
[PB81-104135] p0375 N81-16523  
Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California  
[EPRI-EM-1654] p0275 N81-19630

## WATER TREATMENT

Combined aquatic-terrestrial biomass systems  
p0304 N81-29267  
Catalytic cracking of hydrotreated coal liquids and related polycyclic naphthenes and naphthenoaromatics  
p0308 N81-18118

## WATER VAPOR

High temperature water vapor electrolysis (HOT ELLY) --- for hydrogen production  
[BNFT-PB-T-80-051] p0292 N81-21627

## WATER WHEELS

Ultra headless hydro power  
[SLAC-PUB-2613] p0352 N81-16609

## WATERWAVE ENERGY

Wave-energy extraction by a submerged cylindrical resonant duct  
p0303 N81-28680  
Head-sea diffraction by a slender raft with application to wave-power absorption  
p0303 N81-28690

## WATERWAVE ENERGY CONVERSION

Investigation of dynamics of a waterwave power plant  
p0333 N81-22176  
Power from water waves  
p0337 N81-23955  
Sources and potential uses of wave energy  
p0339 N81-25079  
Small scale power generation utilizing wave energy  
p0339 N81-25080  
The design and analysis of a vertical axis ocean current power plant  
p0339 N81-25081

## SUBJECT INDEX

### WATERWAVE POWERED MACHINES

Power from water waves  
p0337 N81-23955  
The sea trial of the wave power generator 'Kaimai'  
p0338 N81-24975

### WAVE DIFFRACTION

Head-sea diffraction by a slender raft with application to wave-power absorption  
p0303 N81-28690

### WAXES

PCM thermal energy storage in cylindrical containers of various configurations --- Phase Change Materials  
p0372 N81-24996  
Heat transfer through a paraffin wax solar energy storage characterized by a temperature dependent specific heat  
p0224 N81-25006

### WEAPON SYSTEMS

Use of non-petroleum fuels to reduce military energy vulnerabilities: Self-sufficient bases and new weapon propulsion systems  
[LA-UR-80-3445] p0199 N81-19329

### WEATHER FORECASTING

Development of an improved degree-day concept by analysis of historical weather data for predicting energy requirements of buildings  
p0198 N81-18620

### WEATHER MODIFICATION

An assessment of the atmospheric effects of a Satellite Power System  
p0187 N81-25053  
Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects  
[DOE/EE-0090] p0203 N81-20598

### WEATHER STATIONS

Diffuse sky measurements and determination of corrected shadow band multiplication factors --- solar photovoltaic demonstration project  
[ASME PAPER 80-WA/SOL-26] p0213 N81-21150  
Mapping of solar radiation for use in the Sudanese-Sahelian region of Africa  
p0217 N81-23007

### WEATHERING

Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors  
p0318 N81-20202

### WEATHERPROOFING

Development of simplified process for environmentally resistant cells  
[NASA-CR-163884] p0257 N81-16575

### WEBS (SHEETS)

Development of processes for the production of low cost silicon dendritic web for solar cells  
p0231 N81-27080

### WEIGHT REDUCTION

Commercial, or usable, size Campbell Chinese type windmill  
p0338 N81-25073

### WELLS

The mass discharge of a geofluid from a geothermal reservoir - Well system with flashing flow in the bore  
p0296 N81-24302  
Hydrothermal metamorphism in the Larderello geothermal field  
p0296 N81-24306

Methane production from the Mountain View landfill  
p0300 N81-25553

Heavy oil reservoirs recoverable by thermal technology --- steam injection  
[DOE/ET-12380/1-VOL-3] p0317 N81-19540

Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas  
[DOE/ET-27127/1] p0207 N81-21646

### WEST VIRGINIA

Wind energy resource atlas. Volume 5: The East Central region  
[FNL-3195-VOL-5] p0325 N81-21712

### WILDLIFE

Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas  
[DOE/ET-27127/1] p0207 N81-21646

# SUBJECT INDEX

# WINDPOWER UTILIZATION

## WIND (METEOROLOGY)

Meteorological aspects of wind energy - Assessing the resource and selecting the sites

p0295 A81-23690

Wind engineering; Proceedings of the Fifth International Conference, Colorado State University, Fort Collins, Colo., July 8-14, 1979. Volumes 1 & 2

p0382 A81-27301

Wind resource of the area surrounding Medicine Bow, Wyoming

[PB81-109621] p0308 A81-17684

Wind energy resource atlas. Volume 4: The Northeast region

[FNL-3195-WEBA-4] p0321 A81-20592

## WIND DIRECTION

The estimation of the parameters of the distribution of wind speed and direction

p0294 A81-23069

## WIND EFFECTS

Wind engineering; Proceedings of the Fifth International Conference, Colorado State University, Fort Collins, Colo., July 8-14, 1979. Volumes 1 & 2

p0382 A81-27301

The aerodynamics of heliostats for solar power plant applications

p0253 A81-27310

## WIND MEASUREMENT

Wind resource of the area surrounding Medicine Bow, Wyoming

[PB81-109621] p0308 A81-17684

## WIND PROFILES

Wind energy utilization possibilities in Turkey

p0338 A81-25075

## WIND SHEAR

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect

[FFA-133] p0359 A81-20037

## WIND TUNNEL MODELS

Wind-tunnel simulation of the flow over hills and complex terrain --- for wind energy conversion applications

p0295 A81-23693

## WIND TUNNEL TESTS

The characteristics of two, simple, automatic speed-control devices for horizontal axis wind-turbines

p0338 A81-25070

## WIND VANES

An analysis for aerodynamic performance of the vertical axis 'phi' type rotor wind turbine

p0338 A81-25068

## WIND VARIATIONS

Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study

[UCLA-12/1268] p0197 A81-18576

## WIND VELOCITY

The estimation of the parameters of the distribution of wind speed and direction

p0294 A81-23069

An analytical expression for the average output power of a wind machine

p0337 A81-24433

Wind energy utilization possibilities in Turkey

p0338 A81-25075

## WIND VELOCITY MEASUREMENT

An investigation of wind-energy prospects in the Otago region of New Zealand

p0295 A81-23692

Estimating the wind's potential for small scale energy generation using available local climatological data

p0338 A81-25074

## WINDMILLS (WINDPOWERED MACHINES)

Performance assessment of a Plettner wind turbine

p0327 A81-20025

Prediction model for fatigue crack growth in windmill structures

p0371 A81-21740

A performance analysis for horizontal axis wind turbines applicable to variable pitch or airbrake control

p0333 A81-23067

Current developments in small wind energy conversion systems

p0335 A81-23695

The performance of arrays of wind turbines

p0335 A81-23698

An analysis for aerodynamic performance of the vertical axis 'phi' type rotor wind turbine

p0338 A81-25068

The flow field about a vertical axis wind turbine

p0338 A81-25069

The characteristics of two, simple, automatic speed-control devices for horizontal axis wind-turbines

p0338 A81-25070

An unconventional wind machine

p0338 A81-25072

Commercial, or usable, size Campbell Chinese type windmill

p0338 A81-25073

The aerodynamic analysis of a 10 kW horizontal-axis windmill

p0354 A81-18484

Aerodynamic analysis of propeller-type windmills with helical trailing vortices

p0355 A81-18565

Wind machine fatigue analysis and life prediction

[BFP-3135/3533/80/19] p0357 A81-19495

Static deflection and eigenfrequency analysis of the Hube wind turbine rotors. Theoretical background --- structural vibration

[BISOE-H-2199] p0357 A81-19497

Mod 2 wind turbine development project

[SERI/SP-732-728] p0358 A81-19619

Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IEA, research and development WECS, annex one, subtask A1 --- conference, Stockholm 1980

[FFA-TN-HU-2218] p0359 A81-19636

The velocity induced by the wake of a wind turbine in a shear layer, including ground effect

[FFA-133] p0359 A81-20037

Investigations of structural dynamics on the Gedser WTG and on new Danish wind turbines

[BISOE-H-2146] p0363 A81-21626

## WINDOWS

Handbook for calculating solar-influenced building heat losses

[SAND-79-2173] p0279 A81-20583

## WINDOWS (APERTURES)

Thin film electrochromic materials for energy efficient windows

[LEL-10862] p0197 A81-18549

## WINDPOWER UTILIZATION

Prospective energy sources and their comparison with current supplies

p0185 A81-21063

The estimation of the parameters of the distribution of wind speed and direction

p0294 A81-23069

Meteorological aspects of wind energy - Assessing the resource and selecting the sites

p0295 A81-23690

Wind energy resource survey methodology

p0295 A81-23691

An investigation of wind-energy prospects in the Otago region of New Zealand

p0295 A81-23692

Wind-tunnel simulation of the flow over hills and complex terrain --- for wind energy conversion applications

p0295 A81-23693

Performance calculation of a vertical-axis wind power converter

p0337 A81-24617

New developments in wind systems technology

p0338 A81-25067

An unconventional wind machine

p0338 A81-25072

Estimating the wind's potential for small scale energy generation using available local climatological data

p0338 A81-25074

Wind energy utilization possibilities in Turkey

p0338 A81-25075

Wind energy conversion in the MW range

p0339 A81-25076

Wind energy - A utility perspective

p0187 A81-26371

Overview of wind energy systems - Issues in development and application

p0345 A81-27551

- Flow field analysis and performance of wind turbines employing slotted diffusers  
p0345 A81-27553
- Wind energy systems act of 1980  
[H-BEPT-96-1217] p0190 A81-16525
- Wind-power site-screening methodology  
[UCRL-52938] p0314 A81-18526
- Proceedings of the Vertical Axis Wind Turbine (VAWT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 A81-18550
- Wind energy - how reliable  
[AD-A094988] p0317 A81-19563
- Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report  
[RFP-3007-VOL-2] p0357 A81-19581
- Dunlite model 81/002550 wind turbine generator  
[RFP-3149/3533/80/17] p0358 A81-19601
- Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IEA, research and development WECS, annex one, subtask A1 --- conference, Stockholm 1980  
[PPA-TN-HU-2218] p0359 A81-19636
- Wind energy systems information user study  
[SBRI/TR-751-749] p0363 A81-21578
- Alternate sources of energy  
[COMF-8009109] p0384 A81-21580
- Wind energy integration study  
[DOE/BF-10552/17] p0205 A81-21593
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update  
[DOE/EV-73002/1-VOL-3] p0205 A81-21597
- Wind energy resource atlas. Volume 5: The East Central region  
[PNL-3195-VOL-5] p0325 A81-21712
- WINDPOWERED GENERATORS**
- Torque ripple in a Darrieus, vertical axis wind turbine  
[ASME PAPER 80-WA/SOL-13] p0331 A81-21138
- VAUTDYN - A numerical package for the dynamic analysis of vertical axis wind turbines  
[ASME PAPER 80-WA/SOL-18] p0331 A81-21142
- Stability of large horizontal-axis axisymmetric wind turbines  
p0333 A81-22526
- The photovoltaic-aeolian plant at Passo Mandrioli /Italy/  
p0218 A81-23013
- A review of the icing problem for aerogenerators  
p0333 A81-23066
- A performance analysis for horizontal axis wind turbines applicable to variable pitch or airbrake control  
p0333 A81-23067
- Integration of wind power into Australian electricity grids without storage - A computer simulation  
p0334 A81-23068
- Large wind-turbine projects in the United States wind energy program  
p0335 A81-23694
- Current developments in small wind energy conversion systems  
p0335 A81-23695
- Wind-turbine aerodynamics  
p0335 A81-23696
- Aeroelastic stability and response analysis of large horizontal-axis wind turbines  
p0335 A81-23697
- The performance of arrays of wind turbines  
p0335 A81-23698
- An analytical expression for the average output power of a wind machine  
p0337 A81-24433
- Performance calculation of a vertical-axis wind power converter  
p0337 A81-24617
- High temperature storage for a wind energy system  
p0372 A81-25002
- Alternative energy sources II: Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 4 - Indirect solar energy  
p0382 A81-25065
- New developments in wind systems technology  
p0338 A81-25067
- A new concept in horizontal axis wind turbine rotors  
p0338 A81-25071
- Estimating the wind's potential for small scale energy generation using available local climatological data  
p0338 A81-25074
- Wind energy conversion in the MW range  
p0339 A81-25076
- Dynamic response of power generating wind turbines  
p0339 A81-25077
- Reliability, energy, and cost effects of wind integration with conventional electrical generating systems  
p0339 A81-25078
- Wind energy - A utility perspective  
p0187 A81-26371
- Aeroelastic stability of wind turbine rotors  
p0345 A81-26975
- Overview of wind energy systems - Issues in development and application  
p0345 A81-27551
- Making windpower an important part of a national energy plan  
[ASME PAPER 81-PET-11] p0189 A81-30113
- Proceedings of the Vertical Axis Wind Turbine (VAWT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 A81-18550
- Wind machine fatigue analysis and life prediction  
[RFP-3135/3533/80/19] p0357 A81-19495
- Wind power generation dynamic impacts on electric utility systems  
[EPRI-AP-1614] p0358 A81-19585
- Small wind systems technology assessment. State of the art and near term goals  
[RFP-3136/3533/80/18] p0358 A81-19600
- Dunlite model 81/002550 wind turbine generator  
[RFP-3149/3533/80/17] p0358 A81-19601
- Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-M-2242] p0359 A81-19637
- Wind generator network methodology and analysis  
p0359 A81-20356
- Large wind energy converter: Growian 3 MW  
[NASA-TN-75404] p0360 A81-20543
- Variable speed constant frequency constant voltage alternator --- converting wind power to usable 60 hertz power  
[DOE/ET-29246-T1] p0361 A81-21298
- The NASA-LeRC wind turbine sound prediction code  
[NASA-TN-81737] p0362 A81-21537
- Aerodynamic characteristics of the TARP (Toroidal Accelerator Rotor Platform) wind energy conversion system  
[PB81-140675] p0364 A81-21632
- The Lehost Wind Turbine experimental program  
[PB81-141467] p0364 A81-21634
- The velocity induced by the wake of a wind turbine in a shear layer, including ground effect  
[PB81-142184] p0364 A81-21635
- WIRE WINDING**
- The design of a tapered bore superconducting MHD magnet system  
p0334 A81-23442
- WOOD**
- Wood energy in West Virginia  
p0297 A81-25066
- Albany biomass-to-oil project  
p0301 A81-25562
- Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 A81-21234
- Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day  
[PNL-3695-APP-B] p0324 A81-21604
- WORK CAPACITY**
- Low-temperature thermal emission rectifier with an oxidized titanium collector  
p0337 A81-24209
- WORKING FLUIDS**
- Analysis of two-phase flow solar collectors with application to heat pumps  
[ASME PAPER 80-WA/SOL-32] p0214 A81-21153
- Thermal energy storage and regeneration --- Book  
p0371 A81-21391

# SUBJECT INDEX

# ZINC-BROMIDE BATTERIES

Fluids for energy transport and conversion in solar power stations p0220 A81-24616

PCM thermal energy storage in cylindrical containers of various configurations --- Phase Change Materials p0372 A81-24996

A cycle life tester for the long-term stability of phase change materials for thermal energy storage p0372 A81-24997

Solar-powered saline sorbent-solution heat pump/storage system p0224 A81-25001

Numerical resolution of the heat transfer equations in a latent heat solar energy storage system p0224 A81-25005

Trombe-Michel wall using phase change materials --- for solar heating of buildings p0224 A81-25007

The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction p0225 A81-25016

Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums p0255 A81-29254

Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy [DOE/ET-20417/4] p0378 A81-19633

## Y

YAG LASERS

Photochemical solar energy conversion in surfactant vehicles [DOE/ER-10601/1] p0269 A81-18560

## Z

ZAMBIA

Irradiance estimates for Zambia p0220 A81-24434

ZEOLITES

A new route to liquid fuels from coal p0304 A81-28999

Development of a system for off-peak electrical energy use by air conditioners and heat pumps [TVA-EDT-122] p0377 A81-18509

ZETA PINCH

Voltage and current sensors for a high-density z-pinch experiment p0332 A81-21641

ZINC

Effect of zinc impurity on silicon solar-cell efficiency p0256 A81-29290

Development of zinc-bromine batteries for utility energy storage [DOE/ET-29345/21] p0379 A81-20591

ZINC CHLORIDES

Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies [FE-1743-80-VOL-1] p0316 A81-19335

ZINC COMPOUNDS

Polycrystalline Zn3P2 Schottky barrier solar cells p0220 A81-24414

Thin polycrystalline Zn3P2 films for photovoltaic cells p0240 A81-27170

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions [SERI/PR-8031-1-12] p0264 A81-17595

ZINC OXIDES

Selective fast neutron detector p0332 A81-21640

Characterization of ZnO for the fabrication of conductor-insulator-semiconductor /CIS/ solar cells p0237 A81-27141

ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis p0240 A81-27169

Theoretical advantages of pn+-type Cu2S-ZnO solar cell p0346 A81-28395

Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors [DOE/AL-04266/T1] p0268 A81-18537

ZINC SLENIDES

ZnSe solar spectrum converter for GaAs solar cells p0237 A81-27143

ZINC SULFIDES

Cu/x/S/Cd/y/Zn/1-y/S and Cu/x/S/Cd/y/Zn/1-y/S, CdS thin film solar cells using chemically sprayed films p0229 A81-26355

Growth and evaluation of CdS and /CdZn/S films for the fabrication of high performance photovoltaic devices p0241 A81-27180

ZINC-BROMIDE BATTERIES


Zinc-bromine batteries for energy storage p0373 A81-25607

# PERSONAL AUTHOR INDEX

ENERGY / A Continuing Bibliography (Issue 30)

JULY 1981

## Typical Personal Author Index Listing

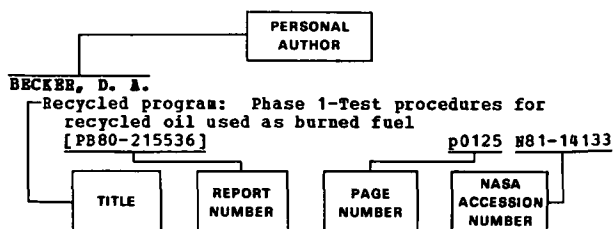

Listings in this index are arranged alphabetically by personal author. The title of the document provides the user with a brief description of the subject matter. The report number helps to indicate the type of document listed (e.g. NASA report, translation, NASA contractor report). The page and accession numbers are located beneath and to the right of the title. Under any one author's name the accession numbers are arranged in sequence with the AIAA accession numbers appearing first.

## A

- AAHODT, R. L.**  
Basic research needed for the development of geothermal energy  
[LA-8562-MS] p0320 A81-20580
- ABBEY, D.**  
Water supply and demand in an energy supply model  
[DOE/EV-10180/2] p0204 A81-21560
- ABBIN, J. P., JR.**  
Binary Rankine-cycle engines for solar-thermal power systems  
[ASME PAPER 80-WA/SOL-19] p0332 A81-21143
- ABBOTT, D. H.**  
AlGaAs-GaAs cascade solar cell p0261 A81-17550
- ABDELRAHMAN, R. A. H.**  
Technical evaluation of gaseous suspensions of graphite for the absorption of concentrated solar radiation  
[EPFL-ITA-6] p0272 A81-19574
- ABDERASSOUL, R.**  
Chemical and structural defects in thin film polycrystalline silicon solar cells p0233 A81-27105
- ABELES, B.**  
Short circuit currents and collection efficiencies in a-SiHx solar cells p0246 A81-27235
- ABEUS, S. G.**  
Improvement of phosphoric acid fuel cell stacks  
[AD-A092814] p0351 A81-16589
- ABERNATHY, G. H.**  
Operational characterization of the solar-thermal power system near Willard, New Mexico  
[ASME PAPER 80-WA/SOL-39] p0214 A81-21159
- ABOU-ELFOTOUH, F.**  
Solar thermionic power plant. II p0228 A81-25057
- ABRAHAM, K. H.**  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 A81-21586
- ABROMAVAGE, H. H.**  
Environmental assessment for the satellite power system concept development and evaluation program  
[AIAA PAPER 81-0244] p0185 A81-20695
- ABTABI, F.**  
Superconducting generators - Economics, technical considerations and ancillary technology p0335 A81-23466
- ADAMS, G. R.**  
The design and analysis of a vertical axis ocean current power plant p0339 A81-25081
- ADAMS, S. H.**  
Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TM-6783] p0198 A81-18578
- ADAMSON, C. E.**  
Coal hydrogasification process development  
[DOE/ET-10328/27] p0319 A81-20304
- ADDIS, F. H.**  
Investigation of Cu2O solar cells p0237 A81-27140
- ADKINS, D. W.**  
Dynamic response of power generating wind turbines p0339 A81-25077
- ADLER, D.**  
Chalcogenide-glass solar cells  
[DOE/ET-23043/T1] p0284 A81-21608
- ADLER, F. H.**  
Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report  
[BPP-3007-VOL-2] p0357 A81-19581
- ADORNI, E.**  
Construction of a probe for measuring temperature and pressure in deep wells p0296 A81-24304
- ADRIANI, E.**  
Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234
- ADRIANI, E.**  
Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems p0247 A81-27244
- AGABAEV, CH.**  
Development and study of a lead telluride/germanium telluride solar thermoelectric generator p0254 A81-28588
- AGARWAL, A. K.**  
Pricetown I - In-situ coal conversion field test for bituminous coals p0298 A81-25111
- AGARWAL, S. C.**  
Energy conservation through process modification and control  
[ASME PAPER 81-PID-2] p0188 A81-30111
- AGERSTRAND, Z.**  
Energy out of groundwater  
[NE/HETV-80/9] p0320 A81-20565
- AGGARWAL, K. K.**  
New method for maximum power consideration in solar cells with and without resistive losses p0209 A81-19951
- AGGRADI, F. G. P.**  
Construction of a complete all season conditioning with solar energy of an office building of 260 m2 and its operation  
[EUR-6702-EN] p0263 A81-17589
- AGNEHOTRI, O. P.**  
Solar selective surfaces p0256 A81-29684
- AHLSTROM, H. G.**  
Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory p0294 A81-22511
- AHLUWALIA, R. K.**  
Three-dimensional analysis of MHD generators - Development of electrical solution  
[AIAA PAPER 81-0175] p0329 A81-20650
- AHLUWALIA, R. K.**  
Heat transfer in slagging MHD radiant boilers  
[AIAA PAPER 81-0316] p0330 A81-20747



- Two-dimensional MHD generator model  
[ANL/MHD-80-11] p0359 N81-19932
- AHN, Y. K.**  
Research and evaluation of biomass  
resources/conversion/utilization systems  
(market/experimental analysis for development of  
a data base for a fuels from biomass model.  
Volume 1: Biomass allocation model  
[DOE/ET-20611/14] p0315 N81-18553
- AIACHE, L.**  
Solar input and solar energy resources  
p0217 A81-23008
- AIHAW, W. R.**  
Solar coal gasification: Plant design and economics  
[UCRL-84610] p0265 N81-18225
- AKIBA, R.**  
Kinetics of the reaction between Mg<sub>2</sub>Ni and H<sub>2</sub>  
p0290 A81-25499
- AL-ANSARI, J. M.**  
High temperature thermal energy storage in  
aquifers with a solar power plant application  
p0377 N81-18486
- ALBERTO, G.**  
Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 N81-21629
- ALBERTS, R. D.**  
Wisconsin Electric's characterization of  
Americology's refuse-derived fuel  
p0301 A81-25555
- ALBERTS, R. D.**  
Application analysis of photovoltaic systems for  
service/commercial/institutional and industrial  
sectors  
p0233 A81-27106
- ALBRECHT, P. R.**  
The Cycloentrifuge - An advanced gas/solids  
separator for coal conversion processes  
[AIAA PAPER 81-0395] p0293 A81-20804
- ALCORN, J.**  
Design of the EPA superconducting 30 MJ energy  
storage coil  
p0371 A81-23450
- ALEPHIL, G.**  
Metal hydrides in energy conversion systems  
p0342 A81-25480
- ALEKSOV, V. R.**  
Thermodynamic and thermochemical properties of  
combustion products. Volume 10 - Fuels that are  
in current use, in the research stage, and  
considered a possibility. Part 2 -  
Multicomponent fuel compositions /Handbook/  
p0302 A81-26195
- ALESINA, A.**  
Solid-state power conversion - A Fourier analysis  
approach to generalized transformer synthesis  
p0347 A81-29243
- ALEXANDER, P.**  
An all-plated, low cost contact system for silicon  
solar cells  
p0243 A81-27197
- ALFF, R. K.**  
Economics of heavy fuels in gas turbines and  
combined cycles  
[ASME PAPER 81-GT-45] p0347 A81-29959
- ALIA, P.**  
Optimized design of total energy systems: The  
BETE project  
[CISE-1606] p0196 N81-18512
- ALLEN, M. D.**  
Stress corrosion studies in solvent refined coal  
liquefaction pilot plants  
[ORNL/TN-7513] p0321 N81-21179
- ALLENDORF, G.**  
High concentration silicon photovoltaic cell  
development  
[SAND-80-7068] p0279 N81-20595
- ALLISON, J. F.**  
Thin n-i-p silicon solar cell  
p0232 A81-27097
- Dependence of efficiency of shallow junction  
silicon solar cells on substrate doping  
p0254 A81-28216
- Recent progress in high-output-voltage silicon  
solar cells  
p0260 N81-17534
- ALLRED, R. E.**  
Development of sheet molding compound solar  
collectors with molded-in silvered glass  
reflective surfaces  
[SAND-80-0702] p0273 N81-19613
- ALLSUP, J. E.**  
Comparisons of gasohol and gasoline in laboratory  
and field trials  
[CONF-801030-3] p0312 N81-18237
- ALMASHARY, M.**  
Solar thermionic power plant. II  
p0228 A81-25057
- ALMGREN, D. B.**  
Study of process technology for GaInAs/GaAs  
heteroface solar cells  
p0261 N81-17544
- AMADO, J.**  
Mapping of solar radiation for use in the  
Sudanese-Sahelian region of Africa  
p0217 A81-23007
- AMANO, M.**  
Hydrogen storage properties of FeTi<sub>1+x</sub>/  
p0290 A81-25494
- AMEND, W. E.**  
Evaluation of a two-phase turbine for solar  
electric power generation  
[DOE/ET-20431/T1] p0263 N81-17587
- AMOS, D. J.**  
High-reliability gas turbine combined-cycle  
development program, phase 1  
[EPRI-AP-1598] p0358 N81-19632
- ANDERSON, A. T.**  
Evaluating the environmental effects of past and  
present surface mining - A remote sensing  
applied research review  
p0186 A81-23555
- ANDERSON, D. W.**  
Ultra-lean combustion at high inlet temperatures  
[ASME PAPER 81-GT-44] p0347 A81-29958
- ANDERSON, H. E.**  
Handbook for calculating solar-influenced building  
heat losses  
[SAND-79-2173] p0279 N81-20583
- ANDERSON, J.**  
Evaluation of solar collectors for heat pump  
applications  
[DOE/CS-35351/T1] p0278 N81-20568
- ANDERSON, J. R.**  
Nickel contacts for low cost solar cells  
p0245 A81-27223
- ANDERSON, R. J.**  
Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study  
[PB81-121147] p0201 N81-19674
- ANDERSON, W. A.**  
Loss mechanism analysis in single-crystal and  
polycrystalline silicon MIS solar cells to  
produce 13% efficiency  
p0221 A81-24803
- Design considerations for high efficiency  
polycrystalline silicon MIS solar cells  
p0236 A81-27127
- Nuclear radiation effects on the photovoltaic  
performance and interface states of Cr, p-type,  
single crystal, MISi solar cells  
p0244 A81-27208
- Fabrication and testing of MIS solar  
cells on  
a-Si:F:H  
[SERI/TR-8041-9-T1] p0269 N81-18552
- ANDREWS, J. E.**  
Research on high efficiency cascade solar cells  
[SERI/PR-8136-1-T1] p0258 N81-16595
- ANDREWS, J. E.**  
Thin-film flat-plate solar collectors for low cost  
manufacture and installation  
[BNL-51124] p0269 N81-18545
- Solar/performance goals for solar and  
ground-coupled heat pump systems  
[BNL-51259] p0273 N81-19609
- ANDREYCHIK, R. W.**  
Rectenna system design  
p0257 N81-16559
- ANG, P. G. P.**  
Electrochemical photovoltaic cells  
[SERI/PR-9175-1-T2] p0267 N81-18521
- Electrochemical photovoltaic cells  
[SERI/TR-8002-5-T1] p0272 N81-19582

# PERSONAL AUTHOR INDEX

BACA, G. A.

- ANGELOFF, L. G.  
Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report [BPP-3007-VOL-2] p0357 A81-19581
- ANNABI, E.  
Identification of a solar pumping installation p0218 A81-23012
- ANNEN, L. D.  
Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition p0346 A81-28217
- ANSARI, J. H.  
Thermal energy storage in aquifers for a solar power plant p0224 A81-24992
- ANSFAUGH, E. E.  
The spectral irradiance of some solar simulators and its effect on cell measurements p0238 A81-27147  
Influence of processing on the electrical performance of proton irradiated silicon solar cells p0244 A81-27205
- ANSU, Y.  
Advanced Cogeneration Technology Economic Optimization Study (ACTEOS) [NASA-CR-163887] p0306 A81-16573
- ANTAL, E. J., JR.  
Gasification of biomass as a source of synfuels for developing countries p0298 A81-25118
- APARISI, R. E.  
Method of calculating shading of heliostats in tower-type solar power plants p0211 A81-20907
- APLEY, W. J.  
Assessment of solar options for large power applications [PNL-SA-8968] p0268 A81-18542  
Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1 [PNL-3533-VOL-1] p0283 A81-21605
- ARAI, K. I.  
Ultra high speed growth of silicon ribbons for solar cells p0231 A81-27081
- ARANOVICH, J. A.  
ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis p0240 A81-27169
- ARANOVITCH, E.  
Thermal processes in flat plate solar collectors p0266 A81-18503  
Description and thermal performance of corrugated solar collectors p0266 A81-18504
- ARAUJO, D. P. H.  
Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain [E81-10119] p0323 A81-21423
- ARBO, J. C.  
Energy from biomass: The simplex process for the gasification of coal and forest pulp [PB81-110512] p0305 A81-16324
- ARIESOHN, P. C.  
Optical diagnostic measurements of coal slag parameters in combustion MHD systems p0353 A81-18153
- ARITA, E.  
Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493
- ARMITAGE, D. E.  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C [DOE/CS-20060/5120-VOL-1] p0192 A81-17394
- ARMSTRONG, A. A.  
Solid source diffusion process for silicon solar cells p0243 A81-27199
- ARNOLD, G. D.  
Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 A81-18493
- ARNOLD, R. A.  
Thin n-i-p silicon solar cell p0232 A81-27097  
Recent progress in high-output-voltage silicon solar cells p0260 A81-17534
- ARNETT, J. C.  
Influence of module requirements on flat plate module design evolution p0251 A81-27279
- ARORA, J. D.  
Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells p0209 A81-20008
- ARORA, J. L.  
The economics of hydrogen production p0285 A81-24013
- AROSIO, S.  
A non-conventional reversible total energy system p0186 A81-25036
- ASAJI, K.  
Energy transfer in a system of superconductive magnets p0374 A81-26858
- ASCENZO, F. J.  
Improvement of phosphoric acid fuel cell stacks [AD-A092814] p0351 A81-16589
- ASHOK, S.  
Performance study of p+/n and n+/p solar cell structures on polycrystalline material p0231 A81-27087  
Heterojunction solar cell design and evaluation p0239 A81-27163
- ASHRAF, F. A.  
PCM thermal energy storage in cylindrical containers of various configurations p0372 A81-24996
- ATON, C. L.  
Wood energy in West Virginia p0297 A81-25066
- ATTAN, A.  
Sulfur pollution from coal combustion - Effect of the mineral components of coal on the thermal stabilities of sulfated ash and calcium sulfate p0186 A81-24622
- ATTERKVIST, S.  
Swedish energy storage projects 1979: Research-development-full-scale experiments supported by governmental organizations [PB81-122947] p0378 A81-19644
- ATTIA, A. J.  
Development of zinc-bromine batteries for utility energy storage [DOE/ET-29345/21] p0379 A81-20591
- AUCOUTURIER, E.  
Physical and chemical characterization of R.A.D. silicon films p0249 A81-27260
- AULD, E. E.  
Solar collector foundation designs [SAND-80-7070] p0279 A81-26582
- AVCI, R. I.  
Laser fusion systems for process heat p0341 A81-25106
- AVERY, W. H.  
Contribution of ocean thermal energy conversion to world energy needs p0333 A81-22900

## B

- BABA, E.  
Performance of a flat type solar collector composed of the selective transparent and absorbing plates p0223 A81-24982
- BABER, A. W.  
The utilization of the free and at present dissipated gravitational force inherent in tidal motion by conversion to electrical energy, using compressed air as the active intermediary p0339 A81-25083
- BACA, G. A.  
Energy storage technology - Environmental implications of large scale utilization p0186 A81-24991

- BACHIR-RAO, M.  
Solar input and solar energy resources  
p0217 A81-23008
- BACHMANN, K. J.  
Chemistry and preparation of III-V heterojunction solar cells  
p0252 A81-27288
- BACKUS, C. E.  
The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight  
p0237 A81-27135
- BACON, D. J.  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C [DOE/CS-20060/5120-VOL-1]  
p0192 A81-17394
- BADGER, E. A.  
Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas [DOE/ET-27127/1]  
p0207 A81-21646
- BAHETI, B. S.  
Design of self-calibrating controllers for heliostats in a solar power plant  
p0211 A81-21030
- BAHN, R. J.  
Optimization of storage in passive solar heating systems [DOE/CS-35405/T1]  
p0278 A81-20574  
Preparation of monthly maps of solar availability for New Mexico based on satellite photography [EHD-78-2131]  
p0284 A81-21668
- BAKER, B. S.  
Improvement of phosphoric acid fuel cell stacks [AD-A092814]  
p0351 A81-16589
- BAKER, C. C.  
Trends and developments in magnetic confinement fusion reactor concepts  
p0336 A81-23711
- BAKER, D. C.  
Sulfur pollution from coal combustion - Effect of the mineral components of coal on the thermal stabilities of sulfated ash and calcium sulfate  
p0186 A81-24622
- BAKER, I.  
Concentrator designs for space photovoltaic arrays  
p0250 A81-27271
- BALLIOW, J.  
Metal chelate catalysts for fuel cells [PB81-132953]  
p0364 A81-21629
- BANBIEGER, C. E.  
Thermochemical water-splitting cycles based upon reactions of cerium- and alkaline earth phosphates  
p0287 A81-25143
- BANNERT, K.  
Small gas turbine with large parabolic dish collectors [ASME PAPER 81-GT-201]  
p0349 A81-30091
- BANGERTER, C. D.  
The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc [AIAA PAPER 81-0173]  
p0329 A81-20649
- BANSAL, P. K.  
Simple transient thermal model for solar collector/storage water heaters  
p0218 A81-23498
- BARAK, M.  
Electrochemical power sources: Primary and secondary batteries  
p0373 A81-25565
- BARANOV, V. K.  
Heliostats and concentrators with variable reflecting-surface geometry  
p0211 A81-20908
- BARAONA, C. E.  
Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model  
p0232 A81-27099
- BARCHET, M. R.  
Meteorological aspects of wind energy - Assessing the resource and selecting the sites  
p0295 A81-23690  
Wind energy resource atlas. Volume 4: The Northeast region [PNL-3195-WERA-4]  
p0321 A81-20592
- Wind energy resource atlas. Volume 5: The East Central region [PNL-3195-VOL-5]  
p0325 A81-21712
- BARCIBELLA, S.  
Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research  
p0288 A81-25152
- BARDON, M. P.  
Thermodynamic calculations for Otto cycle engines using methanol as a fuel  
p0342 A81-25123  
Modified Brayton cycles utilizing alcohol fuels [ASME PAPER 81-GT-103]  
p0348 A81-30009
- BARDWELL, K.  
Minimizing end shadowing effects on parabolic concentrator arrays  
p0242 A81-27191
- BARDWELL, K. E.  
PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements  
p0250 A81-27275
- BARIS, J.  
Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165179]  
p0352 A81-17527  
Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells [NASA-CR-165245]  
p0354 A81-18496
- BARKER, R. E.  
Hydrocarbonization research: Completion report [ORNL/TN-6693]  
p0311 A81-18232
- BARLOW, T. M.  
Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCRL-15259]  
p0376 A81-17963
- BARRETT, A. E.  
A low-cost manufacturing process for thin-film solar cells  
p0235 A81-27121
- BARREY, D. L.  
Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications [ANL-80-49]  
p0375 A81-16591
- BARNHART, J. S.  
Energy transport system optimization for distributed networks of solar collectors [ASME PAPER 81-SOL-1]  
p0365 A81-30109
- BARNHOUSE, L. W.  
Strategies for ecological effects assessment at DOE energy activity sites [ORNL/TN-6783]  
p0198 A81-18578
- BARON, B. E.  
A low-cost manufacturing process for thin-film solar cells  
p0235 A81-27121
- BARRA, O. A.  
Advanced solar collectors (concentrating troughs)  
p0267 A81-18505  
A natural convection solar house system  
p0267 A81-18506
- BARRETT, A. J.  
Natural convection heat leak in supercritical hydrogen tanks  
p0290 A81-26872
- BARRETT, R. W.  
Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra  
p0188 A81-28478
- BARRON, W.  
Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy [PB81-119786]  
p0201 A81-19646
- BARTH, E. A.  
Emissions and fuel economy of a Compres. Pressure Wave Supercharged Diesel [PB81-133399]  
p0204 A81-21371
- BARTLIT, J. E.  
Some long-term energy options [LA-8628-MS]  
p0200 A81-19596
- BARTON, J. P.  
Fluctuations in combustion-driven MHD generators  
p0356 A81-18877
- BASAR, E. S.  
A bottom fixed OFEC plant on the edge of a continental /or island/ shelf  
p0340 A81-25086

- BASE, T. E.**  
The flow field about a vertical axis wind turbine  
p0338 A81-25069
- BASESCU, M.**  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597  
Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 N81-19598
- BASOL, B.**  
Emerging materials for solar cell applications:  
Electrodeposited CdTe  
[SERI/PR-9152-1-T1] p0269 N81-18555
- BASON, F.**  
Direct solar air heating in Denmark /56 deg N/-  
Heating strategies in theory and practice  
p0225 A81-25022
- BATAKIS, A.**  
Low NO<sub>x</sub>/ combustion systems for burning heavy  
residual fuels and high-fuel-bound nitrogen fuels  
[ASME PAPER 81-GT-109] p0348 A81-30014
- BATES, F. J.**  
Laser fusion systems for process heat  
p0341 A81-25106
- BATTLES, J. E.**  
Lithium/iron sulfide batteries for  
electric-vehicle propulsion and other applications  
[AHL-80-49] p0375 N81-16591
- BAUCHE, R. E.**  
Experimental results of the UTSI coal-fired MHD  
generator and investigations of various power  
take-off schemes  
[AIAA PAPER 81-0030] p0328 A81-20550
- BAUER, A. G.**  
Strategic petroleum reserve data acquisition system  
[SAND-80-2143] p0317 N81-19539
- BAUER, R.**  
Development of sodium/sulfur batteries  
[BHFT-FB-79-60] p0376 N81-17607
- BAUM, V. A.**  
Development and study of a lead  
telluride/germanium telluride solar  
thermoelectric generator  
p0254 A81-28588
- BAUMAN, A. J.**  
Molten salt pyrolysis of latex  
[NASA-CASE-NPO-14315-1] p0306 N81-17261
- BAUMAN, L. E.**  
Diagnostic instrumentation development program for  
the heat recovery/seed recovery system of the  
open-cycle, coal-fired magnetohydrodynamic power  
plant  
[AIAA PAPER 81-0110] p0328 A81-20602
- BAUSERMAN, G.**  
Gas turbine combustor performance on synthetic  
fuels, volume 1  
[EPRI-AP-1623-VOL-1] p0356 N81-19259
- BAYAZITOGLOU, Y.**  
Solar image characteristics of concentrators  
p0223 A81-24986
- BAYLIN, F.**  
Sensitivity analysis of a community solar system  
using annual cycle thermal energy storage  
p0224 A81-24998
- BAYLOR, V. E.**  
Stress corrosion studies in solvent refined coal  
liquefaction pilot plants  
[ORNL/TN-7513] p0321 N81-21179
- BAZAROV, G. P.**  
Electrical characteristics of MHD generators with  
solid electrodes and linear distribution of  
potential at the end strips  
p0337 A81-23747
- BEAL, G. E.**  
Evaluation of concepts for controlling exhaust  
emissions from minimally processed petroleum and  
synthetic fuels  
[ASME PAPER 81-GT-157] p0188 A81-30056
- BEATTIE, A. G.**  
An acoustic measurement of boiling instabilities  
in a solar receiver  
[SAND-80-2409] p0284 N81-21621
- BEATTY, J. E.**  
Solar satellites - The trillion dollar question  
p0219 A81-23724
- BECKERHIESE, R.**  
Design and qualification of BSR-solar cells for  
future solar arrays  
p0248 A81-27250
- BECKES, B.**  
Combined gas and steam cycle for a gas-cooled  
solar tower power plant  
[ASME PAPER 81-GT-102] p0348 A81-30008
- BECKMAN, W. A.**  
Design procedure and application of solar-assisted  
series heat pump systems  
[ASME PAPER 80-WA/SOL-9] p0212 A81-21135
- BEDAIR, S. M.**  
Recent progress in the development of the cascade  
solar cell  
p0235 A81-27118  
Research on high efficiency cascade solar cells  
[SERI/PR-8136-1-T1] p0258 N81-16595  
Fabrication of AlGaAs/GaAs cascade solar cell by LPE  
p0262 N81-17551
- BEDARD, R. J.**  
Advanced solar concentrator mass production,  
operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 N81-19571
- BEER, J. M.**  
Combustion of coal-derived liquids and shale oil  
in gas turbine combustors  
p0343 A81-26016
- BEJAN, A.**  
Second law analysis and synthesis of solar  
collector systems  
p0253 A81-27554
- BELEN, M. E.**  
Passive solar energy information user study  
[SERI/TR-751-746] p0273 N81-19607  
Photovoltaics information user study  
[SERI/TR-751-652] p0278 N81-20570  
Wind energy systems information user study  
[SERI/TR-751-749] p0363 N81-21578
- BELEN, C.**  
Substrate related problems in RAD solar cells  
p0231 A81-27084
- BELL, C. E.**  
Solar options in central Europe. A synthesis of  
solar technology assessment and contemporary  
criteria in 1978-1979  
[IIASA-EE-79-14] p0280 N81-21489
- BELL, D. E.**  
Survey of EPA facilities for solar thermal energy  
applications  
[NASA-CR-162469] p0265 N81-17617  
Advanced solar concentrator mass production,  
operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 N81-19571
- BELL, R. E.**  
Energy/economic model analysis. Livermore energy  
policy model  
[PB81-114266] p0194 N81-17616
- BELLAPROVATE, R.**  
Cells and modules for linear P.V. concentrator  
systems with forced cooling  
p0242 A81-27186
- BELLER, M.**  
Hydrogen technology - An overview  
p0285 A81-24014
- BELOTE, J. C.**  
Design of a 100 kW photovoltaic flat panel system  
at a Washington, D.C. area waste treatment plant  
p0228 A81-25056
- BELOUNT, C.**  
Substrate related problems in RAD solar cells  
p0231 A81-27084
- BEN-DAVID, S.**  
Residential passive solar systems - Regional  
sensitivity to system performance costs, and  
alternative prices  
p0187 A81-25061
- BEN-DROR, J.**  
Design improvements in LiBr absorption chillers  
for solar applications  
p0253 A81-27558
- BERNARD, C.**  
Numerical resolution of the heat transfer  
equations in a latent heat solar energy storage  
system  
p0224 A81-25005  
Heat transfer through a paraffin wax solar energy  
storage characterized by a temperature dependent  
specific heat  
p0224 A81-25006

- BENDT, P.**  
Optical analysis of point focus parabolic radiation concentrators  
p0219 A81-24332  
Appropriate sizing of solar heating systems [SERI/TR-333-320] p0264 A81-17600
- BENSHAHN, J. E.**  
Combined aquatic-terrestrial biomass systems p0304 A81-29267
- BENENATI, R.**  
HYFIRE: A Tokamak high temperature electrolysis system [BNL-28679] p0352 A81-16908
- BENES, E.**  
A new formal graphic language for the representation of complex energy distribution systems p0225 A81-25010  
Report on the measuring data evaluation of the first large-scale solar heated building in Austria p0226 A81-25032
- BENNETT, W. S.**  
Energy storage technology - Environmental implications of large scale utilization p0186 A81-24991
- BENOIT, A. E.**  
Construction of a photovoltaic power system at Natural Bridges National Monument [DOE/ET-20279/94] p0283 A81-21607
- BENOIT, M.**  
New solar still /the wiping spherical still/ - Design and experimentation p0227 A81-25042
- BENTON, R. D.**  
Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant [AIAA PAPER 81-0110] p0328 A81-20602
- BERCHTOLD, M.**  
A new breed of an air breathing engine p0347 A81-29070
- BERGER, D. A.**  
Community energy auditing: Experience with the comprehensive community energy management program [ANL/CNSV/TN-43] p0193 A81-17588
- BERJOAN, E.**  
Solar gasification of carbonaceous materials [UCRL-53063] p0272 A81-19605
- BERNARD, E.**  
Energy collected by flat-plate collectors, not oriented toward the south p0218 A81-23010
- BERNATONICS, D. T.**  
Space solar cells - High efficiency and radiation damage p0240 A81-27174
- BEROI, H. S.**  
CSU Solar House 3 solar heating and cooling system performance [DOE/CS-30122/T1] p0272 A81-19587
- BERRY, G.**  
Heat transfer in slagging MHD radiant boilers [AIAA PAPER 81-0316] p0330 A81-20747
- BERRY, G. F.**  
Off-design study of an open cycle MHD power plant with oxygen enrichment [AIAA PAPER 81-0319] p0330 A81-20748
- BERWALD, D. E.**  
An economics method for symbiotic fusion-fission electricity generation systems p0336 A81-23716  
Performance and economics analysis of several laser fusion breeder fueled electricity generation systems p0336 A81-23717
- BESSEBERG, G.**  
Status of the development of the general atomic thermochemical water-splitting cycle p0287 A81-25141
- BETHEL, J. S.**  
Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood [PB81-134777] p0323 A81-21234
- BEARDWAJ, E.**  
Solar energy conversion by chloroplast photoelectrochemical cells p0216 A81-22349
- BLAKE, S.**  
Advanced propulsion system concept for hybrid vehicles [NASA-CR-159772] p0198 A81-18935
- BLATT, B.**  
Flash pyrolysis and hydrolypyrolysis of coal [BNL-28577] p0319 A81-20301
- BLUSHAN, M.**  
Polycrystalline Zn<sub>3</sub>P<sub>2</sub> Schottky barrier solar cells p0220 A81-24414  
Thin polycrystalline Zn<sub>3</sub>P<sub>2</sub> films for photovoltaic cells p0240 A81-27170
- BICHENKOV, E. I.**  
MK-generators using the transition of a semiconductor material into a conducting state p0331 A81-21064
- BICKLER, D. B.**  
A silicon sheet casting experiment p0231 A81-27082
- BIDREMAN, S.**  
Hydrides of ternary TiFe/xM/1-x//M = Cr, Mn, Co, Ni/ intermetallics p0290 A81-26584
- BIEG, M. E.**  
Anode plasma behavior in a magnetically insulated ion diode p0344 A81-26571
- BIGGS, F.**  
Optimization of a photovoltaic receiver for a parabolic trough concentrator p0242 A81-27187
- BILGEN, E.**  
High temperature solar reactors for hydrogen production p0286 A81-24557
- BILJETINA, E.**  
Development status of the Steam-Iron Process for hydrogen production p0287 A81-25142
- BIRCHFIELD, J. L.**  
Wood energy in West Virginia p0297 A81-25066
- BIRCHFIELD, T. K.**  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [CONF-8010106-7] p0189 A81-16314  
Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data [CONF-8010106-3] p0305 A81-16315  
Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TN-7525] p0316 A81-19332  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [ORNL/TN-7428] p0320 A81-20305
- BIRD, S. P.**  
Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1 [PRL-3533-VOL-1] p0283 A81-21605
- BIRINGER, K. L.**  
Photovoltaic intermediate applications p0247 A81-27246
- BIRKHIRE, R. W.**  
Growth and evaluation of CdS and CdZnS films for the fabrication of high performance photovoltaic devices p0241 A81-27180  
Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses p0253 A81-27299
- BIRSIC, E. J.**  
The Philippines geothermal success story p0296 A81-24751
- BISAGMI, M.**  
Parabolic troughs concentrators photovoltaic module p0242 A81-27188
- BITER, W. J.**  
Development of copper sulfide/cadmium sulfide thin film solar cells [SERI/PB-8143-1-T2] p0269 A81-18559

- BITIUMIN, V. A.**  
Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips  
p0337 A81-23747  
A numerical study of the nonuniform loading of a segmented MHD channel  
p0346 A81-27967
- BITNER, I.**  
Chemistry and preparation of III-V heterojunction solar cells  
p0252 A81-27288
- BJURSTROM, H.**  
The absorption process for heating, cooling and energy storage - An historical survey  
p0381 A81-23496
- BLACKSLEE, A. E.**  
Incorporation of superlattice crystal layers in multijunction solar cells  
p0261 A81-17549
- BLAKE, T. E.**  
Computer modeling of coal gasification reactors, year 4  
[FE-1770-66]  
p0312 A81-18235
- BLAKE, W. E.**  
Verification test of jet industries Electra-Van 1000P  
[AD-A093738]  
p0376 A81-17961
- BLANCO, L. E.**  
Static endo-absorbent flat solar collector  
p0222 A81-24979
- BLEVINS, B.**  
Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors  
p0225 A81-25015
- BLOMQUIST, C. A.**  
Assessment of high-head turbomachinery for underground pumped hydroelectric storage plants  
p0372 A81-25003  
Engineering development of a HYCSOS chemical heat pump  
p0287 A81-25017
- BLOOMFIELD, D.**  
Task report no. 3. Systems analysis of organic Rankine bottoming cycles  
[PSI-TR-245]  
p0354 A81-18529
- BLOOMQUIST, E. G.**  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12]  
p0318 A81-19597  
Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11]  
p0318 A81-19598
- BLOOMSTER, C. E.**  
Making geothermal power competitive  
p0340 A81-25092
- BLOSS, W. E.**  
Cu<sub>2</sub>S-CdS-thin film solar cells  
p0234 A81-27110
- BLUM, E. A.**  
Vacuum deposited polycrystalline silicon solar cells for terrestrial use  
p0236 A81-27128
- BLUM, S. B.**  
Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study  
[DOE/CS-30108/T3]  
p0278 A81-20567
- BLURTON, K. F.**  
Fuel cell support studies: On-site molten carbonate systems  
[PB81-113672]  
p0353 A81-17619
- BOBROV, E. S.**  
A superconducting magnet for Stanford University  
p0334 A81-23441  
ETF magnet design alternatives for the national MHD program  
p0334 A81-23443
- BOCKRIS, J. O'M.**  
Hydrogen/metal interactions with special reference to electrochemical approaches  
p0286 A81-24556
- BOEHM, H.**  
Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte  
p0343 A81-25611
- BOENIG, P. E.**  
High-reliability gas turbine combined-cycle development program, phase 1  
[EPRI-AP-1599-VOL-1]  
p0357 A81-19466
- High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendixes  
[EPRI-AP-1599-VOL-2]  
p0360 A81-20434
- BOES, E. C.**  
Photovoltaic concentrators  
p0246 A81-27230
- BOESSE, F. E.**  
A consideration of possible receiver designs for solar tower plants  
p0220 A81-24426
- BOHARA, R. C.**  
Investigation of Cu<sub>2</sub>O solar cells  
p0237 A81-27140
- BOHN, E.**  
Omnium-G parabolic dish optical efficiency: A comparison of two independent measurement techniques  
[SEI/TR-631-544]  
p0267 A81-18520
- BOLAND, C. E.**  
The nuclear closed-cycle gas turbine /HTGR-GT/ - Dry cooled commercial power plant studies  
[ASME PAPER 80-GT-82]  
p0332 A81-21162
- BOLLHEIER, E. S.**  
Small wind systems technology assessment. State of the art and near term goals  
[RFP-3136/3533/80/18]  
p0358 A81-19600
- BONNATERRA, E.**  
A new airborne nickel cadmium battery concept  
p0374 A81-25618
- BONNET, D.**  
The CdSe thin-film solar cell  
p0240 A81-27168
- BONORA, A. C.**  
Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology  
p0294 A81-27113
- BOON, E. W.**  
Superconductive energy storage for diurnal use by electric utilities  
p0371 A81-23440  
Shape optimization study for a three-tunnel superconductive energy storage magnet  
p0374 A81-26861
- BOOTH, D. C.**  
The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties  
p0280 A81-20912
- BOOTH, L. A.**  
Fusion reactors as high-temperature process heat sources  
p0341 A81-25105  
Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources  
p0297 A81-25108
- BORDE, I.**  
On the possible use of MHD generators in solar energy systems  
p0209 A81-19813
- BORDEN, F.**  
High efficiency compound semiconductor concentrator photovoltaics  
p0261 A81-17545  
OM-VPE grown materials for high efficiency solar cells  
p0262 A81-17552
- BORDEN, F. G.**  
A monolithic series-connected Al<sub>0.93</sub>Ga<sub>0.07</sub>As/GaAs solar cell array  
p0239 A81-27158
- BORGES, W.**  
Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte  
p0374 A81-25613
- BORGIO, P. A.**  
Design of a 100 kW photovoltaic flat panel system at a Washington, D.C. area waste treatment plant  
p0228 A81-25056
- BORODULIA, V. A.**  
Solid-fuel combustion in fluidized beds  
p0303 A81-27539
- BOROVSKII, A. V.**  
The efficiency of conical pellets for laser fusion  
p0294 A81-23227

- BOROVSKII, V. V.**  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content  
p0302 A81-26895
- BORRERO, J. M.**  
Grain boundary edge passivated solar cells on thin film GaAs  
p0251 A81-27284
- BOTSARIS, G. D.**  
Coal-oil mixtures - Their technical and commercial status  
p0300 A81-25133
- BOTTS, T. E.**  
Advanced synfuels production/power systems utilizing laser particulate control  
p0299 A81-25127
- BOUGARD, J.**  
General introduction to thermal conversion of solar energy  
p0266 A81-18500
- BOUGHOT, J.**  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181
- BOUQUET, F.**  
Criteria for evaluation of reflective surface for parabolic dish concentrators [NASA-CN-163898]  
p0258 A81-16581
- BOURDEAU, L. E.**  
Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating [LA-UR-80-2930]  
p0280 A81-20936
- BOURNE, J. E.**  
Design improvements in LiBr absorption chillers for solar applications  
p0253 A81-27558
- BOURNE, R. C.**  
Membrane-lined thermal storage systems  
p0224 A81-25000
- BOUSSERHARR, C.**  
Water systems modeling  
p0277 A81-20554
- BOULES, B. L.**  
Interactions of efficiency and material requirements for terrestrial silicon solar cells  
p0210 A81-20295
- BOULES, B. L.**  
Operational energy conservation strategies in commercial aviation  
p0185 A81-20465
- BOWLING, C.**  
Passive and hybrid solar manufactured housing and buildings [DOE/CS-30384/1]  
p0263 A81-17592
- BOWMAN, D.**  
High temperature storage for a wind energy system  
p0372 A81-25002
- BOWMAN, J. E.**  
Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region [DOE/ET-28392/T2]  
p0315 A81-18547
- BOWMAN, R. M.**  
Fuel cell support studies: On-site molten carbonate systems [PB81-113672]  
p0353 A81-17619
- BOYLES, C. O.**  
Proposed design of a-Si:H solar cells using ultrathin active layer to increase conversion efficiency  
p0247 A81-27237
- BOYLES, C. O.**  
GaAs shallow-homojunction solar cells  
p0247 A81-27243
- BRADELEY, J. M.**  
The development of a freeze-tolerant solar water heater using crosslinked polyethylene as a material of construction  
p0225 A81-25016
- BRAGAGNOLLO, J. A.**  
Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses  
p0253 A81-27299
- BRANDENST, H. E., JR.**  
Space solar cells - High efficiency and radiation damage  
p0240 A81-27174
- BRANDT, L. D.**  
Methodology for estimating future market values of solar thermal technologies [SAND-80-8248]  
p0284 A81-21617
- BRANOVER, H.**  
On the possible use of MHD generators in solar energy systems  
p0209 A81-19813
- BRASIER, R. I.**  
Energy storage technology - Environmental implications of large scale utilization  
p0186 A81-24991
- BRAUNSTEIN, A.**  
On the dynamic optimal coupling of a solar cell array to a load and storage batteries  
p0229 A81-26372
- BRAUNSTEIN, A.**  
Dynamic matching of a solar-electrical /photovoltaic/ system - An estimation of the minimum requirements on the matching system  
p0229 A81-26373
- BRAUNSTEIN, A.**  
Optimum operation of a combined system of a solar cell array and a dc motor  
p0229 A81-26374
- BRAUNSTEIN, H.**  
Optimization of distribution transformer efficiency characteristics [DOE/ET-29298/T1]  
p0356 A81-19402
- BREAUULT, R. D.**  
Improved PCG-1 cell technology [EPRI-EM-1566]  
p0351 A81-16598
- BREESSE, L. S.**  
Coal Hydrogasification process development. volume 1: Coal studies [FR-3125-24-VOL-1]  
p0312 A81-18238
- BREESSE, L. S.**  
Coal hydrogasification process development [DOE/ET-10328/27]  
p0319 A81-20304
- BRETT, C. E.**  
Thermal energy storage in aquifers for a solar power plant  
p0224 A81-24992
- BRECH, B. L.**  
Simulation of the performance of a 100-kW-peak photovoltaic system  
p0233 A81-27108
- BRENNER, P.**  
H<sub>2</sub> as an energy vector - Hydrogen production by the BLOPLUX electrolytic cell  
p0285 A81-23014
- BRIDGERS, F.**  
Solar installation for process steam generation for a refinery  
p0227 A81-25038
- BRIGGS, D. G.**  
Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood [PB81-134777]  
p0323 A81-21234
- BRIGGS, H. B.**  
The future of fusion power comes into focus  
p0341 A81-25101
- BRINKER, D. J.**  
Cuprous oxide MIS solar cells  
p0237 A81-27139
- BRINZANESCU, L.**  
On the flow of an ionized gas in a MHD generator with segmented electrodes  
p0337 A81-24811
- BROADBENT, S.**  
The 10-kilowatt photovoltaic concentrator array fabrication [SAND-80-7062]  
p0279 A81-20599
- BRODE, R.**  
Wind energy resource atlas. Volume 5: The East Central region [PHL-3195-VOL-5]  
p0325 A81-21712
- BRODERICK, E. J.**  
Solar Maximum Mission (SMM) in-flight performance  
p0281 A81-21523
- BRODIE, D. E.**  
Characterization of ZnO for the fabrication of conductor-insulator-semiconductor /CIS/ solar cells  
p0237 A81-27141
- BRODICKI, Y. L.**  
A solar-pond power plant  
p0219 A81-24056
- BROOKS, D. M.**  
Environmental influences in the simulation of a solar space heating system [AD-A092436]  
p0190 A81-16587

- BROWN, C. H., JR.  
Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 N81-18232
- BROWN, D. E.  
Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PRL-3533-VOL-1] p0283 N81-21605
- BROWN, K. C.  
Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SEHI/TR-351-461-VOL-1] p0273 N81-19618
- BROWN, R. E.  
The conversion of peat - Recent developments in simultaneous dewatering and hydrogenolysis  
p0298 N81-25116
- BROWN, W. C.  
The adapting of the crossed-field directional amplifier to the requirements of the SPS  
p0367 N81-16553  
The history of the development of the rectenna  
p0257 N81-16558  
Satellite Power System (SPS) magnetron tube assessment study  
[NASA-CR-3383] p0368 N81-18490
- BROWNELL, D. E., JR.  
Computer modeling of coal gasification reactors, year 4  
[FE-1770-66] p0312 N81-18235
- BRUBACKER, K. L.  
Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects  
[DOE/EE-0090] p0203 N81-20598
- BRUBAKER, K. L.  
An assessment of the atmospheric effects of a Satellite Power System  
p0187 N81-25053
- BRUHN, R. L.  
Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2] p0315 N81-18547
- BRUNNER, S. E.  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586
- BRUNZONE, G.  
Hydrogen storage in aluminum-substituted TiFe compounds  
p0287 N81-24560
- BRYAN, D. F.  
Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979  
p0381 N81-21730
- BRYANT, R.  
Environmental overview for the development of geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 N81-21639
- BURN, R. E.  
ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis  
p0240 N81-27169  
The role of deep levels in controlling the photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction  
p0241 N81-27182  
Photoelectronic properties of zinc phosphide crystals, films and heterojunctions  
[SEHI/PR-8031-1-T2] p0264 N81-17595
- BUCCIARELLI, L. L.  
Simulation of the performance of a 100-kW-peak photovoltaic system  
p0233 N81-27108  
The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system  
p0238 N81-27152
- BUCHNER, R.  
Perspectives for metal hydride technology  
p0285 N81-21504
- BUCK, C. L.  
Economic analysis and optimization of solar residential space heating  
[ASME PAPER 80-WA/SOL-11] p0212 N81-21137
- BUCKWALTER, C. Q.  
Barstow heliostat mirror glass characterization  
[PRL-3576] p0267 N81-18522
- BUEHRING, W. A.  
Reliability, energy, and cost effects of wind integration with conventional electrical generating systems  
p0339 N81-25078
- BUCIANIS, S. A.  
Linear induction-type MHD machine with a winding connected to the voltage source  
p0346 N81-27966
- BURAKHANOV, B. E.  
A numerical study of the nonuniform loading of a segmented MHD channel  
p0346 N81-27967
- BURGELMAN, M.  
Theoretical advantages of pn/+/-type Cu<sub>2</sub>S-ZnO solar cell  
p0346 N81-28395
- BURGENSON, R. E.  
Emissions and fuel economy of a Comprex Pressure Wave Supercharged Diesel  
[PB81-133399] p0204 N81-21371
- BURGGRAPH, C.  
Physical and chemical characterization of R.A.D. silicon films  
p0249 N81-27260
- BURK, D.  
The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states  
p0215 N81-22155  
An investigation of the Cu<sub>x</sub>/S-CdS structure for photovoltaic conversion using an Al<sub>1</sub> film vacuum deposited process  
p0241 N81-27178  
Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon  
p0252 N81-27295
- BURKE, J. A., JR.  
Municipal solid waste comminution by steam explosion  
p0301 N81-25561
- BURNS, E.  
Availability modeling methodology applied to solar power systems  
p0220 N81-24431
- BURNS, E. J. T.  
Anode plasma behavior in a magnetically insulated ion diode  
p0344 N81-26571
- BURNS, E. J.  
PREHEAT - A passive solar system simulation program  
p0216 N81-22212
- BURROWS, B. W.  
Recent developments in secondary batteries for use in electric vehicles  
p0373 N81-25606
- BURTON, L. C.  
Thin film photovoltaic solar energy conversion  
p0228 N81-25054  
The CdS<sub>1-x</sub>As<sub>2x</sub> thin films for solar cell applications  
[DOE/ET-23007/4] p0270 N81-18561
- BUSCH, G. E.  
The chemically pumped iodine laser as a fusion driver  
[KNSF-U-944] p0350 N81-16456
- BUTLER, J. P.  
Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams  
p0286 N81-24559
- BUTTER, C. D.  
Continuous coating of silicon-on-ceramic  
p0231 N81-27083
- BUTTERFIELD, C. P.  
Current developments in small wind energy conversion systems  
p0335 N81-23695  
New developments in wind systems technology  
p0338 N81-25067  
Small wind systems technology assessment. State of the art and near term goals  
[BPP-3136/3533/80/18] p0358 N81-19600
- BUEBY, J. E.  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586
- BYVIE, C. E.  
Study of process technology for GaAlAs/GaAs heteroface solar cells  
p0261 N81-17544



- BEURA, J. J.  
Superconducting generators - Economics, technical considerations and ancillary technology  
p0335 A81-23466

## C

- CALZOLARI, P. U.  
The photovoltaic-aeolian plant at Passo Mandrioli /Italy/  
p0218 A81-23013
- CANACHO, S.  
Remote sensing techniques for identification and evaluation of geothermal areas  
p0294 A81-23587
- CAMPBELL, J. S.  
Commercial, or usable, size Campbell Chinese type windmill  
p0338 A81-25073
- CAMPBELL, J., JR.  
Coal-fired heaters for CCGT cogeneration service [ASME PAPER 81-GT-212]  
p0350 A81-30101
- CAMPBELL, R. B.  
Solar cells and modules from dendritic web silicon  
p0234 A81-27117  
POC13 gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216
- CANPS, J. A.  
Synthetic gas production for methanol - Current and future trends  
p0295 A81-24016
- CAPE, J. A.  
Performance losses in high-efficiency monolithic multi-junction solar cells  
p0235 A81-27120  
Effects of temperature variation in concentrator cell series resistance measurements  
p0237 A81-27138  
Status of Rockwell-BEC high efficiency solar cell programs  
p0261 A81-17546  
Gallium arsenide photovoltaic dense array for concentrator applications [SAND-78-7056]  
p0267 A81-18530
- CAPRIOGLIO, G.  
Closing the loop for the sulfur-iodine cycle  
p0286 A81-24022  
Status of the development of the general atomic thermochemical water-splitting cycle  
p0287 A81-25141
- CARD, E. C.  
Current transport mechanisms of metal-polycrystalline silicon Schottky barrier solar cells  
p0236 A81-27130
- CAREY, P.  
Comparison of gas phase hydrocarbon emissions from light-duty gasoline vehicles and light-duty vehicles equipped with diesel engines [PB81-122996]  
p0203 A81-20620
- CARLOCK, J. B.  
The construction cost of thermal storage for solar systems  
p0229 A81-25062
- CARLSON, D. E.  
An overview of amorphous silicon solar-cell development  
p0234 A81-27111  
Amorphous thin films for solar-cell applications [SERI/PR-0-8254-F]  
p0283 A81-21591
- CARLSON, G. A.  
Trends and developments in magnetic confinement fusion reactor concepts  
p0336 A81-23711
- CARNICHAEL, R. L.  
Fuel cycle analysis for fossil energy systems: coal combustion [ORNL-5661]  
p0205 A81-21606
- CARRATELLI, R. P.  
Advanced solar collectors (concentrating troughs)  
p0267 A81-18505  
A natural convection solar house system  
p0267 A81-18506
- CARRERAS, B.  
Effects of toroidal coupling on the stability of tearing modes  
p0332 A81-21480

- CARVALHO, A. V., JR.  
Domestic solar water preheating versus solar water heating: An economic evaluation  
p0229 A81-25064  
Future of alcohol fuels programs in Brasil  
p0299 A81-25121
- CASADA, S. S.  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [CONF-8010106-7]  
p0189 A81-16314  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [ORNL/TM-7428]  
p0320 A81-20305
- CASAROSA, C.  
Experimental apparatus for cooling of photovoltaic cells at high concentration  
p0218 A81-23011
- CASE, P. M.  
Radioisotope powered light sources [CONF-801157-1]  
p0351 A81-16597
- CASHMAN, J.  
Combined solar and fossil fuel systems for electric power generation  
p0381 A81-25048
- CASTLE, J. A.  
Simulation of a hybrid solar photovoltaic/solar thermal electric power system  
p0246 A81-27234  
Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems  
p0247 A81-27244
- CATALANO, A.  
Polycrystalline Zn3P2 Schottky barrier solar cells  
p0220 A81-24414  
Thin polycrystalline Zn3P2 films for photovoltaic cells  
p0240 A81-27170
- CAVAGNARO, D. M.  
Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base [PB81-800021]  
p0352 A81-16615
- CAVARETTA, G.  
Hydrothermal metamorphism in the Larderello geothermal field  
p0296 A81-24306
- CEFRATTI, C.  
High temperature solar power tower plants - Concept considerations and operational criteria  
p0227 A81-25044
- CEFRATELLI, L.  
Construction of a probe for measuring temperature and pressure in deep wells  
p0296 A81-24304
- CERHAN, J. E.  
Wind engineering; Proceedings of the Fifth International Conference, Colorado State University, Fort Collins, Colo., July 8-14, 1979. Volumes 1 & 2  
p0382 A81-27301  
The aerodynamics of heliostats for solar power plant applications  
p0253 A81-27310
- CESS, R. D.  
Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning [ASME PAPER 80-WA/HT-3]  
p0185 A81-21101
- CHA, B. K.  
A 'two-tank' seasonal storage concept for solar space heating of buildings  
p0372 A81-25035
- CHA, Y. S.  
Some basic considerations and possible improvements on the solar pond [AHL-CT-80-23]  
p0268 A81-18540
- CHAMPION, R. L.  
Development of sheet molding compound solar collectors with molded-in silvered glass reflective surfaces [SAND-80-0702]  
p0273 A81-19613
- CHEN, P. C. R.  
Effect of zinc impurity on silicon solar-cell efficiency  
p0256 A81-29290

- CHAM, T. W.  
Operational, control and protective system  
transient analyses of the closed-cycle GT-HTGR  
power plant  
[ASME PAPER 80-WA/GT-1] p0331 A81-21096
- CHANDRA, R.  
Optimization of fin and tube parameters in a  
flat-plate collector p0209 A81-19849  
Optimization of fin and tube parameters in a  
flat-plate collector p0255 A81-29032
- CHANG, C. T.  
Indium phosphide films for photovoltaic devices p0240 A81-27173
- CHANG, J.  
Recent progress in the development of the cascade  
solar cell p0235 A81-27118
- CHANTLAND, A. O.  
The Ames Resource Recovery facility p0301 A81-25558
- CHAO, K. C.  
Phase equilibrium in coal liquefaction processes  
[EPRI-AP-1593] p0311 A81-18227
- CHAPMAN, D. S.  
Thermal studies in a geothermal area. Report 1:  
Thermal studies at Roosevelt Hot Springs, Utah.  
Report 2: Heat flow above an arbitrarily  
dipping plane of heat sources. Report 3: A  
datum correction for heat flow measurements made  
on an arbitrary surface p0314 A81-18479  
[DOE/ID-12079/19]  
Management assistance for the development of  
hydrothermal energy in the Rocky Mountain/basin  
and range region p0315 A81-18547  
[DOE/ET-28392/T2]
- CHAPMAN, J. C.  
PHEHEAT - A passive solar system simulation program p0216 A81-22212
- CHAPMAN, P. W.  
Silicon-on-ceramic process: Silicon sheet growth  
and device development for the large-area  
silicon sheet task of the low-cost solar array  
project p0281 A81-21546  
[NASA-CR-164134]
- CHAPMAN, R. L.  
Efficient Si solar cells by laser photochemical  
doping p0229 A81-25873
- CHARI, A.  
Physical and chemical characterization of R.A.L.  
silicon films p0249 A81-27260
- CHARLES, J. P.  
An analytical model for solar cells p0221 A81-24806
- CHARLIER, R. H.  
Tides and turbines p0336 A81-23719
- CHANG, T.  
Fuel cells feasibility p0356 A81-18998
- CHASANOV, N. G.  
The effect of secondary combustion on nitric oxide  
concentrations in a MHD combustion gas p0328 A81-20604  
[AIAA PAPER 81-0102]
- CHASSAGNE, P. J.  
Coal preparation using magnetic separation.  
Volume 5: Evaluation of magnetic coal  
desulfurization concepts p0319 A81-20302  
[EPRI-CS-1517-VOL-5]
- CHATURVEDI, A. C.  
Indian energy sources in 1980's p0187 A81-25098
- CHATURVEDI, K.  
Analysis of two-phase flow solar collectors with  
application to heat pumps p0214 A81-21153  
[ASME PAPER 80-WA/SOL-32]
- CHAUDHONT, D.  
A solar biotechnology based on microalgae p0218 A81-23015
- CHEN, C.  
Methodology to evaluate the potential for ground  
water contamination from geothermal fluid releases  
[PB81-111114] p0195 A81-17641
- CHEN, C. S.  
Coupling Ocean Thermal Energy Conversion  
technology /OTEC/ with nuclear power plants p0340 A81-25087
- CHEN, C.-J.  
Construction program for a large superconducting  
MHD magnet system at the Coal-Fired Flow Facility p0334 A81-23451
- CHEN, H.  
Advanced propulsion system concept for hybrid  
vehicles p0198 A81-18935  
[NASA-CR-159772]
- CHEN, H. T.  
An assessment of the use of chemical reaction  
systems for thermal energy transport p0365 A81-25011  
Research and evaluation of biomass  
resources/conversion/utilization systems  
(market/experimental analysis for development of  
a data base for a fuels from biomass model.  
Volume 1: Biomass allocation model p0315 A81-16553  
[DOE/ET-20611/14]
- CHEN, P. I.  
Solar power generation by ground thermal energy  
conversion p0227 A81-25046
- CHEN, P. J.  
Computer modeling of coal gasification reactors,  
year 4 p0312 A81-16235  
[FE-1770-66]
- CHEN, W.  
Design of the BPA superconducting 30 MJ energy  
storage coil p0371 A81-23450
- CHENG, K. Y.  
A performance analysis for horizontal axis wind  
turbines applicable to variable pitch or  
airbrake control p0333 A81-23067
- CHENG, L. J.  
Behavior of interdigitated back-contact solar cells p0231 A81-27086
- CHENG, J.  
Solar water heating demonstration program for  
public schools in New Mexico p0225 A81-25013  
Preliminary evaluation of overall thermal  
performance of solar water heating systems using  
air and liquid flat-plate collectors p0225 A81-25015
- CHEERY, M. J.  
Wind energy resource survey methodology p0295 A81-23691
- CHESOWIS, V. I.  
Linear induction-type MHD machine with a winding  
connected to the voltage source p0346 A81-27966
- CHIANG, C. W.  
Nocturnal radiation from a solar collector  
[ASME PAPER 80-WA/SOL-35] p0214 A81-21155
- CHIANG, Y. F.  
Analysis of two-phase flow solar collectors with  
application to heat pumps p0214 A81-21153  
[ASME PAPER 80-WA/SOL-32]
- CHIBA, T.  
Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project p0298 A81-25113
- CHIBISOV, A. K.  
Efficiency of energy storage in photochemical  
electron transfer reactions p0371 A81-19897
- CHIE, C. H.  
Coherent multiple tone technique for ground based  
SPS control p0366 A81-16544
- CHILENSKAS, A. A.  
Lithium/iron sulfide batteries for  
electric-vehicle propulsion and other applications  
[A81-80-49] p0375 A81-16591
- CHIN, D. J.  
Two-dimensional analysis of the interdigitated  
back-contact solar cell p0216 A81-22197
- CHIRANJIVI, C.  
The development of biogas technology in India p0298 A81-25117

- CHITRE, S. R.  
Cost effective, high throughput, junction formation techniques using spray-on dopants  
p0245 A81-27220
- CHOE, M. S.  
Low-cost high-efficiency  $\text{SnO}_2/\text{n}^+/\text{p}$  Si heteroface solar cell fabricated by paint-on-diffusant method  
p0249 A81-27259
- CHOI, M. K.  
Thermal and economic assessment of ground-coupled storage for residential solar heat pump systems  
[ASME PAPER 80-WA/SOL-10] p0212 A81-21136
- CHOKOUHAND, M.  
An investigation on Tehran municipal solid waste with the view of electricity generation  
p0302 A81-26474
- CHOW, M. Y.  
Bi-coolant flat plate solar collector  
p0226 A81-25023
- CHORNET, E.  
The conversion of peat - Recent developments in simultaneous devatering and hydrogenolysis  
p0298 A81-25116
- CHOUDRY, A.  
Digital holographic interferometry of convective heat transport  
p0254 A81-28737
- CHOW, L. W.  
 $\text{Cu}/\text{x}/\text{S}/\text{Cd}/\text{y}/\text{Zn}/1-\text{y}/\text{S}$  and  $\text{Cu}/\text{x}/\text{S}/\text{Cd}/\text{y}/\text{Zn}/1-\text{y}/\text{S}$ ,  $\text{CdS}$  thin film solar cells using chemically sprayed films  
p0229 A81-26355
- CHRIEN, R. E.  
Selective fast neutron detector  
p0332 A81-21640
- CHRISTENSEN, C. J.  
Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-M-2242] p0359 A81-19637  
Investigations of structural dynamics on the Gedser WTG and on new Danish wind turbines  
[RISOE-M-2146] p0363 A81-21626
- CHRISTENSEN, L. S.  
Preliminary Faraday performance of a large MHD generator at high magnetic field  
[AIAA PAPER 81-0028] p0327 A81-20548
- CHRISTIE, J.  
Analysis of residential duct losses  
[PB80-228000] p0191 A81-16614
- CHRISTNER, L.  
Technology development for phosphoric acid fuel cell powerplant, phase 2  
[NASA-CR-165317] p0362 A81-21536  
Technology development for phosphoric acid fuel cell powerplant (phase 2)  
[NASA-CR-165316] p0362 A81-21547
- CHRISTOPHER, D. M.  
Parametric analysis of louvered air-heating solar collectors  
[ASME PAPER 80-WA/SOL-38] p0214 A81-21158
- CHU, S. S.  
Chemical and structural defects in thin film polycrystalline silicon solar cells  
p0233 A81-27105  
Indium phosphide films for photovoltaic devices  
p0240 A81-27173  
Improved polycrystalline thin film gallium arsenide MOS solar cells  
p0251 A81-27281
- CHU, Y. L.  
Chemical and structural defects in thin film polycrystalline silicon solar cells  
p0233 A81-27105  
Indium phosphide films for photovoltaic devices  
p0240 A81-27173  
Improved polycrystalline thin film gallium arsenide MOS solar cells  
p0251 A81-27281
- CHUAN, D. G. S.  
Solar radiation estimates in Malaysia  
p0220 A81-24428
- CINGO, M. P.  
Small wind systems technology assessment. State of the art and near term goals  
[RFP-3136/3533/80/18] p0358 A81-19600
- CISNER, T. P.  
Contiguous capillary coating of silicon on porous carbon substrates  
p0236 A81-27129
- CLAESSON, J.  
Continuous heat source model for ground heat storage  
[PB81-122889] p0378 A81-19643
- CLARK, G.  
The Solar-Meteorological Research Program for the South-Central U.S.  
[ASME PAPER 80-WA/SOL-24] p0213 A81-21148
- CLARK, R. A.  
Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors  
p0318 A81-20202
- CLARK, J. A.  
The a priori decision in solar energy and conservation economics  
p0278 A81-20558  
A life-cycle model for solar heating system design and economic evaluation Michigan Economic Model for Solar Heating (MESM)  
p0278 A81-20559
- CLARK, L. D.  
Solar installation for process steam generation for a refinery  
p0227 A81-25038
- CLARK, T. B.  
A dish-Stirling solar-thermal power system  
p0217 A81-22897
- CLARK, W. E.  
Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies  
[FE-1743-80-VOL-1] p0316 A81-19335
- CLARK, R.  
An investigation of the  $\text{Cu}/\text{x}/\text{S}-\text{CdS}$  structure for photovoltaic conversion using an Al film vacuum deposited process  
p0241 A81-27178
- CLAYTON, R. M.  
Two-stage combustion for reducing pollutant emissions from gas turbine combustors  
[NASA-CR-163877] p0350 A81-16056
- CLEMENTS, L. D.  
Active cooling system alternatives for concentrating photovoltaic systems  
p0256 A81-29265
- CLEMONS, R. W.  
Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes  
[AIAA PAPER 81-0030] p0328 A81-20550
- CLOFFINE, A. S.  
Economic feasibility of photovoltaic energy systems  
p0246 A81-27229
- CLYMAN, M.  
Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base  
[AD-A094226] p0196 A81-18050  
Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report  
[AD-A094225] p0196 A81-18051
- COCHRAN, R. D., JR.  
Hydrocarbonization research: Completion report  
[ORNL/TN-6693] p0311 A81-18232
- CODY, G. D.  
Short circuit currents and collection efficiencies in a-SiHx solar cells  
p0246 A81-27235
- COHEN, J.  
Comparison of gas phase hydrocarbon emissions from light-duty gasoline vehicles and light-duty vehicles equipped with diesel engines  
[PB81-122996] p0203 A81-20620
- COHEN, S.  
Energy/economic model analysis. Volume 1: Gas technology assessments using three energy supply/demand integrating models  
[PB81-114225] p0194 A81-17611  
Energy/economic model analysis. Volume 2: Evaluation of energy supply/demand integrating models  
[PB81-114233] p0194 A81-17612
- COHN, A.  
Effect of water injection for NOx reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor  
[ASME PAPER 81-GT-51] p0348 A81-29964

- COLAIENNA, P.**  
Description and thermal performance of corrugated solar collectors  
p0266 N81-18504
- COLEMAN, J. H.**  
Plasma-assisted CVD of fluorinated, hydrogenated amorphous silicon  
[SERI/TR-8041-2-T1]  
p0274 N81-19629
- COLEMAN, J. J.**  
Stacked multiple-bandgap solar cells prepared by CVD techniques  
p0253 N81-27297
- COLEMAN, E. G.**  
Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis  
p0238 N81-27146  
A base-metal conductor system for silicon solar cells  
p0243 N81-27196
- COLOSIBO, D. D.**  
The rebirth of the Rankine cycle  
p0327 N81-20225
- COMBS, L. P.**  
Coal Hydrogasification process development. volume 1: Coal studies  
[FE-3125-24-VOL-1]  
p0312 N81-18238  
Coal hydrogasification process development  
[DOE/ET-10328/27]  
p0319 N81-20304
- COMPARD, D. G.**  
Example of a favorable policy for space technology transfer to other fields  
p0198 N81-18951
- COMPARE, A. L.**  
Fuel alcohol extraction technology commercialization conference  
[CONF-801212]  
p0311 N81-18233
- CONGDON, J. V.**  
Improved PCG-1 cell technology  
[EPRI-EH-1566]  
p0351 N81-16598
- CONNELL, H. L.**  
Solar standards and testing activities in developed and developing countries  
p0229 N81-25096
- CONNOR, D. E.**  
A 'two-tank' seasonal storage concept for solar space heating of buildings  
p0372 N81-25035
- CONNOR, E.**  
System modeling using TRNSYS computer simulation  
p0277 N81-20555
- CONSORZI, B.**  
Experimental apparatus for cooling of photovoltaic cells at high concentration  
p0218 N81-23011
- CONTI, E.**  
Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems  
p0215 N81-21954
- CONWAY, E. J.**  
Simultaneous radiation damage and annealing of GaAs solar cells  
p0247 N81-27240  
High temperature properties of GaAlAs/GaAs heteroface solar cells  
p0247 N81-27242  
Study of process technology for GaAlAs/GaAs heteroface solar cells  
p0261 N81-17544
- COOK, J. L.**  
Computer modeling of coal gasification reactors, year 4  
[FE-1770-66]  
p0312 N81-18235
- COOK, K. L.**  
Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2]  
p0315 N81-18547
- COOK, E. L.**  
Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant  
[AIAA PAPER 81-0110]  
p0328 N81-20602
- COOKE, E. J.**  
Corrosion of alloys at high temperature in coal gasification environments  
p0302 N81-26491
- COOLEY, S. A.**  
Observations on test stockpiles of dried lignite and subbituminous coals  
[DOE/GFETC/RI-80/5]  
p0321 N81-21217
- COOPER, B., III**  
OM-VPE grown materials for high efficiency solar cells  
p0262 N81-17552
- COOPER, P. I.**  
A non-linear flat-plate collector model  
p0254 N81-27571
- CORF, W. A.**  
Dynamic response analysis of a solar powered heliotropic fluid-mechanical drive system  
p0223 N81-24990
- CORNELIUS, K. A.**  
The US Air Force Academy solar energy research project summary report  
[AD-A094802]  
p0199 N81-19576
- CORNELL, E. P.**  
Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles  
[UCRL-15259]  
p0376 N81-17963
- CORREW, D.**  
The Lebost Wind Turbine experimental program  
[PB81-141467]  
p0364 N81-21634
- COSTA, G.**  
Hydrogen storage in aluminium-substituted TiFe compounds  
p0287 N81-24560
- COSTAIN, J. E.**  
Evaluation and targeting of geothermal energy resources in the southeastern United States  
[DOE/ET-27001/8]  
p0314 N81-18480
- COUANO, J. C.**  
Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium  
p0215 N81-21584
- COUPLAND, D. H.**  
Petroleum exploration with Landsat in Bay County, Michigan - An interim case study  
p0294 N81-23562
- COUTURES, J. P.**  
Solar gasification of carbonaceous materials  
[UCRL-53063]  
p0272 N81-19605
- COVEY, E. H.**  
Operational energy conservation strategies in commercial aviation  
p0185 N81-20465
- CONSER, K. E.**  
Life Sciences Synthetic Fuels program at Oak Ridge National Lab.  
[CONF-801039-3]  
p0192 N81-17285
- COX, A. J.**  
The economics of photovoltaics in the commercial, institutional, and industrial sectors  
p0233 N81-27107
- COX, C. E., III**  
Design of solar cells for use in photovoltaic/thermal collectors  
[ASME PAPER 80-WA/SOL-37]  
p0214 N81-21157
- COYNE-DALL, E. D.**  
Improved PCG-1 cell technology  
[EPRI-EH-1566]  
p0351 N81-16598
- CRABB, E. L.**  
Review of in-orbit performance of ESA's spacecraft solar arrays  
p0249 N81-27267
- CRAPA, V. J.**  
Engine cycle selection for advanced technology engine studies  
[ASME PAPER 81-GT-191]  
p0349 N81-30084
- CRANE, E. A.**  
Performance of active solar domestic hot water heating systems  
[SOLAR/0024-80/41]  
p0281 N81-21556  
Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980  
[SOLAR/1014-80/14]  
p0281 N81-21557
- CRANDALL, R. S.**  
Optical absorption by gap states in amorphous silicon  
p0249 N81-27265  
Amorphous thin films for solar-cell applications  
[SERI/FE-0-8254-F]  
p0283 N81-21591

- CRAWFORD, C. D.**  
Economic comparison of molten carbonate fuel cells and gas turbines in coal gasification based power plants  
[EPRI-AP-1543] p0322 N81-21229
- CRAWFORD, L. E.**  
On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution  
[ASME PAPER 80-WA/HT-11] p0331 A81-21105
- CREMER, H. W.**  
Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary  
[BNFT-FB-T-79-121] p0291 N81-19339
- CREWS, R.**  
Analysis of residential duct losses  
[PB80-228000] p0191 N81-16614
- CRINI, P.**  
Performance assessment of a Flettner wind turbine  
p0327 A81-20025
- CRIST, M.**  
Satellite Power System (SPS) utility integration: Institutional, planning and operational issues  
[EAC-R-4015] p0279 N81-20596
- CROCKER, J. G.**  
Environmental and safety issues of the fusion fuel cycle  
[CONF-801011-66] p0353 N81-17911
- CROWAUSER, D. C.**  
Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T2] p0305 N81-16318  
Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T1] p0315 N81-19258  
Investigation of the liquefaction of partially dried and oxidized coals  
[EPRI-AP-1625] p0321 N81-21222
- CROW, J. T.**  
Self-magnetically insulated ion diode  
p0344 A81-26552
- CULIK, J.**  
Development of a high efficiency thin silicon solar cell  
[NASA-CR-163931] p0259 N81-17522
- CUNNIFF, R.**  
Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 N81-21562
- CUTRONE, E. B.**  
Evaluation of advanced combustors for dry NO<sub>x</sub>/suppression with nitrogen bearing fuels in utility and industrial gas turbines  
[ASME PAPER 81-GT-125] p0349 A81-30029
- CYB, E. J.**  
The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology  
[NASA-TN-58229] p0193 N81-17526
- CEKUBATYJ, M.**  
Photovoltaic behavior of amorphous silicon-based alloys  
p0249 A81-27263
- D**
- DAIDOLA, J. C.**  
A bottom fixed OTEC plant on the edge of a continental /or island/ shelf  
p0340 A81-25086
- DAIELLO, R. V.**  
Epitaxial solar cells on metallurgical grade silicon substrates  
p0231 A81-27085  
Automated array assembly, phase 2  
[NASA-CR-163878] p0258 N81-16578
- DALACU, R.**  
An investigation of the Cu<sub>x</sub>/S-CdS structure for photovoltaic conversion using an A11 film vacuum deposited process  
p0241 A81-27178
- DALAL, V. L.**  
Design of monolithic, multiple-gap, amorphous Si-Ge solar cells  
p0247 A81-27236
- DALLAVALLE, F.**  
Optimized design of total energy systems: The BITE project  
[CISE-1606] p0196 N81-18512
- DARIANO, D. J.**  
Trash to energy  
p0300 A81-25162
- DAMPIER, F. W.**  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586
- DANG, V. D.**  
The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant  
[BNL-51279] p0192 N81-16631
- DANIELS, J.**  
On the safety to solar electric power generation  
p0256 A81-29269
- DAPKUS, P. D.**  
Stacked multiple-bandgap solar cells prepared by CVD techniques  
p0253 A81-27297
- DARBY, R.**  
Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 N81-21629
- DARKAZALLI, G.**  
The parallel heat pump and photovoltaic heating and cooling - Phase II  
[ASME PAPER 80-WA/SOL-40] p0214 A81-21160  
Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems  
p0226 A81-25028
- DARNELL, A. J.**  
Production of hydrogen from carbonaceous materials  
p0288 A81-25146
- DAS, S. K.**  
Extraction of oxygen and metals from lunar ores  
p0222 A81-24827
- DASGUPTA, S.**  
Simplified methods for analyzing the performance of parabolic dish systems  
p0255 A81-29252
- DAUD, T.**  
Grain size dependence of silicon solar cell parameters  
p0249 A81-27261  
Copper doped polycrystalline silicon solar cell  
[NASA-CASE-WFO-14670-1] p0270 N81-19558
- DAURES, R.**  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181
- DAVID, J.-P.**  
Solar input and solar energy resources  
p0217 A81-23008
- DAVIES, L. W.**  
Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells  
p0217 A81-22872
- DAVIS, A.**  
Capacity modulation of solar-fired absorption chillers with single and multi-temperature energizing sources  
p0210 A81-20493  
Investigation of the liquefaction of partially dried and oxidized coals  
[EPRI-AP-1625] p0321 N81-21222
- DAVIS, J. R.**  
Solar cells and modules from dendritic web silicon  
p0234 A81-27117  
Theoretical design considerations for back surface field solar cells  
p0239 A81-27160  
POC13 gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216
- DAVIS, J. R., JR.**  
The properties of polycrystalline silicon solar cells with controlled titanium additions  
p0209 A81-20010
- DAVIS, R. A.**  
Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic  
[DOE/ER-0096] p0207 N81-21642
- DAVIS, T. D.**  
Current and future industrial energy service characterizations, volume 1  
[SERI/TR-733-790-VOL-1] p0206 N81-21618

PERSONAL AUTHOR INDEX

DIAZ, L. A.

- DAVISON, B. B.  
Dynamic behavior of a natural circulation loop for  
a solar collector p0256 A81-29261
- DAVISON, B. B.  
Storage of cold water in aquifers p0375 A81-29257
- DAWBER, E. B.  
An investigation of wind-energy prospects in the  
Otago region of New Zealand p0295 A81-23692
- DANKINS, B. P.  
Economic comparison of molten carbonate fuel cells  
and gas turbines in coal gasification based  
power plants [EPRI-AP-1543] p0322 A81-21229
- DAWSON, A. B.  
RTF magnet design alternatives for the national  
MHD program p0334 A81-23443  
Superconducting MHD magnet engineering program p0344 A81-26852
- DAWSON, J. W.  
Cryogenic aspects of the UTSI-CPPF superconducting  
dipole magnet for MHD research p0345 A81-26855
- DE MARCHI DESERZANI, P.  
Geothermal energy and biofuel production in  
agriculture p0297 A81-25093
- DE PAUN, P.  
MIS silicon grating solar cells on BSP substrates p0252 A81-27293
- DE VISSCHERE, P.  
A two-dimensional model of an MIS inversion layer  
solar cell p0232 A81-27088
- DEAN, A. B.  
A manual for the use of electrostatic  
precipitators to collect fly ash particles  
[PB81-112757] p0308 A81-17640
- DEANGELIS, E. B.  
DLTS spectra and defect effects on irradiated  
silicon solar cells p0244 A81-27203
- DEAR, B. G.  
Integration of fuel conservative procedures in the  
high density terminal area p0185 A81-20468
- DEBLASIO, B.  
Interim performance criteria for photovoltaic  
energy systems [SERI/TR-742-654] p0282 A81-21577
- DECONSO, S. B.  
Gas turbine combustor performance on synthetic  
fuels, Volume 1 [EPRI-AP-1623-VOL-1] p0356 A81-19259
- DEGIOVANNI, O. B.  
Coal preparation using magnetic separation.  
Volume 5: Evaluation of magnetic coal  
desulfurization concepts [EPRI-CS-1517-VOL-5] p0319 A81-20302
- DEIMINGBE, P.  
Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 A81-21629
- DEL RIO, L.  
Remote sensing techniques for identification and  
evaluation of geothermal areas p0294 A81-23587
- DELASCUVAS, B. B.  
Thermal mapping, geothermal source location,  
natural effluents and plant stress in the  
Mediterranean coast of Spain [B81-10119] p0323 A81-21423
- DELOHME, C.  
Mapping of solar radiation for use in the  
Sudanese-Sahelian region of Africa p0217 A81-23007  
Mapping of solar radiation for use in the  
Sudanese-Sahelian region of Africa p0217 A81-23007
- DEMETRIADES, S. T.  
The SID/MHD codes - Comparison of analyses with  
experiments at AEDC/EPDB, Reynolds Metal Co.,  
and Hercules, Inc [AIAA PAPER 81-0173] p0329 A81-20649  
On the magnetoaerothermal instability [AIAA PAPER 81-0248] p0330 A81-20698
- DEMIRJIAN, A. B.  
Plasma diagnostics of MHD generators  
[AIAA PAPER 81-0099] p0328 A81-20601  
Power conditioning and control requirements of  
coal fired MHD generators [AIAA PAPER 81-0246] p0330 A81-20696  
Performance of MHD generators with electrode  
current control [AIAA PAPER 81-0249] p0330 A81-20699  
Electrical conductivity and Hall parameter  
measurements in Faraday MHD generators  
[ASME PAPER 80-WA/HT-9] p0331 A81-21103  
MHD electrode performance - Heat transfer and  
voltage drops [ASME PAPER 80-WA/HT-10] p0331 A81-21104
- DEMUETH, R. B.  
Geothermal energy enhancement by thermal fracture  
[LA-8428] p0325 A81-21623
- DEWARD, C.  
Optimized design of total energy systems: The  
RETE project [CISE-1606] p0196 A81-18512
- DEHISENKO, G. I.  
Investigation of dynamics of a waterwave power plant  
p0333 A81-22176
- DENNING, R. S.  
Laser fusion systems for process heat p0341 A81-25106
- DENNIS, W. B.  
Encapsulation of PV cells using silicone materials  
p0245 A81-27225
- DEMOUDEN, C.  
The benefits of advanced heat storage systems  
p0277 A81-20551  
A method to tune the various components of a solar  
heating system p0277 A81-20552
- DEMOVAN, A. S.  
Heavy water recovery from combined electrolytic  
and non-electrolytic hydrogen streams p0286 A81-24559
- DEPAUL, R. A.  
The CNG nickel electrode p0379 A81-21509
- DEREVIANKO, V. A.  
Magnetohydrodynamic generator of electrical energy  
using gasification products of lignite coal  
p0331 A81-21065
- DEROSSETT, A. J.  
Upgrading of coal liquids: Upgrading distillates  
from coal liquefaction [FE-2566-42] p0310 A81-18226
- DESAGREDO, D. F. L.  
Thermal mapping, geothermal source location,  
natural effluents and plant stress in the  
Mediterranean coast of Spain [B81-10119] p0323 A81-21423
- DESANTI, O.  
A solar biotechnology based on microalgae  
p0218 A81-23015
- DESARO, B.  
An assessment of the use of antimisting fuel in  
turbofan engines [NASA-CR-165258] p0315 A81-19316
- DEUTSCH, T. F.  
Efficient Si solar cells by laser photochemical  
doping p0229 A81-25873
- DEVILLE, J. P.  
Physical and chemical characterization of B.A.L.  
silicon films p0249 A81-27260
- DEVINE, W. D., JR.  
Energy accounting for solar and alternative energy  
sources p0382 A81-25165
- DEVITT, T. B.  
Acid rain: The impact of local sources  
[DOE/NETC-14787/103] p0197 A81-18573
- DEYO, J. B.  
Photovoltaic applications - Past and future  
p0246 A81-27231
- DEYOORE, P.  
MIS silicon grating solar cells on BSP substrates  
p0252 A81-27293
- DIAZ, L. A.  
Temperature variation in the absorber plate of an  
air heating flat plate solar collector  
[ASME PAPER 80-WA/SOL-2] p0211 A81-21130

- DICK-PEDDIE, W. A.  
Environmental overview for the development of  
geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 H81-21639
- DICKIEY, E. C.  
Development of copper sulfide/cadmium sulfide thin  
film solar cells  
[SERI/PR-8143-1-T2] p0269 H81-18559
- DICKINSON, E. E.  
Rectenna array measurement results p0367 H81-16562
- DICKINSON, T.  
Room temperature cells with solid electrolytes p0373 H81-25568
- DIEBOLD, J.  
Commercialization potential of the China Lake  
trash-to-gasoline process p0301 H81-25560
- DIRENDORF, M.  
Integration of wind power into Australian  
electricity grids without storage - A computer  
simulation p0334 H81-23068
- DIETZ, R. H.  
Solar Power Satellite Microwave Transmission and  
Reception  
[NASA-CP-2141] p0365 H81-16533
- DIGUET, D.  
Transport properties in 100 nm C<sub>2</sub> silicon p0234 H81-27115
- DINWOODIE, T.  
System design, test results, and economic analysis  
of a flywheel energy storage and conversion  
system for photovoltaic applications p0375 H81-27232
- DIVER, R. B.  
Hydrogen and oxygen from water. V - The ROC system p0285 H81-21955
- DIVIGALPITIYA, W. E. R.  
Chlorophyll sensitized solar photovoltaic cell  
with cuprous iodide electrode p0254 H81-28936
- DIION, A. E.  
Characterization of ZnO for the fabrication of  
conductor-insulator-semiconductor /CIS/ solar  
cells p0237 H81-27141
- DOCHAT, G.  
Advanced propulsion system concept for hybrid  
vehicles  
[NASA-CR-159772] p0198 H81-18935
- DOENITZ, E.  
High temperature water vapor electrolysis (HOT ELLY)  
[BMFT-FB-T-80-051] p0292 H81-21627
- DORRING, R. W.  
Sampling and instrumentation for fluidized-bed  
combustion  
[ANL/CEN/FE-80-2] p0305 H81-16317
- DOGNIAUX, R.  
Meteorological data: Measurement techniques and  
solar components p0266 H81-18501
- DOHERTY, M. G.  
Analysis of geopressed aquifers  
[PB81-123416] p0317 H81-19553
- DONAGHEY, L. F.  
Cu/x/S growth kinetics and composition analysis by  
absorbance transient and galvanic  
electrochemical measurements p0241 H81-27184
- DONARUMA, L. G.  
Conversion of organic wastes to oil by reductive  
formylation p0302 H81-25563
- DONOVAN, R. L.  
The 10-kilowatt photovoltaic concentrator array  
fabrication  
[SAND-80-7062] p0279 H81-20599
- DORATO, P.  
A review of the application of modern control  
theory to solar energy systems p0210 H81-20490
- DORN, D. E.  
World activity in solar ponds  
[UCID-18900] p0282 H81-21564
- DORRANCE, R. E.  
Non-corrosive, two-reaction, low temperature T/C  
cycles p0287 H81-25144
- DOSS, E.  
Comparison of analytical and experimental studies  
of the HPDE MHD generator performance  
[AIAA PAP88 81-0029] p0327 H81-20549
- U-25B MHD generator performance  
[AIAA PAP88 81-0032] p0328 H81-20552
- DOSS, E. D.  
A comparison of experimental results from the UTSI  
coal-fired MHD generator to theoretical  
predictions  
[AIAA PAP88 81-0031] p0328 H81-20551
- Two-dimensional MHD generator model  
[ANL/HMD-80-11] p0359 H81-19932
- DONGIALLO, E. J., JR.  
Verification test of jet industries Electra-Van  
1000P  
[AD-A093738] p0376 H81-17961
- DOWNING, R. G.  
The spectral irradiance of some solar simulators  
and its effect on cell measurements p0238 H81-27147
- Influence of processing on the electrical  
performance of proton irradiated silicon solar  
cells p0244 H81-27205
- DOYLE, S.  
Boston solar retrofits: Studies of solar access  
and economics  
[DOE/CS-10047/T5] p0268 H81-18538
- DRAGO, P.  
A simulated comparison of the useful energy gain  
in fixed and tracking flat plate and evacuated  
tube collectors p0222 H81-24978
- DRAGOS, L.  
On the flow of an ionized gas in a MHD generator  
with segmented electrodes p0337 H81-24811
- DREGALIN, A. F.  
Thermodynamic and thermophysical properties of  
combustion products. Volume 10 - Fuels that are  
in current use, in the research stage, and  
considered a possibility. Part 2 -  
Multicomponent fuel compositions /Handbook/  
p0302 H81-26195
- DRESNER, J.  
Amorphous thin films for solar-cell applications  
[SERI/PR-0-8254-F] p0283 H81-21591
- DREVINSKI, P. J.  
DLTS spectra and defect effects on irradiated  
silicon solar cells p0244 H81-27203
- DRIGGERS, J. E.  
Development of processes for the production of low  
cost silicon dendritic web for solar cells p0231 H81-27080
- DRIGGS, C. L.  
Adiabatic compressed air energy storage in hard rock  
[FNL-SA-9010] p0376 H81-17591
- DROST, R. E.  
Assessment of generic solar thermal systems for  
large power applications: Analysis of electric  
power generating costs for systems larger than  
10 MWe, volume 1  
[FNL-3533-VOL-1] p0283 H81-21605
- DROULEY, C. I.  
A new method of measuring diffusion length and  
surface recombination velocity p0239 H81-27164
- DUBOW, J.  
Surface charge and specific ion adsorption effects  
in photoelectrochemical devices p0215 H81-22148
- Majority carrier conduction effects in ITO/SIS  
solar cells p0239 H81-27166
- DUBOW, J. B.  
Development trends for the mass production of low  
cost conductor-insulator-semiconductor /CIS/  
solar cells p0228 H81-25051
- DUDNIK, S.  
Troy-Miami Library, Troy, Ohio: Solar energy  
system performance evaluation  
[SOLAR/2029-80/14] p0281 H81-21555

- DUFFY, R. E.**  
Aerodynamic characteristics of the TARP (Toroidal Accelerator Rotor Platform) wind energy conversion system  
[PB81-140675] p0364 N81-21632
- DUGGER, G. L.**  
Contribution of ocean thermal energy conversion to world energy needs p0333 A81-22900
- DUNSMAN, J. A.**  
Cu/x/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements p0241 A81-27184
- DUNCAN, C. S.**  
Development of processes for the production of low cost silicon dendritic web for solar cells p0231 A81-27080
- DUNCAN, R. L.**  
A baseload gas turbine to meet utility requirements for reliability and availability [ASME PAPER 81-GT-127] p0349 A81-30031
- DUNKLE, R. V.**  
A non-linear flat-plate collector model p0254 A81-27571
- DUNN, J. C.**  
Kilauea Iki lava lake experiment plans [SAND-80-1653] p0318 N81-19699
- DUNN, P. F.**  
Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations p0327 A81-19810  
The effect of secondary combustion on nitric oxide concentrations in a MHD combustion gas [AIAA PAPER 81-0102] p0328 A81-20604
- DUPUIS, R. D.**  
Stacked multiple-bandgap solar cells prepared by CVD techniques p0253 A81-27297
- DURAN, P.**  
Closed-cycle helium gas turbine for solar tower power plant p0353 N81-18247
- DUROU, C.**  
Analysis by real-time holographic interferometry of heat transfer at the surface of cold solar collectors p0216 A81-22695
- DUTKIEWICZ, R. K.**  
Small scale power generation utilizing wave energy p0339 A81-25080
- DUTRE, W. L.**  
Performance of air collector house heating systems with rock bed storage p0277 N81-20553
- DUTRI, R. J.**  
The environmental assessment of a contemporary coal mining system [NASA-CR-163974] p0197 N81-18571
- DUVALL, D. S.**  
Technology for powdered fuel preparation from solid waste p0301 A81-25559  
Obtaining improved products from the organic fraction of municipal solid waste [PB81-110918] p0307 N81-17295
- DVERNIakov, V. S.**  
Interaction in Si3N4-C and BN-C systems under conditions of radiation heating p0210 A81-20906
- DYKHUIZEN, R. C.**  
Laser fusion systems for process heat p0341 A81-25106
- E**
- EAGLE, K. E.**  
High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1598] p0358 N81-19632
- EASTERLING, B.**  
Carbon monoxide: Resource of the future [BBL-28576] p0307 N81-17603
- EASTLAKE, E. E.**  
A primer on economic feasibility for direct-users p0346 A81-28550
- EBINA, H.**  
Performance of a flat type solar collector composed of the selective transparent and absorbing plates p0223 A81-24982
- ECONOMOU, N. A.**  
Heterojunction solar cells on cuprous oxide p0221 A81-24809
- EDBLQW, G.**  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis [DOE/EV-73002/1-VOL-1] p0205 N81-21595  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 2: Hydroelectric development [DOE/EV-73002/1-VOL-2] p0205 N81-21596  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update [DOE/EV-73002/1-VOL-3] p0205 N81-21597
- EDENBURN, R. W.**  
Low-cost, high-performance, point-focus concentrator array design p0242 A81-27189  
Active and passive cooling for concentrating photovoltaic arrays p0243 A81-27192
- EDESKUTY, P. J.**  
Some long-term energy options [LA-8628-MS] p0200 N81-19596
- EDINGTON, J. W.**  
A microstructural study of the heterojunction materials of the CdS-Cu2S solar cell p0241 A81-27179
- EDLER, L.**  
Marine biomass: Algae as source of energy [NE/BCO-80/12] p0320 N81-20581
- EDWARDS, J. B.**  
An optimal control approach to energy minimization in electric vehicles [HEPT-109] p0201 N81-19972
- EDWARDS, P. J.**  
An investigation of wind-energy prospects in the Otago region of New Zealand p0295 A81-23692
- EGGERS, A. J., JR.**  
Comparative analysis of coal use options for reducing the dependence of utilities on imported oil [DOE/EA-12301-T1] p0322 N81-21230
- EGGWERTS, S.**  
Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IEA, research and development WECS, annex one, subtask A1 [PPA-TN-HU-2218] p0359 N81-19636
- EHLERS, K. W.**  
Transport of low energy positive and negative ion beam by permanent magnets [LBL-11636] p0359 N81-19888
- EBELICH, D. J.**  
Efficient Si solar cells by laser photochemical doping p0229 A81-25873
- EICHHOLZ, J. J.**  
Sampling and instrumentation for fluidized-bed combustion [ABL/CEE/PB-80-2] p0305 N81-16317
- ICKER, P. J.**  
Solar central receiver systems comparative economics [SERI/SP-633-637] p0267 N81-18523
- EINHORN, S. J.**  
Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base [AD-A094226] p0196 N81-18050  
Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report [AD-A094225] p0196 N81-18051
- RISENLOHR, K. H.**  
Motor fuels from coal - Technology and economics p0293 A81-22275



## EISENHANN, W.

An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical  
p0287 A81-25140

## EKDARL, C. A.

Voltage and current sensors for a high-density z-pinch experiment  
p0332 A81-21641

## EKSTADT, R. E.

Evaluation of advanced combustors for dry NO<sub>x</sub>/ suppression with nitrogen bearing fuels in utility and industrial gas turbines  
[ASME PAPER 81-GT-125]  
p0349 A81-30029

## EL DERRINI, Z.

Comparison of analytical and experimental studies of the HPDE MHD generator performance  
[AIAA PAPER 81-0029]  
p0327 A81-20549

## EL-BASSUONI, A.-M. A.

Thermoelectrochemical hydrogen production using sodium chloride  
p0288 A81-25145

## EL-BOHER, A.

On the possible use of MHD generators in solar energy systems  
p0209 A81-19813

## EL-DERRINI, M. M.

Shape optimization study for a three-tunnel superconductive energy storage magnet  
p0374 A81-26861

## EL-SHOOKSHY, M. S.

Theoretical and experimental investigation of a flat-plate solar collector performance with the use of a solar simulator  
p0223 A81-24983

## ELICHEVA, G. S.

Interaction in Si<sub>3</sub>N<sub>4</sub>-C and BN-C systems under conditions of radiation heating  
p0210 A81-20906

## ELLINGSON, M. A.

Materials technology for coal-conversion processes [ANL-80-93]  
p0322 A81-21228

## ELLIOTT, D. L.

Meteorological aspects of wind energy - Assessing the resource and selecting the sites  
p0295 A81-23690

Wind energy resource atlas. Volume 4: The Northeast region  
[PNL-3195-NEEA-4]  
p0321 A81-20592

Wind energy resource atlas. Volume 5: The East Central region  
[PNL-3195-VOL-5]  
p0325 A81-21712

## ELLISON, R. D.

Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5]  
p0200 A81-19599

## ELLMAN, R. C.

Observations on test stockpiles of dried lignite and subbituminous coals  
[DOE/GFETC/RI-80/5]  
p0321 A81-21217

## ELSTON, L. W.

Pyrolytic oils: Characterization and data development for continuous processing  
[PB81-110959]  
p0306 A81-17294

## ENNELIN, L.

Marine biomass: Algae as source of energy  
[NE/BIO-80/12]  
p0320 A81-20581

## ENDO, H.

Characteristics of acidic electrolyte hydrogen-air fuel batteries (3)  
[UCRL-TRANS-11655]  
p0358 A81-19604

## ESTINE, G.

Low cost sprayed CdTe solar cell research  
[DSE-4042-T34]  
p0275 A81-19631

Low cost, sprayed CdTe solar cell research  
[SERI/PR-8104-3-T2]  
p0279 A81-20585

## EPSTEIN, R.

Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts  
[BPRI-CS-1517-VOL-5]  
p0319 A81-20302

## ERGUN, S.

Albany biomass-to-oil project  
p0301 A81-25562

Sulphur removal potential of American coals as a determinant of sulphur dioxide emissions from coal-fired power plants  
p0188 A81-28993

## ERIKSSON, L. O.

Energy out of groundwater  
[NE/HETV-80/9]  
p0320 A81-20565

## ERLEY, D.

Residential solar design review: A manual on community architectural controls and solar energy use  
[PB81-128605]  
p0275 A81-19648

## ESCHER, W. J. D.

Liquid-hydrogen automotive onboard storage and servicing system project  
[LA-UR-80-3491]  
p0291 A81-19971

## ESDER, T.

The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey  
p0297 A81-25090

## ESER, E.

Growth and evaluation of CdS and CdZnS films for the fabrication of high performance photovoltaic devices  
p0241 A81-27180

## ESPOSITO, M. P.

Acid rain: The impact of local sources  
[DOE/HETC-14787/103]  
p0197 A81-16573

## ESTEY, R. S.

The spectral irradiance of some solar simulators and its effect on cell measurements  
p0238 A81-27147

## ETTENDIRH, B.

Solids circulation around a jet in a fluidized bed gasifier  
[DOE/ET-12229/T1]  
p0313 A81-16343

## ETTENDIRH, M.

SPS design with solid-state transmitter  
p0365 A81-24831

## EUSTAQUIO DOS ANJOS, C.

Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goias - Brazil  
p0295 A81-23630

## AUSTIS, R. H.

Feasibility of the inflow disk generator for open-cycle MHD power generation  
[AIAA PAPER 81-0250]  
p0330 A81-20700

## EVANS, D. L.

Two modified single diode models for simulating solar cells with distributed series resistance  
p0239 A81-27161

## EVANS, D. V.

Power from water waves  
p0337 A81-23955

## EVANS, S. H., JR.

Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2]  
p0315 A81-18547

## EVDOKIMOV, V. M.

Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination  
p0219 A81-23803

## EWE, H.

H<sub>2</sub> as an energy vector - Hydrogen production by the H<sub>2</sub>O/FLUX electrolytic cell  
p0285 A81-23014

## EWELL, R.

Radiatively coupled thermionic and thermoelectric power system concept  
[AIAA PAPER 81-0217]  
p0329 A81-20683

## F

## FAAS, S. E.

Cost-performance comparison of water-steam receivers for solar central electric power plants  
[SAND-80-8245]  
p0273 A81-19615

## FABIAN, CH.

The oxygen electrode - A major problem in energy conversion  
p0342 A81-25608

## FABRE, R.

Transport properties in 100 nm CZ silicon  
p0234 A81-27115

Fabrication of amorphous silicon solar cells, using an industrial process  
[LRP-80.638.SSE-689-A]  
p0280 A81-20602

# PERSONAL AUTHOR INDEX

FERRINDECI, A. M.

- FABRI, G.  
GaAs (GaAl) as solar cells to be used under concentrated solar light condition [EUB-6934-EN] p0274 N81-19625
- FABRIS, G.  
Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations p0327 A81-19810
- FABRE, D.  
Photovoltaic applications - Past and future p0246 A81-27231
- FAGEN, E. A.  
Design of monolithic, multiple-gap, amorphous Si-Ge solar cells p0247 A81-27236
- FAHRHENDRICH, A. L.  
ZnO films and ZnO/CdTe heterojunctions prepared using spray pyrolysis p0240 A81-27169
- FALBE, J.  
Coal gasification for hydrogen manufacturing p0286 A81-24018
- FALK, U.  
Alkaline storage batteries p0373 A81-25566
- FALLIN, M.  
Performance calculation of a vertical-axis wind power converter p0337 A81-24617
- FALLON, M. M.  
Sampling and instrumentation for fluidized-bed combustion [ANL/CEN/FE-80-2] p0305 N81-16317
- FAN, J. C. C.  
Efficient Si solar cells by laser photochemical doping p0229 A81-25873  
Proposed design of a-Si:H solar cells using ultrathin active layer to increase conversion efficiency p0247 A81-27237  
GaAs shallow-homojunction solar cells p0247 A81-27243  
Efficient large-grained GaAs homojunction solar cells p0251 A81-27285
- FANETTI, E.  
High efficiency 1.43 and 1.69 eV band gap Ga/1-x/Al/x/As-GaAs solar cells for multicolour applications p0255 A81-28958
- FANG, C. S.  
Process feasibility study in support of silicon material task 1 [NASA-CR-164009] p0271 N81-19570
- FANG, J. M.  
Analysis of alternative strategies for energy conservation in new buildings [PNL-3309] p0199 N81-19353
- FANGHANEL, E.  
Tetrathiafulvalenes as catalysts for the reduction of oxygen in acid electrolytes p0342 A81-25325
- FANT, D. B.  
Computer simulation of solar air heating systems using rock bed thermal storage units [AD-A094771] p0377 N81-19580
- FARAG, I. M.  
Fundamentals and applications of solar energy: Proceedings of the Seventy-Second Annual Meeting, San Francisco, Calif., November 25-29, 1979 p0382 A81-29251  
Design and performance of a concentrating solar collector p0255 A81-29253
- FARBEE, E. A.  
Performance comparison of flat plate collector absorber coatings utilizing NBS Standard 74-635 and the ASHRAE Collector Performance Method p0222 A81-24981  
Dynamic response analysis of a solar powered heliostatic fluid-mechanical drive system p0223 A81-24990
- FARBMAN, G. E.  
The sulfur-cycle hydrogen production process p0286 A81-24024
- FARCASIU, M.  
Coal liquefaction: The chemistry and technology of thermal processes p0304 A81-29692
- FARFALLETTI, F.  
Description and thermal performance of corrugated solar collectors p0266 N81-18504
- FARNSWORTH, A. V., JR.  
Anode plasma behavior in a magnetically insulated ion diode p0344 A81-26571
- FAROUK, B.  
Trombe-Michel wall using phase change materials p0224 A81-25007
- FARRELL, M. R.  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [CONF-8010106-7] p0189 N81-16314  
Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data [CONF-8010106-3] p0305 N81-16315  
Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data [ORNL/TN-7525] p0316 N81-19332  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility [ORNL/TN-7428] p0320 N81-20305
- FASSBENDER, L. L.  
Making geothermal power competitive p0340 A81-25092
- FATHI, H.  
Solar thermionic power plant. II p0228 A81-25057
- FAUGHNAN, S.  
Development of amorphous silicon cells p0249 A81-27262
- FELDER, W.  
Rate coefficients of combustion/fuel conversion reactions by high-temperature photochemistry [COO-4169-5] p0314 N81-18525
- FELDKIRCHNER, H. L.  
Hydrogasification of oil shale [PB81-114092] p0306 N81-17292
- FELDMAN, C.  
Vacuum deposited polycrystalline silicon solar cells for terrestrial use p0236 A81-27128
- FELICE, E.  
Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148] p0282 N81-21575
- FELLOWS, L.  
Thermal storage cell for high temperature solar systems p0224 A81-24993
- FELLOWS, S. K.  
Liquefaction of biomass as a source of fuels or chemicals p0294 A81-22350
- FENDLER, J. E.  
Photochemical solar energy conversion in surfactant vehicles [DOE/EE-10601/1] p0269 N81-18560
- FENG, T.  
SnO2/polycrystalline silicon solar cells p0248 A81-27255
- FENTON, D. L.  
Operational characterization of the solar-thermal power system near Willard, New Mexico [ASME PAPER 80-WA/SOL-39] p0214 A81-21159
- FERRER, E. E.  
The DOE photovoltaic program - An overview p0228 A81-25055
- FERCHAK, J. D.  
Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion p0296 A81-24427
- FERRINDECI, A. M.  
Flux pump excited brushless alternator p0334 A81-23436

- FERRAGLIO, R. C.**  
Nuclear radiation effects on the photovoltaic performance and interface states of Cr, p-type, single crystal, MISi solar cells  
p0244 A81-27208
- FERRANDO, M.**  
Lightweight composite cadmium electrodes  
p0379 A81-21510
- FERRETTI, M.**  
Hydrogen storage in aluminum-substituted TiFe compounds  
p0287 A81-24560
- FEUSTEL, J. E.**  
Large wind energy converter: Growian 3 MW  
[NASA-TN-75404]  
p0360 A81-20543
- FEY, R. G.**  
Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays  
[NASA-CR-163943]  
p0260 A81-17525
- FIEGL, G. F.**  
Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology  
p0234 A81-27113
- FIGARD, R. L.**  
The aerodynamic analysis of a 10 kW horizontal-axis windmill  
p0354 A81-18484
- FILLO, J. A.**  
Advanced synfuels production/power systems utilizing laser particulate control  
p0299 A81-25127
- Fusion reactors for hydrogen production via electrolysis  
p0287 A81-25139
- HYFIRE: A Tokamak high temperature electrolysis system**  
[BNL-28679]  
p0352 A81-16908
- Review of fusion synfuels  
[BNL-28627]  
p0291 A81-20300
- FISCH, F. T.**  
Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources  
p0297 A81-25108
- FISCHER, H. H.**  
Combined gas and steam cycle for a gas-cooled solar tower power plant  
[ASME PAPER 81-GT-102]  
p0348 A81-30008
- FINEGOLD, J. G.**  
Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SERI/TR-351-461-VOL-1]  
p0273 A81-19618
- FINGER, D. G.**  
Analytical design of an advanced radial turbine  
[NASA-CR-165170]  
p0361 A81-20958
- FINGER, R. W.**  
Prediction model for fatigue crack growth in windmill structures  
p0371 A81-21740
- FINLAYSON, A. W.**  
Making windpower an important part of a national energy plan  
[ASME PAPER 81-PET-11]  
p0189 A81-30113
- FINNELL, W.**  
Microwave power transmission system workshop, session on solid state  
p0367 A81-16563
- FIORENTINO, A.**  
An assessment of the use of antimisting fuel in turbofan engines  
[NASA-CR-165258]  
p0315 A81-19316
- FIORITO, G.**  
GaAs(GaAl) as solar cells to be used under concentrated solar light condition  
[EUR-6934-EN]  
p0274 A81-19625
- FISCHER, R.**  
Compatibility of BSR and BSF solar cell technology  
p0232 A81-27093
- Growth structure of cast silicon and related photovoltaic properties of solar cells  
p0245 A81-27214
- FISCHER, S. E.**  
Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5]  
p0200 A81-19599
- FISCHER, N.**  
Development of sodium/sulfur batteries  
[BNFT-PB-T-79-60]  
p0376 A81-17607
- FISCHL, R.**  
Optimal and suboptimal control policies for a solar collector system  
p0211 A81-21029
- FISH, J. D.**  
Overall efficiencies for conversion of solar energy to a chemical fuel  
p0288 A81-25148
- FISHER, J. F.**  
Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664]  
p0322 A81-21223
- FISHER, L. R.**  
Wood energy in West Virginia  
p0297 A81-25066
- FISK, J. W.**  
Synthetic fuel production in a particle-beam driven fusion reactor  
p0297 A81-25107
- FISSAN, H.-J.**  
Utilization of cascade impactors in hot waste gas from an oil firing installation  
p0186 A81-23416
- FITZSIMMONS, G. W.**  
SPS solid state antenna power combiner  
p0367 A81-16565
- FLANAGAN, T. B.**  
Hydrogen in LaNi5 intermetallic compound  
p0290 A81-25496
- FLRISCHMANN, R.**  
Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte  
p0343 A81-25611
- FLETCHER, R. A.**  
Hydrogen and oxygen from water. V - The EOC system  
p0285 A81-21955
- FLITT, R. J.**  
Hydrogen/metal interactions with special reference to electrochemical approaches  
p0286 A81-24556
- FLORES, C.**  
High efficiency 1.43 and 1.69 eV band gap Ga/1-x/Al/x/As-GaAs solar cells for multicolour applications  
p0255 A81-28958
- FODOR, J.**  
High efficiency solar panel - Phase II  
p0250 A81-27270
- FOGARASSY, R.**  
Silicon solar cells realized by laser induced diffusion of deposited antimony  
p0244 A81-27202
- FOGH, E.**  
Direct solar air heating in Denmark /56 deg N/ - Heating strategies in theory and practice  
p0225 A81-25022
- FONASH, S. J.**  
Performance study of p+/n and n+/p solar cell structures on polycrystalline material  
p0231 A81-27087
- Heterojunction solar cell design and evaluation  
p0239 A81-27163
- FONG, F. K.**  
Hydrogen generation from the chlorophyll water splitting reaction Photochemical conversion and solar energy storage  
p0288 A81-25151
- FONSECA, R.**  
The conversion of peat - Recent developments in simultaneous dewatering and hydrogenolysis  
p0298 A81-25116
- FONT, S.**  
High power silver zinc and thermal batteries for missiles and aviation applications  
p0373 A81-25612
- FONTAINE, C.**  
Physical and chemical characterization of R.A.D. silicon films  
p0249 A81-27260
- FORD, R. D.**  
Pulsed high voltage and high current outputs from homopolar energy storage system  
[AD-A094910]  
p0377 A81-19575

- FORBES, S.**  
Interim performance criteria for photovoltaic energy systems  
[SRI/TR-742-654] p0282 N81-21577
- FORBES, S. E.**  
Performance and reliability of photovoltaic modules at various NIT LL test sites  
p0251 A81-27277
- FORNEY, R. G.**  
The DOE photovoltaic program - An overview  
p0228 A81-25055
- FORRESTER, R. C., III**  
Indirect conversion of coal to methanol and gasoline: Product price vs product slate  
[CONF-801142-3] p0311 N81-18228  
Liquefaction technology assessment. Phase 1:  
Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664] p0322 N81-21223
- FOXT, J. A.**  
Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PHL-3533-VOL-1] p0283 N81-21605
- FOSSUM, A. F.**  
Laboratory studies of hard rock for CARS  
[PHL-SA-8971] p0375 N81-16599
- FOSSUM, J. G.**  
Characterization of p+/nn+/+ BSP silicon concentrator solar cells  
p0236 A81-27133  
Review of physics underlying recent improvements in silicon solar-cell performance  
p0241 A81-27176
- FOX, R. L.**  
Technology for powdered fuel preparation from solid waste  
p0301 A81-25559  
Obtaining improved products from the organic fraction of municipal solid waste  
[PB81-110918] p0307 N81-17295
- FRAAS, L. E.**  
The influence of the electronic structure of grain boundaries on the diode characteristics of polycrystalline solar cells  
p0251 A81-27283
- FRANK, R. A.**  
Lubricants for combating effects of high-sulfur fuel  
[AD-A094900] p0315 N81-19312
- FRANCESCHI, J.**  
Bed expansion and attrition studies in a coal-fired fluidized bed  
p0299 A81-25128
- FRANCESCHI, L.**  
Advanced solar collectors (concentrating troughs)  
p0267 N81-18505
- FRANCOIS, G. L.**  
High-reliability gas turbine combined-cycle development program, phase 1  
[EPRI-AP-1598] p0358 N81-19632
- FRANSEN, S.**  
Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-M-2242] p0359 N81-19637
- FRANK, J.**  
Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research  
p0288 A81-25152
- FRANK, R.**  
High concentration silicon photovoltaic cell development  
[SAND-80-7068] p0279 N81-20595
- FRANK, R. L.**  
A low series resistance silicon photovoltaic cell for high intensity applications  
p0236 A81-27134
- FRANK, T. G.**  
Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources  
p0297 A81-25108
- FRANKE, P. E.**  
Hot Dry Rock Geothermal Energy Development Program  
p0297 A81-25091
- FRANKFORT, K.**  
A market research effort leading to the development of a high efficiency 10,000 shp gas turbine system  
[ASME PAPER 81-GT-190] p0349 A81-30083
- FRANKIEWICZ, T. C.**  
Design and management for resource recovery. Volume 1 - Energy from waste  
p0300 A81-25551
- FRANK, T.**  
An assessment of the use of antimisting fuel in turbofan engines  
[NASA-CR-165258] p0315 N81-19316
- FRANKEN, B.**  
Utilization of cascade impactors in hot waste gas from an oil firing installation  
p0186 A81-23416
- FREEMAN, J. W.**  
Workshop on the microwave power transmission system for the solar power satellite - Review panel report  
p0365 A81-24832
- FRIEWALD, D. A.**  
Use of non-petroleum fuels to reduce military energy vulnerabilities: Self-sufficient bases and new weapon propulsion systems  
[LA-UR-80-3445] p0199 N81-19329
- FRIE, W.**  
Design and efficiency estimation of a thermochemical system of hydrogen production  
p0285 A81-23531
- FRIED, S.**  
Task report no. 3. Systems analysis of organic Rankine bottoming cycles  
[PSI-TR-245] p0354 N81-18529
- FRIEDLY, J. C.**  
Dynamic behavior of a natural circulation loop for a solar collector  
p0256 A81-29261
- FRIEDMANN, R. P.**  
Aeroelastic stability and response analysis of large horizontal-axis wind turbines  
p0335 A81-23697
- FRIGO, A. A.**  
Assessment of high-head turbomachinery for underground pumped hydroelectric storage plants  
p0372 A81-25003
- FRISSEN, L.**  
Silicon solar cells with screen printed diffusion and metallization  
p0245 A81-27221
- FRIITS, D. E.**  
Testing the mechanical characteristics of sintered nickel battery plaque and their relationship to nickel electrode performance  
p0372 A81-25323
- FUKKI, K.**  
Progress in batteries and solar cells. Volume 3  
p0382 A81-25601
- FUEHNHANN, A.**  
Tetrahydrofulvalenes as catalysts for the reduction of oxygen in acid electrolytes  
p0342 A81-25325
- FULLER, H. L.**  
Hydrogen in thin film hydriding alloys  
p0289 A81-25155
- FUNG, K. T.**  
Wind energy - A utility perspective  
p0187 A81-26371
- FUNK, J. E.**  
An exergetic/energetic/economic analysis of three hydrogen production processes - Electrolysis, hybrid, and thermochemical  
p0287 A81-25140
- FURTA, T. E.**  
Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides  
[IS-4745] p0259 N81-16606

## G

- GABANO, J. E.**  
Progress in batteries and solar cells. Volume 3  
p0382 A81-25601
- GACKE, D.**  
Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility  
p0334 A81-23451

- GAENSSLEN, H.  
Motor fuels from coal - Technology and economics  
p0293 A81-22275
- GAINES, L. L.  
Energy and materials flows in the production of  
olefins and their derivatives  
[ANL/CNSV-9] p0203 N81-21161
- GALANCA, F. L.  
Experimental results of the UTSI coal-fired MHD  
generator and investigations of various power  
take-off schemes  
[AIAA PAPER 81-0030] p0328 A81-20550  
A comparison of experimental results from the UTSI  
coal-fired MHD generator to theoretical  
predictions  
[AIAA PAPER 81-0031] p0328 A81-20551
- GALL, R. P.  
GaAs shallow-homojunction solar cells  
p0247 A81-27243  
Efficient large-grained GaAs homojunction solar  
cells  
p0251 A81-27285
- GALINDO, J.  
High temperature solar reactors for hydrogen  
production  
p0286 A81-24557
- GALKIN, G. M.  
Concentration dependences of the parameters of  
high-voltage silicon photocells under high  
levels of illumination  
p0219 A81-23803
- GALLAGHER, B. D.  
Solar cells and modules from dendritic web silicon  
p0234 A81-27117
- GALVAN, E.  
Remote sensing techniques for identification and  
evaluation of geothermal areas  
p0294 A81-23587
- GALVIN, W. E.  
Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 N81-21361
- GAMZE, M. G.  
Analysis of residential duct losses  
[PB80-228000] p0191 N81-16614
- GANESAN, V.  
Solar energy in the field of distillation - Design  
parameters and thermodynamic analysis of solar  
still  
p0227 A81-25041
- GARAY, L.  
Energy from biological processes. Volume 3:  
Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 N81-21234
- GARCIA, A., III  
An improved lamination technique for solar arrays  
p0245 A81-27226
- GARDNER, J. F.  
Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 N81-21361
- GARG, R. P.  
Optimization of fin and tube parameters in a  
flat-plate collector  
p0209 A81-19849  
Optimization of fin and tube parameters in a  
flat-plate collector  
p0255 A81-29032
- GARNER, C. H.  
Effects of nonuniform illumination on the  
performance of silicon concentrator solar cells  
p0237 A81-27136  
Optimization of a photovoltaic receiver for a  
parabolic trough concentrator  
p0242 A81-27187
- GARNER, H.  
Low-cost, high-performance, point-focus  
concentrator array design  
p0242 A81-27189
- GARRISON, G.  
Improvement of phosphoric acid fuel cell stacks  
[AD-A092814] p0351 N81-16589
- GARRETT-PRICE, B. A.  
Assessment of generic solar thermal systems for  
large power applications: Analysis of electric  
power generating costs for systems larger than  
10 MWe, volume 1  
[PNL-3533-VOL-1] p0283 N81-21605
- GARRETT, A. S., JR.  
Biological exposure sensors in coal conversion  
technologies  
[CCNF-801143-1] p0192 N81-17410
- GARRETT, L. B.  
Utility of and technology for a space central  
power station  
[AIAA PAPER 81-0449] p0216 A81-22763
- GARRISON, G. W.  
Preliminary Paraday performance of a large MHD  
generator at high magnetic field  
[AIAA PAPER 81-0028] p0327 A81-20548
- GARULLI, A.  
The photovoltaic-aeolian plant at Passo Mandrioli  
/Italy/  
p0218 A81-23013
- GASS, S. I.  
The NBS Energy Model Assessment project: Summary  
and overview  
[PB81-105082] p0191 N81-16612
- GATE, R.  
Surface charge and specific ion adsorption effects  
in photoelectrochemical devices  
p0215 A81-22148
- GATTI, A.  
A conceptual design study of a high temperature  
solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523
- GAUL, R. W.  
Omnibus-G parabolic dish optical efficiency: A  
comparison of two independent measurement  
techniques  
[SERI/TR-631-544] p0267 N81-18520
- GAY, E. C.  
Lithium/iron sulfide batteries for  
electric-vehicle propulsion and other applications  
[ANL-80-49] p0375 N81-16591
- GAYHEART, T. E.  
Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 N81-21361
- GEFFKEN, J.  
Pressurized fluidized bed - A technology for  
combined cycle power generation  
[AIAA PAPER 81-0392] p0330 A81-20802
- GEISSER, R. E.  
The Pompano Beach RefCOM facility  
p0300 A81-25554
- GENENS, L.  
Construction program for a large superconducting  
MHD magnet system at the Coal-Fired Flow Facility  
p0334 A81-23451  
Final design of a superconducting MHD magnet for  
the coal-fired flow facility at the University  
of Tennessee Space Institute  
p0345 A81-26854  
Cryogenic aspects of the UTSI-CFFF superconducting  
dipole magnet for MHD research  
p0345 A81-26855
- GENEQUAND, R.  
Direct thermal water splitting by concentrated  
solar radiation for hydrogen production. Phase  
0: Proof of concept experiment  
[NASA-CR-164137] p0291 N81-21210
- GEORGE, R. L.  
Wind energy resource atlas. Volume 4: The  
Northeast region  
[FNL-3195-WEBB-4] p0321 N81-20592  
Wind energy resource atlas. Volume 5: The East  
Central region  
[FNL-3195-VOL-5] p0325 N81-21712
- GEORGESCU-ROGHEANU, N.  
General reflections on the theme of innovations  
p0383 N81-18940
- GERMAN, M. L.  
The role of high-Btu coal gasification technology  
p0298 A81-25112
- GERSTHANN, J.  
Design and development of Stirling engines for  
stationary power generation applications in the  
500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1] p0363 N81-21581

- GERBIN, H. J.  
Photovoltaic advanced systems test facility:  
Description and operations plan  
[SAND-80-1612] p0259 N81-16607
- GESSEL, S. P.  
Energy from biological processes. Volume 3:  
Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 N81-21234
- GEYER, H. K.  
Off-design study of an open cycle MHD power plant  
with oxygen enrichment  
[AIAA PAP88 81-0319] p0330 A81-20748  
Two-dimensional MHD generator model  
[ABL/MHD-80-11] p0359 N81-19932
- GHANDHI, S. K.  
Grain boundary edge passivated solar cells on thin  
film GaAs p0251 A81-27284
- GHASHEE, A. A.  
Technology for powdered fuel preparation from  
solid waste p0301 A81-25559  
Obtaining improved products from the organic  
fraction of municipal solid waste  
[PB81-110918] p0307 N81-17295
- GHEZELI, S.  
Methodology to evaluate the potential for ground  
water contamination from geothermal fluid releases  
[PB81-111114] p0195 N81-17641
- GHOSH, A. K.  
SnO<sub>2</sub>/polycrystalline silicon solar cells  
p0248 A81-27255
- GIANELLI, G.  
Hydrothermal metamorphism in the Larderello  
geothermal field p0296 A81-24306
- GIANSANTE, J. E.  
The use of concrete block directly under a  
concrete slab as a heat storage system in a  
passive solar heated building p0224 A81-24999
- GIDASPOV, D.  
Solids circulation around a jet in a fluidized bed  
gasifier  
[DOE/ST-12229/T1] p0313 N81-18343
- GIDDINGS, J. M.  
Strategies for ecological effects assessment at  
DOE energy activity sites  
[ORNL/TM-6783] p0198 N81-18578
- GIELLIS, R.  
Terrestrial photovoltaic system analysis  
[AD-A094827] p0272 N81-19578
- GILEV, S. D.  
HX-generators using the transition of a  
semiconductor material into a conducting state  
p0331 A81-21064
- GILLANDRES, R.  
High efficiency wraparound contact solar cells  
/HEWACS/ p0232 A81-27094  
The HEWAC pilot line experience p0262 N81-17574
- GINELL, W. S.  
Development of a prototype heat engine for energy  
conservation  
[DOE/OR-06028/T6] p0199 N81-19589
- GINSBURG, R.  
The effects of junction depth and impurity  
concentration on diffused junction solar cells  
p0228 A81-25050
- GIORDANO, T. J.  
Ammoniated salt heat pump p0372 A81-25019
- GIRISCH, R.  
NIS silicon grating solar cells on BSP substrates  
p0252 A81-27293
- GIUFFRIDA, R.  
Cells and modules for linear P.V. concentrator  
systems with forced cooling p0242 A81-27186  
Parabolic troughs concentrators photovoltaic module  
p0242 A81-27188
- GIULIANO, R.  
Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495
- GLASER, D. P.  
Energy from biomass: The simplex process for the  
gasification of coal and forest pulp  
[PB81-110512] p0305 N81-16324
- GLOEL, J.  
A 10 kW small solar power station and operations  
optimization  
[BNFT-PB-T-79-139] p0275 N81-19638
- GHANAIDJER, Y. A.  
Optimisation of total annual energy output from  
constant/adjustable tilt solar PV arrays  
p0250 A81-27273
- GOBIN, D.  
Numerical resolution of the heat transfer  
equations in a latent heat solar energy storage  
system p0224 A81-25005  
Heat transfer through a paraffin wax solar energy  
storage characterized by a temperature dependent  
specific heat p0224 A81-25006
- GOCHENHANN, E.  
Experimental study to define developments for  
terrestrial solar cell generators  
[BNFT-PB-T-79-143] p0279 N81-20600
- GODET, M.  
Europe in face of the future p0383 N81-18955
- GOELLER, H. E.  
Comments on long-term aspects of renewable versus  
nonrenewable resource substitution  
[CONF-801158-1] p0313 N81-18477  
Future US energy supply: Constraints by nonfuel  
mineral resources  
[ORNL-5656] p0204 N81-21467
- GOETTL, R. J., IV  
Energy/economic model analysis. Macroeconomic  
impacts of research and development in gas  
supply and end use technologies  
[PB81-114258] p0194 N81-17613
- GOETTERBERGER, A.  
Efficiency and stability of experimental  
fluorescent planar concentrators /FPC/  
p0242 A81-27190
- GOLDBERG, I. B.  
Studies of the mechanism of coal hydrogenation by  
electron spin resonance  
[DOE/PC-30072/T2] p0313 N81-18241
- GOLDBERG, R. L.  
Carbon monoxide: Resource of the future  
[BNL-28576] p0307 N81-17603
- GOLDEN, T. S.  
Housing authority of Baltimore City-Public Housing  
Energy Workshop  
[NASA-TM-82050] p0190 N81-16569
- GOLDHAMMER, L. J.  
Summary results of the ATIS-6 solar cell flight  
experiment p0244 A81-27209
- GOLDMAN, H.  
Low cost processes for fabricating silicon solar  
cells p0245 A81-27218
- GOLDSCHIED, F. R.  
Air/gas system dynamics of fossil fuel power  
plants. Volume 4: Experimental vibration and  
acoustic test data of a 500-MW unit  
[EPRI-CS-1444-VOL-4] p0351 N81-16602
- GOLDSTEIN, B.  
Amorphous thin films for solar-cell applications  
[SEI/PB-0-8254-F] p0283 N81-21591
- GOLDSTEIN, D. B.  
A simple method for computing the dynamic response  
of passive solar buildings to design weather  
conditions p0226 A81-25029
- GOLDSTEIN, L., JR.  
Future of alcohol fuels programs in Brasil  
p0299 A81-25121
- GOLDSTEIN, M. K.  
Coupling Ocean Thermal Energy Conversion  
technology /OTEC/ with nuclear power plants  
p0340 A81-25087
- GOLDSTEIN, M. B.  
Updated plan for support of research related to  
geothermal reservoir engineering  
[LBL-10807] p0323 N81-21463
- GOLDTHWAITE, W. E.  
Laser fusion systems for process heat  
p0341 A81-25106

- GOMA, J.  
Physical and chemical characterization of R.A.D.  
silicon films  
p0249 A81-27260
- GOMCZY, J.  
Construction program for a large superconducting  
MHD magnet system at the Coal-Fired Flow Facility  
p0334 A81-23451  
Final design of a superconducting MHD magnet for  
the coal-fired flow facility at the University  
of Tennessee Space Institute  
p0345 A81-26854
- GOMCZY, J. D.  
Cryogenic aspects of the UTSI-CFPF superconducting  
dipole magnet for MHD research  
p0345 A81-26855
- GONZALEZ, C.  
Circuit design considerations for photovoltaic  
modules and systems  
p0238 A81-27153
- GOODLING, J. S.  
Economic analysis and optimization of solar  
residential space heating  
[ASME PAPER 80-WA/SOL-11]  
p0212 A81-21137
- GOODNICK, S. M.  
Degradation of ITO/p-Si solar cells  
p0248 A81-27257
- GOODNICH, J.  
High concentration silicon photovoltaic cell  
development  
[SAND-80-7068]  
p0279 A81-20595
- GOODRICH, J. L.  
A low series resistance silicon photovoltaic cell  
for high intensity applications  
p0236 A81-27134
- GOOSIN, J. M.  
Fuel alcohol extraction technology  
commercialization conference  
[CONF-801212]  
p0311 A81-18233
- GOPALSAMI, M.  
Monitoring temperatures in coal conversion and  
combustion processes via ultrasound  
[ANL-PE-49622-TH09]  
p0325 A81-21875
- GORADIA, C.  
Theoretical results on the tandem junction solar  
cell based on its Ebers-Moll transistor model  
p0232 A81-27099
- GORDON, R. G.  
Optimization of transparent electrode for solar  
cells  
[SERI/PR-9318-1-T1]  
p0274 A81-19621
- GORLOV, A. M.  
Some new conceptions in the approach to harnessing  
tidal energy  
p0339 A81-25082
- GORY, J. C.  
Heat transfer through a paraffin wax solar energy  
storage characterized by a temperature dependent  
specific heat  
p0224 A81-25006
- GOSWAMI, T. K.  
Comparison of several models for long term monthly  
average daily insolation on horizontal surfaces  
and the estimation of horizontal surface  
insolation for 16 U. S. locations  
[ASME PAPER 80-WA/SOL-28]  
p0213 A81-21152
- GOVARETS, R.  
Silicon solar cells with screen printed diffusion  
and metallization  
p0245 A81-27221
- GOVIL, K. K.  
New method for maximum power consideration in  
solar cells with and without resistive losses  
p0209 A81-19951
- GOYAL, A.  
Evaluation of advanced combustors for dry NO<sub>x</sub>/  
suppression with nitrogen bearing fuels in  
utility and industrial gas turbines  
[ASME PAPER 81-GT-125]  
p0349 A81-30029  
Solids circulation around a jet in a fluidized bed  
gasifier  
[DOE/ET-12229/T1]  
p0313 A81-18343
- GRAP, A. M.  
Updated plan for support of research related to  
geothermal reservoir engineering  
[LBL-10807]  
p0323 A81-21463
- GRANDEBOIS, A.  
A cycle life tester for the long-term stability of  
phase change materials for thermal energy storage  
p0372 A81-24997
- GRANDY, D. M.  
Formation and behaviour of coal free radicals in  
pyrolysis and liquefaction conditions  
p0294 A81-23495
- GRANFENHANN, W. W.  
Variable speed constant frequency constant voltage  
alternator  
[DOE/ET-29246-T1]  
p0361 A81-21298
- GRANOW, L. A.  
Flat plate vs. concentrator solar photovoltaic  
cells - A manufacturing cost analysis  
p0238 A81-27146
- GRANT, W. B.  
Environmental assessment for the satellite power  
system concept development and evaluation  
program-electromagnetic  
[DOE/EE-0096]  
p0207 A81-21642
- GRASSI, A.  
Construction of a probe for measuring temperature  
and pressure in deep wells  
p0296 A81-24304
- GRAVE, B.  
Design and efficiency estimation of a  
thermochemical system of hydrogen production  
p0285 A81-23531
- GRAY, J. A.  
Coal conversion /combustion and gasification/  
p0302 A81-26477
- GREEN, L. L.  
Bi-coolant flat plate solar collector  
p0226 A81-25023
- GREEN, L., JR.  
Production of liquid fuels with a high-temperature  
gas-cooled reactor  
p0298 A81-25120
- GREEN, M. A.  
Electrostatic effects in inversion-layer  
metal-insulator-semiconductor solar cells  
p0217 A81-22872  
Review of conductor-insulator-semiconductor /CIS/  
solar cells  
p0254 A81-28954
- GREEN, T. A.  
Charge exchange and energy loss of carbon ions in  
air-plasma channels  
p0344 A81-26570
- GREENBAUM, J.  
Photosynthetic bacteria as alternative energy  
sources Overview on hydrogen production research  
p0288 A81-25152
- GREENBERG, H. S.  
Summary of LSST systems analysis and integration  
task for SPS flight test articles  
p0270 A81-19177  
Satellite Power Systems (SPS). LSST systems and  
integration task for SPS flight test article  
[NASA-CR-3375]  
p0271 A81-19564
- GREENE, D. L.  
End use energy consumption data base:  
Transportation sector  
[PB81-112203]  
p0194 A81-17610
- GREENSTREET, W. L.  
Fuel cycle analysis for fossil energy systems:  
Coal combustion  
[ORNL-5661]  
p0205 A81-21606
- GREENWALD, A. C.  
Low-cost ion implantation and annealing technology  
for solar cells  
p0244 A81-27201
- GREENG, D. W.  
Solar coal gasification: Plant design and economics  
[UCRL-84610]  
p0265 A81-18225
- GREGORY, D. P.  
The economics of hydrogen production  
p0285 A81-24013
- GREGORY, P.  
High efficiency compound semiconductor  
concentrator photovoltaics  
p0261 A81-17545  
OM-VPE grown materials for high efficiency solar  
cells  
p0262 A81-17552

# PERSONAL AUTHOR INDEX

GUTHRIE, I.

- GREGORY, F. E.  
Further development of a novel solar cell  
concentrator photovoltaic converter system  
[SAND-80-7072] p0278 881-20572
- GREEN, L.  
Near-term implementation of projection cost  
reductions for photovoltaic concentrator array  
[SAND-80-7073] p0274 881-19628
- GREEN, L. A.  
Production of high efficiency silicon concentrator  
solar cells from state-of-the-art design and  
processing p0238 881-27156
- GRESHAM, J. B.  
Comparative ranking of 0.1 to 10 MW sub e solar  
thermal electric power systems. Volume 1:  
Summary of results  
[SERI/TR-351-461-VOL-1] p0273 881-19618
- GRETS, J.  
High temperature solar power tower plants -  
Concept considerations and operational criteria  
p0227 881-25044  
Thermomechanical solar power/electricity  
generation. Technico-economic problems and  
prospectives of development and application  
p0277 881-20556
- GREYSTAD, P. E.  
A baseload gas turbine to meet utility  
requirements for reliability and availability  
[ASME PAPER 81-GT-127] p0349 881-30031
- GRIFFIN, O. M.  
OPEC cold water pipe design for problems caused by  
vortex-excited oscillations p0347 881-29200
- GRIFFITH, J. S.  
Qualification test results for DOE solar  
photovoltaic flat panel procurement - PRDA 38  
p0251 881-27278
- GRIFFITH, R. A.  
Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 881-21361
- GRIFFITH, R. L.  
Fuel alcohol extraction technology  
commercialization conference  
[CONF-801212] p0311 881-18233
- GRIGGS, R. E.  
Community energy auditing: Experience with the  
comprehensive community energy management program  
[ANL/CMSV/TM-43] p0193 881-17588
- GRIGGS, R. E.  
Sampling and instrumentation for fluidized-bed  
combustion  
[ANL/CMSV/TM-80-2] p0305 881-16317
- GRILIKHES, V. A.  
Solar electric propulsion systems - A survey  
p0211 881-20910
- GRILL, C.  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 881-27181
- GRINER, D. F.  
Solar energy breeders  
p0220 881-24430
- GROB, A.  
Silicon solar cells realized by laser induced  
diffusion of deposited antimony  
p0244 881-27202
- GROB, J. J.  
Silicon solar cells realized by laser induced  
diffusion of deposited antimony  
p0244 881-27202
- GROS, J. G.  
Reliability, energy, and cost effects of wind  
integration with conventional electrical  
generating systems  
p0339 881-25078
- GROSS, E. L.  
Solar energy conversion by chloroplast  
photoelectrochemical cells  
p0216 881-22349
- GROSSMAN, B. L.  
Simulation of the performance of a 100-kW-peak  
photovoltaic system  
p0233 881-27108  
The energy balance associated with the use of a  
maximum power tracer in a 100-kW-peak power system  
p0238 881-27152
- GROSSMAN, G.  
Design improvements in LiBr absorption chillers  
for solar applications p0253 881-27558
- GRUBB, D. M.  
Enhancement of low grade heat via the HYSOS  
chemical heat pump  
p0225 881-25018
- GRUBS, B. L.  
Continuous coating of silicon-on-ceramic  
p0231 881-27083  
Silicon-on-ceramic process: Silicon sheet growth  
and device development for the large-area  
silicon sheet task of the low-cost solar array  
project  
[NASA-CR-164134] p0281 881-21546
- GRUBER, G. A.  
Optimization of carbon-supported platinum  
catalysts for fuel cell electrodes  
[AD-A094714] p0357 881-19579
- GUANG, D.  
China starts tapping rich geothermal resources  
p0296 881-24750
- GUARINI, G.  
High efficiency 1.43 and 1.69 eV band gap  
Ga<sub>1-x</sub>Al<sub>x</sub>/As-GaAs solar cells for multicolour  
applications  
p0255 881-28958
- GUBAREV, A. V.  
Transient processes and self-excited oscillations  
in the electrical circuit of an MHD generator  
p0346 881-27968
- GUCHRI, S. I.  
Trombe-Michel wall using phase change materials  
p0224 881-25007
- GUDIN, C.  
A solar biotechnology based on microalgae  
p0218 881-23015
- GUDMUNDSON, C. W.  
Environmetrics of synfuels. 1: Processing the  
automated PDP-11 data components for the UMD  
gasifier facility  
[CONF-8010106-7] p0189 881-16314  
Environmetrics of synfuels. II: A computer-based  
coding scheme for coal-conversion research data  
[CONF-8010106-3] p0305 881-16315  
Environmetrics of synfuels. 2: A computer-based  
coding scheme for coal-conversion research data  
[ORNL/TM-7525] p0316 881-19332  
Environmetrics of synfuels. 1: Processing the  
automated PDP-11 data components for the UMD  
gasifier facility  
[ORNL/TM-7428] p0320 881-20305
- GUERIN, J.  
Solar input and solar energy resources  
p0217 881-23008
- GURNEY, J.  
Analysis by real-time holographic interferometry  
of heat transfer at the surface of cold solar  
collectors  
p0216 881-22695
- GURSS, R. H.  
GE's electric powered automobile  
p0373 881-25605
- GUPTA, B. K.  
Solar selective surfaces  
p0256 881-29684
- GUPTA, M. C.  
Investigations on the prediction of thermal  
performance of compound parabolic concentrators  
p0223 881-24989
- GUPTA, V. P.  
Design and performance characteristics of a solar  
photovoltaic power system at the Oklahoma Center  
for Science and Arts  
p0232 881-27090
- GURNEY, M. D.  
Comparisons of gasohol and gasoline in laboratory  
and field trials  
[CONF-801030-3] p0312 881-18237
- GUSTAVSON, T. C.  
Environmental analysis of geopressured-geothermal  
prospect areas, DeWitt and Colorado counties,  
Texas  
[DOE/ET-27127/1] p0207 881-21646
- GUTHRIE, I.  
The CH<sub>6</sub> nickel electrode  
p0379 881-21509



## H

- HAAR, W.  
Development of sodium/sulfur batteries  
[BHFT-PB-T-79-60] p0376 N81-17607
- HAAS, W. E.  
Ammoniated salt heat pump p0372 A81-25019
- HADARI, Z.  
Hydrides of ternary TiFe/xM/1-x//M = Cr, Mn, Co,  
Ni/ intermetallics p0290 A81-26584
- HADRREVI, J.  
Semiconductor-insulator-semiconductor /SIS/ solar  
cells - Indium-tin-oxide on silicon p0252 A81-27295
- HAFIZ, E. I.  
Mathematical programming applied to power systems  
expansion planning with pumped storage p0377 N81-18485
- HAGGERTY, J. S.  
Chalcogenide-glass solar cells  
[DOE/ET-23043/T1] p0284 A81-21608
- HAGLUND, R. A.  
Dish Stirling solar receiver program  
[NASA-CR-163889] p0257 N81-16574
- HAINES, W. G.  
The role of deep levels in controlling the  
photovoltaic properties of Cu<sub>2</sub>S/CdS heterojunction p0241 A81-27182
- HALL, F. F.  
More on dual purpose solar-electric power plants  
Ultra headless hydro power  
[SLAC-PUB-2613] p0227 A81-25045  
p0352 A81-16609
- HALL, I. J.  
Handbook for calculating solar-influenced building  
heat losses  
[SAND-79-2173] p0279 N81-20583
- HALL, R. B.  
Growth and evaluation of CdS and /CdZn/S films for  
the fabrication of high performance photovoltaic  
devices p0241 A81-27180
- HALL, R. C.  
Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 N81-21361
- HALL, R. W.  
Polka Dot Solar Cell p0238 A81-27157
- HANAKAWA, Y.  
Optimum design and device physics of the  
horizontally multilayered high voltage solar  
cells produced by plasma deposited amorphous  
silicon p0247 A81-27238  
Low-cost high-efficiency SnO<sub>2</sub>/n/+/-p Si heteroface  
solar cell fabricated by paint-on-diffusant method  
p0249 A81-27259
- HAMBURGER, C. L.  
Wellbore flow characteristics for optimal energy  
recovery from Gulf Coast geopressured geothermal  
sources  
[ASME PAPER 81-PET-18] p0350 A81-30112
- HAMDAH, B. E.  
Calculation of hourly and daily available solar  
energy to a flat plate collector inclined by the  
angle of optimum tilt in Iraq p0222 A81-24977
- HANNEED, S.  
Response of the global climate to changes in  
atmospheric chemical composition due to fossil  
fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 A81-21101
- HAMILTON, R. E.  
Design of a 100 kW photovoltaic flat panel system  
at a Washington, D.C. area waste treatment plant  
p0228 A81-25056
- HAMILTON, R. C.  
Design and operation of the Solarex two-axis  
tracking linear concentrating collector system  
p0243 A81-27193
- HAMMEL, E. F.  
Energy, helium, and the future, 2  
[LA-UR-80-3342] p0191 N81-16605
- HAMMILLI, M.  
Heavy water recovery from combined electrolytic  
and non-electrolytic hydrogen streams p0286 A81-24559
- HANNES, J. P.  
Plasma-assisted CVD of fluorinated, hydrogenated  
amorphous silicon  
[SERI/TR-8041-2-T1] p0274 N81-19629
- HAN, E. K.  
Fabrication and testing of MIS solar cells on  
a-Si:F:H  
[SERI/TR-8041-9-T1] p0269 N81-18552
- HANAR, J. J.  
Progress toward large area amorphous silicon solar  
cells p0240 A81-27167  
Development of amorphous silicon cells p0249 A81-27262  
Amorphous thin films for solar-cell applications  
[SERI/PR-0-8254-F] p0283 N81-21591
- HANDA, M.  
Fluidized bed combustion of coal p0299 A81-25130
- HANFMAN, D.  
Temperature dependence for the power outputs of  
n-CdSe liquid junction cells p0222 A81-24823
- HANLEY, G. M.  
Satellite Power Study (SPS) concept definition  
study (Exhibit D). Volume 1: Executive summary  
[NASA-CR-3392] p0271 N81-19562  
Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 3: Transportation  
analysis  
[NASA-CR-3394] p0271 N81-19565  
Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 6, part 1: Cost and  
Programmatics  
[NASA-CR-3397] p0276 N81-20537  
Satellite Power System (SPS) concept definition  
study (Exhibit D). Volume 2:  
Systems/subsystems analyses  
[NASA-CR-3393] p0280 N81-21491  
Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 4, Part 2: Cost and  
programmatics appendix  
[NASA-CR-3398] p0280 N81-21492
- HANLEY, J. T.  
Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study  
[PB81-121147] p0201 N81-19674
- HANNA, G. B.  
Theoretical and experimental investigation of a  
flat-plate solar collector performance with the  
use of a solar simulator p0223 A81-24983
- HANSEN, A. C.  
Current developments in small wind energy  
conversion systems p0335 A81-23695  
Small wind systems technology assessment. State  
of the art and near term goals  
[RFP-3136/3533/80/18] p0358 N81-19600
- HANSEN, L. C.  
Process feasibility study in support of silicon  
material task 1  
[NASA-CR-164009] p0271 N81-19570
- HANSETH, E. J.  
High temperature solar thermal technology  
[ASME PAPER 80-WA/SOL-20] p0213 A81-21144
- HANSON, S.  
Combustion of coal-derived liquids and shale oil  
in gas turbine combustors p0343 A81-26016
- HAPPEL, J.  
Development of catalysts for coal conversion  
[PB81-111395] p0307 N81-17296
- HARDER, R. C.  
Thermal techniques for characterizing magma body  
geometries p0296 A81-24303  
Comparative assessment of five potential sites for  
hydrothermal-magma systems: Summary  
[DOE/TIC-11303] p0320 N81-20525
- HAREN, P.  
Head-sea diffraction by a slender raft with  
application to wave-power absorption p0303 A81-28690

- HARIPRASAD, C. R.**  
Investigations on the prediction of thermal performance of compound parabolic concentrators  
p0223 A81-24989
- HARLOW, F. H.**  
Geothermal energy enhancement by thermal fracture  
[LA-8428] p0325 N81-21623
- HARRAN, J. E.**  
Synopsis of R and D in geothermal-geochemical engineering at the Lawrence Livermore National Laboratory, 1976 - 1980  
[UCID-18863] p0324 N81-21615
- HARRIGAN, R. W.**  
Handbook for calculating solar-influenced building heat losses  
[SAND-79-2173] p0279 N81-20583
- HARRIS, A. W.**  
Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages  
p0225 A81-25021
- HARRIS, J. S., JR.**  
Molecular beam epitaxial GaAs heteroface solar cell grown on Ge  
p0217 A81-22874  
Low bandgap /0.7 to 1.1 eV/ solar cells in the GaAlSb/GaSb system  
p0235 A81-27119  
Performance losses in high-efficiency monolithic multijunction solar cells  
p0235 A81-27120
- HARRIS, M. J.**  
Construction and startup performance of the Miamisburg salt-gradient solar pond  
p0253 A81-27552
- HARRIS, R. B.**  
Storage of cold water in aquifers  
p0375 A81-29257
- HARRIS, Y.**  
A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program  
[PB81-111593] p0306 N81-17287  
A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 N81-17644
- HARRISON, B.**  
Design and management for resource recovery. Volume 2 - High technology A failure analysis  
p0300 A81-25225
- HARRISON, J. E.**  
Space platform reference mission studies overview  
p0383 N81-19174
- HARRISON, T. D.**  
Midtemperature Solar Systems Test Facility Program for predicting thermal performance of line-focusing, concentrating solar collectors  
[SAND-80-1964] p0269 N81-18551  
Midtemperature solar systems test facility predictions for thermal performance of the Acurex solar collector with PER 244 reflector surface  
[SAND-80-1964/3] p0282 N81-21568
- HARTMAN, R. A.**  
Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells  
[NASA-CR-164012] p0271 N81-19568
- HARTMAN, R.**  
Development of sodium/sulfur batteries  
[BNFT-FB-T-79-60] p0376 N81-17607
- HARTMAGEL, B. L.**  
Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells  
p0209 A81-20008
- HARTZOG, J. E.**  
The design and analysis of a vertical axis ocean current power plant  
p0339 A81-25081
- HARVEY, D. H.**  
Everlasting sliding-disc valve METC SOA test valve No. B-3, state-of-the-art lockhopper valve testing and development project  
[DOE/METC-SP-80/17] p0323 N81-21361
- HARVEY, B. S.**  
Experimental comparison of control strategies for solar energy systems incorporating dual storage tanks  
p0253 A81-27556
- HASHIMOTO, H.**  
Sealed nickel-cadmium batteries for memory backup  
p0374 A81-25616
- HASKINS, D. E.**  
Performance of a solar-heated assembly building at Sandia National Laboratories  
[SAND-80-0599] p0258 N81-16593
- HASSLERIIS, P.**  
Eco-Fuel and the Bridgeport facility  
p0301 A81-25556
- HASTINGS, G. A.**  
Coal-fired heaters for CCGT cogeneration service  
[ASME PAPER 81-GT-212] p0350 A81-3C101
- HATCH, A. H.**  
ETF magnet design alternatives for the national NHD program  
p0334 A81-23443
- HATCH, W. E.**  
Support for the analytical tools for automotive fuel economy activities  
[PB81-109555] p0192 N81-17445
- HAUPIN, W. E.**  
Extraction of oxygen and metals from lunar ores  
p0222 A81-24827
- HAUSEN, J. E.**  
Recent progress in the development of the cascade solar cell  
p0235 A81-27118  
Research on high efficiency cascade solar cells  
[SBRI/PB-8136-1-T1] p0258 N81-16595
- HAUT, W.**  
Guidelines for conceptual design and evaluation of aquifer thermal energy storage  
[PWL-3581] p0380 N81-21587
- HAULADER, H. H. A.**  
The solar pond - A collector and store of solar energy  
p0219 A81-23701
- HAYNES, L.**  
Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research  
p0288 A81-25152
- HEAPS, J. D.**  
Continuous coating of silicon-on-ceramic  
p0231 A81-27083  
Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project  
[NASA-CR-164134] p0281 N81-21546
- HECHT, M. L.**  
Technology for powdered fuel preparation from solid waste  
p0301 A81-25559  
Obtaining improved products from the fraction of municipal solid waste  
[PB81-110918] p0307 N81-17295
- HEDGEFORTH, J. E.**  
Efficient structures for geosynchronous spacecraft solar arrays  
p0262 N81-17573
- HEFFLER, J.**  
Tungsten carbide/platinum fuel cell with phosphoric acid electrolyte  
p0343 A81-25611
- HEIDLER, E.**  
Efficiency and stability of experimental fluorescent planar concentrators /FPC/  
p0242 A81-27190
- HEINBOCKEL, J. E.**  
Simultaneous radiation damage and annealing of GaAs solar cells  
p0247 A81-27240  
High temperature properties of GallAs/GaAs heteroface solar cells  
p0247 A81-27242
- HELDENBRAND, J. L.**  
A reference building approach to building energy performance standards for single-family residences  
[PB81-135642] p0201 N81-20318
- HELDENBRAND, E. W.**  
Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 N81-21080
- HELLER, A.**  
11.5% solar conversion efficiency in the photocathodically protected p-InP/V<sub>3</sub>+/V<sub>2</sub>+/HCl/C semiconductor liquid junction cell  
p0230 A81-27014

- HELLSTROM, G.**  
Aquifer thermal energy storage: A survey  
[LBL-10441] p0378 N81-19606  
Production of a raw material for energy production  
in agriculture  
[DPE-31] p0324 N81-21550
- HELM, R. W.**  
Research and evaluation of biomass  
resources/conversion/utilization systems  
(market/experimental analysis for development of  
a data base for a fuels from biomass model.  
Volume 1: Biomass allocation model  
[DOE/ET-20611/14] p0315 N81-18553
- HELM, S.**  
Large wind energy converter: Growian 3 MW  
[NASA-TN-75404] p0360 N81-20543
- HEMMING, D. F.**  
The economics of advanced technologies for  
electricity generation from coal p0300 A81-25134
- HEMCH, T. L.**  
Growth and evaluation of CdS and CdZn/S films for  
the fabrication of high performance photovoltaic  
devices p0241 A81-27180
- HENDERSON, T. M.**  
Engineering aspects of cryogenic laser-fusion  
targets p0345 A81-26857
- HENDRIX, S. D.**  
Analytical predictions of liquid and air  
photovoltaic/thermal flat-plate collector  
performance  
[ASME PAPER 80-WA/SOL-3] p0212 A81-21131  
A comparison of theory and experiment for  
photovoltaic/thermal collector performance  
p0250 A81-27276
- HENNING, C. D.**  
Reliability of large superconducting magnets  
through design p0335 A81-23452
- HENSING, P. C.**  
Aeroelastic stability of wind turbine rotors  
p0345 A81-26975
- HENTON, P.**  
Development of an 8 kilowatt wind turbine  
generator for residential type applications.  
Phase 1: Design and analysis. Volume 2:  
Technical report  
[RFP-3007-VOL-2] p0357 N81-19581
- HEPPEL, R. E.**  
Enhanced heat conduction in phase-change thermal  
energy storage devices  
[ASME PAPER 80-WA/HT-45] p0371 A81-21114
- HERBERT, J. E.**  
Frameworks for modeling learning on the supply  
side of solar technology market penetration  
studies p0215 A81-21958
- HERRENDEEN, R. A.**  
Energy analysis of four geothermal technologies  
p0185 A81-19848  
Energy analysis of four geothermal technologies  
p0346 A81-29031
- HERLEVICH, F. A.**  
Comparative ranking of 0.1 to 10 MW sub e solar  
thermal electric power systems. Volume 1:  
Summary of results  
[SEET/FR-351-461-VOL-1] p0273 N81-19618
- HERRENKING, R.**  
High temperature water vapor electrolysis (HOT ELLY)  
[BNFT-FB-T-80-051] p0292 N81-21627
- HERZENBERG, C. L.**  
Sampling and instrumentation for fluidized-bed  
combustion  
[ANL/CEN/FR-80-2] p0305 N81-16317
- HEWIG, G. E.**  
Cu<sub>2</sub>S-CdS-thin film solar cells p0234 A81-27110
- HEYLAND, J. E.**  
Development of zinc-bromine batteries for utility  
energy storage  
[DOE/ET-29345/21] p0379 N81-20591
- HICKS, R. E.**  
Effects of toroidal coupling on the stability of  
tearing modes p0332 A81-21480
- HIRSTER, T. E.**  
Meteorological aspects of wind energy - Assessing  
the resource and selecting the sites p0295 A81-23690
- HIGASHI, K. E.**  
Dunlite model 81/002550 wind turbine generator  
[RFP-3149/3533/80/17] p0358 N81-19601
- HIGBEE, C.**  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597  
Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 N81-19598
- HIGGINS, J.**  
Pigmented tin oxide solar cell p0235 A81-27124
- HIGHLAND, H. J.**  
Winter Simulation Conference, San Diego, Calif.,  
December 3-5, 1979, Proceedings. Volumes 1 & 2  
p0381 A81-22208
- HILDEBRAND, S. G.**  
A comparison of environmental issues related to  
development of small hydropower resources at new  
versus existing sites  
[CONF-801210-13] p0197 N81-18577
- HILDEBRANDT, A. F.**  
Simplified methods for analyzing the performance  
of parabolic dish systems p0255 A81-29252
- HILPHAN, L.**  
Upgrading of coal liquids: Upgrading distillates  
from coal liquefaction  
[FE-2566-42] p0310 N81-18226
- HILL, C.**  
Photosynthetic bacteria as alternative energy  
sources Overview on hydrogen production research  
p0288 A81-25152
- HILL, F. E.**  
Development of processes for the production of low  
cost silicon dendritic web for solar cells  
p0231 A81-27080
- HILL, J.**  
On the safety to solar electric power generation  
p0256 A81-29269  
Satellite Power System (SPS) utility integration:  
Institutional, planning and operational issues  
[EAC-R-4015] p0279 N81-20596
- HILLS, R. G.**  
Kilauea Iki lava lake experiment plans  
[SAND-80-1653] p0318 N81-19699
- HILT, R. E.**  
Evaluation of advanced combustors for dry NO<sub>x</sub>/  
suppression with nitrogen bearing fuels in  
utility and industrial gas turbines  
[ASME PAPER 81-GR-125] p0349 A81-30029
- HIROGONE, T.**  
Heat generation for multipurpose utilization  
systems by heat of dilution converted from solar  
energy p0227 A81-25039
- HIRSCHBERG, M. S.**  
Stability of large horizontal-axis axisymmetric  
wind turbines p0333 A81-22526
- HIRST, E.**  
An energy used model of the residential sector  
p0185 A81-21022
- HMATON, M. A.**  
Development of catalysts for coal conversion  
[PB81-111395] p0307 N81-17296
- HO, C. T.**  
Effect of short wavelength illumination on the  
characteristic bulk diffusion length in ribbon  
silicon solar cells p0216 A81-22198
- HO, F. F.**  
High efficiency silicon concentrator cells  
p0236 A81-27132
- HO, F. E.**  
Effects of pore diameter and catalyst loading in  
hydroliquefaction of coal with CoO/MoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub>  
catalysts p0293 A81-22274
- HOAGLAND, L.**  
Design and development of Stirling engines for  
stationary power generation applications in the  
500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1] p0363 N81-21581

- HOCHMUTH, J.**  
Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245] p0354 N81-18496
- HODGE, R. C.**  
Photovoltaic concentrator array production process study. Volume 2: Study results  
[SAND-79-7055/2] p0282 N81-21574
- HOFFERT, R.**  
The Lehigh Wind Turbine experimental program  
[PB81-141467] p0364 N81-21634
- HOFFMAN, A. R.**  
Photovoltaic module soiling studies, May 1978 - October 1980  
[DOE/JPL-1012-49] p0258 N81-16580
- HOFFMAN, J.**  
Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 N81-26854
- Cryogenic aspects of the UTSI-CFFP superconducting dipole magnet for MHD research  
p0345 N81-26855
- HOFFMAN, K. L.**  
The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 N81-16612
- HOFFMAN, T. J.**  
Concept evaluation of nuclear fusion driven symbiotic energy systems  
p0341 N81-25102
- HOFFMANN, R.**  
Design of the BPA superconducting 30 MJ energy storage coil  
p0371 N81-23450
- HOGAN, J. S.**  
Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 N81-21101
- HOGAN, S.**  
Interim performance criteria for photovoltaic energy systems  
[SERI/TR-742-654] p0282 N81-21577
- HOHMANN, G. M.**  
Management assistance for the development of hydrothermal energy in the Rocky Mountain basin and range region  
[DOE/ET-28392/T2] p0315 N81-18547
- HOHMANN, H. A.**  
On-farm production of fuel-alcohol in Mid-America: technical and economic potential  
[MASEC-TP-80-009] p0189 N81-16316
- HOLDREN, J. P.**  
Contribution of activation products to fusion accident risk. I - A preliminary investigation  
p0336 N81-23712
- HOLLOWAY, P. F.**  
Utility of and technology for a space central power station  
[AIAA PAPER 81-0449] p0216 N81-22763
- HOLM, A.**  
Development of method and equipment for energy recovery from the exhaust gases of the oil-fueled smelting and holding furnaces  
[STU-78-6895] p0203 N81-20573
- HOLT, C. R.**  
Coal-fired heaters for CCGT cogeneration service  
[ASME PAPER 81-GT-212] p0350 N81-30101
- HONEYER, H.**  
Private sector initiatives - A case history  
p0188 N81-29681
- HONOLIA, J. B.**  
Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City  
p0186 N81-23073
- HONG, K. H.**  
High temperature properties of GaAlAs/GaAs heteroface solar cells  
p0247 N81-27242
- HONMA, S.**  
Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project  
p0298 N81-25113
- HONORE, R.**  
Silicon solar cells with screen printed diffusion and metallization  
p0245 N81-27221
- HONTON, R. J.**  
Development of sweet sorghum as an energy crop. Volume 3: Integration concepts  
[BRI-2054-VOL-3] p0316 N81-19334
- HOOGENDOORN, J. C.**  
Motor fuels and chemicals from coal via the Sasol Synthol route  
p0303 N81-28994
- HOOKER, J. E.**  
End use energy consumption data base: Transportation sector  
[PB81-112203] p0194 N81-17610
- HOOPER, R. E., JR.**  
Transport of low energy positive and negative ion beam by permanent magnets  
[LBL-11636] p0359 N81-19888
- HOOPER, D. G., JR.**  
Cell module and fuel conditioner  
[NASA-CR-165189] p0354 N81-18494
- Cell module and fuel conditioner development  
[NASA-CR-165190] p0357 N81-19573
- HOOPER, R. E.**  
SOLCEL II - An improved photovoltaic system analysis computer program  
p0250 N81-27272
- Comparative analysis of combined flat-plate PV/T collectors with separate PV/T collectors  
[SAND-80-1494] p0259 N81-16608
- HOPKINS, D.**  
Aquifer thermal energy storage: A survey  
[LBL-10441] p0378 N81-19606
- HOPKINS, P. M.**  
Design and breadboard evaluation of the SPS reference phase control system concept  
p0366 N81-16543
- HOPKINS, R. H.**  
The properties of polycrystalline silicon solar cells with controlled titanium additions  
p0209 N81-20010
- Development of processes for the production of low cost silicon dendritic web for solar cells  
p0231 N81-27080
- POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 N81-27216
- HOPF, W. J.**  
The economics of residential energy efficiency  
[FNL-SA-8696] p0206 N81-21624
- HOPPE, J. E.**  
Process feasibility study in support of silicon material task 1  
[NASA-CR-164009] p0271 N81-19570
- HORN, P.**  
HYFIRE: A Tokamak high temperature electrolysis system  
[BNL-28679] p0352 N81-16908
- HORNBECK, R. G.**  
Everlasting sliding-disc valve METC SOA test valve No. B-3, state-of-the-art lockhopper valve testing and development project  
[DOE/METC-SF-80/17] p0323 N81-21361
- HORNE, R. M.**  
Geothermal reservoir engineering computer code comparison and validation using the GROMZ simulator program  
[DOE/SF-11450/1] p0314 N81-18478
- HORNER, H. S.**  
Development of high-temperature turbine subsystem technology to a technology readiness status, phase 2  
[FE-1806-96] p0360 N81-20440
- HOROWITZ, J. S.**  
Engineering development of a HYSOS chemical heat pump  
p0287 N81-25017
- HOT, J. P.**  
Analysis by real-time holographic interferometry of heat transfer at the surface of cold solar collectors  
p0216 N81-22695
- HOUSTON, S.**  
Solar-powered saline sorbent-solution heat pump/storage system  
p0224 N81-25001
- HOWARD, J. E.**  
Updated plan for support of research related to geothermal reservoir engineering  
[LBL-10807] p0323 N81-21463

- HOWARD, P. L.  
Efficient ultrasonic grinding: A new technology  
for micron-sized coal  
[DOE/ER-10466/T1] p0315 N81-19317
- HOWELL, J. R.  
Analysis and design of hybrid double-absorption  
cooling systems for low grade thermal energy  
applications  
[ASME PAPER 80-WA/HT-44] p0211 N81-21113
- HSU, J. C.  
An assessment of the use of chemical reaction  
systems for thermal energy transport p0365 N81-25011
- HSU, Y.-R.  
Design of the BPA superconducting 30 MJ energy  
storage coil p0371 N81-23450  
Safety analysis of the UTSI-CFFF superconducting  
magnet p0345 N81-26856
- HU, C.  
A new method of measuring diffusion length and  
surface recombination velocity p0239 N81-27164
- HUANG, H. D.  
Study of the behavior of gas distribution  
equipments in hydrogen service, phase 2  
[CONF-801055-5] p0291 N81-16323
- HUANG, I.-P.  
Cuprous oxide MIS solar cells p0237 N81-27139
- HUANG, Y.-C.  
Construction program for a large superconducting  
MHD magnet system at the Coal-Fired Flow Facility  
p0334 N81-23451
- HUB, K. A.  
Reliability, energy, and cost effects of wind  
integration with conventional electrical  
generating systems p0339 N81-25078
- HUBER, C. C.  
Reliability, energy, and cost effects of wind  
integration with conventional electrical  
generating systems p0339 N81-25078
- HUBER, R. E.  
Strategies for ecological effects assessment at  
DOE energy activity sites  
[ORNL/TM-6783] p0198 N81-18578
- HUDSON, D. A.  
Problems and promises in gas turbine combustor  
design development p0343 N81-26007
- HUDSON, R. A.  
Energy/economic model analysis. Macroeconomic  
impacts of research and development in gas  
supply and end use technologies  
[PB81-114258] p0194 N81-17613
- HUDSON, R.  
On the safety to solar electric power generation  
p0256 N81-29269
- HUDSON, S.  
Solar installation for process steam generation  
for a refinery p0227 N81-25038
- HURTENHAIN, H.  
Coal preparation using magnetic separation.  
Volume 5: Evaluation of magnetic coal  
desulfurization concepts  
[EPRI-CS-1517-VOL-5] p0319 N81-20302
- HUMPHREY, J. A. C.  
Enhanced heat conduction in phase-change thermal  
energy storage devices  
[ASME PAPER 80-WA/HT-45] p0371 N81-21114
- HUNDEMAN, A. S.  
Energy policy and research planning. Citations  
from the NIS data base  
[PB81-800112] p0195 N81-17620
- HURD, J. L.  
Contiguous capillary coating of silicon on porous  
carbon substrates p0236 N81-27129
- HURST, D. E.  
Pyrolytic oils: Characterization and data  
development for continuous processing  
[PB81-110959] p0306 N81-17294
- HURT, P.  
On the safety to solar electric power generation  
p0256 N81-29269
- HURTADO, O.  
Efficient large-grained GaAs homojunction solar  
cells p0251 N81-27285
- HUSSEINY, A.  
Availability modeling methodology applied to solar  
power systems p0220 N81-24431
- HUSTON, R. L.  
Development of solar-hydrogen systems using metal  
hydrides p0289 N81-25158
- HUTCHBY, J. A.  
Cascade Solar Cell Workshop report p0262 N81-17553
- HUTCHINSON, C. F.  
The environmental assessment of a contemporary  
coal mining system  
[NASA-CR-163974] p0197 N81-18571
- HUTCHINSON, P. A., SR.  
Community energy auditing: Experience with the  
comprehensive community energy management program  
[AHL/CHSV/TM-43] p0193 N81-17588
- HUANG, H. L.  
Ion implanted grating type Si solar cells -  
Junction depth dependence p0235 N81-27126
- HUANG, H.  
Current transport mechanisms of  
metal-polycrystalline silicon Schottky barrier  
solar cells p0236 N81-27130
- HYDE, I. C.  
Study of the effectiveness of selective absorber  
coatings and phase change materials in passive  
solar space heating  
[LA-UR-80-2930] p0280 N81-20936
- I
- IAKOVLEV, V. I.  
Theory of a conducting MHD motor with a free field  
p0331 N81-21062  
Theory of an induction MHD propeller with a free  
field p0344 N81-26062
- IANNUCCI, J. J.  
Fixed site hydrogen storage. I - Applications impact  
p0289 N81-25159  
Fixed site hydrogen storage. II - Comparison of  
technologies and economics p0289 N81-25160  
Survey of US industrial process heat usage  
distributions  
[SAND-80-8234] p0206 N81-21622
- IARYGIN, V. I.  
Low-temperature thermal emission rectifier with an  
oxidized titanium collector p0337 N81-24209
- ICHINOSE, Y.  
Hydrogen absorption and hydriding of Ti-based  
intermetallic compounds p0289 N81-25493
- IJAZ, L. E.  
Thin film photovoltaic solar energy conversion  
p0228 N81-25054
- IJAZ, H. A.  
Thin film photovoltaic solar energy conversion  
p0228 N81-25054
- IKEDA, H.  
Progress in batteries and solar cells. Volume 3  
p0382 N81-25601
- ILES, P.  
Evaluation and optimization of silicon sheet solar  
cells p0234 N81-27114
- ILES, P. A.  
High efficiency silicon concentrator cells  
p0236 N81-27132  
An all-plated, low cost contact system for silicon  
solar cells p0243 N81-27197
- IM, K. H.  
Three-dimensional analysis of MHD generators -  
Development of electrical solution  
[AIAA PAPER 81-0175] p0329 N81-20650  
Heat transfer in slagging MHD radiant boilers  
[AIAA PAPER 81-0316] p0330 N81-20747

- IMAMURA, R. S.  
Terrestrial photovoltaic system analysis  
[AD-A094827] p0272 N81-19578
- INAL, O. T.  
Microstructural and mechanical property evaluation  
of black chrome and zinc oxide coated solar  
collectors  
[DOR/AL-04266/T1] p0268 N81-18537
- INBODY, R. A.  
The effect of secondary combustion on nitric oxide  
concentrations in a HSD combustion gas  
[AIAA PAPER 81-0102] p0328 A81-20604
- INGLEY, R. A.  
Performance comparison of flat plate collector  
absorber coatings utilizing NBS Standard 74-635  
and the ASHRAE Collector Performance Method  
p0222 A81-24981  
Dynamic response analysis of a solar powered  
heliotropic fluid-mechanical drive system  
p0223 A81-24990
- INGRAM, R. L.  
Peat resources of North Carolina  
[DOR/ET-14693/T1] p0317 N81-19541
- INOUE, M.  
The effects of intragrain defects on the local  
photoresponse of polycrystalline silicon solar  
cells  
p0221 A81-24805
- INOUE, T.  
A preliminary investigation of an Al/Pes2  
secondary cell  
p0374 A81-25615
- IRELAND, R. J.  
Indium phosphide films for photovoltaic devices  
p0240 A81-27173  
Grain boundary chemistry and its effects upon the  
performance of polycrystalline solar cells  
p0251 A81-27282
- IRELAND, R. R.  
Ecology problems associated with geothermal  
development in California  
[UCRL-83941-REV-1] p0192 N81-16635
- IRVINE, A. R.  
Liquefaction technology assessment. Phase 1:  
Indirect liquefaction of coal to methanol and  
gasoline using available technology  
[ORNL-5664] p0322 N81-21223
- ISAACS, R.  
HYPER: A Tokamak high temperature electrolysis  
system  
[BNL-28679] p0352 N81-16908
- ISAACSON, P.  
Flat plate thermal solar collectors: A physical  
background  
[PB81-135741] p0280 N81-20605
- ISHIDA, T.  
Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106
- ISHIDO, T.  
Effects of adsorbed gas molecules on  
hydrogen-sorbing behaviour of magnesium-nickel  
alloys  
p0290 A81-25500
- ISSER, S.  
Current and future industrial energy service  
characterizations, volume 1  
[SERI/TR-733-790-VOL-1] p0206 N81-21618
- ISSHIKI, M.  
An experimental investigation of manned vehicle  
utilizing CDE /concentration difference energy/  
engine  
p0342 A81-25132
- ITO, Y.  
Energy analysis of high temperature batteries  
p0374 A81-25614
- ITOH, T.  
Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106
- J
- JACKSON, D. E.  
The SEC-II process  
p0304 A81-28997
- JACKSON, F.  
Current and future industrial energy service  
characterizations, volume 1  
[SERI/TR-733-790-VOL-1] p0206 N81-21618
- JACKSON, R. E. E.  
The NBS Energy Model Assessment project: Summary  
and overview  
[PB81-105082] p0191 N81-16612
- JACKSON, W. L.  
Design optimization of conventional heat pumps:  
Application to steady state heating efficiency  
[CONF-810101-5] p0200 N81-19599
- JACOBS, R. E.  
Engineering aspects of cryogenic laser-fusion  
targets  
p0345 A81-26857
- JADOT, R.  
Latent and chemical storage  
p0277 N81-20550
- JAEGER, F. J.  
Associated salt heat pump  
p0372 A81-25019
- JAFFE, R.  
Residential solar design review: A manual on  
community architectural controls and solar  
energy use  
[PB81-128605] p0275 N81-19648
- JAFFE, R.  
LSA field test  
[NASA-CR-164083] p0276 N81-20544
- JAIN, R. K.  
Theoretical efficiency of S/p+ -n/IS solar cells  
p0221 A81-24801
- JAIN, S. C.  
Theory of photo induced open circuit voltage decay  
in a solar cell  
p0216 A81-22200
- JAMES, R.  
Suppression of stream condensate corrosion at  
Wairakei Geothermal Project  
p0294 A81-22774
- JAMES, S. C.  
Methane production from the Mountain View landfill  
p0300 A81-25553
- JARAN, C.  
Aerodynamic characteristics of the TARP (Toroidal  
Accelerator Rotor Platform) wind energy  
conversion system  
[PB81-140675] p0364 N81-21632
- JARRETT, M.  
Extraction of oxygen and metals from lunar ores  
p0222 A81-24827
- JASINOWSKI, M. J.  
Study of the behavior of gas distribution  
equipments in hydrogen service, phase 2  
[CONF-801055-5] p0291 N81-16323
- JASSBY, D. L.  
The fusion-supported decentralized nuclear energy  
system  
p0337 A81-23848
- JEFFERIES, M. S.  
Analysis of GaAs and Si solar cell arrays for  
earth orbital and orbit transfer missions  
p0248 A81-27254  
Analysis of costs of gallium arsenide and silicon  
solar arrays for space power applications  
[NASA-TP-1811] p0276 N81-20173
- JELLINEK, R. E. G.  
Osmo-power - Theory and performance of an  
osmo-power pilot plant  
p0347 A81-29199
- JENKINS, D.  
Pulsed high voltage and high current outputs from  
homopolar energy storage system  
[AD-A094910] p0377 N81-19575
- JENKINS, L. E.  
Space construction technology needs  
[AIAA PAPER 81-0442] p0381 A81-22757
- JENKINS, P. E.  
Comparison of the HTT reheat-gas-turbine combined  
cycle with the HTT nonreheat gas-turbine  
combined cycle  
[ASME PAPER 81-GT-69] p0348 A81-29978
- JENKINS, R. J.  
Investigation of the liquefaction of partially  
dried and oxidized coals  
[SERI-AP-1625] p0321 N81-21222

- JENSEN, R. J.  
Solar coal gasification  
[DOE/TIC-11384] p0279 H81-20587
- JIANG, C. L.  
Improved polycrystalline thin film gallium  
arsenide MOS solar cells p0251 A81-27281
- JODY, B. J.  
Fuel cell support studies: On-site molten  
carbonate systems [PB81-113672] p0353 H81-17619
- JOEL, L. S.  
The NBS Energy Model Assessment project: Summary  
and overview [PB81-105082] p0191 H81-16612
- JOHANSSON, B. C. A.  
The velocity induced by the wake of a wind turbine  
in a shear layer, including ground effect [FFA-133] p0359 H81-20037  
The velocity induced by the wake of a wind turbine  
in a shear layer, including ground effect [PB81-142184] p0364 H81-21635
- JOHANSSON, B.  
Continuous heat source model for ground heat storage  
[PB81-122889] p0378 H81-19643
- JOHNSING, B.  
Analysis of the utilization of lunar resources for  
space power systems. Part 1: System definition  
and model structure [ILR-MITT-73/1980-PT-1] p0284 H81-21628
- JOHNSON, D. J.  
Self-magnetically insulated ion diode p0344 A81-26552  
Anode plasma behavior in a magnetically insulated  
ion diode p0344 A81-26571
- JOHNSON, L.  
Sampling and instrumentation for fluidized-bed  
combustion [ANL/CEN/FE-80-2] p0305 H81-16317
- JOHNSON, J.  
Design of a side-by-side photovoltaic thermal  
system for a Northeast all-electric residence  
[SAND-80-7148] p0282 H81-21575
- JOHNSON, K. E.  
Change-of-pace electric automobile user  
demonstration (COMCAR 2) [DOE/TIC-11373] p0379 H81-21359
- JOHNSON, B. E.  
Chemical vapor deposition of thin-film  
polycrystalline Si for low cost solar cells  
[SAM-3045-3] p0275 H81-19634
- JOHNSON, R. W.  
Upgrading of coal liquids: Upgrading distillates  
from coal liquefaction [FE-2566-42] p0310 H81-18226
- JOHNSON, S. M.  
The influence of grains and grain boundaries on  
the device characteristics of polycrystalline  
silicon solar cells p0233 A81-27101
- JOHNSON, T. R.  
The effect of secondary combustion on nitric oxide  
concentrations in a MHD combustion gas  
[AIAA PAPER 81-0102] p0328 A81-20604
- JOHNSTON, R.  
The economics of advanced technologies for  
electricity generation from coal p0300 A81-25134
- JOHNSTON, S. F.  
Proceedings of the Vertical Axis Wind Turbine  
(VAWT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 H81-18550
- JOHNSTON, T. E.  
Limits to plasma science p0333 A81-22876
- JOHNER, J. E.  
Economic comparison of molten carbonate fuel cells  
and gas turbines in coal gasification based  
power plants [EPRI-AP-1543] p0322 H81-21229
- JONES, D.  
Performance of solar collectors - An evaluation of  
standard ratings [ASME PAPER 80-WA/SOL-1] p0211 A81-21129
- JONES, G. J.  
Energy storage in grid-connected applications  
p0375 A81-27233
- Photovoltaic system sizing analysis p0248 A81-27249
- JONES, G. T.  
Automated array assembly task development of  
low-cost polysilicon solar cells [NASA-CR-163939] p0259 H81-17521
- JONES, G., JR.  
Resource recovery from coal residues  
[CONF-801104-8] p0305 H81-16322
- JONES, J.  
Fatigue-creep lifetime analysis of four advanced  
central receiver concepts [SAND-80-8047] p0273 H81-19612
- JONES, K. A.  
The effects of intragrain defects on the local  
photoresponse of polycrystalline silicon solar  
cells p0221 A81-24805
- JONES, L.  
Hydrogen bonding in asphaltenes and coal liquids  
[DOE/PC-30252/T1] p0318 H81-20227
- JONES, R.  
Evaluation of solar collectors for heat pump  
applications [DOE/CS-35351/T1] p0278 H81-20568
- JONES, R. G.  
A superconducting magnet for Stanford University  
p0334 A81-23441
- JOSEPH, E. M.  
Progress in batteries and solar cells. Volume 3  
p0382 A81-25601
- JUROSHEK, J. R.  
Environmental assessment for the satellite power  
system concept development and evaluation  
program-electromagnetic [DOE/EE-0096] p0207 H81-21642
- JUSTI, E.  
H<sub>2</sub> as an energy vector - Hydrogen production by  
the ELOFLUX electrolytic cell p0285 A81-23014
- JUSTUS, D.  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 H81-19597  
Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 H81-19598

## K

- KACHARE, A. E.  
Performance of silicon solar cells fabricated from  
multiple Czochralski ingots grown by using a  
single crucible p0234 A81-27116
- KACHOUKE, E.  
Identification of a solar pumping installation  
p0218 A81-23012
- KAHN, D. E.  
Coal Hydrogasification process development. volume  
1: Coal studies [FE-3125-24-VOL-1] p0312 H81-18238  
Coal hydrogasification process development  
[DOE/ET-10328/27] p0319 H81-20304
- KAJITA, S.  
Combustion of methanol and liquefied butane in a  
gas turbine combustor [ASME PAPER 81-GT-50] p0348 A81-29963
- KALEJS, J. E.  
Progress in the growth of wide silicon ribbons by  
the EFG technique at high speed using multiple  
growth stations p0230 A81-27078
- KALLIS, J. E.  
Simulation of a hybrid solar photovoltaic/solar  
thermal electric power system p0246 A81-27234  
Performance evaluation of conceptual hybrid solar  
photovoltaic/solar thermal electric power systems  
p0247 A81-27244
- KANARAJ, G.  
Solar energy in the field of distillation - Design  
parameters and thermodynamic analysis of solar  
stills p0227 A81-25041
- KANATH, G. S.  
Deep-level defects and recombination parameters in  
proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239  
GaAs workshop report p0261 H81-17547

- KAMINOTO, M.**  
Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy  
p0227 A81-25039
- KAMOSHIDA, J.**  
An experimental investigation of manned vehicle utilizing CDE /concentration difference energy/ engine  
p0342 A81-25132
- KANAYAMA, K.**  
Performance of a flat type solar collector composed of the selective transparent and absorbing plates  
p0223 A81-24982
- KANDPAL, T. C.**  
A Fresnel-Winston tandem concentrator system  
p0218 A81-23497
- KANISBERG, L. D.**  
Compressed Air Energy Storage Technology Program overview  
[PNL-SA-8988]  
p0376 A81-16600
- KAO, Y. B.**  
Ion implanted grating type Si solar cells - Junction depth dependence  
p0235 A81-27126
- KAPLAN, S. I.**  
Photovoltaic applications - Past and future  
p0246 A81-27231
- KAPLOW, B.**  
A low series resistance silicon photovoltaic cell for high intensity applications  
p0236 A81-27134
- KAPUR, S. K.**  
Everlasting sliding-disc valve HETC SOA test valve No. B-3, state-of-the-art lockhopper valve testing and development project  
[DOE/HETC-SP-80/17]  
p0323 A81-21361
- KAR, S.**  
Majority carrier conduction effects in ITO/SIS solar cells  
p0239 A81-27166
- KARANCHETTI, S.**  
Study of fuel cell on-site, integrated energy systems in residential/commercial applications  
[NASA-CR-165144]  
p0361 A81-21533
- KARLSON, F. V.**  
Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts  
[EPRI-CS-1517-VOL-5]  
p0319 A81-20302
- KARNOPOSKIY, K.**  
Current and future industrial energy service characterizations, volume 1  
[SERI/TR-733-790-VOL-1]  
p0206 A81-21618
- KASHANI, A.**  
On the safety to solar electric power generation  
p0256 A81-29269
- KASSING, D.**  
Energy from space - A survey of activities for power generation using space technology  
p0219 A81-23861
- KAUSHIK, S. C.**  
Simple transient thermal model for solar collector/storage water heaters  
p0218 A81-23498
- KAWABATA, J.**  
Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project  
p0298 A81-25113
- KAWAOKA, K. H.**  
Military wastes-to-energy applications  
[AD-A093042]  
p0193 A81-17578
- KAWAOKA, K. H.**  
Military wastes-to-energy applications  
p0314 A81-18483
- KAYACOS, M. S.**  
Temperature dependence for the power outputs of n-CdSe liquid junction cells  
p0222 A81-24823
- KAZEMSKI, L. L.**  
An overview of thin-film polycrystalline silicon research and development  
p0233 A81-27109
- KAZEMSKI, L. L.**  
Indium phosphide films for photovoltaic devices  
p0240 A81-27173
- KAZEMSKI, L. L.**  
Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells  
p0251 A81-27282
- KEARNEY, D. M.**  
Second law analysis and synthesis of solar collector systems  
p0253 A81-27554
- KEATING, B.**  
Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition  
p0346 A81-28217
- KEIL, F.**  
Thermodynamic calculations for coal gasification processes  
p0294 A81-22849
- KEISER, J. B.**  
Stress corrosion studies in solvent refined coal liquefaction pilot plants  
[ORNL/TM-7513]  
p0321 A81-21179
- KELLER, W. B.**  
Energy storage technology - Environmental implications of large scale utilization  
p0186 A81-24991
- KELLY, D. A.**  
Convertible, tri-mode solar conversion system  
p0226 A81-25031
- KELLY, D. A.**  
Automotive dual-mode hydrogen generation system  
p0288 A81-25147
- KEMPER, Y.**  
The rotating traction drive  
[ASME PAPER 80-GT-99]  
p0332 A81-21163
- KENDALL, P. E.**  
Performance of active solar domestic hot water heating systems  
[SOLAR/0024-80/41]  
p0281 A81-21556
- KENIE, E. A.**  
EVEN in situ hydriding of hydrogen storage materials  
p0342 A81-25492
- KESHAB, A.**  
A solar-powered organic vapour power cycle with electricity generation  
p0228 A81-25047
- KENNEDY, L. A.**  
Catalytic combustion of synthetic fuels  
[DOE/PC-30220/T1]  
p0321 A81-21154
- KENNEDY, E. J.**  
Comparison of liquid solar thermal storage subsystems in the national solar data network  
[ASME PAPER 80-WA/SOL-36]  
p0214 A81-21156
- KENNISH, W. J.**  
Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study  
[DOE/CS-30108/T3]  
p0278 A81-20567
- KENTFIELD, J. A. C.**  
The characteristics of two, simple, automatic speed-control devices for horizontal axis wind-turbines  
p0338 A81-25070
- KERN, E. C., JR.**  
Residential use of photovoltaics  
[DOE/ET-20279/109]  
p0264 A81-17604
- KERN, L. E.**  
Use of weighted brines in recovery of geothermal energy from hot, dry rock  
p0303 A81-26928
- KERN, W.**  
Titanium dioxide antireflection coating for silicon solar cells by spray deposition  
p0209 A81-19766
- KRESSLER, E.**  
Preliminary results of analytical modeling of subsonic MHD diffusers  
[AIAA PAPER 81-0177]  
p0329 A81-20652
- KESPER, M. O.**  
Coal conservation and stabilization during storage  
p0299 A81-25126
- KEYES, M. A.**  
Energy conservation through process modification and control  
[ASME PAPER 81-PID-2]  
p0188 A81-30111
- KHALIFA, H. E.**  
Gas-turbine-topped hybrid power plants for the utilization of geopressured geothermal resources  
[ASME PAPER 81-PET-5]  
p0350 A81-3C114
- KHAN, A. M.**  
Energy efficiency of electrified passenger railway in the Canadian context  
p0187 A81-25800



- KHATTAK, C. P.**  
Low-cost conversion of polycrystalline silicon into sheet by BEM and FAST p0238 A81-27145
- KHEMTHONG, S.**  
High efficiency silicon concentrator cells p0236 A81-27132
- KHONICHEV, V. I.**  
Theory of a conducting MHD motor with a free field p0331 A81-21062
- KHUDIAKOV, V. A.**  
Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/ p0302 A81-26195
- KIDD, J.**  
Evaluation of solar collectors for heat pump applications [DOE/CS-35351/T1] p0278 A81-20568
- KILKIS, B.**  
Solar energy assisted fluidized bed fruit drying p0227 A81-25037
- KIM, H. Y.**  
Phase equilibrium in coal liquefaction processes [EPRI-AP-1593] p0311 A81-18227
- KIM, Y. S.**  
A new method of measuring diffusion length and surface recombination velocity p0239 A81-27164
- KIMCHI, Y.**  
Design improvements in LiBr absorption chillers for solar applications p0253 A81-27558
- KIMURA, K.**  
Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals p0230 A81-27079
- KIMURA, T.**  
Combustion of methanol and liquefied butane in a gas turbine combustor [ASME PAPER 81-GT-50] p0348 A81-29963
- KIMURA, R.**  
Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493
- KING, P. R.**  
Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report [BPP-3007-VOL-2] p0357 A81-19581
- KING, R. B.**  
Status of commercial phosphoric acid fuel cell system development [AIAA PAPER 81-0396] p0330 A81-20805
- KING, T. A.**  
The construction cost of thermal storage for solar systems p0229 A81-25062
- KING, W. J.**  
Development of simplified process for environmentally resistant cells [NASA-CR-163884] p0257 A81-16575
- KIRKPATRICK, A. R.**  
Low-cost ion implantation and annealing technology for solar cells p0244 A81-27201
- KIRKPATRICK, A. R.**  
Silicon solar cells with high open-circuit voltage p0232 A81-27089
- KIRMAN, I.**  
Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979 p0382 A81-26476
- KIRSCHNER, C.**  
Residential passive solar systems - Regional sensitivity to system performance costs, and alternative prices p0187 A81-25061
- KITAGAWA, J.**  
Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys p0290 A81-25500
- KITAJIMA, J.**  
Combustion of methanol and liquefied butane in a gas turbine combustor [ASME PAPER 81-GT-50] p0348 A81-29963
- KITANO, K.**  
Low-Btu coal char gasification by a pressurized two-stage fluidized bed - Sunshine project p0298 A81-25113
- KITTO, R. D.**  
Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood [PB81-134777] p0323 A81-21234
- KITZMAN, I.**  
High temperature water vapor electrolysis (HOT ELLY) [BHFT-FB-T-80-051] p0292 A81-21627
- KIVELSON, M. G.**  
Research in the geosciences related to resource assessment [DOE/IR-10119/T1] p0313 A81-18476
- KLAFFATZ, R. D.**  
Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64] p0348 A81-29974
- KLEIN, A. C.**  
Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor p0336 A81-23714
- KLEIN, S. A.**  
An algorithm for calculating monthly-average radiation on inclined surfaces p0253 A81-27555
- KLEINHAUS, U.**  
Test stations for flat plate collectors in Iran, Brazil and India [BHFT-FB-T-79-94] p0264 A81-17609
- KLEINSCHMAGER, R.**  
Development of sodium/sulfur batteries [BHFT-FB-T-79-60] p0376 A81-17607
- KLETT, D. R.**  
Comparison of several models for long term monthly average daily insolation on horizontal surfaces and the estimation of horizontal surface insolation for 16 U. S. locations [ASME PAPER 80-SA/SOL-28] p0213 A81-21152
- KLINEBERG, S. L.**  
Social acceptability of Satellite Power Systems (SPS). The near term outlook [DOE/EE-10072/1] p0200 A81-19603
- KLOPOV, A. L.**  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content p0302 A81-26895
- KLOSEK, J.**  
Cryogenic methane separation/catalytic hydrogasification process analysis [DOE/ET-10325/T3] p0321 A81-21218
- KNAUF, R.**  
Electrodes and diaphragms for fuel cells [BHFT-FB-T-79-140] p0359 A81-19639
- KNECHTLI, R. C.**  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells p0247 A81-27239
- KNIGHT, J. A.**  
Pyrolytic oils: Characterization and data development for continuous processing [PB81-110959] p0306 A81-17294
- KNOX, J. B.**  
Wind-power site-screening methodology [UCRL-52938] p0314 A81-18526
- KOBER, A. A.**  
Coal conservation and stabilization during storage p0299 A81-25126
- KOCH, A.**  
High temperature water vapor electrolysis (HOT ELLY) [BHFT-FB-T-80-051] p0292 A81-21627
- KOCH, J.**  
Advanced module technique with thin solar cells p0248 A81-27251
- KOELLE, R. R.**  
Analysis of the utilization of lunar resources for space power systems. Part 1: System definition and model structure [ILR-MITT-73/1980-PT-1] p0284 A81-21628

- KORLLING, G.  
Development of liquefaction and gasification in the Federal Republic of Germany p0304 A81-28996
- KORPEK, R.  
Photovoltaic research and development projects in Germany p0245 A81-27213
- KORREBER, F.  
Large wind energy converter: Growian 3 MW [NASA-TN-75404] p0360 A81-20543
- KORSTER, J. K.  
Electrical effects of coal slag in a diffuse mode MHD generator [AIAA PAPER 81-0176] p0329 A81-20651
- KOHL, A. L.  
Molten salt coal gasification process development unit, phase 1. Volume 1: PDU operations [DOE/ET-10296/66-VOL-1] p0319 A81-20296
- KOK, L. D.  
Laser fusion systems for process heat p0341 A81-25106
- KOLAR, A.  
Bed expansion and attrition studies in a coal-fired fluidized bed p0299 A81-25128
- KOLDREKAR, S. M.  
Temperature stratification in hot water solar thermal storage tanks [AIAA PAPER 81-0368] p0210 A81-20787
- KOLECIC, J. C.  
Commercial (terrestrial) and modified solar array design studies for low cost, low power space applications [NASA-TN-81622] p0259 A81-17266
- KOLIYAD, K. M.  
Grain size dependence of silicon solar cell parameters p0249 A81-27261
- Copper doped polycrystalline silicon solar cell [NASA-CASE-WFO-14670-1] p0270 A81-19558
- KONF, R. J.  
Cuprous oxide MIS solar cells p0237 A81-27139
- KOOL, C. F.  
Salt gradient solar pond with reflective bottom - Application to the 'saturated' pond p0254 A81-27570
- KORDESCH, K. V.  
Progress in batteries and solar cells. Volume 3 p0382 A81-25601
- KOROBKIN, V. V.  
The efficiency of conical pellets for laser fusion p0294 A81-23227
- KOROBOV, V. E.  
Efficiency of energy storage in photochemical electron transfer reactions p0371 A81-19897
- KOROL, A. A.  
Interaction in Si<sub>3</sub>N<sub>4</sub>-C and BN-C systems under conditions of radiation heating p0210 A81-20906
- KORSUN, V.  
Development of amorphous silicon cells p0249 A81-27262
- KOSHAHL, R. G.  
Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies p0367 A81-16552
- KOSTIN, V. M.  
Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/ p0302 A81-26195
- KOSTOFF, R. M.  
Possible application of electromagnetic guns to impact fusion [LA-UR-80-3137] p0353 A81-17910
- KOTAS, J. F.  
Design and evaluation of a computer controlled solar collector simulator [ASME PAPER 80-WA/SOL-6] p0212 A81-21133
- KOTIN, A. D.  
Satellite Power System (SPS) utility integration: Institutional, planning and operational issues [EAC-R-4015] p0279 A81-20596
- KOUDELKA, V.  
Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode p0372 A81-25322
- KOURA, M.  
A preliminary investigation of an Al/Pes2 secondary cell p0374 A81-25615
- KOVAC, R. J.  
Pyrolytic oils: Characterization and data development for continuous processing [FB81-110959] p0306 A81-17294
- KOVACH, S. L.  
Electrochemical semiconductor solar energy converters p0215 A81-21674
- KOVAL, O. I.  
Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination p0219 A81-23803
- KOWALIK, J.  
Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results [SERI/TR-351-461-VOL-1] p0273 A81-19618
- KOYAMA, S.  
Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals p0230 A81-27079
- KOZAWA, A.  
Progress in batteries and solar cells. Volume 3 p0382 A81-25601
- KRAFT, R.  
Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility p0334 A81-23451
- Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute p0345 A81-26854
- KRAKOWSKI, R. A.  
Trends and developments in magnetic confinement fusion reactor concepts p0336 A81-23711
- KRAN, A.  
The outlook for thin solar cells p0245 A81-27217
- KRANC, S. C.  
Combustion of coal suspension fuels using air atomizers p0299 A81-25129
- KRAWIEC, P.  
Current and future industrial energy service characterizations, volume 1 [SERI/TR-733-790-VOL-1] p0206 A81-21618
- KREISHAM, W. S.  
Development of glass encapsulation techniques for terrestrial photovoltaic arrays p0246 A81-27227
- KREITH, F.  
Heat transfer and the future of solar energy utilization [ASME PAPER 80-WA/SOL-41] p0215 A81-21161
- Second law analysis and synthesis of solar collector systems p0253 A81-27554
- KREJCIC, I.  
Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode p0372 A81-25322
- KRISHNER, R.  
Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range, volume 1 [DOE/ET-15207/T2-VOL-1] p0363 A81-21581

- KRIVONAPICH, G. A.**  
Operational characterization of the solar-thermal power system near Willard, New Mexico  
[ASME PAPER 80-WA/SOL-39] p0214 A81-21159
- KRIZ, T. A.**  
Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SRI/TR-351-461-VOL-1] p0273 A81-19618
- KROLL, P.**  
Geothermal energy market study on the Atlantic Coastal Plain. GEITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 A81-19646
- KRUEGER, R. P.**  
The Niagara Falls resource recovery system  
p0301 A81-25557
- KRUPKA, M. C.**  
Energy storage technology - Environmental implications of large scale utilization  
p0186 A81-24991  
Energy, helium, and the future, 2  
[LA-UR-80-3342] p0191 A81-16605
- KSOUBI, M.**  
Identification of a solar pumping installation  
p0218 A81-23012
- KU, W. S.**  
Study of fuel cell on-site, integrated energy systems in residential/commercial applications  
[NASA-CR-165144] p0361 A81-21533
- KUCZERA, M.**  
The state of solar technology  
p0255 A81-29196
- KUDASHOVA, L. P.**  
Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination  
p0219 A81-23803
- KUDISH, A.**  
Sede Boger shallow pond project  
p0220 A81-24448
- KUDO, K.**  
Merocyanine-dye photovoltaic cell on a plastic film  
p0220 A81-24444
- KUEHN, T. E.**  
Performance enhancement of compound parabolic concentrators using air and a liquid simultaneously as heat transfer mediums  
p0255 A81-29254
- KUESTER, J. L.**  
Conversion of cellulosic wastes to liquid fuels  
p0302 A81-25564  
Conversion of cellulosic wastes to liquid fuels  
[COO-2982-57] p0320 A81-20306
- KUPA, E. E.**  
Electrical characteristics of MHD generators with solid electrodes and linear distribution of potential at the end strips  
p0337 A81-23747
- KURRR, C. J.**  
Hydrogen production from partial oxidation of residual fuel oil  
p0285 A81-24015
- KUJAWA, P.**  
Heavy oil reservoirs recoverable by thermal technology  
[DOE/ET-12380/1-VOL-3] p0317 A81-19540  
Heavy oil reservoirs recoverable by thermal technology  
[DOE/ET-12380/1-VOL-1] p0318 A81-19616  
Heavy oil reservoirs recoverable by thermal technology  
[DOE/ET-12380/1-VOL-2] p0318 A81-19617
- KUKULKA, J.**  
Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon  
p0252 A81-27295
- KULL, J. L.**  
Solar production of industrial process hot water: Operation and evaluation of the Campbell Soup hot water solar facility  
[SAB-1218-4] p0274 A81-19626
- KUMAR, K. D.**  
Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TN-6783] p0198 A81-18578
- KUNAZAWA, S.**  
Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research  
p0288 A81-25152
- KUNZ, H. E.**  
Optimization of carbon-supported platinum catalysts for fuel cell electrodes  
[AD-A094714] p0357 A81-19579
- KUNZE, D.**  
Low cost fabrication methods for LiAl/iron sulfide cells with molten salt electrolyte  
p0374 A81-25613
- KUPFER, A. B.**  
Indium phosphide films for photovoltaic devices  
p0240 A81-27173  
Improved polycrystalline thin film gallium arsenide MOS solar cells  
p0251 A81-27281
- KUSH, E. A.**  
The series solar heat pump and energy conservation  
p0186 A81-25020
- KUSHENKO, P. J.**  
Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition  
p0346 A81-28217
- KVAJIC, G.**  
Solar desalination by freezing and distillation  
p0227 A81-25043
- KWOK, H. L.**  
Cu/x/S/Cd/y/Zn/1-y/S and Cu/x/S/Cd/y/Zn/1-y/S, Cds thin film solar cells using chemically sprayed films  
p0229 A81-26355
- KYDES, A. S.**  
Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 A81-17615
- L**
- LABEAU, G.**  
Economic aspects of coal gasification and liquefaction in Belgium  
p0300 A81-25136
- LABELLE, S. J.**  
Technology assessments in transportation: Survey of recent literature  
[ANL/CNSV/TR-44] p0192 A81-16958
- LABRANDERO, D. J. L.**  
Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain  
[81-10119] p0323 A81-21423
- LAGUEAU, J.**  
Water systems modeling  
p0277 A81-20554
- LANE, E.**  
Optimization of total annual energy output from constant/adjustable tilt solar PV arrays  
p0250 A81-27273
- LAI, P. W.**  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239
- LAKE, W. F.**  
Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 A81-21234
- LAKSHMANAN, S.**  
Production of fuels from high temperature solar thermal systems - Economic analysis  
p0256 A81-29268
- LALK, T. E.**  
Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant  
[DOE/CS-56604/T1] p0355 A81-18546
- LAN, Y. M.**  
Electrostatic effects in inversion-layer metal-insulator-semiconductor solar cells  
p0217 A81-22672
- LANE, J. P.**  
Wellbore flow characteristics for optimal energy recovery from Gulf Coast geopressured geothermal sources  
[ASME PAPER 81-FET-18] p0350 A81-30112
- LANEBAKKE, T. J.**  
Minimizing and shadowing effects on parabolic concentrator arrays  
p0242 A81-27191

- PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements  
p0250 A81-27275
- LANBERT, S.  
Characterization of sulfate emissions from nonutility boilers firing low-S residual oils in New York City  
p0186 A81-23073
- LANDBECK, E.  
Improvement of phosphoric acid fuel cell stacks [AD-A092814]  
p0351 A81-16589
- LANICH, G. J.  
Enhancement of low grade heat via the HICSOs chemical heat pump  
p0225 A81-25018
- LANOITE, E. F.  
AlGaAs-GaAs cascade solar cell  
p0261 A81-17550
- LANPHEE, C. H.  
Thin film electrochromic materials for energy efficient windows [LBL-10862]  
p0197 A81-18549
- LANDIS, G. A.  
Development of glass encapsulation techniques for terrestrial photovoltaic arrays  
p0246 A81-27227  
Integral glass covering of spacecraft solar cells by electrostatic bonding  
p0250 A81-27269
- LANE, D.  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis [DOE/EV-73002/1-VOL-1]  
p0205 A81-21595  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 2: Hydroelectric development [DOE/EV-73002/1-VOL-2]  
p0205 A81-21596  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update [DOE/EV-73002/1-VOL-3]  
p0205 A81-21597
- LANE, J. E.  
Cooled radial in-flow turbines for advanced gas turbine engines [ASME PAPER 81-GT-213]  
p0350 A81-30102
- LANE, R. L.  
Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible  
p0234 A81-27116
- LANISING, F. L.  
Analysis of a high-performance tubular solar collector  
p0223 A81-24987
- LAOU, S.  
Fabrication of amorphous silicon solar cells, using an industrial process [LEP-80.638.SHE-689-A]  
p0280 A81-20602
- LAPTEV, S. A.  
Transient processes and self-excited oscillations in the electrical circuit of an MHD generator  
p0346 A81-27968
- LAQUEE, E.  
Flux pump excited brushless alternator  
p0334 A81-23436
- LAQUIL, P. D.  
Cost-performance comparison of water-steam receivers for solar central electric power plants [SAND-80-8245]  
p0273 A81-19615
- LARGE, G. R.  
Analytical design of an advanced radial turbine [NASA-CR-165170]  
p0361 A81-20958
- LARSEN, J. E.  
Hydrogen in thin film hydriding alloys  
p0289 A81-25155  
Investigations of intermetallic alloy film hydriding mechanisms  
p0290 A81-25497
- LARSON, D. E.  
Thermal techniques for characterizing magma body geometries  
p0296 A81-24303
- LARSON, E. J.  
Pricetown I - In-situ coal conversion field test for bituminous coals  
p0298 A81-25111
- LARUE, A. D.  
High efficiency klystron for the SPS application  
p0366 A81-16551
- LASSNER, E.  
Domestic solar water preheating versus solar water heating An economic evaluation  
p0229 A81-25064
- LATHROP, J. E.  
Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells [NASA-CR-164012]  
p0271 A81-19568
- LATROPA, E.  
Experimental apparatus for cooling of photovoltaic cells at high concentration  
p0218 A81-23011
- LAURIAT, G.  
A numerical approach for the prediction of the front losses of a flat-plate solar collector  
p0255 A81-29255
- LAUVRAY, E.  
Transport properties in 100 nm CZ silicon  
p0234 A81-27115
- LAVRIKOV, S. A.  
Investigation of dynamics of a waterwave power plant  
p0333 A81-22176
- LAULEY, T. J.  
Analytical and experimental evaluation of solar absorption and vapor compression residential cooling systems  
p0226 A81-25028
- LAWRENCE, E. J.  
Stress corrosion studies in solvent refined coal liquefaction pilot plants [ORNL/TM-7513]  
p0321 A81-21179
- LAWRENCE, I. E.  
Thick film conductive ink contacts for concentrator cells  
p0238 A81-27155
- LAWRENCE, W. T.  
Capital cost estimates of selected advanced thermal energy storage technologies [ANL/SPG-11]  
p0376 A81-17590
- LAYTON, D. W.  
Environment, health, socioeconomic and environmental control technology executive summary [DOE/TIC-11308]  
p0197 A81-18575
- LASARENTE, O. W.  
HYFIRE: A Tokamak high temperature electrolysis system [BNL-28679]  
p0352 A81-16908
- LEAR, W. E.  
Feasibility of the inflow disk generator for open-cycle MHD power generation [AIAA PAPER 81-0250]  
p0330 A81-20700
- LEBER, E. E.  
Overview of unconventional energy projects in the public power sector [ASME PAPER 81-DGP-1]  
p0189 A81-30118
- LECHER, E. E.  
Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels [ASME PAPER 81-GT-109]  
p0348 A81-30014
- LEDET, E.  
Description and thermal performance of corrugated solar collectors  
p0266 A81-18504
- LEE, A. L.  
Evaluation of coal conversion catalysts [FB81-111387]  
p0306 A81-17291
- LEE, D.  
Strategies for ecological effects assessment at DOE energy activity sites [ORNL/TM-6783]  
p0198 A81-18578
- LEE, D. E.  
Effects of toroidal coupling on the stability of tearing modes  
p0332 A81-21480
- LEE, J.  
An assessment of the atmospheric effects of a Satellite Power System  
p0187 A81-25053
- LEE, J. E.  
Modeling of a solar-pumped iodine laser  
p0221 A81-24618

- LEE, J. L.  
Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects [DOE/EE-0090] p0203 N81-20598
- LEE, S. L.  
Solar radiation estimates in Malaysia p0220 A81-24428
- LEE, W. T.  
Coal Hydrogasification process development. volume 1: Coal studies [FE-3125-24-VOL-1] p0312 N81-18238  
Coal hydrogasification process development [DOE/ET-10328/27] p0319 N81-20304
- LEE, Y. T.  
Improved polycrystalline thin film gallium arsenide MOS solar cells p0251 A81-27281
- LEEFER, R. J.  
Self-magnetically insulated ion diode p0344 A81-26552
- LEFEBVRE, A. H.  
Gas turbine combustor design problems p0343 A81-26006
- LEHMAN, C. L.  
Engine cycle selection for advanced technology engine studies [ASME PAPER 81-GT-191] p0349 A81-30084
- LEHR, W. J.  
Solar power generation by ground thermal energy conversion p0227 A81-25046
- LEIBOWITZ, L. P.  
High temperature solar thermal technology [ASME PAPER 80-WA/SOL-20] p0213 A81-21144
- LEITCHER, A.  
On the possible use of MHD generators in solar energy systems p0209 A81-19813
- LENGEL, J.  
Defense Energy Information System (DEIS): DEIS-80 system design specification [AD-A096263] p0384 N81-21960
- LENZO, C.  
Comparison of analytical and experimental studies of the HPDE MHD generator performance [AIAA PAPER 81-0029] p0327 A81-20549
- LEOCARD, E.  
A new airborne nickel cadmium battery concept p0374 A81-25618
- LEONARD, B. R., JR.  
The fusion fission hybrid - Roles in the energy economy p0341 A81-25103
- LEONARD, P. A.  
AGT-1500 combustor and fuel effects modeling [AD-A092255] p0350 N81-16061
- LEHMUSIEAU, P.  
Economic aspects of coal gasification and liquefaction in Belgium p0300 A81-25136
- LEBOY, R. L.  
Heavy water recovery from combined electrolytic and non-electrolytic hydrogen streams p0286 A81-24559
- LESLIE, J. D.  
Characterization of ZnO for the fabrication of conductor-insulator-semiconductor /CIS/ solar cells p0237 A81-27141
- LESSLEY, B. L.  
Simulation of a hybrid solar photovoltaic/solar thermal electric power system p0246 A81-27234
- LESTER, P.  
Performance study of p+/n and n+/p solar cell structures on polycrystalline material p0231 A81-27087
- LEUNG, C. T.  
Performance test of a non-parabolic asymmetrical solar concentrator p0230 A81-26473
- LEUNG, D. C.  
Behavior of interdigitated back-contact solar cells p0231 A81-27086
- LEUNG, K. M.  
Transport of low energy positive and negative ion beam by permanent magnets [LBL-11636] p0359 N81-19888
- LEVESQUE, D.  
Numerical resolution of the heat transfer equations in a latent heat solar energy storage system p0224 A81-25005  
Heat transfer through a paraffin wax solar energy storage characterized by a temperature dependent specific heat p0224 A81-25006
- LEVINE, A. S.  
Design and operation of the Solarex two-axis tracking linear concentrating collector system p0243 A81-27193
- LEVY, E.  
Passive and hybrid solar manufactured housing and buildings [DOE/CS-30384/1] p0263 N81-17592
- LEWIS, D. H.  
Two-stage combustion for reducing pollutant emissions from gas turbine combustors [NASA-CR-163877] p0350 N81-16056
- LEWIS, G.  
Irradiance estimates for Zambia p0220 A81-24434
- LEWIS, J. H.  
High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1599-VOL-1] p0357 N81-19466  
High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendixes [EPRI-AP-1599-VOL-2] p0360 N81-20434
- LEWIS, R. I.  
A performance analysis for horizontal axis wind turbines applicable to variable pitch or airbrake control p0333 A81-23067
- LI, K. W.  
Combined solar and fossil fuel systems for electric power generation p0381 A81-25048
- LI, K. Y.  
Process feasibility study in support of silicon material task 1 [NASA-CR-164009] p0271 N81-19570
- LI, H. C.  
Hydrogen bonding in asphaltenes and coal liquids [DOE/PC-30252/T1] p0318 N81-20227
- LI, S. S.  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells p0247 A81-27239
- LIARONIS, B.  
Development of catalysts for coal conversion [EPRI-111395] p0307 N81-17296
- LIBBY, L.  
On the safety to solar electric power generation p0256 A81-29269
- LIBERATORE, A. J.  
Pricetown I - In-situ coal conversion field test for bituminous coals p0298 A81-25111
- LIDORENKO, N. S.  
Direct conversion of chemical energy to electrical energy p0337 A81-23901
- LIEBERG, M.  
Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility p0334 A81-23451
- LINACH, M.  
Lifting hydro's potential p0335 A81-23515
- LIEKOS, R.  
Hybrid fuels for highway transportation [DOE/CS-54240/T1] p0313 N81-18242
- LIMAYE, D. R.  
Current and future industrial energy service characterizations, volume 1 [EPRI/TR-733-790-VOL-1] p0206 N81-21618
- LIW, C.  
Solids circulation around a jet in a fluidized bed gasifier [DOE/ET-12229/T1] p0313 N81-18343
- LIN, C. L.  
Indium phosphide films for photovoltaic devices p0240 A81-27173

- LIE, H. C.**  
The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells  
p0233 A81-27101
- LIN, H. H.**  
Phase equilibrium in coal liquefaction processes  
[EPRI-AP-1593] p0311 A81-18227
- LIND, H. A.**  
Barstow heliostat mirror glass characterization  
[PHL-3576] p0267 A81-18522
- LINDER, C. G.**  
Analytical design of an advanced radial turbine  
[NASA-CR-165170] p0361 A81-20958
- LINDHOLM, P. A.**  
Review of physics underlying recent improvements in silicon solar-cell performance  
p0241 A81-27176
- LINDNER, H.**  
Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution  
p0293 A81-22207
- LINDSAY, T. O.**  
SPS fiber optic link assessment  
p0366 A81-16548
- LINDBERRY, J. T.**  
Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes  
[AIAA PAPER 81-0030] p0328 A81-20550  
A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions  
[AIAA PAPER 81-0031] p0328 A81-20551
- LIPINSKY, E. S.**  
Development of sweet sorghum as an energy crop. Volume 3: Integration concepts  
[BHI-2054-VOL-3] p0316 A81-19334
- LIPPERT, T. E.**  
Operational analysis of open-cycle MHD  
[EPRI-AP-1463] p0352 A81-16909
- LIS, S.**  
Low cost sprayed CdTe solar cell research  
[DSE-4042-T34] p0275 A81-19631  
Low cost, sprayed CdTe solar cell research  
[SERI/PR-8104-3-T2] p0279 A81-20585
- LISS, R.**  
Fluid bed hydrogenation of agglomerating bituminous coals  
p0298 A81-25115
- LISSBERGER, P. E.**  
Coatings with induced transmission  
p0211 A81-20973
- LIU, B.**  
A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions  
[AIAA PAPER 81-0031] p0328 A81-20551
- LIU, D. C.**  
Ion implanted grating type Si solar cells - Junction depth dependence  
p0235 A81-27126
- LIU, K. V.**  
Some basic considerations and possible improvements on the solar pond  
[AHL-CT-80-23] p0268 A81-18540
- LIU, Y. Z.**  
Low bandgap /0.7 to 1.1 eV/ solar cells in the GaInAsSb/GaSb system  
p0235 A81-27119
- LIVESAY, B. R.**  
Hydrogen in thin film hydriding alloys  
p0289 A81-25155  
H<sub>2</sub> in situ hydriding of hydrogen storage materials  
p0342 A81-25492  
Investigations of intermetallic alloy film hydriding mechanisms  
p0290 A81-25497
- LJUNG, L.**  
Energy production from waste heat by means of elastomers or memory metals  
[STU-79-6394] p0362 A81-21551
- LLOYD, D. E.**  
Corrosion of alloys at high temperature in coal gasification environments  
p0302 A81-26491
- LOAR, J. H.**  
A comparison of environmental issues related to development of small hydropower resources at new versus existing sites  
[CONF-801210-13] p0197 A81-18577
- LOBITZ, D. H.**  
VAUTDYN - A numerical package for the dynamic analysis of vertical axis wind turbines  
[ASME PAPER 80-WA/SOL-18] p0331 A81-21142
- LOBO, P. C.**  
Solar collector performance without flow measurement  
p0223 A81-24984
- LOEFFLER, A. L., JR.**  
Flow field analysis and performance of wind turbines employing slotted diffusers  
p0345 A81-27553
- LOEWENTHAL, S. E.**  
Advanced continuously variable transmissions for electric and hybrid vehicles  
[NASA-TN-81718] p0368 A81-19459
- LOF, G. O. G.**  
Performance of solar collectors - An evaluation of standard ratings  
[ASME PAPER 80-WA/SOL-1] p0211 A81-21129
- LOPESKI, J. J.**  
Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces  
p0235 A81-27125  
Ion implanted grating type Si solar cells - Junction depth dependence  
p0235 A81-27126  
Theoretical limit efficiency of direct gap solar cells  
p0239 A81-27162  
Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon  
p0252 A81-27295
- LOIS, L.**  
Wind energy conversion in the MW range  
p0339 A81-25076
- LOKHANSHKIN, M.**  
A simple method for computing the dynamic response of passive solar buildings to design weather conditions  
p0226 A81-25029
- LOO, E. Y.**  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239
- LOOSE, V.**  
Water supply and demand in an energy supply model  
[DOE/EV-10180/2] p0204 A81-21560
- LOBAST, S. J. S.**  
Applied Superconductivity Conference, Santa Fe, N. Mex., September 29-October 2, 1980, Proceedings  
p0334 A81-23426
- LOSCUTOFF, H. V.**  
Compressed Air Energy Storage Technology Program overview  
[PHL-SA-8988] p0376 A81-16600
- LOTT, D.**  
Improved performance from thin film dielectric wraparound solar cells  
p0233 A81-27100
- LOUAT, R.**  
Development and study of a flat mirror multivalent concentrator  
p0223 A81-24988  
New solar still /the wiping spherical still/ - Design and experimentation  
p0227 A81-25042
- LOUIS, J. F.**  
Investigative data analysis technique for MHD generators  
[AIAA PAPER 81-0174] p0329 A81-20653  
MHD effects on viscous and thermal wakes and their influence on the performance of MHD generators  
[LOG-E281] p0352 A81-16899
- LOWENDES, D. R.**  
Applications of laser annealing and laser-induced diffusion to photovoltaic conversion  
[CONF-801153-1] p0258 A81-16594
- LOXSON, F.**  
The Solar-Meteorological Research Program for the South-Central U.S.  
[ASME PAPER 80-WA/SOL-24] p0213 A81-21148

- LU, K. C.**  
 Fuel cell support studies: On-site molten carbonate systems [PB81-113672] p0353 N81-17619
- LU, P. C.**  
 Preliminary design procedure for high power density MHD generators [AD-A096144] p0364 N81-21916
- LU, P. Y.**  
 Development of zinc-bromine batteries for utility energy storage [DOE/ET-29345/21] p0379 N81-20591
- LUCCHESI, J. G.**  
 The Bridgeport resource recovery system p0300 A81-25163
- LUCHERO, R. B.**  
 The ecliptic-align v-grooved hyperjunction cell p0252 A81-27296
- LUCHAK, P. J.**  
 Optimization of carbon-supported platinum catalysts for fuel cell electrodes [AD-A094714] p0357 N81-19579
- LUDOWISE, M.**  
 OM-VEE grown materials for high efficiency solar cells p0262 N81-17552
- LUDWIG, R.**  
 Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility p0334 A81-23451  
 Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute p0345 A81-26854
- LUNSDAINE, E.**  
 Solar water heating demonstration program for public schools in New Mexico p0225 A81-25013  
 Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors p0225 A81-25015  
 Solar installation for process steam generation for a refinery p0227 A81-25038
- LUND, W. W.**  
 SPS phase control studies p0366 N81-16547  
 Reference System Description p0367 N81-16554
- LUNDEN, C. D.**  
 Reference System Description p0367 N81-16554
- LUNDSAGER, P.**  
 Static deflection and eigenfrequency analysis of the Nibe wind turbine rotors. Theoretical background [RISOE-M-2199] p0357 N81-19497  
 Analysis of data from the Gedser wind turbine: 1977 to 1979 [RISOE-M-2242] p0359 N81-19637  
 Investigations of structural dynamics on the Gedser WTG and on new Danish wind turbines [RISOE-M-2146] p0363 N81-21626
- LUNDSTROM, M. S.**  
 Computer modeling of high-efficiency solar cells p0260 N81-17537
- LUOMA, W. L.**  
 Improved PCG-1 cell technology [EPRI-EM-1566] p0351 N81-16598
- LUPTON, R. E.**  
 Pulsed high voltage and high current outputs from monopolar energy storage system [AD-A094910] p0377 N81-19575
- LUTH, R. C.**  
 Comparative assessment of five potential sites for hydrothermal-magma systems: Summary [DOE/TIC-11303] p0320 N81-20525
- LUTWACK, R.**  
 Effect of zinc impurity on silicon solar-cell efficiency p0256 A81-29290
- LYCHKOWSKI, R. W.**  
 Solids circulation around a jet in a fluidized bed gasifier [DOE/ET-12229/T1] p0313 N81-18343

- LYKE, S. B.**  
 Methanol production with elemental phosphorus byproduct gas: Technical and economic feasibility [BNL-3694] p0322 N81-21224
- LYKODIS, P. S.**  
 Liquid metal MHD generators with shunt layer p0327 A81-19812
- LYNCH, J. F.**  
 Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs [DOE/BV-0115] p0201 N81-19655
- LYON, R. F.**  
 The energy balance associated with the use of a maximum power tracer in a 100-kW-peak power system p0238 A81-27152
- LYTLE, J. E.**  
 Mechanism of coal hydrogenation-liquefaction - Effect of temperature and coal particle size p0293 A81-22273

## M

- MAAG, C. E.**  
 Photovoltaic module soiling studies, May 1978 - October 1980 [DOE/JPL-1012-49] p0258 N81-16580
- MAASE, D. L.**  
 An evaluation of polycyclic aromatic hydrocarbons from processed oil shales p0308 N81-18104
- MACGREGOR, A. W. K.**  
 The potential for solar space heating in Scotland p0217 A81-22898
- MACINTOSH, B. H.**  
 Progress in the growth of wide silicon ribbons by the EPG technique at high speed using multiple growth stations p0230 A81-27078
- MACONBER, H. L.**  
 Photovoltaic applications - Past and future p0246 A81-27231
- MACPHERSON, M. D.**  
 National petroleum reserve - Alaska: Marine transportation system analysis [PB81-105041] p0368 N81-17288  
 National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary [PB81-105033] p0368 N81-17289
- MADAN, A.**  
 Photovoltaic behavior of amorphous silicon-based alloys p0249 A81-27263
- MAGID, L. E.**  
 The U.S. National Photovoltaic Program p0188 A81-27212
- MAGNUSON, G. D.**  
 A superconducting magnet for Stanford University p0334 A81-23441  
 A computer circuit analysis investigation into stray subplate capacitance effects during the discharge of an MHD magnet p0334 A81-23447
- MAHER, D.**  
 Construction and properties of a quadrupole mass spectrometer device, developed for the investigation of a thermionic barium-cesium-diode vapor atmosphere [DFVLR-FB-79-39] p0361 N81-21308
- MAIYA, P. S.**  
 State-of-the-art review of materials-related problems in flue gas desulfurization systems [BNL-80-59] p0384 N81-21645
- MAJED, Z. M.**  
 Calculation of hourly and daily available solar energy to a flat plate collector inclined by the angle of optimum tilt in Iraq p0222 A81-24977
- MAKKI, A.**  
 New solar still /the wiping spherical still/ - Design and experimentation p0227 A81-25042
- MAKOWITZ, H.**  
 HYFIRE: A Tokamak high temperature electrolysis system [BNL-28679] p0352 N81-16908

- MALIK, J.**  
Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode  
p0372 A81-25322
- MALIK, M.**  
Analysis of residential duct losses  
[PB80-228000] p0191 N81-16614
- MANAGAN, W. W.**  
Sampling and instrumentation for fluidized-bed combustion  
[AHL/CEN/FE-80-2] p0305 N81-16317
- MANASSE, F. K.**  
Production of fuels from high temperature solar thermal systems - Economic analysis  
p0256 A81-29268
- MANNES, K. B.**  
Recent progress in inertial confinement fusion at the Lawrence Livermore Laboratory  
p0294 A81-22511
- MARISCALCO, J. A.**  
An economics method for symbiotic fusion-fission electricity generation systems  
p0336 A81-23716  
Performance and economics analysis of several laser fusion breeder fueled electricity generation systems  
p0336 A81-23717
- MANNING, G. B.**  
Gas turbine materials evaluation program utilizing coal derived gaseous fuel  
[ASME PAPER 81-6T-65] p0348 A81-29975
- MANUEL, E. H., JR.**  
Advanced Cogeneration Technology Economic Optimization Study (ACTEOS)  
[NASA-CR-163887] p0306 N81-16573
- MARPLES, D.**  
Performance of a solar heating system on the LSU Field House determined from test data  
p0226 A81-25033
- MARCOMX, L.**  
High energy density batteries for satellite applications  
p0379 N81-21505
- MARIN, T. L.**  
Photovoltaics information user study  
[SEBI/TR-751-652] p0278 N81-20570
- MARIS, O.**  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181
- MARKE, R.**  
Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30384/1] p0263 N81-17592
- MARLE, T. L.**  
Passive solar energy information user study  
[SEBI/TR-751-746] p0273 N81-19607  
Wind energy systems information user study  
[SEBI/TR-751-749] p0363 N81-21578
- MARLIN, J. M.**  
Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 N81-21562
- MARRACHE, A.**  
An analytical model for solar cells  
p0221 A81-24806
- MARRIOTT, J. B.**  
Behaviour of high temperature alloys in aggressive environments; Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979  
p0382 A81-26476
- MARSH, R.**  
High energy density batteries for satellite applications  
p0379 N81-21505
- MARSTON, R. G.**  
ETP magnet design alternatives for the national MHD program  
p0334 A81-23443  
Superconducting MHD magnet engineering program  
p0344 A81-26852
- MARTIN, B.**  
Integration of wind power into Australian electricity grids without storage - A computer simulation  
p0334 A81-23068
- MARTIN, J. P.**  
US Department of Energy thermal energy storage program  
[CONP-801154-1] p0196 N81-18510
- MARTIN, J. W.**  
Pricetown I - In-situ coal conversion field test for bituminous coals  
p0298 A81-25111
- MARTIN, S. M.**  
Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 A81-25153
- MARTORANO, L.**  
Experimental apparatus for cooling of photovoltaic cells at high concentration  
p0218 A81-23011
- MARTRES, B.**  
Substrate related problems in RAD solar cells  
p0231 A81-27084
- MARUCCHI, J.**  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181
- MARUSAK, T. J.**  
The development of a free-piston Stirling engine power conversion system for multiple applications utilizing alternative fuel sources  
p0342 A81-25131
- MARUSKA, H. P.**  
SnO<sub>2</sub>/polycrystalline silicon solar cells  
p0248 A81-27255
- MASCETTI, G. J.**  
Operational energy conservation strategies in commercial aviation  
p0185 A81-20465
- MASI, J. V.**  
A low-cost manufacturing process for thin-film solar cells  
p0235 A81-27121
- MASKER, J. P.**  
Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies  
[FE-1743-80-VOL-1] p0316 N81-19335
- MASLOSKI, K. T.**  
The GaAs solar cell research and development programs of the Air Force  
p0260 N81-17542
- MASSEY-NORTON, J. T.**  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C  
[DOE/CS-20060/5120-VOL-1] p0192 N81-17394
- MASSOUDI, M. S.**  
An investigation on Tehran municipal solid waste with the view of electricity generation  
p0302 A81-26474
- MASUDA, H.**  
Osmo-power - Theory and performance of an osmo-power pilot plant  
p0347 A81-29199
- MASUDA, M.**  
Energy transfer in a system of superconductive magnets  
p0374 A81-26858
- MASUDA, Y.**  
The sea trial of the wave power generator 'Kaimei'  
p0338 A81-24975
- MATAYA, M. P.**  
Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854  
Cryogenic aspects of the UTSI-CFFF superconducting dipole magnet for MHD research  
p0345 A81-26855
- MATHIAS, J. D.**  
Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells  
p0216 A81-22198



- MATHUR, P. C.  
Effect of anodic-oxide layer thickness on the performance of GaAs MOS solar cells p0209 A81-20008
- MATHUR, S. S.  
A Fresnel-Winston tandem concentrator system p0218 A81-23497
- MATHUR, V. K.  
Production of fuels from high temperature solar thermal systems - Economic analysis p0256 A81-29268
- MATSUMAGA, M.  
Energy analysis of high temperature batteries p0374 A81-25614
- MATTHEI, K. W.  
Silicon solar cells with high open-circuit voltage p0232 A81-27089
- MATTHEI, M.  
High concentration silicon photovoltaic cell development [SAND-80-7068] p0279 N81-20595
- MAUK, C. E.  
Simplified methods for analyzing the performance of parabolic dish systems p0255 A81-29252
- MAURICIO, A. F.  
Application of aerial remote sensing to the study of geothermal resources in the desertic north of Chile and environmental pollution in Santiago, Chile p0294 A81-23590
- MAWARDI, O. K.  
Flux pump excited brushless alternator p0334 A81-23436
- MAXWELL, C. D.  
The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc [AIAA PAPER 81-0173] p0329 A81-20649  
On the magnetoaerothermal instability [AIAA PAPER 81-0248] p0330 A81-20698
- MAXWELL, J. C.  
Heat-flow measurements in the state of Arkansas [LA-8569-MS] p0324 A81-21573
- MAYCOCK, P. D.  
Overview - Cost goals in the LSA project p0230 A81-27077  
The U.S. National Photovoltaic Program p0188 A81-27212
- MAYER, A.  
Development of megasonic cleaning for silicon wafers [NASA-CR-164011] p0271 N81-19569
- MAYER, E.  
Solar air conditioning with solid absorbents and earth cooling p0226 A81-25025
- MAYNARD, C. W.  
Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor p0336 A81-23714
- MAYNARD, D. P.  
Critical parameters for coarse coal underground slurry haulage systems [JPL-PUB-81-11] p0369 N81-20495
- MAYNARD, G. E.  
Initial MPTS study results: Design considerations and issues p0365 N81-16536  
Solid state sandwich concept: Designs, considerations and issues p0368 N81-16568
- MAZZUCCHI, E. P.  
The economics of residential energy efficiency [PNL-SA-8696] p0206 N81-21624
- MCCALISTER, A. J.  
Non-noble catalysts and catalyst supports for phosphoric acid fuel cells [NASA-CR-165221] p0354 N81-18497
- MCCABE, J. T.  
The Cyclocentrifuge - An advanced gas/solids separator for coal conversion processes [AIAA PAPER 81-0395] p0293 A81-20804
- MCCABE, J. P.  
Temperature dependence for the power outputs of n-CdSe liquid junction cells p0222 A81-24823
- MCCLEUNG, J. D.  
Pricetown I - In-situ coal conversion field test for bituminous coals p0298 A81-25111
- MCCLEUNG, T. A.  
Development of sweet sorghum as an energy crop. Volume 3: Integration concepts [BHI-2054-VOL-3] p0316 N81-19334
- MCCORMICK, E.  
Closing the loop for the sulfur-iodine cycle p0286 A81-24022  
Status of the development of the general atomic thermochemical water-splitting cycle p0287 A81-25141
- MCCORMICK, J. E.  
POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells p0245 A81-27216
- MCCRACKEN, D. J.  
Indirect conversion of coal to methanol and gasoline: Product price vs product slate [CONF-801142-3] p0311 N81-18228
- MCCREIGHT, L. E.  
A conceptual design study of a high temperature solar thermal receiver (added tasks 6 and 7) [NASA-CR-163944] p0259 N81-17523
- MCCROBY, E. L.  
Nonlinear evolution of ablation-driven Rayleigh-Taylor instability p0332 A81-21466
- MCCROSKY, A.  
Silicon solar cells with high open-circuit voltage p0232 A81-27089
- MCCUTCHAN, D. A.  
Operational analysis of open-cycle MHD [EPRI-AP-1463] p0352 N81-16909
- MCDEVITT, F.  
Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range [DOE/ID-01756/T1] p0324 N81-21562
- MCDONALD, C. F.  
The nuclear closed-cycle gas turbine /HTGR-GT/- Dry cooled commercial power plant studies [ASME PAPER 80-GT-82] p0332 A81-21161
- MCDONALD, J. R.  
A manual for the use of electrostatic precipitators to collect fly ash particles [PB81-112757] p0308 N81-17640
- MCDONALD, E. E.  
Proceedings of the 16th Project Integration Meeting [NASA-CR-164073] p0276 N81-20545
- MCDONELL, J. F.  
Qualification testing of photovoltaic concentrator modules for system application experiments p0251 A81-27280
- MCELROY, J. F.  
Electrical energy storage via high efficiency-cost effective hydrogen/halogen regenerative fuel cell systems p0375 A81-29266
- MCGUIRE, J. A.  
Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra p0188 A81-28478
- MCHUGH, J. E.  
Development of processes for the production of low cost silicon dendritic web for solar cells p0231 A81-27080
- MCKEE, D.  
Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day [PNL-3695-APP-B] p0324 N81-21604
- MCKINNEY, M. L.  
Regional conversion to coal [FE-2468-63] p0314 N81-18517
- MCHORDIE, E.  
Evaluation of solar collectors for heat pump applications [DOE/CS-35351/T1] p0278 N81-20568
- MCHUAL, S. E.  
Satellite Power System (SPS) public outreach experiment [NASA-CR-164022] p0275 N81-19635

- SCHEERSE, L. E.**  
Fossil energy program  
[ORNL-5702] p0317 N81-19588
- SCHEIL, B. L.**  
Investigation of mechanism of hydrogen transfer in  
coal hydrogenation  
[DOE/PC-30080/T2] p0305 N81-16318
- SCPPERSON, B.**  
Hot water from the Sun: A consumer guide to solar  
water heating  
[PB81-128597] p0275 N81-19647
- SCWILLIAMS, B.**  
The estimation of the parameters of the  
distribution of wind speed and direction  
p0294 A81-23069
- SEAKIN, J. D.**  
Growth and evaluation of CdS and /CdZn/S films for  
the fabrication of high performance photovoltaic  
devices p0241 A81-27180
- SEIDIN, S. A.**  
Electrical characteristics of MHD generators with  
solid electrodes and linear distribution of  
potential at the end strips p0337 A81-23747  
A numerical study of the nonuniform loading of a  
segmented MHD channel p0346 A81-27967
- SEHALICK, E. M.**  
Photovoltaic system sizing analysis p0248 A81-27249  
Design of a side-by-side photovoltaic thermal  
system for a Northeast all-electric residence  
[SAND-80-7148] p0282 N81-21575
- SEHSHON, T. A.**  
Charge exchange and energy loss of carbon ions in  
air-plasma channels p0344 A81-26570
- SEI, C. C.**  
Head-sea diffraction by a slender raft with  
application to wave-power absorption p0303 A81-28690
- SEINHOLD, H.**  
Development of sodium/sulfur batteries  
[BNFT-FB-T-79-60] p0376 N81-17607
- SEISEL, S. L.**  
A new route to liquid fuels from coal  
p0304 A81-28999
- SELI, M. J.**  
Flux pump excited brushless alternator  
p0334 A81-23436
- SELLOS, A. M.**  
AGT-1500 combustor and fuel effects modeling  
[AD-A092255] p0350 N81-16061
- SELISK, A.**  
Solar energy for multi-residential water heating -  
An economic approach p0229 A81-25063
- SELSHEIMER, S. S.**  
Fundamentals and applications of solar energy;  
Proceedings of the Seventy-Second Annual  
Meeting, San Francisco, Calif., November 25-29,  
1979 p0382 A81-29251
- SENGU, G.**  
Development and study of a flat mirror multivalent  
concentrator p0223 A81-24988  
New solar still /the wiping spherical still/ -  
Design and experimentation p0227 A81-25042
- SENON, A. S.**  
PCM thermal energy storage in cylindrical  
containers of various configurations p0372 A81-24996
- SEVILLAT, P. D.**  
Strategic petroleum reserve data acquisition system  
[SAND-80-2143] p0317 N81-19539
- SEWELL, A.**  
A consideration of possible receiver designs for  
solar tower plants p0220 A81-24426
- SEWNEY, R. M.**  
Wind-tunnel simulation of the flow over hills and  
complex terrain p0295 A81-23693
- SEWIGAN, A.**  
Ceramic heat pipe development  
[DOE/TIC-11389] p0205 N81-21611
- SERTENS, R.**  
Silicon solar cells with screen printed diffusion  
and metallization p0245 A81-27221  
NIS silicon grating solar cells on BSF substrates  
p0252 A81-27293
- SERZ, M.**  
Behaviour of high temperature alloys in aggressive  
environments; Proceedings of the Petten  
International Conference, Petten, Netherlands,  
October 15-18, 1979 p0382 A81-26476
- SESKO, J. E.**  
Combined gas-steam turbine cycle using coal  
derived liquid fuel - A viable alternative to  
direct combustion of coal p0341 A81-25119
- SETE, P. D.**  
Experimental results from the first year of  
operation of the solar ground coupling research  
facility of Brookhaven National Laboratory  
p0225 A81-25009
- SEULENBERG, A.**  
Dependence of efficiency of shallow junction  
silicon solar cells on substrate doping  
p0254 A81-28216
- SEULENBERG, A., JR.**  
Thin n-i-p silicon solar cell p0232 A81-27097  
Silicon Research and Technology Workshop report  
p0260 N81-17541
- SEUNIER, G.**  
On the safety to solar electric power generation  
p0256 A81-25269
- SEYER-PITTOFF, R.**  
Combined gas and steam cycle for a gas-cooled  
solar tower power plant  
[ASME PAPER 81-GT-102] p0348 A81-30008
- SEYER, C. P.**  
Guidelines for conceptual design and evaluation of  
aquifer thermal energy storage  
[PNL-3581] p0380 N81-21587
- SEYERHOFF, E. W.**  
Efficiency of hydrogen compression by means of  
hydrides p0289 A81-25157
- SEZZINA, A.**  
Hydrogen technology - An overview  
p0285 A81-24014
- SIALBE, P.**  
An analytical model for solar cells  
p0221 A81-24806
- SICEK, L.**  
The Solar-Meteorological Research Program for the  
South-Central U.S.  
[ASME PAPER 80-WA/SOL-24] p0213 A81-21148
- MICHAELS, G.**  
Analysis of residential duct losses  
[FB80-228000] p0191 N81-16614
- MICHELLETTI, L.**  
Description and thermal performance of corrugated  
solar collectors p0266 N81-18504
- MIKKELSEN, A. B.**  
Rapid-rate bituminous coal gasification  
[PB81-114290] p0306 N81-17293
- MILBORNOV, D. J.**  
The performance of arrays of wind turbines  
p0335 A81-23698
- MILEY, G. E.**  
Overview of nonelectrical applications of fusion  
p0341 A81-25104
- MILLEN, B.**  
11.5% solar conversion efficiency in the  
photocathodically protected  
p-InP/V/3+/-V/2+/-HCl/C semiconductor liquid  
junction cell p0230 A81-27014
- MILLER, D. L.**  
Molecular beam epitaxial GaAs heteroface solar  
cell grown on Ge p0217 A81-22874  
Estimating the wind's potential for small scale  
energy generation using available local  
climatological data p0338 A81-25074  
Status of Rockwell-ERC high efficiency solar cell  
programs p0261 A81-17546

- MILLER, G.**  
Bed expansion and attrition studies in a coal-fired fluidized bed  
p0299 A81-25128  
The Lebost Wind Turbine experimental program [PB81-141467] p0364 A81-21634
- MILLER, I. J.**  
Liquefaction of biomass as a source of fuels or chemicals  
p0294 A81-22350
- MILLER, J. M.**  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C [DOE/CS-20060/5120-VOL-1] p0192 A81-17394
- MILLER, P. C.**  
Hulco Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980 [SOLAR/1043-80/14] p0281 A81-21553
- MILLER, W. E.**  
Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications [ANL-80-49] p0375 A81-16591
- MILLER, W. S.**  
Regenerative Engine Analysis Program (REAP) [AD-A096113] p0361 A81-21080
- MILLNER, A. R.**  
System design, test results, and economic analysis of a flywheel energy storage and conversion system for photovoltaic applications  
p0375 A81-27232
- MILNES, A. G.**  
Concepts for GaAs//AlGa/As solar cells with valley-transferred electrons for voltage and efficiency enhancement  
p0238 A81-27154
- MILOVANOV, A. P.**  
Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination  
p0219 A81-23803
- MIRALA-ARROYO, J.**  
A 14 percent efficiency  $\text{SnO}_2/\text{x-SiO}_2/\text{n-Si}$  solar cell  
p0252 A81-27294
- MIRAHAN, J. A.**  
Silicon solar cell process development, fabrication and analysis [NASA-CR-164164] p0281 A81-21541
- MINEY, R. G.**  
Technical and economic advances in steam reforming of hydrocarbons  
p0285 A81-24017
- MINUCCI, J. A.**  
Silicon solar cells with high open-circuit voltage  
p0232 A81-27089  
Low-cost ion implantation and annealing technology for solar cells  
p0244 A81-27201
- MINOR, J. R.**  
Seasonal Thermal Energy Storage Program [PML-SA-9030] p0376 A81-17602
- MINTZ, H. R.**  
Hydrides of ternary  $\text{TiFe/x/Al-1-x/Al} = \text{Cr, Mn, Co, Ni}$  intermetallics  
p0290 A81-26584
- MIRALLES, D. J. M.**  
Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain [A81-10119] p0323 A81-21423
- MISHRA, C. B.**  
Performance study of air-heated packed-bed solar-energy collectors  
p0215 A81-21957
- MITCHELL, D. E.**  
Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day [PML-3695-APP-B] p0324 A81-21604
- MITCHELL, J. E.**  
Design procedure and application of solar-assisted series heat pump systems [ASME PAPER 80-WA/SOL-9] p0212 A81-21135
- MITCHELL, K. W.**  
Incorporation of superlattice crystal layers in multijunction solar cells  
p0261 A81-17549
- MITCHELL, R.**  
The use of concrete block directly under a concrete slab as a heat storage system in a passive solar heated building  
p0224 A81-24999
- MITCHELL, T. O.**  
Coal liquefaction: The chemistry and technology of thermal processes  
p0304 A81-29692
- MITSUI, A.**  
Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research  
p0288 A81-25152
- MIX, L. P.**  
Anode plasma behavior in a magnetically insulated ion diode  
p0344 A81-26571
- MIYAHARA, T.**  
Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible  
p0234 A81-27116
- MIYAHARA, T. P.**  
Influence of processing on the electrical performance of proton irradiated silicon solar cells  
p0244 A81-27205
- MIYAZAKI, Y.**  
The sea trial of the wave power generator 'Kaimai'  
p0338 A81-24975
- MIZUKAMI, K.**  
Characteristics of acidic electrolyte hydrogen-air fuel batteries (3) [UCRL-TRANS-11655] p0358 A81-19604
- MOBARAK, A.**  
Small gas turbine with large parabolic dish collectors [ASME PAPER 81-GT-201] p0349 A81-30091
- MODELLI, A.**  
Development of a high efficiency 2 arcsec silicon solar cell for concentrator systems  
p0215 A81-21954
- MOEN, R. L.**  
Solar Energy Management System  
p0210 A81-20492
- HOFFETT, D. E.**  
Influence of processing on the electrical performance of proton irradiated silicon solar cells  
p0244 A81-27205
- MOHAN, G.**  
Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments  
p0309 A81-18211
- MOITE, S. M.**  
Simulation of a hybrid solar photovoltaic/solar thermal electric power system  
p0246 A81-27234  
Performance evaluation of conceptual hybrid solar photovoltaic/solar thermal electric power systems  
p0247 A81-27244
- MOLLENKOPF, H.**  
POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216
- MOMENT, R. L.**  
New developments in wind systems technology  
p0338 A81-25067
- MONFORD, L. G.**  
Solar power satellite system sizing tradeoffs [NASA-TF-1804] p0265 A81-18493
- MONTI, R.**  
Sensitivity analysis of a community solar system using annual cycle thermal energy storage  
p0224 A81-24998
- MONTGOMERY, D. B.**  
Superconducting MHD magnet engineering program  
p0344 A81-26852
- MONTIERTH, L.**  
Nonlinear evolution of ablation-driven Rayleigh-Taylor instability  
p0332 A81-21466
- MOORE, A. E.**  
Amorphous thin films for solar-cell applications [SEI/PB-0-8254-F] p0283 A81-21591

- MOORE, C. J.  
Characterization of ZnO for the fabrication of  
conductor-insulator-semiconductor /CIS/ solar  
cells  
p0237 A81-27141
- MOORE, J. E.  
Energy storage technology - Environmental  
implications of large scale utilization  
p0186 A81-24991
- MOORE, J. L.  
Community energy auditing: Experience with the  
comprehensive community energy management program  
[ANL/CHSV/TM-43] p0193 N81-17588
- MOORE, O.  
High efficiency compound semiconductor  
concentrator photovoltaics  
p0261 N81-17545
- MORA, S.  
Diffusion length measurements in CdS and CdSe  
Schottky barrier junctions  
p0209 A81-19698
- MORAN, P. J.  
Improvements in the electrolytic generation of  
hydrogen  
p0291 N81-20287
- MORHOUSE, J. H.  
Thermal and economic assessment of ground-coupled  
storage for residential solar heat pump systems  
[ASME PAPER 80-WA/SOL-10] p0212 A81-21136
- MORRIS, J. R.  
Gasification of biomass as a source of synfuels  
for developing countries  
p0298 A81-25118
- MOREL, D. L.  
Short circuit currents and collection efficiencies  
in a-SiHx solar cells  
p0246 A81-27235
- MORELL, D.  
Alternative energy facility siting policies for  
urban coastal areas: Executive summary of  
findings and policy recommendations  
[DOE/EV-01528/T1] p0204 N81-21559
- MORITTI, P. E.  
Overview of wind energy systems - Issues in  
development and application  
p0345 A81-27551
- MORGAN, C. R.  
Gasoline from alcohols  
p0297 A81-24900
- MORGAN, J. H.  
Characterization of ZnO for the fabrication of  
conductor-insulator-semiconductor /CIS/ solar  
cells  
p0237 A81-27141
- MORIIZUMI, T.  
Merocyanine-dye photovoltaic cell on a plastic film  
p0220 A81-24444
- MORRIS, J. F.  
Improved thermionic energy converters  
[NASA-CASE-LEN-12443-1] p0357 N81-19561  
Thermionic Energy Conversion (TEC) topping  
thermoelectrics  
[NASA-TM-81677] p0359 N81-19920
- MORRIS, W. F.  
Management plan for fiscal year 1981:  
Environmental Control Technology Project  
geothermal development  
[UCID-18903] p0206 N81-21640
- MORRISON, C. A.  
Dynamic response analysis of a solar powered  
heliotropic fluid-mechanical drive system  
p0223 A81-24990
- MORRISON, E. L.  
Environmental assessment for the satellite power  
system concept development and evaluation  
program-electromagnetic  
[DOE/ER-0096] p0207 N81-21642
- MORRISON, K.  
Light aircraft engines, the potential and problems  
for use of automotive fuels. Phase I:  
Literature search  
[AD-A094154] p0308 N81-18057
- MORSE, R. L.  
Nonlinear evolution of ablation-driven  
Rayleigh-Taylor instability  
p0332 A81-21466
- MORTIMER, A. E.  
A review of the icing problem for aerogenerators  
p0333 A81-23066
- MORTON, J. E.  
A statistical study of Coal Sulfur Variability and  
Related Factors. Documentation for the coal  
sulfur variability data base and analytical  
program  
[PB81-111593] p0306 N81-17287  
A statistical study of coal sulfur variability and  
related factors  
[PB81-111585] p0195 N81-17644
- MOSER, R. L.  
Terrestrial photovoltaic system analysis  
[AD-A094827] p0272 N81-19578
- MOSSES, C. A.  
Hybrid fuels for highway transportation  
[DOE/CS-54240/T1] p0313 N81-18242
- MOSKOWITZ, S.  
Pressurized fluidized bed - A technology for  
combined cycle power generation  
[AIChE PAPER 81-0392] p0330 A81-20802
- MOUDY, L. A.  
Chemical vapor deposition of thin-film  
polycrystalline Si for low cost solar cells  
[SAN-3045-3] p0275 N81-19634
- MOULDER, G. E.  
Efficient ultrasonic grinding: A new technology  
for micron-sized coal  
[DOE/ER-10466/T1] p0315 N81-19317
- MOUNCE, W. E.  
An assessment of the use of chemical reaction  
systems for thermal energy transport  
p0365 A81-25011
- MOUTON, H.  
Convection in side-by-side open and closed  
vertical rectangular channels in thermal  
interaction with the ambient medium  
p0215 A81-21584
- MREHA, J.  
Plastic-bonded electrodes for nickel-cadmium  
accumulators. V - Influence of the current  
collector and mechanical compression on the  
current carrying capability of the nickel oxide  
electrode  
p0372 A81-25322
- MUCHNIK, G. G.  
Direct conversion of chemical energy to electrical  
energy  
p0337 A81-23901
- MUDGE, L. K.  
Investigations on catalyzed steam gasification of  
biomass. Appendix B: Feasibility study of  
methanol production via catalytic gasification  
of 2000 tons of wood per day  
[FNL-3695-APP-B] p0324 N81-21604
- MUELENBERG, A.  
Recent progress in high-output-voltage silicon  
solar cells  
p0260 N81-17534
- MUELLER, R. O.  
A 'two-tank' seasonal storage concept for solar  
space heating of buildings  
p0372 A81-25035
- MUJAHID, A.  
Diffuse sky measurements and determination of  
corrected shadow band multiplication factors  
[ASME PAPER 80-WA/SOL-26] p0213 A81-21150
- MUJUNDAE, A. S.  
PCM thermal energy storage in cylindrical  
containers of various configurations  
p0372 A81-24996
- MULCAHEY, T. P.  
Monitoring temperatures in coal conversion and  
combustion processes via ultrasound  
[AHL-FE-49622-TM09] p0325 N81-21875
- MULIK, P. E.  
Effect of water injection for NOx reduction with  
synthetic liquid fuels containing high  
fuel-bound nitrogen in a gas turbine combustor  
[ASME PAPER 81-GT-51] p0348 A81-29964  
Gas turbine combustor performance on synthetic  
fuels, volume 1  
[EPRI-AF-1623-VOL-1] p0356 N81-19259
- MULLER, J. C.  
Silicon solar cells realized by laser induced  
diffusion of deposited antimony  
p0244 A81-27202
- MULLINS, J.  
EVEN in situ hydriding of hydrogen storage materials  
p0342 A81-25492

- MULLONEY, J. A., JR.  
Ethanol from municipal cellulosic wastes  
p0299 A81-25124
- MUNROE, E.  
An assessment of solar energy availability in  
different regions of the solar spectrum  
p0220 A81-24429
- MURPHY, D. L.  
Diagnostic instrumentation development program for  
the heat recovery/seed recovery system of the  
open-cycle, coal-fired magnetohydrodynamic power  
plant  
[AIAA PAPER 81-0110] p0328 A81-20602
- MURPHY, B.  
Strategies for ecological effects assessment at  
DOE energy activity sites  
[ORNL/TM-6783] p0198 A81-18578
- MURPHY, E. B.  
Measuring dirt on photovoltaic modules, part 2  
[COO-4094-86-PT-2] p0284 A81-21609
- MURPHY, R. M.  
Performance and safety characteristics of Li/BCI  
and Li/CSC systems  
p0379 A81-21495
- MURR, L. E.  
Microstructural and mechanical property evaluation  
of black chrome and zinc oxide coated solar  
collectors  
[DOE/AL-04266/T1] p0268 A81-18537
- MUSHNICK, S.  
The design of a tapered bore superconducting MHD  
magnet system  
p0334 A81-23442
- MUSINSKI, D. L.  
Engineering aspects of cryogenic laser-fusion  
targets  
p0345 A81-26857
- MUTHUKRISHNAN, S.  
Energy supply and demand properties from  
engineering process models  
[EPRI-BA-1568] p0191 A81-16603
- MYLES, K. M.  
Sampling and instrumentation for fluidized-bed  
combustion  
[ANL/CEN/PS-80-2] p0305 A81-16317

## N

- NADER, L.  
Energy choices in a democratic society  
[PB81-114852] p0197 A81-18563
- NAGESHWAR, G. D.  
Phase equilibrium in coal liquefaction processes  
[EPRI-AP-1593] p0311 A81-18227
- NAKAHARA, T.  
Feasibility of the inflow disk generator for  
open-cycle MHD power generation  
[AIAA PAPER 81-0250] p0330 A81-20700
- NAKATANI, K.  
Sealed nickel-cadmium batteries for memory backup  
p0374 A81-25616
- NALOS, E. J.  
SPS large array simulation  
p0365 A81-16537
- SPS fiber optic link assessment  
p0366 A81-16548
- High efficiency SPS klystron design  
p0366 A81-16550
- Reference System Description  
p0367 A81-16554
- NAKHORI, T.  
High performance BSF silicon solar cell with fire  
through contacts printed on AR coating  
p0243 A81-27198
- NANDA, P.  
Advanced Cogeneration Technology Economic  
Optimization Study (ACTEOS)  
[NASA-CR-163887] p0306 A81-16573
- WANDI, A. K.  
Ionospheric effects in active retrodirective array  
and mitigating system design  
p0366 A81-16549
- NAKANI, P. D.  
An assessment of the use of chemical reaction  
systems for thermal energy transport  
p0365 A81-25011

- NARAYANAN, T. V.  
High-flux solar absorber concept for central  
receiver power plants  
p0253 A81-27557
- NASBY, R. D.  
Characterization of p+/nn+/+ BSF silicon  
concentrator solar cells  
p0236 A81-27133
- Effects of nonuniform illumination on the  
performance of silicon concentrator solar cells  
p0237 A81-27136
- NASH, W. P.  
Management assistance for the development of  
hydrothermal energy in the Rocky Mountain/basin  
and range region  
[DOE/ET-28392/T2] p0315 A81-18547
- NATARAJAN, R.  
Investigations on the prediction of thermal  
performance of compound parabolic concentrators  
p0223 A81-24989
- NATHAN, K.  
Corrosion behavior of metallic materials in the  
reducing environments characteristic of a  
coal-fired MHD generator  
p0332 A81-21494
- NAVON, D. H.  
Two-dimensional analysis of the interdigitated  
back-contact solar cell  
p0216 A81-22197
- NEAVEL, R. C.  
Exxon donor solvent liquefaction process  
p0304 A81-26998
- NEELY, H. C.  
Gasification combined cycle B&A assessment  
p0295 A81-24265
- NEIMEYER, W. M.  
Solar production of industrial process hot water:  
Operation and evaluation of the Campbell Soup  
hot water solar facility  
[SAN-1218-4] p0274 A81-15626
- NEJAT, Z.  
An investigation on Tehran municipal solid waste  
with the view of electricity generation  
p0302 A81-26474
- NELSON, R. T.  
Research and evaluation of biomass  
resources/conversion/utilization systems  
(market/experimental analysis for development of  
a data base for a fuels from biomass model.  
Volume 1: Biomass allocation model  
[DOE/ET-20611/14] p0315 A81-18553
- NELSON, R. V.  
Survey of EPA facilities for solar thermal energy  
applications  
[NASA-CR-162469] p0265 A81-17617
- NELSON, R. A.  
Engineering development of a HYSOS chemical heat  
pump  
p0287 A81-25017
- NELSON, R. E.  
Electrical effects of coal slag in a diffuse mode  
MHD generator  
[AIAA PAPER 81-0176] p0329 A81-20651
- NESBITT, D. E.  
Energy/economic model analysis. Energy economic  
modeling system  
[PB81-114274] p0194 A81-17614
- NEUGROSCHER, A.  
Determination of lifetimes and recombination  
currents in p-n junction solar cells, diodes,  
and transistors  
p0209 A81-20011
- NEUMANN, K.-K.  
Thermodynamic calculations for coal gasification  
processes  
p0294 A81-22849
- NEVILLE, R. C.  
The effects of junction depth and impurity  
concentration on diffused junction solar cells  
p0228 A81-25050
- Study of combined /photovoltaic-thermal/ solar  
energy systems  
p0228 A81-25059
- NEVERMAN, P.  
The economics of hydrogen production  
p0285 A81-24013

- NEWMAN, J.**  
Mathematical modeling of the lithium-aluminum,  
iron sulfide battery. I - Galvanostatic  
discharge behavior. II - The influence of  
relaxation time on the charging characteristics  
p0374 A81-25837
- NEWTON, A. B.**  
Capacity modulation of solar-fired absorption  
chillers with single and multi-temperature  
energizing sources  
p0210 A81-20493
- NG, K.**  
Photovoltaic behavior of amorphous silicon-based  
alloys  
p0249 A81-27263
- NG, K. H.**  
Oil ganglion dynamics in flow through porous media  
p0313 A81-18314
- NG, Y. B.**  
Performance test of a non-parabolic asymmetrical  
solar concentrator  
p0230 A81-26473
- NGAN, Y.**  
A statistical study of Coal Sulfur Variability and  
Related Factors. Documentation for the coal  
sulfur variability data base and analytical  
program  
[PB81-111593] p0306 A81-17287  
A statistical study of coal sulfur variability and  
related factors  
[PB81-111585] p0195 A81-17644
- NICHOLLS, J. A.**  
Initiation of detonation in unconfined natural  
gas-air clouds  
[PB81-113292] p0308 A81-18149
- NICOL, J.**  
An evaluation of superconducting magnetic energy  
storage  
p0371 A81-23439
- NICOLAS, P.**  
Meteorological data: Treatment of radiation data,  
test reference year  
p0266 A81-18502
- NIEMANN, R. C.**  
Final design of a superconducting MHD magnet for  
the coal-fired flow facility at the University  
of Tennessee Space Institute  
p0345 A81-26854  
Cryogenic aspects of the UTSI-CPPF superconducting  
dipole magnet for MHD research  
p0345 A81-26855
- NIEMEYER, W. A.**  
Advanced solar concentrator mass production,  
operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 A81-19571
- NIGG, D. H.**  
Preliminary skyshine calculations for the Poloidal  
Divertor Tokamak Experiment  
p0336 A81-23713
- NIGRO, E. F.**  
The Chicago Southwest Supplemental Fuel Processing  
Facility  
p0300 A81-25552
- NIMMO, B.**  
Effects of dust on the performance of thermal and  
photovoltaic flat plate collectors in Saudi  
Arabia - Preliminary results  
p0223 A81-24985
- NITTA, Y.**  
Optimum design and device physics of the  
horizontally multilayered high voltage solar  
cells produced by plasma deposited amorphous  
silicon  
p0247 A81-27238
- NOBILI, D.**  
The photovoltaic-aeolian plant at Passo Mandriola  
/Italy/  
p0218 A81-23013
- NOBURA, K.**  
Kinetics of the reaction between  $Hg_2Br_2$  and  $H_2$   
p0290 A81-25499
- NORIAN, K. H.**  
A microstructural study of the heterojunction  
materials of the  $CdS-Cu_2S$  solar cell  
p0241 A81-27179
- NORING, J. E.**  
Hydrogen and oxygen from water. V - The ROC system  
p0285 A81-21955
- NORMAN, C. E.**  
High efficiency MIS/inversion layer silicon solar  
cells  
p0252 A81-27290
- NORMAN, J.**  
Status of the development of the general atomic  
thermochemical water-splitting cycle  
p0287 A81-25141
- NORTH, R. B.**  
High efficiency MIS/inversion layer silicon solar  
cells  
p0252 A81-27290
- NOTARDONATO, J.**  
Evaluation of advanced combustors for dry  $NO_x$ /  
suppression with nitrogen bearing fuels in  
utility and industrial gas turbines  
[ASME PAPER 81-GT-125] p0349 A81-30029
- NOHLAN, M. J.**  
Development of glass encapsulation techniques for  
terrestrial photovoltaic arrays  
p0246 A81-27227
- NOHOTNY, E.**  
Regional operations research program for  
commercialization of geothermal energy in the  
Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 A81-21562
- NUMOI, T.**  
High performance BSP silicon solar cell with fire  
through contacts printed on AR coating  
p0243 A81-27198
- NURICK, G. M.**  
Small scale power generation utilizing wave energy  
p0339 A81-25080
- NUSS, G.**  
Interim performance criteria for photovoltaic  
energy systems  
[SERI/TR-742-654] p0282 A81-21577
- NUTTALL, L. J.**  
Production and application of electrolytic  
hydrogen - Present and future  
p0286 A81-24019
- OBERLIN, M.**  
Physical and chemical characterization of R.A.D.  
silicon films  
p0249 A81-27260
- OBEROI, H. S.**  
Handbook of experiences in the design and  
installation of solar heating and cooling systems  
[DOE/CS-32224/T1] p0282 A81-21566
- OBRIEN, G.**  
Design of a side-by-side photovoltaic thermal  
system for a Northeast all-electric residence  
[SAND-80-7148] p0282 A81-21575
- ODEA, P.**  
Regional operations research program for  
commercialization of geothermal energy in the  
Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 A81-21562
- ODGERS, J.**  
Problems due to multifuel operation of gas turbine  
combustors  
p0343 A81-26009
- ODONNELL, D. T.**  
The effects of nonuniform illumination and  
temperature profiles on silicon solar cells  
under concentrated sunlight  
p0237 A81-27135
- OHLSNER, C.**  
Calculations of the anomalies of the vertical  
temperature gradient using the horizontal  
temperature distribution  
p0293 A81-22207
- OGAWA, H.**  
Progress in batteries and solar cells. Volume 3  
p0382 A81-25601
- OGGE, D. O.**  
Geothermal reservoir engineering computer code  
comparison and validation using the GEORZ  
simulator program  
[DOE/SF-11450/1] p0314 A81-18478
- OHTA, T.**  
Feasibility study on the Porsche - Optimum design  
of solar collection on a fluctuating base  
p0288 A81-25149

## OHYA, Y.

Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research p0288 A81-25152

## OKADA, Y.

Fluidized bed combustion of coal p0299 A81-25130

## OKAMOTO, H.

Optimum design and device physics of the horizontally multilayered high voltage solar cells produced by plasma deposited amorphous silicon p0247 A81-27238

## OKEEFE, D.

Status of the development of the general atomic thermochemical water-splitting cycle p0287 A81-25141

## OLCSESE, G. L.

Hydrogen storage in aluminium-substituted TiFe compounds p0287 A81-24560

## OLEARY, M. J.

Active cooling system alternatives for concentrating photovoltaic systems p0256 A81-29265

## OLESEN, O.

Technical and economic advances in steam reforming of hydrocarbons p0285 A81-24017

## OLIPHANT, J. L.

Phase equilibrium in coal liquefaction processes [EPRI-AP-1593] p0311 A81-18227

## OLIVA, L.

Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research p0288 A81-25152

## OLIVER, D. A.

The STD/HHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc [AIAA PAPER 81-0173] p0329 A81-20649  
On the magnetoacoustic instability [AIAA PAPER 81-0248] p0330 A81-20698

## OLSEN, L. C.

Investigation of Cu<sub>2</sub>O solar cells p0237 A81-27140

## OLSON, C.

Cost effective, high throughput, junction formation techniques using spray-on dopants p0245 A81-27220  
An improved lamination technique for solar arrays p0245 A81-27226  
Array automated assembly task low cost silicon solar array project, phase 2 [NASA-CR-164037] p0272 A81-19572

## OHAN, D. B.

Energy/economic model analysis. Energy economic modeling system [PB81-114274] p0194 A81-17614

## OHEAL, D. L.

An energy used model of the residential sector p0185 A81-21022

## OHEILL, M. J.

The 25 kW Fresnel lens/photovoltaic concentrator application experiment at Dallas-Fort Worth Airport p0232 A81-27091

## OHEILL, T. C.

Thermal performance predictions of flat-plate solar collector air heaters p0270 A81-18566

## OHEY, S.

Wind energy utilization possibilities in Turkey p0338 A81-25075

## OHISCHAK, M.

High-temperature high-pressure particulate removal in coal gasification [PB81-113664] p0308 A81-17642

## ONO, S.

Kinetics of the reaction between Mg<sub>2</sub>Ni and H<sub>2</sub> p0290 A81-25499  
Effects of adsorbed gas molecules on hydrogen-sorbing behaviour of magnesium-nickel alloys p0290 A81-25500

## OPRENSHAW, P. L.

Operational, control and protective system transient analyses of the closed-cycle GT-HTGR power plant [ASME PAPER 80-WA/GT-1] p0331 A81-21096

## OPJORDEN, E.

High efficiency wraparound contact solar cells /HEWACS/ p0232 A81-27094  
High efficiency solar panel - Phase II p0250 A81-27270  
The HEWAC pilot line experience p0262 A81-17574

## ORBACH, A.

Optimal and suboptimal control policies for a solar collector system p0211 A81-21029

## OREAR, D. J.

Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes [FE-2315-55] p0311 A81-18231

## ORLANDO, A. F.

Domestic solar water preheating versus solar water heating An economic evaluation p0229 A81-25064

## ORLANDO, J. A.

Analysis of residential duct losses [PB80-228000] p0191 A81-16614

## ORTEGA, J. K. E.

Radiation and free convection shield for passive thermal control [ASME PAPER 80-WA/SOL-7] p0212 A81-21134

## ORTIZ, P.

Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California [EPRI-EM-1654] p0275 A81-19630

## ORTIZ, T. S.

Strategic Petroleum Reserve (SPR) geological summary. Weeks Island Salt Dome [SAND-80-1323] p0324 A81-21468

## OSGOOD, R. H., JR.

Efficient Si solar cells by laser photochemical doping p0229 A81-25873

## OSTADHOSSRINI, A.

An investigation on Tehran municipal solid waste with the view of electricity generation p0302 A81-26474

## OSWALD, G. E.

Hydrocarbonization research: Completion report [ORNL/TN-6693] p0311 A81-18232

## OTHMER, D. F.

Methanol - The efficient conversion of valueless fuels into a versatile fuel and chemical feedstock [ASME PAPER 81-PID-1] p0305 A81-30110

## OTT, J. H.

An interferometer-based phase control system p0366 A81-16545  
A sonic satellite power system microwave power transmission simulation p0366 A81-16546

## A theoretical study of microwave beam absorption by a rectenna

[NASA-CR-160921] p0369 A81-20328

## OTTE, L. J.

Peat resources of North Carolina [DOE/ET-14693/T1] p0317 A81-19541

## OTTERBEIN, R. T.

Two modified single diode models for simulating solar cells with distributed series resistance p0239 A81-27161

## OTTS, J. V.

Operational characterization of the solar-thermal power system near Willard, New Mexico [ASME PAPER 80-WA/SOL-39] p0214 A81-21159

## OVERLY, P. T.

Survey of EPA facilities for solar thermal energy applications [NASA-CR-162469] p0265 A81-17617

## OVEZSAKHATOV, N.

Development and study of a lead telluride/germanium telluride solar thermoelectric generator p0254 A81-28588

## OWEN, R.

High efficiency compound semiconductor concentrator photovoltaics p0261 A81-17545

- OILEY, J. E.  
Zinc-bromine batteries for energy storage  
p0373 A81-25607

## P

- PACEY, K.  
An optimal control approach to energy minimization  
in electric vehicles  
[N8FT-109] p0201 A81-19972
- PACKER, C. E.  
The performance of NiCrAl alloys in complex coal  
conversion atmospheres  
p0302 A81-26492
- PADBRICK, T. D.  
Catalytic effects in coal gasification  
[SAND-80-2151] p0322 A81-21231
- PAGLIARO, F.  
Preparation and evaluation of advanced  
electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165179] p0352 A81-17527  
Preparation and evaluation of advanced  
electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245] p0354 A81-18496
- PALAMA, A.  
Construction of a probe for measuring temperature  
and pressure in deep wells  
p0296 A81-24304
- PALETTA, F.  
High efficiency 1.43 and 1.69 eV band gap  
Ga<sub>1-x</sub>Al<sub>x</sub>/As-GaAs solar cells for multicolour  
applications  
p0255 A81-28958
- PALMER, J. E. L.  
Heat exchanger for in-ground heat storage  
p0375 A81-29260
- PALMER, H. A.  
Anode plasma behavior in a magnetically insulated  
ion diode  
p0344 A81-26571
- PAN, E. L.  
Solar energy conversion by chloroplast  
photoelectrochemical cells  
p0216 A81-22349
- PAN, Y.  
U-25B MHD generator performance  
[AIAA PAPER 81-0032] p0328 A81-20552
- PAN, Y. C.  
A comparison of experimental results from the UTSI  
coal-fired MHD generator to theoretical  
predictions  
[AIAA PAPER 81-0031] p0328 A81-20551
- PANDE, K. P.  
Grain boundary edge passivated solar cells on thin  
film GaAs  
p0251 A81-27284
- PANESAR, H. S.  
Low cost fabrication methods for LiAl/iron sulfide  
cells with molten salt electrolyte  
p0374 A81-25613
- PANGBORN, J. B.  
Assessment of methane hydrates  
[PB81-113300] p0307 A81-17510
- PAPADIMITRIOU, L.  
Heterojunction solar cells on cuprous oxide  
p0221 A81-24809
- PAREKH, P.  
On the safety to solar electric power generation  
p0256 A81-29269
- PARIS, J. E.  
A cycle life tester for the long-term stability of  
phase change materials for thermal energy storage  
p0372 A81-24997
- PARKER, A. J., JR.  
Ethanol from municipal cellulosic wastes  
p0299 A81-25124
- PARKER, G. E.  
The sulfur-cycle hydrogen production process  
p0286 A81-24024
- PARKER, H. W.  
Engine fuels from biomass  
[ASME PAPER 81-DGP-4] p0305 A81-30116
- PARKER, J.  
Design of a side-by-side photovoltaic thermal  
system for a Northeast all-electric residence  
[SAND-80-7148] p0282 A81-21575
- PARKER, J. C.  
Development and testing of heat transport fluids  
for use in active solar heating and cooling  
systems  
[NASA-TM-82395] p0368 A81-16584
- PARKINSON, B. A.  
Photoelectrochemical solar cells based on d-band  
electrochemistry at transition metal diselenides  
[IS-4745] p0259 A81-16606  
Photoelectrochemical solar cells based on d-band  
electrochemistry at transition metal diselenides  
[IS-4759] p0283 A81-21583
- PARNER, J. F.  
A superconducting magnet for Stanford University  
p0334 A81-23441
- PARRILLA, D. G.  
Thermal mapping, geothermal source location,  
natural effluents and plant stress in the  
Mediterranean coast of Spain  
[B81-10119] p0323 A81-21423
- PARRISH, M. A.  
Fuel cells - A survey. I  
p0333 A81-22400
- PARSONS, V. B.  
Constraints to bio-energy development  
[LA-UR-80-3387] p0191 A81-16604
- PARSONS, V. K. B.  
Micro-level land use impacts of bioconversion  
[LA-8599-T] p0325 A81-21616
- PARTCH, R.  
Conversion of organic wastes to oil by reductive  
formylation  
p0302 A81-25563
- PASCAUD, P. E.  
Remote sensing techniques for identification and  
evaluation of geothermal areas  
p0294 A81-23587
- PASHKOV, S. A.  
A study of a commercial MHD power plant scheme  
p0342 A81-25381
- PASSMAN, R. A.  
Synfuels from coal  
p0304 A81-29682
- PASSONI, D.  
High efficiency 1.43 and 1.69 eV band gap  
Ga<sub>1-x</sub>Al<sub>x</sub>/As-GaAs solar cells for multicolour  
applications  
p0255 A81-28958
- PATENA, R. P.  
A figure of merit for solar collectors with  
several separate absorber segments  
p0222 A81-24980
- PATTEN, D. T.  
Microenvironmental changes and plant responses due  
to shading and wind deflection by solar  
collectors: A simulation study  
[UCLA-12/1268] p0197 A81-18576
- PATTERSON, D. J.  
Light aircraft engines, the potential and problems  
for use of automotive fuels. Phase 1:  
Literature search  
[AD-A094154] p0308 A81-18057
- PATTERSON, R.  
Design requirements for high-efficiency high  
concentration ratio space solar cells  
p0263 A81-17575
- PATTINSON, T. E.  
Engineering aspects of cryogenic laser-fusion  
targets  
p0345 A81-26857
- PATTON, W. P.  
Assessment of generic solar thermal systems for  
large power applications: Analysis of electric  
power generating costs for systems larger than  
10 MWe, volume 1  
[PNL-3533-VOL-1] p0283 A81-21605
- PATNA, G. G.  
Electrical energy storage via high efficiency-cost  
effective hydrogen/halogen regenerative fuel  
cell systems  
p0375 A81-29266
- PAULSON, L. E.  
Observations on test stockpiles of dried lignite  
and subbituminous coals  
[DOE/GPFTC/RI-80/5] p0321 A81-21217
- PAUNWELS, H. J.  
Theoretical advantages of pn<sup>+</sup>/p-type Cu<sub>2</sub>S-ZnO  
solar cell  
p0346 A81-28395



- PEARSON, G. F.  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586
- PEARSON, J. T.  
Parametric analysis of louvered air-heating solar collectors  
[ASME PAPER 80-WA/SOL-38] p0214 A81-21158
- PEARSON, K. S.  
Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site  
[LBL-11978] p0270 N81-18572
- PEASLEE, A. T.  
Possible application of electromagnetic guns to impact fusion  
[LA-UR-80-3137] p0353 N81-17910
- PECK, S. D.  
A superconducting magnet for Stanford University  
p0334 A81-23441
- PEDERSON, B. O.  
Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications  
p0344 A81-26853
- PEDREYRA, D.  
Evaluation of solar collectors for heat pump applications  
[DOE/CS-35351/T1] p0278 N81-20568
- PELLEGRIN, M. L.  
High temperature solar thermal technology  
[ASME PAPER 80-WA/SOL-20] p0213 A81-21144
- PELCEANSKI, W.  
Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854
- PELL, H.  
Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies  
[FE-1743-80-VOL-1] p0316 N81-19335
- PELLICANE, J. P.  
Development of amorphous silicon cells  
p0249 A81-27262
- PELLICORI, S. P.  
Wide band wide angle reflection-reducing coatings for silicon cells  
p0221 A81-24807
- PENSLER, J. P.  
Survey of electrochemical production of inorganic compounds  
[ANL/OEPH-80-3] p0318 N81-20226
- PENDEGRASS, J. E.  
Fusion reactors as high-temperature process heat sources  
p0341 A81-25105
- Realistic assessment of direct radiolysis for synthetic fuels production using fusion radiation sources  
p0297 A81-25108
- PENG, C.  
Classification of bituminous coals - Application of the technique of optimal sections in coal classification  
p0293 A81-19847
- PENG, C. S. F.  
Analysis and design of hybrid double-absorption cooling systems for low grade thermal energy applications  
[ASME PAPER 80-WA/HT-44] p0211 A81-21113
- PENNEL, W. T.  
Meteorological aspects of wind energy - Assessing the resource and selecting the sites  
p0295 A81-23690
- PERARD, J.  
Identification of a solar pumping installation  
p0218 A81-23012
- PEREES, E.  
A solar heating plant in Studvik: Design and first year operational performance  
[PB81-114480] p0275 N81-19640
- PERKINS, R. A.  
The performance of MCrAl alloys in complex coal conversion atmospheres  
p0302 A81-26492
- Electrode materials for coal-fired MHD generators  
[EPRI-AP-1562] p0355 N81-18536
- PERKINS, R. B.  
Inertial fusion program  
[LA-7755-PB] p0360 N81-20901
- PERLADO, D. J. P.  
Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain  
[EB1-10119] p0323 N81-21423
- PEROTIN, M.  
Cu<sub>2</sub>S-CdS sprayed solar cells  
p0241 A81-27181
- PERRY, R. T.  
The fusion fission hybrid - Roles in the energy economy  
p0341 A81-25103
- PESKOVSKII, I. D.  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content  
p0302 A81-26895
- PETERKA, J. A.  
The aerodynamics of heliostats for solar power plant applications  
p0253 A81-27310
- PETERS, J. E.  
AGT-1500 combustor and fuel effects modeling  
[AD-A092255] p0350 N81-16061
- PETERSEN, R. C.  
Nickel contacts for low cost solar cells  
p0245 A81-27223
- PETERSEN, S. E.  
A reference building approach to building energy performance standards for single-family residences  
[PB81-135642] p0201 N81-20318
- PETERSON, J. E.  
Wind generator network methodology and analysis  
p0359 N61-20356
- PETERSON, R. E.  
Gas turbine materials evaluation program utilizing coal derived gaseous fuel  
[ASME PAPER 81-GT-65] p0348 A81-29975
- PETERSON, T. E.  
Cu/x/S growth kinetics and composition analysis by absorbance transient and galvanic electrochemical measurements  
p0241 A81-27184
- PETIT, E.  
HS silicon grating solar cells on BSP substrates  
p0252 A81-27293
- PETRAKIS, I.  
Formation and behaviour of coal free radicals in pyrolysis and liquefaction conditions  
p0294 A81-23495
- PETRICK, E.  
Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations  
p0327 A81-19810
- PETRIE, T.  
U-25B MHD generator performance  
[AIAA PAPER 81-0032] p0328 A81-20552
- PHATAK, S. E.  
Recent progress in the development of the cascade solar cell  
p0235 A81-27118
- Research on high efficiency cascade solar cells  
[SERI/PR-8136-1-T1] p0258 N81-16595
- PHILLIPS, J. E.  
Current-voltage analysis of the Cu<sub>2</sub>S/CdS solar cell with an interdigitated grid  
p0242 A81-27185
- Thin-film CdS/Cu<sub>2</sub>S cells with high open-circuit voltage and low reflection losses  
p0253 A81-27299
- PHILLIPS, P.  
Solar image characteristics of concentrators  
p0223 A81-24986
- PHUNG, D. L.  
Cost-energy dynamics: An engineering-economic basis for industrial energy conservation policies  
[ORAU/IEA-80-12(H)] p0193 N81-17583
- PHUOC, N.-T.  
Transport properties in 100 mm C2 silicon  
p0234 A81-27115
- PIAN, C. C. F.  
Preliminary results of analytical modeling of subsonic MHD diffusers  
[AIAA PAPER 81-0177] p0329 A81-20652

- Performance of MHD generators with electrode current control  
[AIAA PAPER 81-0249] p0330 A81-20699
- Performance calculations for 1000 MWe MHD/steam power plants  
[NASA-TN-81667] p0351 N81-16570
- PICKERING, K. E.  
Wind energy resource atlas. Volume 4: The Northeast region  
[PNL-3195-WERA-4] p0321 N81-20592
- PICOLOGLIOU, B. P.  
U-25B MHD generator performance  
[AIAA PAPER 81-0032] p0328 A81-20552
- PICON, D. J. L.  
Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain  
[881-10119] p0323 N81-21423
- PIDATELLA, S.  
Cells and modules for linear P.V. concentrator systems with forced cooling  
p0242 A81-27186
- Parabolic troughs concentrators photovoltaic module  
p0242 A81-27188
- PIERSON, E. S.  
Two-phase liquid-metal MHD generator experiments and pressure-gradient correlations  
p0327 A81-19810
- PILATTE, A.  
Meteorological data: Treatment of radiation data, test reference year  
p0266 N81-18502
- PILLSBURY, P. W.  
Gas turbine combustor performance on synthetic fuels, volume 1  
[EPRI-AP-1623-VOL-1] p0356 N81-19259
- PILLSBURY, R. D.  
Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications  
p0344 A81-26853
- PILLSBURY, R. D., JR.  
The design of a tapered bore superconducting MHD magnet system  
p0334 A81-23442
- PIOLINE, D.  
A solar biotechnology based on microalgae  
p0218 A81-23015
- PLANT, R. L.  
Energy analysis of four geothermal technologies  
p0185 A81-19848
- Energy analysis of four geothermal technologies  
p0346 A81-29031
- PLEATSIKAS, C. J.  
An analysis of macroeconomic effects of increased market penetration by solar energy technologies  
p0229 A81-25060
- PODSOSOVA, L. L.  
Elements of the geological structure of the western Siberian plate on the basis of the interpretation of small-scale space images, with reference to the evaluation of petroleum and natural-gas content  
p0302 A81-26895
- POGANY, A.  
Variation of diffusion length of ribbon-Si solar cells with light intensity  
p0236 A81-27131
- POGOBYTSKII, P. P.  
Electrochemical semiconductor solar energy converters  
p0215 A81-21674
- POLLARD, R.  
Mathematical modeling of the lithium-aluminum, iron sulfide battery. I - Galvanostatic discharge behavior. II - The influence of relaxation time on the charging characteristics  
p0374 A81-25837
- POLLOCK, R.  
Hulco Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980  
[SOLAR/1043-80/14] p0281 N81-21553
- POLLOCK, G.  
Evaluation and optimization of silicon sheet solar cells  
p0234 A81-27114
- POLOVINO, R. E.  
Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data  
[CONF-8010106-3] p0305 N81-16315
- Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data  
[ORNL/TN-7525] p0316 N81-19332
- POMEROY, B. D.  
High-flux solar absorber concept for central receiver power plants  
p0253 A81-27557
- PONS, R. L.  
A dish-Stirling solar-thermal power system  
p0217 A81-22697
- POPE, M. D.  
Photovoltaic applications - Past and future  
p0246 A81-27231
- POPOV, L. B.  
Solar electric propulsion systems - A survey  
p0211 A81-20910
- POSOLSKI, W. F.  
Sampling and instrumentation for fluidized-bed combustion  
[ANL/CBN/PB-80-2] p0305 N81-16317
- POST, R.  
Interim performance criteria for photovoltaic energy systems  
[SERI/TR-742-654] p0282 N81-21577
- POST, R. W.  
Low cost structures for photovoltaic arrays  
p0248 A81-27248
- POTTEE, J. M.  
Effect of load spectrum variables on fatigue crack initiation and propagation; Proceedings of the Symposium, San Francisco, Calif., May 21, 1979  
p0381 A81-21730
- POULIN, R.  
Development of an automatic heliostat cleaning system  
[SAND-79-8184] p0268 N81-18532
- POWELL, J. R.  
Advanced synfuels production/power systems utilizing laser particulate control  
p0299 A81-25127
- Fusion reactors for hydrogen production via electrolysis  
p0287 A81-25139
- HYPIRE: A Tokamak high temperature electrolysis system  
[BNL-28679] p0352 N81-16908
- POWELL, W. E.  
An analytical expression for the average output power of a wind machine  
p0337 A81-24433
- POWER, W. E.  
Investigation of swirling flow mixing for application in an MHD pulverized coal combustor using isothermal modeling  
[DCE/ET-10815/39] p0356 N81-19266
- PRACCHIA, J. A.  
Transparent heat mirrors - Influence of the materials on the optical characteristics  
p0215 A81-21939
- PRATT, D. T.  
Coalescence/dispersion modeling of gas turbine combustors  
p0344 A81-26018
- PRICE, W. G., JR.  
Advanced Cogeneration Technology Economic Optimization Study (ACTEOS)  
[NASA-CR-163887] p0306 N81-16573
- PRITCHARD, D. A.  
Qualification testing of photovoltaic concentrator modules for system application experiments  
p0251 A81-27280
- PROBERT, P. R.  
Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant  
[AIAA PAPER 81-0110] p0328 A81-20602
- PROKOPIUS, P. R.  
Status of commercial phosphoric acid fuel cell system development  
[AIAA PAPER 81-0396] p0330 A81-20805

**PRYOR, R. A.**

- Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing  
p0238 A81-27156
- A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings  
p0243 A81-27194
- A base-metal conductor system for silicon solar cells  
p0243 A81-27196
- Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing  
p0244 A81-27200

**PSCHUNDEB, W.**

- Experimental study to define developments for terrestrial solar cell generators  
[BMPT-PB-T-79-143]  
p0279 A81-20600

**PURSCHEL, R. F.**

- Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra  
p0188 A81-28478

**PURCHARD, W. F. B.**

- The design of a tapered bore superconducting MHD magnet system  
p0334 A81-23442

**PURCELL, J.**

- Design of the BPA superconducting 30 MJ energy storage coil  
p0371 A81-23450

**PUTT, R. A.**

- Development of zinc-bromine batteries for utility energy storage  
[DOE/ET-29345/21]  
p0379 A81-20591

**PURBDDU, R.**

- Hydrothermal metamorphism in the Larderello geothermal field  
p0296 A81-24306

**PYE, R. E.**

- Utilization of biomass in the U.S. for the production of ethanol fuel as a gasoline replacement. I - Terrestrial resource potential. II - Energy requirements, with emphasis on lignocellulosic conversion  
p0296 A81-24427

**PYRON, A. J.**

- Heat-flow measurements in the state of Arkansas [LA-8569-MS]  
p0324 A81-21573

**PYTILINSKI, J. T.**

- Solar water heating demonstration program for public schools in New Mexico  
p0225 A81-25013
- Method of on site testing for performance rating of solar water heating systems  
p0225 A81-25014
- Preliminary evaluation of overall thermal performance of solar water heating systems using air and liquid flat-plate collectors  
p0225 A81-25015
- Solar installation for process steam generation for a refinery  
p0227 A81-25038
- Solar standards and testing activities in developed and developing countries  
p0229 A81-25096

**Q**

**QUADE, R. B.**

- Production of liquid fuels with a high-temperature gas-cooled reactor  
p0298 A81-25120

**QUINCY, L. A.**

- Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3  
p0293 A81-22278

**QUIGLEY, J. V.**

- The design and analysis of a vertical axis ocean current power plant  
p0339 A81-25081

**QUIJANO, I. R.**

- Power conditioning and control requirements of coal fired MHD generators  
[AIAA PAPER 81-0246]  
p0330 A81-20696

**QUINTANA, R. A.**

- Pump heat loss test report [SAND-80-2526]  
p0273 A81-19614

**QUINTERO, J. R.**

- Self-magnetically insulated ion diode  
p0344 A81-26552
- Anode plasma behavior in a magnetically insulated ion diode  
p0344 A81-26571

**R**

**RABE, J. A.**

- Satellite Power System (SPS) utility integration: Institutional, planning and operational issues [EAC-R-4015]  
p0279 A81-20596

**RABINOWITZ, J.**

- Energy/economic model analysis. Time-stepped energy system optimization model [PB81-114241]  
p0194 A81-17615

**RABY, A.**

- Optical analysis of point focus parabolic radiation concentrators  
p0219 A81-24332
- Yearly average performance of the principal solar collector tapes [SERI/TR-631-716]  
p0282 A81-21579

**RAGHEB, M. M. H.**

- Neutronics shielding analysis of the last mirror-beam duct system for a laser fusion power reactor  
p0336 A81-23714

**RACHURAMAN, P.**

- Analytical predictions of liquid and air photovoltaic/thermal flat-plate collector performance [ASME PAPER 80-WA/SOL-3]  
p0212 A81-21131
- A comparison of theory and experiment for photovoltaic/thermal collector performance  
p0250 A81-27276

**RAHILLY, W. P.**

- DLTS spectra and defect effects on irradiated silicon solar cells  
p0244 A81-27203
- Results of the Air Force high efficiency cascaded multiple bandgap solar cell programs  
p0261 A81-17548

**RAHMAN, M. M.**

- Statistical model fitting of remote induction sounding data from underground coal gasification site - Hanna II, phases 2 and 3  
p0293 A81-22278

**RAI-CHOUDHURY, P.**

- Solar cells and modules from dentritic web silicon  
p0234 A81-27117
- POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells  
p0245 A81-27216

**RAIJI, A. M.**

- Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant [DOE/CS-56604/T1]  
p0355 A81-18546

**RAJ, R.**

- Transpiration air cooled turbine blade - A technology for future generation aircraft and industrial gas turbine engines using coal or coal derived fuels  
p0347 A81-29115

**RAJESHWAR, K.**

- Surface charge and specific ion adsorption effects in photoelectrochemical devices  
p0215 A81-22148

**RAJESWARAN, G.**

- Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency  
p0221 A81-24803

**RAJKAHAN, K.**

- Loss mechanism analysis in single-crystal and polycrystalline silicon MIS solar cells to produce 13% efficiency  
p0221 A81-24803

- Development trends for the mass production of low cost conductor-insulator-semiconductor (CIS) solar cells  
p0228 A81-25051

- Design considerations for high efficiency polycrystalline silicon MIS solar cells  
p0236 A81-27127

# PERSONAL AUTHOR INDEX

REMPROE, D. A.

- An outlook for automated CIS solar cell factory  
p0246 A81-27228
- Review of conductor-insulator-semiconductor /CIS/  
solar cells  
p0254 A81-28954
- RAIDON, W.  
The absorption process for heating, cooling and  
energy storage - An historical survey  
p0381 A81-23496
- RASBY, H. J., JR.  
Geothermal reservoir engineering computer code  
comparison and validation using the GEONZ  
simulator program  
[DOE/SF-11450/1]  
p0314 A81-18478
- RASHAW, R.  
High temperature storage for a wind energy system  
p0372 A81-25002
- RASHBARK, S.-E.  
Central solar heating plants - Optimal ratio  
between solar collector area and heat storage  
volume  
p0256 A81-29262
- RAND, R. B.  
Study of fuel cell on-site, integrated energy  
systems in residential/commercial applications  
[NASA-CR-165144]  
p0361 A81-21533
- RANDALL, C.  
Design and development of Stirling engines for  
stationary power generation applications in the  
500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1]  
p0363 A81-21581
- RANDOLPH, L. P.  
NASA's high efficiency and radiation damage solar  
cell program  
p0260 A81-17532
- RANDOLPH, P. L.  
Assessment of methane hydrates  
[PB81-113300]  
p0307 A81-17510
- RANI, U.  
Optimization of fin and tube parameters in a  
flat-plate collector  
p0209 A81-19849
- Optimization of fin and tube parameters in a  
flat-plate collector  
p0255 A81-29032
- RAO, B. H.  
Alcohols as auxiliary fuels for diesel engines  
p0299 A81-25122
- RAO, K. V.  
The development of biogas technology in India  
p0298 A81-25117
- RAO, V. R.  
Design and breadboard evaluation of the SPS  
reference phase control system concept  
p0366 A81-16543
- RAPTIS, A. C.  
Monitoring temperatures in coal conversion and  
combustion processes via ultrasound  
[ANL-FE-49622-TH09]  
p0325 A81-21875
- RASCH, K.-D.  
Compatibility of BSR and BSP solar cell technology  
p0232 A81-27093
- Growth structure of cast silicon and related  
photovoltaic properties of solar cells  
p0245 A81-27214
- RASHUSSEN, H. E.  
The energy balance associated with the use of a  
maximum power tracer in a 100-kW-peak power system  
p0238 A81-27152
- RATH-NAGEL, S.  
Oil substitution and energy saving - A research  
and development strategy of the International  
Energy Agency /IEA/  
p0188 A81-29195
- RATHJEN, S.  
SPS large array simulation  
p0365 A81-16537
- RAUH, R. D.  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7]  
p0379 A81-21586
- RAUSCHENBACH, R.  
Design requirements for high-efficiency high  
concentration ratio space solar cells  
p0263 A81-17575
- RAVIPRASAD, A.  
The development of biogas technology in India  
p0298 A81-25117
- RAYMONT, H. E. D.  
Hydrogen from fuel desulfurization  
p0286 A81-24023
- REALE, C. B.  
The Niagara Falls resource recovery system  
p0301 A81-25557
- REALI, M.  
Submarine hydro-electro-osmotic power plants for  
an efficient exploitation of salinity gradients  
p0337 A81-24447
- RECHTSCHAFFEN, E.  
Future of alcohol fuels programs in Brasil  
p0299 A81-25121
- REDDILL, D. L.  
Storage of cold water in aquifers  
p0375 A81-29257
- Heat transport in groundwater systems. Volume 2:  
Laboratory model  
[PB81-104135]  
p0375 A81-16523
- REDFIELD, D.  
Method for evaluation of antireflection coatings  
p0221 A81-24804
- REED, C. B.  
The effect of secondary combustion on nitric oxide  
concentrations in a HHD combustion gas  
[AIAA PAPER 81-0102]  
p0328 A81-20604
- REED, C. L.  
Hydrogen production from partial oxidation of  
residual fuel oil  
p0285 A81-24015
- REED, D. B.  
Heat transport in groundwater systems. Volume 2:  
Laboratory model  
[PB81-104135]  
p0375 A81-16523
- REED, T. B.  
Combustion, pyrolysis, gasification, and  
liquefaction of biomass  
[SERI/TR-622-893]  
p0307 A81-17601
- REEDER, F. S.  
Environmental analysis of geopressured-geothermal  
prospect areas, DeWitt and Colorado counties,  
Texas  
[DOE/ET-27127/1]  
p0207 A81-21646
- REEP, D. B.  
Grain boundary edge passivated solar cells on thin  
film GaAs  
p0251 A81-27284
- REGUNBERG, J.  
Prospects for developing an efficient  
photoemissive solar cell  
p0228 A81-25049
- REICHMAN, J.  
Collection efficiency of low-mobility solar cells  
p0230 A81-27010
- REINHARD, D. K.  
CO-sputtered doped amorphous silicon as a  
photovoltaic material  
p0249 A81-27264
- REINHARDT, C. L.  
Passive solar energy information user study  
[SERI/TR-751-746]  
p0273 A81-19607
- Photovoltaics information user study  
[SERI/TR-751-652]  
p0278 A81-20570
- Wind energy systems information user study  
[SERI/TR-751-749]  
p0363 A81-21578
- REINHARDT, R.  
Performance comparison of flat plate collector  
absorber coatings utilizing NBS Standard 74-635  
and the ASHRAE Collector Performance Method  
p0222 A81-24981
- REITER, F.  
Physical and chemical processes for latent heat  
storage at low temperatures  
p0372 A81-24995
- REHINI, W. C.  
Radioisotope powered light sources  
[CONF-801157-1]  
p0351 A81-16597
- REHONDING, E.  
Light aircraft engines, the potential and problems  
for use of automotive fuels. Phase 1:  
Literature search  
[AD-A094154]  
p0308 A81-18057
- REMPROE, D. A.  
Technical and economic feasibility of a Thermal  
Gradient Utilization Cycle (TGUC) power plant  
[DOE/CS-56604/T1]  
p0355 A81-18546

- RENIER, J. P.  
Concept evaluation of nuclear fusion driven  
symbiotic energy systems  
p0341 A81-25102
- REPETTO, A.  
Cells and modules for linear P.V. concentrator  
systems with forced cooling  
p0242 A81-27186  
Parabolic troughs concentrators photovoltaic module  
p0242 A81-27188
- REYALICK, P. D.  
Disk MHD generator study  
[NASA-CR-159872]  
p0354 A81-18491
- REUTER, R. C., JR.  
Torque ripple in a Darrieus, vertical axis wind  
turbine  
[ASME PAPER 80-WA/SOL-13]  
p0331 A81-21138
- REYNOLDS, G. E.  
Management assistance for the development of  
hydrothermal energy in the Rocky Mountain/basin  
and range region  
[DOE/ET-28392/T2]  
p0315 A81-18547
- REZACHEK, D.  
Coupling Ocean Thermal Energy Conversion  
technology /CTEC/ with nuclear power plants  
p0340 A81-25087
- RHEE, S. J.  
Effect of wall suction on laminar entrance flow  
with application to solar air heaters  
p0265 A81-18488
- RHOADES, M. L.  
Statistical model fitting of remote induction  
sounding data from underground coal gasification  
site - Hanna II, phases 2 and 3  
p0293 A81-22278
- RHYNE, C. W.  
Methane production from the Mountain View landfill  
p0300 A81-25553
- RIBE, F. L.  
Possible application of electromagnetic guns to  
inert fusion  
[LA-UR-80-3137]  
p0353 A81-17910
- RICE, C. E.  
Design optimization of conventional heat pumps:  
Application to steady state heating efficiency  
[CONF-810101-5]  
p0200 A81-19599
- RICE, L. G.  
Comparison of the HTT reheat-gas-turbine combined  
cycle with the HTT nonreheat gas-turbine  
combined cycle  
[ASME PAPER 81-GT-69]  
p0348 A81-29978
- RICE, J. S.  
An interferometer-based phase control system  
p0366 A81-16545  
A sonic satellite power system microwave power  
transmission simulation  
p0366 A81-16546  
A theoretical study of microwave beam absorption  
by a rectenna  
[NASA-CR-160921]  
p0369 A81-20328
- RICH, J.  
A market research effort leading to the  
development of a high efficiency 10,000 shp gas  
turbine system  
[ASME PAPER 81-GT-190]  
p0349 A81-30083
- RICHARD, C. C.  
The design and analysis of a vertical axis ocean  
current power plant  
p0339 A81-25081
- RICHARDSON, D. B.  
The Indian Lands Study: An example of the  
application of geographic research to the  
analysis of complex energy and environmental  
policy issues  
p0189 A81-16510
- RICHMAN, B.  
Epitaxial solar cells on metallurgical grade  
silicon substrates  
p0231 A81-27085
- RICHMOND, C. E.  
Life Sciences Synthetic Fuels program at Oak Ridge  
National Lab.  
[CONF-801039-3]  
p0192 A81-17285
- RICHMOND, J. E.  
Statistical model fitting of remote induction  
sounding data from underground coal gasification  
site - Hanna II, phases 2 and 3  
p0293 A81-22278
- RICKLES, E. E.  
Environmental impact assessment guidelines for new  
source coal gasification facilities  
[PB81-114555]  
p0195 A81-17635
- RICKUS, E.  
The CdSe thin-film solar cell  
p0240 A81-27168
- RIDDLE, W. E.  
Development of sweet sorghum as an energy crop.  
Volume 3: Integration concepts  
[BHI-2054-VOL-3]  
p0316 A81-19334
- RIECKER, R. E.  
Basic research needed for the development of  
geothermal energy  
[LA-8562-MS]  
p0320 A81-20580
- RIEDL, F. J.  
Upgrading of coal liquids: Upgrading distillates  
from coal liquefaction  
[FE-2566-42]  
p0310 A81-18226
- RILEY, T. J.  
Commercial (terrestrial) and modified solar array  
design studies for low cost, low power space  
applications  
[NASA-TN-81622]  
p0259 A81-17266
- RITTER, E. S.  
Dependence of efficiency of shallow junction  
silicon solar cells on substrate doping  
p0254 A81-28216
- RIVERO, L. U.  
The utilization of geothermal energy in the  
Philippines  
p0340 A81-25095
- ROACH, F.  
Residential passive solar systems - Regional  
sensitivity to system performance costs, and  
alternative prices  
p0187 A81-25061
- ROAN, V. P.  
A new concept in horizontal axis wind turbine rotors  
p0338 A81-25071
- ROBBINS, W. E.  
Large wind-turbine projects in the United States  
wind energy program  
p0335 A81-23694
- ROBERTS, A. S., JR.  
Analysis of two-phase flow solar collectors with  
application to heat pumps  
[ASME PAPER 80-WA/SOL-32]  
p0214 A81-21153
- ROBERTS, J. E.  
High-flux solar absorber concept for central  
receiver power plants  
p0253 A81-27557
- ROBERTSON, C. S.  
A conceptual design study of a high temperature  
solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944]  
p0259 A81-17523
- ROBERTSON, R. S.  
A figure of merit for solar collectors with  
several separate absorber segments  
p0222 A81-24980
- ROBERTUS, R. J.  
Investigations on catalyzed steam gasification of  
biomass. Appendix B: Feasibility study of  
methanol production via catalytic gasification  
of 2000 tons of wood per day  
[PBL-3695-APP-B]  
p0324 A81-21604
- ROBINSON, E.  
Use of the ATOP system in the control of an  
off-peak storage device  
p0371 A81-20491
- ROBINSON, P. E.  
Epitaxial solar cells on metallurgical grade  
silicon substrates  
p0231 A81-27085
- ROBINSON, P. E.  
Thermochemical water-splitting cycles based upon  
reactions of cerium- and alkaline earth phosphates  
p0287 A81-25143
- ROBINSON, S. L.  
Fixed site hydrogen storage. I - Applications impact  
p0289 A81-25159  
Fixed site hydrogen storage. II - Comparison of  
technologies and economics  
p0289 A81-25160
- ROBINSON, R.  
Solar-powered saline sorbent-solution heat  
pump/storage system  
p0224 A81-25001

- ROBSON, F. L.**  
Applications study of advanced power generation systems utilizing coal-derived fuels. Volume 1: Executive summary [NASA-CR-161691] p0362 N81-21538  
Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2 [NASA-CR-161692] p0362 N81-21539
- ROCHELLEAU, R. E.**  
A low-cost manufacturing process for thin-film solar cells p0235 A81-27121
- ROCHER, A.**  
Physical and chemical characterization of R.A.D. silicon films p0249 A81-27260
- ROCKEY, D. E.**  
Concentrator designs for space photovoltaic arrays p0250 A81-27271
- ROD, R. L.**  
Thin film polycrystalline solar cells prepared by electrodeposition p0237 A81-27142  
Emerging materials for solar cell applications: Electrodeposited CdTe [SERI/PR-9152-1-11] p0269 N81-18555
- RODRIGUES, J. L.**  
Design, fabrication, and performance of a 20 percent efficient silicon solar cell [SAND-80-2225] p0258 N81-16592
- ROESLER, R.**  
Calculations of the anomalies of the vertical temperature gradient using the horizontal temperature distribution p0293 A81-22207
- ROESSLER, W. U.**  
Operational energy conservation strategies in commercial aviation p0185 A81-20465
- ROETTENBACHER, R.**  
High temperature water vapor electrolysis (HOT ELIY) [BMFT-FB-T-80-051] p0292 N81-21627
- ROGERS, C. B.**  
Minimizing end shadowing effects on parabolic concentrator arrays p0242 A81-27191  
PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements p0250 A81-27275
- ROHATGI, A.**  
The properties of polycrystalline silicon solar cells with controlled titanium additions p0209 A81-20010  
Solar cells and modules from dendritic web silicon p0234 A81-27117  
Theoretical design considerations for back surface field solar cells p0239 A81-27160  
POCl<sub>3</sub> gettering of titanium, molybdenum and iron-contaminated silicon solar cells p0245 A81-27216
- ROILAND, M.**  
Convection in side-by-side open and closed vertical rectangular channels in thermal interaction with the ambient medium p0215 A81-21584
- ROHRO, E.**  
Diffusion length measurements in CdS and CdSe Schottky barrier junctions p0209 A81-19698
- ROHNEY, E.**  
The 10 kilowatt photovoltaic concentrator system as installed at Sandia Laboratories, 1979 [SAND-80-7063] p0283 N81-21601
- ROHRES, C.**  
Optimal and suboptimal control policies for a solar collector system p0211 A81-21029
- ROSE, A. B.**  
End use energy consumption data base: Transportation sector [PB81-112203] p0194 N81-17610
- ROSE, R. J.**  
An update in the 'development of alternate liquid fuels' p0299 A81-25125
- ROSEEN, R.**  
A solar heating plant in Studsvik: Design and first year operational performance [PB81-114480] p0275 N81-19640
- ROSEMARY, J. K.**  
Coal Hydrogasification process development. volume 2: peat studies [FE-3125-24-VOL-2] p0312 N81-18239
- ROSENBUSCH, J. M.**  
Performance of active solar domestic hot water heating systems [SOLAR/0024-80/41] p0281 N81-21556
- ROSENHOEVER, W. A.**  
Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies [FE-1743-80-VOL-1] p0316 N81-19335
- ROSENTHAL, J.**  
Flash photolysis studies of the semiconductor/electrolyte interface p0265 N81-18114
- ROSENER, D.**  
Photosynthetic bacteria as alternative energy sources Overview on hydrogen production research p0288 A81-25152
- ROSS, B.**  
Screenable silver and base metal solar cell contacts p0243 A81-27195
- ROSS, R.**  
Interim performance criteria for photovoltaic energy systems [SERI/TR-742-654] p0282 N81-21577
- ROSS, R. G., JR.**  
Flat-plate photovoltaic array design optimization p0248 A81-27247  
Influence of module requirements on flat plate module design evolution p0251 A81-27279
- ROSSELLI, P.**  
Construction of a probe for measuring temperature and pressure in deep wells p0296 A81-24304
- ROSSI, A. J.**  
Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood [PB81-134777] p0323 N81-21234
- ROSSI, S. M.**  
Comparison of liquid solar thermal storage subsystems in the national solar data network [ASME PAPER 80-WA/SOL-36] p0214 A81-21156
- ROSSO, R. J., JR.**  
Bulk hydrogen storage using metal hydrides p0289 A81-25154  
Heat transfer enhancement in metal hydride systems p0289 A81-25156
- ROTE, D. M.**  
An assessment of the atmospheric effects of a Satellite Power System p0187 A81-25053  
Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects [DOE/ER-0090] p0203 N81-20598
- ROTHLEIN, B.**  
Max Planck Institute for Plasma Physics [IA-TR-80-25] p0364 N81-21919
- ROTHWART, A.**  
The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells p0209 A81-20007  
Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells p0241 A81-27183
- ROUMENGOU, C.**  
Description and thermal performance of corrugated solar collectors p0266 N81-18504
- ROWELL, D.**  
Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit [EPRI-CS-1444-VOL-4] p0351 N81-16602
- ROY, G. D.**  
On heat balance in coal-fired MHD systems, channel heat transfer and electrode temperature distribution [ASME PAPER 80-WA/HT-11] p0331 A81-21105

- ROY, K.**  
Compatibility of BSR and BSF solar cell technology  
p0232 A81-27093  
Growth structure of cast silicon and related  
photovoltaic properties of solar cells  
p0245 A81-27214
- ROY, R.**  
Comparison of commercial and do-it-yourself solar  
collectors  
p0219 A81-23704
- ROY, R. P.**  
Heat-flow measurements in the state of Arkansas  
[LA-8569-HS] p0324 A81-21573
- RUBBERTO, R. G.**  
Investigation of mechanism of hydrogen transfer in  
coal hydrogenation  
[DOE/PC-30080/T2] p0305 A81-16318  
Investigation of mechanism of hydrogen transfer in  
coal hydrogenation  
[DOE/PC-30080/T1] p0315 A81-19258  
Investigation of the liquefaction of partially  
dried and oxidized coals  
[EPRI-AP-1625] p0321 A81-21222
- RUBIN, C. B.**  
Community energy auditing: Experience with the  
comprehensive community energy management program  
[ANL/CHSV/TM-43] p0193 A81-17588
- RUCKENSTEIN, R.**  
Catalytic combustion of synthetic fuels  
[DOE/PC-30220/T1] p0321 A81-21154
- RUDZKI, J. E.**  
The Solar-Meteorological Research Program for the  
South-Central U.S.  
[ASME PAPER 80-WA/SOL-24] p0213 A81-21148
- RUEGG, R. T.**  
Life-cycle cost manual for the Federal Energy  
Management Program  
[PB81-136269] p0200 A81-19641
- RUEYSCH, P.**  
Flat-plate tubular TP lead-acid traction battery  
for electric vehicles  
p0373 A81-25603
- RUGG, B.**  
The Lebest Wind Turbine experimental program  
[PB81-141467] p0364 A81-21634
- RUPPE, R. O.**  
The boundless dimension - Space flight. Volume 1 -  
Prospects and problems  
p0383 A81-29688
- RUSH, W. F., JR.**  
High-temperature high-pressure particulate removal  
in coal gasification  
[PB81-113664] p0308 A81-17642
- RUSSELL, L. D.**  
Modeling and analysis of an all-fiberglass flat  
plate solar collector  
[ASME PAPER 80-WA/SOL-4] p0212 A81-21132  
Development of a system for off-peak electrical  
energy use by air conditioners and heat pumps  
[TVA-EDT-122] p0377 A81-18509
- RUSSELL, L. J.**  
The flow field about a vertical axis wind turbine  
p0338 A81-25069
- RUSSELL, P. L.**  
Evaluation of concepts for controlling exhaust  
emissions from minimally processed petroleum and  
synthetic fuels  
[ASME PAPER 81-GT-157] p0188 A81-30056
- RUSSELL, T. W. F.**  
A low-cost manufacturing process for thin-film  
solar cells  
p0235 A81-27121
- RUSSETT, B.**  
US solar energy policy for less developed countries  
[DOE/CS-10048/T1] p0194 A81-17598
- RUSSO, G.**  
Solar input and solar data computation for the  
engineering of solar systems - Transients'  
simulation  
p0250 A81-27274
- RUTH, R. P.**  
Stacked multiple-bandgap solar cells prepared by  
CVD techniques  
p0253 A81-27297  
Chemical vapor deposition of thin-film  
polycrystalline Si for low cost solar cells  
[SAM-3045-3] p0275 A81-19634
- RUTLEDGE, G.**  
Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 1: Beluga coal district  
analysis  
[DOE/EV-73002/1-VOL-1] p0205 A81-21595  
Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 2: Hydroelectric  
development  
[DOE/EV-73002/1-VOL-2] p0205 A81-21596  
Alaska Regional Energy Resources Planning Project.  
Phase 2: Coal, hydroelectric and energy  
alternatives. Volume 3: Alaska's alternative  
energies and regional assessment inventory update  
[DOE/EV-73002/1-VOL-3] p0205 A81-21597
- RYAN, L. D.**  
Considerations in the design of solar engines  
p0276 A81-20536
- RYAN, T. W.**  
Hybrid fuels for highway transportation  
[DOE/CS-54240/T1] p0313 A81-18242
- RYASON, P. R.**  
Cu/x/S growth kinetics and composition analysis by  
absorbance transient and galvanic  
electrochemical measurements  
p0241 A81-27184
- RYLEY, D. J.**  
The mass discharge of a geofluid from a geothermal  
reservoir - Well system with flashing flow in  
the bore  
p0296 A81-24302

## S

- SAADI, L. H.**  
Theoretical and experimental investigation of a  
flat-plate solar collector performance with the  
use of a solar simulator  
p0223 A81-24983
- SACHS, R. M.**  
Progress in the growth of wide silicon ribbons by  
the EFG technique at high speed using multiple  
growth stations  
p0230 A81-27078
- SADDY, M.**  
Economics and concepts of industrial coal  
fluidized bed combustion in Brazil  
p0300 A81-25135
- SAGE, A. P.**  
Systems engineering - Fundamental limits and  
future prospects  
p0381 A81-22877
- SAH, C.-T.**  
Effect of zinc impurity on silicon solar-cell  
efficiency  
p0256 A81-29290
- SAH, R. L.-Y.**  
Effect of zinc impurity on silicon solar-cell  
efficiency  
p0256 A81-29290
- SAHA, B.**  
Advanced solar thermal storage medium test data  
and analysis  
p0224 A81-24994
- SAHIN, S.**  
Solar energy power generators with advanced  
thermionic converters for spacecraft applications  
p0228 A81-25058
- SAHN, P. R.**  
Behaviour of high temperature alloys in aggressive  
environments; Proceedings of the Petten  
International Conference, Petten, Netherlands,  
October 15-18, 1979  
p0382 A81-26476
- SAID, S. A. M.**  
Effects of dust on the performance of thermal and  
photovoltaic flat plate collectors in Saudi  
Arabia - Preliminary results  
p0223 A81-24985
- SAKAI, S.**  
Theoretical analysis of simplified four wavelength  
division solar cell system  
p0254 A81-28926
- SAKIOIS, M. G.**  
Design of metallization for higher-efficiency  
solar cells  
p0237 A81-27137

- SAKLONIS, M. G.  
Production of high efficiency silicon concentrator solar cells from state-of-the-art design and processing  
p0238 A81-27156
- SAKURAI, M.  
Characteristics of acidic electrolyte hydrogen-air fuel batteries (3)  
[UCRL-TRANS-11655]  
p0358 A81-19604
- SAKUTA, K.  
Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy  
p0227 A81-25039
- SALISBURY, J. D.  
Inductive energy transfer in transportation  
[UCRL-85141]  
p0368 A81-18962
- SALMON, R.  
Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664]  
p0322 A81-21223
- SALZANO, F. J.  
Hydrogen technology - An overview  
p0285 A81-24014
- SALZANO, G.  
A natural convection solar house system  
p0267 A81-18506
- SANMELLS, A. P.  
Electrochemical photovoltaic cells  
[SERI/PR-9175-1-T2]  
p0267 A81-18521  
Electrochemical photovoltaic cells  
[SERI/TR-8002-5-T1]  
p0272 A81-19582
- SAMPSON, W. J.  
A silicon sheet casting experiment  
p0231 A81-27082
- SANUEL, T. D. M. A.  
Optimum performance of thermal trap collectors  
p0220 A81-24432
- SANCHEZ, L. E.  
A silicon sheet casting experiment  
p0231 A81-27082
- SANDERS, P. S.  
Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TR-6783]  
p0198 A81-18578
- SANDERS, J. A.  
The 10-kilowatt photovoltaic concentrator array fabrication  
[SAND-80-7062]  
p0279 A81-20599
- SANDERSON, M. W.  
The effects of nonuniform illumination and temperature profiles on silicon solar cells under concentrated sunlight  
p0237 A81-27135
- SANDROCK, G. D.  
Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling  
p0286 A81-24021  
Development of solar-hydrogen systems using metal hydrides  
p0289 A81-25158
- SANGAL, S. K.  
Optimization of total annual energy output from constant/adjustable tilt solar PV arrays  
p0250 A81-27273
- SANGSTER, J.  
A cycle life tester for the long-term stability of phase change materials for thermal energy storage  
p0372 A81-24997
- SANKIRS, M.  
An evaluation of alternate energy sources for the Guyana energy crisis  
p0340 A81-25097
- SANSON, F.  
Optimized design of total energy systems: The BTE project  
[CISE-1606]  
p0196 A81-18512
- SANTANGELO, J. G.  
Hydrogen: Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979  
p0285 A81-24012
- SAPIENZA, R.  
Carbon monoxide: Resource of the future  
[BNL-28576]  
p0307 A81-17603
- SARDO, A.  
The photovoltaic-aeolian plant at Passo Mandrioli /Italy/  
p0218 A81-23013
- SARVER, G. L., III  
Solar power satellite system  
[NASA-CASE-RQN-10949-1]  
p0190 A81-16530
- SASAKI, Y.  
Hydrogen storage properties of  $\text{FeTi}_{1+x}$ /  
p0290 A81-25494
- SASSCER, D. S.  
A bottom fixed OFEC plant on the edge of a continental /or island/ shelf  
p0340 A81-25086
- SATKIEWICZ, P. G.  
Vacuum deposited polycrystalline silicon solar cells for terrestrial use  
p0236 A81-27128
- SAUCEDO, E.  
A 14 percent efficiency  $\text{SnO}_x/\text{-SiO}_2/\text{n-Si}$  solar cell  
p0252 A81-27294
- SAUNDERS, J. T.  
Hydrogen-methane separation processes and related phenomena  
[DOE/HETC-14386/106]  
p0321 A81-21153
- SAUNDERS, P. B.  
The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082]  
p0191 A81-16612
- SAUNIER, G. Y.  
A simplified non-linear model leading to full range valid calibration test of thermal solar collectors through simple experimental procedure  
p0217 A81-23009
- SAVELLI, M.  
 $\text{Cu}_{25}\text{-CdS}$  sprayed solar cells  
p0241 A81-27181
- SAWAI, H.  
High performance BSF silicon solar cell with fire through contacts printed on AB coating  
p0243 A81-27198
- SAWATA, S.  
Heat generation for multipurpose utilization systems by heat of dilution converted from solar energy  
p0227 A81-25039
- SAYENA, R.  
High efficiency compound semiconductor concentrator photovoltaics  
p0261 A81-17545  
OM-VPE grown materials for high efficiency solar cells  
p0262 A81-17552
- SAYIGH, A. A. M.  
Solar air conditioning in a hot arid climate  
p0226 A81-25027
- SAYLOR, C. E.  
Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells  
[NASA-CR-164012]  
p0271 A81-19568
- SCANTLAND, D. A.  
Development of sweet sorghum as an energy crop. Volume 3: Integration concepts  
[BMI-2054-VOL-3]  
p0316 A81-19334
- SCHADE, H. E.  
Amorphous thin films for solar-cell applications  
[SERI/PR-0-8254-F]  
p0283 A81-21591
- SCHAEFER, W.  
High temperature water vapor electrolysis (HCT ELLI)  
[BNFT-FB-T-80-051]  
p0292 A81-21627
- SCHARTZLE, W. J.  
Thermal energy storage in aquifers for a solar power plant  
p0224 A81-24992
- SCHAFER, C. T.  
Cost-performance comparison of water-steam receivers for solar central electric power plants  
[SAND-80-8245]  
p0273 A81-19615
- SCHAPPE, E.  
Interim performance criteria for photovoltaic energy systems  
[SERI/TR-742-654]  
p0282 A81-21577
- SCHAEHBACH, J. T.  
Wind energy resource atlas. Volume 4: The Northeast region  
[FNL-3195-WERA-4]  
p0321 A81-20592
- SCHALEGER, L.  
Albany biomass-to-oil project  
p0301 A81-25562



- SCHARNER, K.**  
Test stations for flat plate collectors in Iran,  
Brazil and India  
[BMFT-FB-T-79-94] p0264 N81-17609
- SCHARTZ, R. J.**  
Computer modeling of high-efficiency solar cells  
p0260 N81-17537
- SCHNEFFLER, R. L.**  
Wind energy - A utility perspective  
p0187 A81-26371
- SCHIEBER, L. M.**  
Performance enhancement of compound parabolic  
concentrators using air and a liquid  
simultaneously as heat transfer mediums  
p0255 A81-29254
- SCHIMMEL, A.**  
High efficiency ultrathin coplanar back contact  
cells  
p0232 A81-27092  
New developments in vertical junction silicon  
solar cells  
p0232 A81-27095  
Silicon solar cell optimization  
[AD-A092908] p0263 N81-17579  
Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495
- SCHIRMER, R.**  
Design of the BPA superconducting 30 MJ energy  
storage coil  
p0371 A81-23450
- SCHILLER, S. R.**  
Dynamic modeling and experimental simulation of  
active solar energy systems for the evaluation  
of control strategies  
[ASME PAPER 80-WA/SOL-14] p0213 A81-21139
- SCHILLING, R.**  
Compatibility of BSR and BSF solar cell technology  
p0232 A81-27093
- SCHINDWOLF, R.**  
Frequency response analysis of fluid control  
systems for parabolic-trough solar collectors  
[ASME PAPER 80-WA/SOL-15] p0213 A81-21140
- SCHLADITZ, H.**  
Electrodes and diaphragms for fuel cells  
[BMFT-FB-T-79-140] p0359 N81-19639
- SCHLAPBACH, L.**  
Surface segregation effects in Mg<sub>2</sub>Cu, Mg<sub>2</sub>Ni and  
Mg-Mg<sub>2</sub>Ni hydrogen storage compounds  
p0290 A81-25498
- SCHLINGER, W. G.**  
Coal gasification for hydrogen manufacturing  
p0286 A81-24018
- SCHMID, B. K.**  
The SRC-II process  
p0304 A81-28997
- SCHMID, F.**  
Low-cost conversion of polycrystalline silicon  
into sheet by HEM and FAST  
p0238 A81-27145
- SCHMIDBERGER, R.**  
High temperature water vapor electrolysis (HOT ELLY)  
[BMFT-FB-T-80-051] p0292 N81-21627
- SCHMIDT, P. W.**  
Thermal energy storage and regeneration  
p0371 A81-21391
- SCHMIDT, G.**  
Fluids for energy transport and conversion in  
solar power stations  
p0220 A81-24616
- SCHMIT, P.**  
Silicon-on-ceramic process: Silicon sheet growth  
and device development for the large-area  
silicon sheet task of the low-cost solar array  
project  
[NASA-CR-164134] p0281 N81-21546
- SCHNEIDER, G. R.**  
Thermal stability tests of heat transfer fluids  
for transfer and storage of thermal energy  
[DOE/ET-20417/4] p0378 N81-19633
- SCHNEIDER, J.**  
Substrate related problems in RAD solar cells  
p0231 A81-27084
- SCHNEIDER, S. J.**  
MHD effects on viscous and thermal wakes and their  
influence on the performance of MHD generators  
[LOG-E281] p0352 N81-16899
- SCHNEIDER, G. P.**  
Computer modeling of coal gasification reactors,  
year 4  
[FE-1770-66] p0312 N81-16235
- SCHOLZ, D.**  
Passive and hybrid solar manufactured housing and  
buildings  
[DOE/CS-30384/1] p0263 N81-17592
- SCHOLZ, F.**  
An investigation of the Cu/x/S-CdS structure for  
photovoltaic conversion using an AlI film vacuum  
deposited process  
p0241 A81-27178
- SCHONFELD, D.**  
Fuel cells feasibility  
p0356 N81-18998
- SCHOTT, J. I.**  
DLTS spectra and defect effects on irradiated  
silicon solar cells  
p0244 A81-27203
- SCHREIBER, R.**  
Methanol combustion in a 26-MW gas turbine  
[ASME PAPER 81-GT-64] p0348 A81-29974
- SCHREIBER, R., JR.**  
Chemistry and preparation of III-V heterojunction  
solar cells  
p0252 A81-27288
- SCHREUDER, G. P.**  
Energy from biological processes. Volume 3:  
Appendixes. Part A: Energy from wood  
[PB81-134777] p0323 N81-21234
- SCHROEDER, L. K.**  
Solid state systems concepts  
p0367 N81-16566
- SCHUELER, D. G.**  
Photovoltaic applications - Past and future  
p0246 A81-27231
- SCHURTZ, H.**  
Design and development of Stirling engines for  
stationary power generation applications in the  
500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1] p0363 N81-21581
- SCHUMAT, G.**  
Tetraethylenes as catalysts for the reduction  
of oxygen in acid electrolytes  
p0342 A81-25325
- SCHULDT, S. B.**  
Continuous coating of silicon-on-ceramic  
p0231 A81-27083  
Silicon-on-ceramic process: Silicon sheet growth  
and device development for the large-area  
silicon sheet task of the low-cost solar array  
project  
[NASA-CR-164134] p0281 N81-21546
- SCHULTZ, R. S.**  
Compilation of energy efficient concepts in  
advanced aircraft design and operations. Volume  
2: Abstract data base  
[AD-A094226] p0196 N81-18050
- SCHUMACHER, J.**  
High temperature water vapor electrolysis (HOT ELLY)  
[BMFT-FB-T-80-051] p0292 N81-21627
- SCHUMACHER, U.**  
Max Planck Institute for Plasma Physics  
[LA-TR-80-25] p0364 N81-21919
- SCHUMAN, M. D.**  
Coal hydrogasification process development  
[DOE/ET-10328/27] p0319 N81-26304
- SCHUSTER, P.**  
Development of multistep processes for  
thermochemical hydrogen production using nuclear  
heat. A summary  
[BMFT-FB-T-79-121] p0291 N81-19339
- SCHWARTZ, L. R.**  
Development and study of a flat mirror multivalent  
concentrator  
p0223 A81-24988
- SCHWARTZ, M.**  
New solar still /the wiping spherical still/ -  
Design and experimentation  
p0227 A81-25042
- SCHERIN, B. G., JR.**  
The USAF Academy flywheel-electric car  
[AD-A095130] p0378 N81-19969
- SCHNOEBER, J.**  
Investigative data analysis technique for MHD  
generators  
[AIAA PAPER 81-0174] p0329 A81-20653

- SCOTT-MONCK, J. A.**  
Influence of processing on the electrical performance of proton irradiated silicon solar cells  
p0244 A81-27205  
Prospects for enhancing SEP array performance  
p0262 N81-17572  
Blanket technology workshop report  
p0263 N81-17576
- SCOTT, J. L.**  
The development of advanced structural materials for fusion power  
p0333 A81-22659
- SCOTT, M. H.**  
Experimental results of the UTSI coal-fired MHD generator and investigations of various power take-off schemes  
[AIAA PAPER 81-0030] p0328 A81-20550  
A comparison of experimental results from the UTSI coal-fired MHD generator to theoretical predictions  
[AIAA PAPER 81-0031] p0328 A81-20551
- SCOTT, M. I.**  
Assessment of methane hydrates  
[PB81-113300] p0307 N81-17510
- SCOTT, P. F.**  
Design of self-calibrating controllers for heliostats in a solar power plant  
p0211 A81-21030
- SEABAUGH, P. E.**  
Pricetown I - In-situ coal conversion field test for bituminous coals  
p0298 A81-25111
- SEALOCK, L. J., JR.**  
Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day  
[PNL-3695-APP-B] p0324 N81-21604
- SEAMAN, C. H.**  
The spectral irradiance of some solar simulators and its effect on cell measurements  
p0238 A81-27147  
The correction for spectral mismatch effects on the calibration of a solar cell when using a solar simulator  
[NASA-CR-164074] p0276 N81-20546  
Results of the 1980 NASA/JPL balloon flight solar cell calibration program  
[NASA-CR-164078] p0277 N81-20546
- SEBASTIAN, H. M.**  
Phase equilibrium in coal liquefaction processes  
[EPRI-AP-1593] p0311 N81-18227
- SEDERQUIST, R. A.**  
Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels  
[ASME PAPER 81-GT-157] p0188 A81-30056
- SEETHARANU, K. M.**  
Solar energy in the field of distillation - Design parameters and thermodynamic analysis of solar stills  
p0227 A81-25041
- SEGAL, H. E.**  
Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications  
p0344 A81-26853
- SEIBERT, G.**  
Energy from space - A survey of activities for power generation using space technology  
p0219 A81-23861
- SEIDENSTICKER, E. G.**  
Development of processes for the production of low cost silicon dendritic web for solar cells  
p0231 A81-27080
- SEILER, A.**  
Surface segregation effects in Mg<sub>2</sub>Cu, Mg<sub>2</sub>Ni and Mg-Mg<sub>2</sub>Ni hydrogen storage compounds  
p0290 A81-25498
- SELEY, R. C.**  
Diagnostic instrumentation development program for the heat recovery/seed recovery system of the open-cycle, coal-fired magnetohydrodynamic power plant  
[AIAA PAPER 81-0110] p0328 A81-20602
- SELCUK, E. K.**  
Solar energy receiver for a Stirling engine  
[NASA-CASR-BPO-14619-1] p0259 N81-17518
- SELF, S. A.**  
Electron and positive ion measurements in MHD combustion plasmas with phosphorous addition  
p0346 A81-28217
- SEMAN, E. J.**  
Solar cells and modules from dendritic web silicon  
p0234 A81-27117
- SEMON, H. W.**  
A conceptual design study of a high temperature solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523
- SEN, K.**  
Theoretical efficiency of S/p+ -n/IS solar cells  
p0221 A81-24801
- SENS, A. F. C.**  
Optical spectrum of a closed cycle MHD generator plasma  
p0333 A81-23063
- SEO, P. H.**  
Variable speed constant frequency constant voltage alternator  
[DOE/ET-29246-T1] p0361 N81-21298
- SERREZE, E. B.**  
Low cost, sprayed CdTe solar cell research  
[SERI/PB-8104-3-T2] p0279 N81-20585
- SERREZE, E. G.**  
Low cost sprayed CdTe solar cell research  
[DSE-4042-T34] p0275 N81-19631
- SERSEN, S. J.**  
Comparison of liquid solar thermal storage subsystems in the national solar data network  
[ASME PAPER 80-WA/SOL-36] p0214 A81-21156
- SETH, M.**  
Albany biomass-to-oil project  
p0301 A81-25562
- SEXTON, F. W.**  
Design, fabrication, and performance of a 20 percent efficient silicon solar cell  
[SAND-80-2225] p0258 N81-16592
- SEA, W. T.**  
Some basic considerations and possible improvements on the solar pond  
[ANL-CT-80-23] p0268 N81-18540
- SHAFFER, B. D.**  
Low-cost, high-performance, point-focus concentrator array design  
p0242 A81-27189
- SHANNON, E.**  
Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings. Volumes 1 & 2  
p0381 A81-22208
- SHAPIRO, M.**  
Boston solar retrofits: Studies of solar access and economics  
[DOE/CS-10047/T5] p0268 N81-18538
- SHARABIANLOU, M.**  
Development of an improved degree-day concept by analysis of historical weather data for predicting energy requirements of buildings  
p0198 N81-18620
- SHARMA, S. P.**  
Performance study of air-heated packed-bed solar-energy collectors  
p0215 A81-21957
- SHARMA, V. C.**  
A comparison of thermal performance of austenitic stainless steel solar absorber plates coloured by chemical and thermal oxidation techniques  
p0215 A81-21956
- SHARP, B.**  
Closing the loop for the sulfur-iodine cycle  
p0286 A81-24022
- SHASTRY, S. L.**  
Grain boundary edge passivated solar cells on thin film GaAs  
p0251 A81-27284
- SHAW, L.**  
Performance of solar collectors - An evaluation of standard ratings  
[ASME PAPER 80-WA/SOL-1] p0211 A81-21129
- SHAW, T. L.**  
An environmental appraisal of tidal power stations: With particular reference to the Severn barrage  
p0187 A81-26196
- SHAYEGAN, J.**  
An investigation on Tehran municipal solid waste with the view of electricity generation  
p0302 A81-26474

- SHEA, C. A.**  
Solar energy in Italy: A profile of renewable energy activity in its national context [SEBI/SP-763-718] p0204 N81-21576
- SHEFF, J. R.**  
An unconventional wind machine p0338 A81-25072
- SHEFFIELD, J. W.**  
Thermoelectrochemical hydrogen production using sodium chloride p0288 A81-25145
- SHEFT, I.**  
Enhancement of low grade heat via the HYCSOS chemical heat pump p0225 A81-25018
- SHELDON, P.**  
Grain boundary chemistry and its effects upon the performance of polycrystalline solar cells p0251 A81-27282
- SHEW, C. E.**  
Analysis of solar-powered absorption cycle heat pumps with internal/external energy storages p0225 A81-25021
- SHEW, S. Y.**  
Energy and materials flows in the production of olefins and their derivatives [ANL/CNSV-9] p0203 N81-21161
- SHEPHERD, D. C.**  
Small wind systems technology assessment. State of the art and near term goals [RFP-3136/3533/80/18] p0358 N81-19600
- SHEPHERD, W.**  
An assessment of solar energy availability in different regions of the solar spectrum p0220 A81-24429
- SHERMAN, C. A.**  
Wind-power site-screening methodology [UCRL-52938] p0314 N81-18526
- SHERMAN, D. J.**  
Wind energy - how reliable [AD-A094988] p0317 N81-19563
- SHESS, A.**  
Study of seed-reprocessing systems for open-cycle coal-fired MHD power plants. [DOE/ET-15613/T1-APP] p0353 N81-17606
- SHEUCHOW, J.**  
The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states p0215 A81-22155  
Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 A81-27125  
Theoretical limit efficiency of direct gap solar cells p0239 A81-27162  
An investigation of the Cu<sub>x</sub>S-CdS structure for photovoltaic conversion using an Al film vacuum deposited process p0241 A81-27178  
Semiconductor-insulator-semiconductor (SIS) solar cells - Indium-tin-oxide on silicon p0252 A81-27295
- SHIAO, T. C.**  
Aerodynamic analysis of propeller-type windmills with helical trailing vortices p0355 N81-18565
- SHIBIB, M. A.**  
Inclusion of degeneracy in the analysis of heavily doped regions in silicon solar cells and other semiconductor devices p0221 A81-24810
- SHIELDS, K. J.**  
Research and evaluation of biomass resources/conversion/utilization systems (market/experimental analysis for development of a data base for a fuels from biomass model. Volume 1: Biomass allocation model [DOE/ET-20611/14] p0315 N81-18553
- SHINADA, K.**  
Radiatively coupled thermionic and thermoelectric power system concept [AIAA PAPER 81-0217] p0329 A81-20683  
Radiatively coupled thermionic power system concept p0346 A81-28219
- SHINAHARA, A.**  
Feasibility study on the Porsche - Optimum design of solar collection on a fluctuating base p0288 A81-25149
- SHINOTAKE, H.**  
Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications [ANL-80-49] p0375 N81-16591
- SHIN, B. K.**  
Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques p0252 A81-27287
- SHING, Y.-H.**  
ZnSe solar spectrum converter for GaAs solar cells p0237 A81-27143
- SHINGLETON, J. G.**  
The construction cost of thermal storage for solar systems p0229 A81-25062
- SHINN, J. E.**  
Ecology problems associated with geothermal development in California [UCRL-83941-REV-1] p0192 N81-16635
- SHINTOMI, T.**  
Energy transfer in a system of superconductive magnets p0374 A81-26858
- SHIRLAND, P. A.**  
Development of copper sulfide/cadmium sulfide thin film solar cells [SEBI/PR-8143-1-T2] p0269 N81-18559
- SHIROGAMI, T.**  
Progress in batteries and solar cells. Volume 3 p0382 A81-25601
- SHISHKOV, R. V.**  
A study of a commercial MHD power plant scheme p0342 A81-25381
- SHKEDI, Z.**  
Thin film polycrystalline solar cells prepared by electrodeposition p0237 A81-27142
- SHULTZ, D.**  
Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels [ASME PAPER 81-GT-157] p0188 A81-30056
- SHULTZ, R. S.**  
Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report [AD-A094225] p0196 N81-18051
- SHUR, M.**  
Photovoltaic behavior of amorphous silicon-based alloys p0249 A81-27263
- SICHEL, M.**  
Initiation of detonation in unconfined natural gas-air clouds [PB81-113292] p0308 N81-18149
- SICHEL, A. A.**  
Sampling and instrumentation for fluidized-bed combustion [ANL/CEN/PR-80-2] p0305 N81-16317
- SIENKIEWICZ, P.**  
Low cost sprayed CdTe solar cell research [DSE-4042-T34] p0275 N81-19631
- SIPPERT, P.**  
Silicon solar cells realized by laser induced diffusion of deposited antimony p0244 A81-27202
- SILL, W. R.**  
Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region [DOE/ET-28392/T2] p0315 N81-18547
- SILLMAN, S.**  
Sensitivity analysis of a community solar system using annual cycle thermal energy storage p0224 A81-24998
- SILVER, R. S.**  
Investigation of the liquefaction of partially dried and oxidized coals [EPRI-AP-1625] p0321 N81-21222
- SIN, F.**  
Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies [FE-1743-80-VOL-1] p0316 N81-19335
- SIMMS, R. J.**  
Engineering aspects of cryogenic laser-fusion targets p0345 A81-26857

- SIMNICK, J. J.**  
Phase equilibrium in coal liquefaction processes  
[EPRI-AP-1593] p0311 N81-16227
- SIMON, J. M.**  
Transparent heat mirrors - Influence of the materials on the optical characteristics  
p0215 A81-21939
- SIMON, M.**  
Concentrating solar collectors for thermal and photovoltaic application  
p0256 A81-29256  
Small gas turbine with large parabolic dish collectors  
[ASME PAPER 81-GT-201] p0349 A81-30091
- SIMON, M. J.**  
Wave-energy extraction by a submerged cylindrical resonant duct  
p0303 A81-28680
- SIMONS, R.**  
Research on high efficiency cascade solar cells  
[SERI/PR-8136-1-T1] p0258 N81-16595
- SIMONS, S. M.**  
Status of commercial phosphoric acid fuel cell system development  
[AIAA PAPER 81-0396] p0330 A81-20805
- SIMPSON, S.**  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597  
Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 N81-19598
- SIMPSON, M. I.**  
Stacked multiple-bandgap solar cells prepared by CVD techniques  
p0253 A81-27297  
Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells  
[SAE-3045-3] p0275 N81-19634
- SIMSIR, S.**  
The relationship between the temperature-gradient distribution and geological structure in the Izmir-Seferihisar geothermal area, Turkey  
p0297 A81-25090
- SINCLAIR, W. E.**  
Chemistry and preparation of III-V heterojunction solar cells  
p0252 A81-27288
- SINGAL, C. M.**  
Optimum cell size for concentrated-sunlight silicon solar cells  
p0221 A81-24802
- SINGER, G.**  
Alternative energy facility siting policies for urban coastal areas: Executive summary of findings and policy recommendations  
[DOE/EV-01528/T1] p0204 N81-21559
- SINGH, P.**  
Surface charge and specific ion adsorption effects in photoelectrochemical devices  
p0215 A81-22148
- SINGH, P. P.**  
Effect of water injection for NOx reduction with synthetic liquid fuels containing high fuel-bound nitrogen in a gas turbine combustor  
[ASME PAPER 81-GT-51] p0348 A81-29964
- SINGH, R.**  
Surface charge and specific ion adsorption effects in photoelectrochemical devices  
p0215 A81-22148  
Development trends for the mass production of low cost conductor-insulator-semiconductor /CIS/ solar cells  
p0228 A81-25051  
Characterization of ZnO for the fabrication of conductor-insulator-semiconductor /CIS/ solar cells  
p0237 A81-27141  
An outlook for automated CIS solar cell factory  
p0246 A81-27228  
Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon  
p0252 A81-27295  
Review of conductor-insulator-semiconductor /CIS/ solar cells  
p0254 A81-28954
- SINGH, R. N.**  
Corrosion behavior of metallic materials in the reducing environments characteristic of a coal-fired MHD generator  
p0332 A81-21494
- A Fresnel-Winston tandem concentrator system**  
p0218 A81-23497
- SINGH, S. P. M.**  
Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664] p0322 N81-21223
- SINGLETON, P. D., JR.**  
Energy supply and demand properties from engineering process models  
[EPRI-PA-1568] p0191 N81-16603
- SKARTVEDT, G.**  
Evaluation of solar collectors for heat pump applications  
[DOE/CS-35351/T1] p0278 N81-20568
- SKELLEY, W.**  
Bed expansion and attrition studies in a coal-fired fluidized bed  
p0299 A81-25128
- SKELTON, J. C.**  
Laser fusion systems for process heat  
p0341 A81-25106
- SKINNER, J. L.**  
Hydrogen requirements in shale oil and synthetic crude from coal  
p0295 A81-24020
- SKOBERNE, P.**  
Inertial fusion program  
[LA-7755-PR] p0360 N81-20901
- SKUTCH, M. E.**  
Development of processes for the production of low cost silicon dendritic web for solar cells  
p0231 A81-27080
- SLACK, L. H.**  
The CdSiAs2 thin films for solar cell applications  
[DOE/ET-23007/4] p0270 N81-18561
- SLAMA, M. B.**  
Identification of a solar pumping installation  
p0218 A81-23012
- SLAUGHTER, D. M.**  
Coal gasifier wall protection system  
[PB81-141921] p0323 N81-21237
- SLAVIN, V. S.**  
Magnetohydrodynamic generator of electrical energy using gasification products of lignite coal  
p0331 A81-21065
- SLEGERS, W. A. E.**  
Carbon monoxide: Resource of the future  
[BNL-28576] p0307 N81-17603
- SLEMMONS, A. J.**  
Line-Focus Solar Central Power System, phase 1. Volume 1: Executive summary  
[DOE/ET-20550/2-VOL-1] p0283 N81-21598  
Line-Focus Solar Central Power System, phase 1. Volume 2: Text  
[DOE/ET-20550/2-VOL-2] p0283 N81-21599  
Line-Focus Solar Central Power System, phase 1. Volume 3: Appendices  
[DOE/ET-20550/2-VOL-3] p0283 N81-21600
- SLIPEN, L. W., JR.**  
Summary results of the ATS-6 solar cell flight experiment  
p0244 A81-27209
- SLOPSENA, T.**  
Light aircraft engines, the potential and problems for use of automotive fuels. Phase 1: Literature search  
[AD-A094154] p0308 N81-18057
- SNELSER, P.**  
Cryogenic aspects of the UFSI-CFFP superconducting dipole magnet for MHD research  
p0345 A81-26855
- SNELTZER, L. L.**  
Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings  
[ANL/EES-TH-116] p0383 N81-19611
- SMITH, G.**  
Commercialization potential of the China Lake trash-to-gasoline process  
p0301 A81-25560
- SMITH, M. J.**  
A baseload gas turbine to meet utility requirements for reliability and availability  
[ASME PAPER 81-GT-127] p0349 A81-30031

- SMITH, R. B.  
Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2] p0315 N81-18547
- SMITH, R. P.  
Cryogenic aspects of the UTSI-CFFF superconducting dipole magnet for MHD research p0345 A81-26855  
Safety analysis of the UTSI-CFFF superconducting magnet p0345 A81-26856
- SMITH, S. D.  
Microenvironmental changes and plant responses due to shading and wind deflection by solar collectors: A simulation study  
[UCLA-12/1268] p0197 N81-18576
- SMITH, W. M.  
Hydrogen: Production and marketing; Proceedings of the Symposium, Honolulu, Hawaii, April 2-6, 1979 p0285 A81-24012
- SHANKER, W.  
Advanced module technique with thin solar cells p0248 A81-27251
- SHAPE, R.  
Rechargeable metal hydrides - A new concept in hydrogen storage, processing, and handling p0286 A81-24021  
Development of solar-hydrogen systems using metal hydrides p0289 A81-25158
- SHELLINGS, I. R.  
Verification test of jet industries Electra-Van 1000P  
[AD-A093738] p0376 N81-17961
- SHYDER, R. A.  
Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, University of Wisconsin, Madison, Wis., August 21-24, 1979 p0344 A81-26851
- SOBEL, R.  
Biosources digest, a journal on biomass utilization, volume 2, number 3, July 1980  
[PB81-123952] p0317 N81-19340
- SODHA, M. S.  
Simple transient thermal model for solar collector/storage water heaters p0218 A81-23498
- SOKOLOV, V. S.  
Magnetohydrodynamic generator of electrical energy using gasification products of lignite coal p0331 A81-21065
- SOKOLOV, B. B.  
On the safety to solar electric power generation p0256 A81-29269
- SOLERS, A.  
Preliminary results of analytical modeling of subsonic MHD diffusers  
[AIAA PAPER 81-0177] p0329 A81-20652
- SOLMAR, P. J.  
Simulation of the performance of a 100-kW-peak photovoltaic system p0233 A81-27108
- SOLTYS, T. J.  
Polka Dot Solar Cell p0238 A81-27157
- SOMENO, M.  
Hydrogen absorption and hydriding of Ti-based intermetallic compounds p0289 A81-25493
- SONG, W. O.  
Korea tidal power and beyond p0340 A81-25084
- SOO, S. L.  
Some basic considerations and possible improvements on the solar pond  
[ANL-CR-80-23] p0268 N81-18540
- SOPORI, B. L.  
Inhomogeneities in silicon solar cells and their influence on cell performance - An experimental study p0239 A81-27165
- SORGE, R. V.  
The design and analysis of a vertical axis ocean current power plant p0339 A81-25081
- SPAGNI, G.  
Optimized design of total energy systems: The BTE project  
[CISE-1606] p0196 N81-18512
- SPAITE, P.  
Acid rain: The impact of local sources  
[DOE/NETC-14787/103] p0197 N81-18573
- SPARKS, T. G.  
A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings p0243 A81-27194  
A base-metal conductor system for silicon solar cells p0243 A81-27196
- SPEARMAN, J. R.  
A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program  
[PB81-111593] p0306 N81-17287  
A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 N81-17644
- SPEARS, J. W.  
Solar energy system performance evaluation: Kalwall Corporation, Manchester, New Hampshire  
[SOLAR/2015-80/14] p0281 N81-21554
- SPECKS, R.  
Coal gasification for hydrogen manufacturing p0286 A81-24018
- SPREBER, B. R.  
SPS large array simulation p0365 N81-16537  
SPS phase control studies p0366 N81-16547  
Modified reference SPS with solid state transmitting antenna p0367 N81-16564
- SPIEGEL, M. G.  
Winter Simulation Conference, San Diego, Calif., December 3-5, 1979, Proceedings. Volumes 1 & 2 p0381 A81-22208
- SPINKA, M.  
Plastic-bonded electrodes for nickel-cadmium accumulators. V - Influence of the current collector and mechanical compression on the current carrying capability of the nickel oxide electrode p0372 A81-25322
- SPINRAD, B. I.  
Effects of accounting rules on utility choices of energy technologies in the United States  
[IIASA-RR-80-27] p0204 N81-21490
- SPITZ, R. A.  
Survey of electrochemical production of inorganic compounds  
[ANL/OEPH-80-3] p0318 N81-20226
- SPITZER, M.  
The operation of the semiconductor-insulator-semiconductor solar cell - Barrier height lowering through interface states p0215 A81-22155  
Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces p0235 A81-27125  
Theoretical limit efficiency of direct gap solar cells p0239 A81-27162  
Semiconductor-insulator-semiconductor /SIS/ solar cells - Indium-tin-oxide on silicon p0252 A81-27295
- SPOONER, S.  
EVEN in situ hydriding of hydrogen storage materials p0342 A81-25492
- SPREYAK, D.  
The estimation of the parameters of the distribution of wind speed and direction p0294 A81-23069
- SPOUSE, K. M.  
Coal Hydrogasification process development. volume 2: pilot studies  
[FE-3125-24-VOL-2] p0312 N81-18239
- SQUILLANTE, R.  
Low cost, sprayed CdTe solar cell research  
[SERI/FE-8104-3-T2] p0279 N81-20585
- SRINIVASAN, S.  
Hydrogen technology - An overview p0285 A81-24014

- Fuel-cells for electric utility and transportation applications  
[BNL-28696] p0354 N81-18518
- Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles  
[LA-UR-81-293] p0363 N81-21572
- SRIVASTAVA, V. K.  
Theoretical efficiency of S/p+ -n/IS solar cells  
p0221 A81-24801
- STACY, L. E.  
Storage requirement definition study  
[NASA-CR-163882] p0257 N81-16572
- STABLEY, D. L.  
Amorphous thin films for solar-cell applications  
[SERI/PR-0-8254-F] p0283 N81-21591
- STAFFORD, E. A.  
Electric vehicle simulation for design optimization  
[LA-A094734] p0378 N81-19970
- STAFSUDD, O.  
Emerging materials for solar cell applications:  
Electrodeposited CdTe  
[SERI/PR-9152-1-T1] p0269 N81-18555
- STAHL, D.  
A consideration of possible receiver designs for solar tower plants  
p0220 A81-24426
- STAMPER, K. E.  
Fleet trails using methanol/gasoline blends  
[CONF-801030-4] p0311 N81-18230
- STARKEY, A. H.  
Environmental overview for the development of geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 N81-21639
- STAROBIN, L.  
The Total Solar House  
p0230 A81-26401
- STARR, F.  
Coal conversion /combustion and gasification/  
p0302 A81-26477
- STARR, R. F.  
Preliminary Faraday performance of a large MHD generator at high magnetic field  
[AIAA PAPER 81-0028] p0327 A81-20548
- STATLER, R. L.  
NTS-2 solar cell experiment after two years in orbit  
p0249 A81-27268
- Three year performance of the NTS-2 solar cell experiment  
p0262 N81-17559
- STEELE, B.  
Thermal storage requirements for parabolic dish solar power plants  
[ASME PAPER 80-WA/SOL-21] p0213 A81-21145
- STEELE, B.  
A consideration of possible receiver designs for solar tower plants  
p0220 A81-24426
- STEIN, T. E.  
Gas turbine combustor performance on synthetic fuels, volume 1  
[EPRI-AP-1623-VOL-1] p0356 N81-19259
- STEINBERG, M.  
Fusion reactors for hydrogen production via electrolysis  
p0287 A81-25139
- The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant  
[BNL-51279] p0192 N81-16631
- HYFIRE: A Tokamak high temperature electrolysis system  
[BNL-28679] p0352 N81-16908
- Flash pyrolysis and hydrolysis of coal  
[BNL-28577] p0319 N81-20301
- STRINBORN, G.  
Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary  
[BMFT-FB-T-79-121] p0291 N81-19339
- STEELEY, S. J. J.  
The design of a tapered bore superconducting MHD magnet system  
p0334 A81-23442
- STELTZ, E. G.  
Steam turbines for large power outputs  
p0360 N81-20427
- STEPHENS, F. B.  
Management plan for fiscal year 1981:  
Environmental Control Technology Project  
geothermal development  
[UCID-18903] p0206 N81-21640
- STERNLICHT, B.  
The rebirth of the Rankine cycle  
p0327 A81-20225
- STEUNENBERG, E. E.  
Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications  
[ANL-80-49] p0375 N81-16591
- STEVENS, C. E.  
The environmental assessment of a contemporary coal mining system  
[NASA-CR-163974] p0197 N81-18571
- STEVENSON, C. D.  
The development of synthetic fuels: Department of Defense logistics implications  
[AD-A095713] p0319 N81-26290
- STEWART, D.  
RCA Satcom in-orbit experience  
p0379 N81-21526
- STEWART, W. F.  
Liquid hydrogen as an automotive fuel  
p0290 A81-26880
- A liquid-hydrogen-fueled buick  
[LA-8605-MS] p0291 N81-16483
- Liquid-hydrogen automotive onboard storage and servicing system project  
[LA-UR-80-3491] p0291 N81-19971
- STIKO, P. T.  
The Energy Link catalog. Volume 2: Energy resource catalog  
[PB81-140824] p0384 N81-21633
- STERN, R. J.  
Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques  
p0252 A81-27287
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD  
p0261 N81-17543
- STOCHL, R. J.  
Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels  
[NASA-TN-81611] p0351 N81-16571
- STOCK, L. E.  
Coal transformation chemistry  
[DOE/PC-30088/1] p0316 N81-19328
- STOKES, E. D.  
Chemical and structural defects in thin film polycrystalline silicon solar cells  
p0233 A81-27105
- STOLL, J. A.  
Development of copper sulfide/cadmium sulfide thin film solar cells  
[SERI/PR-8143-1-T2] p0269 N81-18559
- STOLPE, J.  
Wind energy - A utility perspective  
p0187 A81-26371
- STONE, J. C.  
Energy supply and demand properties from engineering process models  
[EPRI-BA-1568] p0191 N81-16603
- STONEHART, E.  
Development of advanced electrocatalysts for phosphoric acid fuel cells  
p0342 A81-25602
- Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165179] p0352 N81-17527
- Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245] p0354 N81-18496
- STONE, E.  
Wind energy resource atlas. Volume 5: The East Central region  
[PHL-3195-VOL-5] p0325 N81-21712
- STORTI, G.  
High efficiency ultrathin coplanar back contact cells  
p0232 A81-27092
- Development of a high efficiency thin silicon solar cell  
[NASA-CR-163931] p0259 N81-17522
- Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495

## STORTI, G. M.

The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells

p0233 A81-27101

## STOUT, D. W.

In situ and modified in situ recovery of fossil fuels

p0297 A81-25110

## STRACHAN, J. D.

Selective fast neutron detector

p0332 A81-21640

## STRAND, R. E.

Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[CONF-8010106-7]

p0189 A81-16314

Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data  
[CONF-8010106-3]

p0305 A81-16315

Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data  
[ORNL/TM-7525]

p0316 A81-19332

Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[ORNL/TM-7428]

p0320 A81-20305

## STRATTON, L. J.

Superconducting generators - Economics, technical considerations and ancillary technology

p0335 A81-23466

## STREBKOV, D. S.

Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination

p0219 A81-23803

## STREETS, D. G.

Local air quality constraints on energy growth, 1985-1990

p0201 A81-19653

[ANL/EES-TM-114]

## STRICKLAND, G.

Hydrogen technology - An overview

p0285 A81-24014

Bulk hydrogen storage using metal hydrides

p0289 A81-25154

Heat transfer enhancement in metal hydride systems

p0289 A81-25156

## STRONG, R. E.

High-reliability gas turbine combined-cycle development program, phase 1  
[EPRI-AP-1598]

p0358 A81-19632

## STRUCK, R. T.

Zinc halide hydrocracking process for distillate fuels from coal. Volume 1: Summary and continuous bench studies  
[FE-1743-80-VOL-1]

p0316 A81-19335

## STUCK, R.

Silicon solar cells realized by laser induced diffusion of deposited antimony

p0244 A81-27202

## SUBRAHMANYAM, V.

Low temperature alkali metal-sulfur batteries  
[COO-2520-7]

p0379 A81-21586

## SUDA, S.

Kinetics of the reaction between  $Mg_2Ni$  and  $H_2$

p0290 A81-25499

## SUDWORTH, J. L.

High temperature batteries

p0373 A81-25567

## SUGITANI, M.

An automobile manufacturer and his electric vehicle

p0373 A81-25604

## SULLIVAN, J. A.

Solar coal gasification  
[DOE/TIC-11384]

p0279 A81-20587

## SULLIVAN, P. J.

The environmental assessment of a contemporary coal mining system  
[NASA-CR-163974]

p0197 A81-18571

## SULLIVAN, R. F.

Refining and upgrading of synfuels from coal and oil shales by advanced catalytic processes  
[FE-2315-55]

p0311 A81-18231

## SULLIVAN, R. M.

VAFTODYN - A numerical package for the dynamic analysis of vertical axis wind turbines  
[ASME PAPER 80-WA/SOL-18]

p0331 A81-21142

## SUNBERS, L.

Methodology to evaluate the potential for ground water contamination from geothermal fluid releases  
[FB81-111114]

p0195 A81-17641

## SUNDSTROM, A.

Gasification and desulfurization of coal by injection into molten metals  
[STU-78-4560]

p0310 A81-18223

## SUPPA, E. G.

Review of in-orbit performance of ESA's spacecraft solar arrays

p0249 A81-27267

## SURPRENANT, J. E.

Low temperature alkali metal-sulfur batteries  
[COO-2520-7]

p0379 A81-21586

## SURYANARAYANA, M. V.

Temperature variation in the absorber plate of an air heating flat plate solar collector  
[ASME PAPER 80-WA/SOL-2]

p0211 A81-21130

## SUSSMAN, M. V.

Liquid nitrogen as an energy source for an automotive vehicle

p0345 A81-26881

## SUTER, G. W.

Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TM-6783]

p0198 A81-18578

## SUTSCH, A.

Small gas turbine with large parabolic dish collectors  
[ASME PAPER 81-GT-201]

p0349 A81-30091

## SUTULA, R. A.

Lightweight composite cadmium electrodes

p0379 A81-21510

## SUZUKI, A.

High performance BSF silicon solar cell with fire through contacts printed on AR coating

p0243 A81-27198

## SVARD, C. D.

Design procedure and application of solar-assisted series heat pump systems  
[ASME PAPER 80-WA/SOL-9]

p0212 A81-21135

## SVET, O. J.

Heat exchanger for in-ground heat storage

p0375 A81-29260

## SVIRIDENKO, M. P.

Complex computation of flywheel power systems for flight vehicles

p0375 A81-30158

## SHANINATHAN, S.

Catalytic cracking of hydrotreated coal liquids and related polycyclic naphthenes and naphthoenaromatics

p0308 A81-18118

## SMART, P. L.

Short wavelength spectral response of the tandem junction solar cell

p0221 A81-24808

## SMART, C. K.

Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells

p0244 A81-27207

## SMART, G. A.

Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics

p0249 A81-27266

## SHEAN, T. F., JR.

The STD/HHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc  
[AIAA PAPER 81-0173]

p0329 A81-20649

On the magnetoaerothermal instability  
[AIAA PAPER 81-0248]

p0330 A81-20698

## SHERDLING, S.

High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD

p0261 A81-17543

## SHET, C. J.

Thermochemical storage for solar heating and cooling

p0219 A81-23702

## SHIOTA, S.

Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1]

p0363 A81-21581

## SHABO, M. F.

Acid rain: The impact of local sources  
[DOE/NETC-14787/103]

p0197 A81-18573

## PERSONAL AUTHOR INDEX

THEILACKER, J. C.

- SEEDON, J. R.  
Development of copper sulfide/cadmium sulfide thin  
film solar cells  
[SERI/PR-8143-1-T2] p0269 H81-18559
- SZEGO, J.  
Economics and concepts of industrial coal  
fluidized bed combustion in Brazil p0300 A81-25135

## T

- TABI, R.  
Combined gas-steam turbine cycle using coal  
derived liquid fuel - A viable alternative to  
direct combustion of coal p0341 A81-25119
- TAJIMA, H.  
Characteristics of acidic electrolyte hydrogen-air  
fuel batteries (3)  
[UCRL-TRANS-11655] p0358 H81-19604
- TAKADA, T.  
Fluidized bed combustion of coal p0299 A81-25130
- TAKAHASHI, S.  
A preliminary investigation of an Al/FeS2  
secondary cell p0374 A81-25615
- TAKAKURA, H.  
Low-cost high-efficiency SnO<sub>2</sub>/n<sup>+</sup>/p Si heterojunction  
solar cell fabricated by paint-on-diffusion method  
p0249 A81-27259
- TAKEDA, S.  
Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project p0298 A81-25113
- TAKESUCHI, T.  
Ultra high speed growth of silicon ribbons for  
solar cells p0231 A81-27081
- Analytical consideration of fuel economy and  
dynamic response of a regenerative high  
temperature automobile gas turbine. II  
[ASME PAPER 81-GT-218] p0350 A81-30106
- TALBERT, S. G.  
Analysis of field test data on residential heating  
and cooling  
[EPRI-BA-1649] p0204 H81-21561
- TALBOT, H.  
Low cost, sprayed CdTe solar cell research  
[SERI/PR-8104-3-T2] p0279 H81-20585
- TAN, S. W.  
Assessment of high-head turbomachinery for  
underground pumped hydroelectric storage plants p0372 A81-25003
- TANAKA, S.  
Hydrogen in LaB<sub>15</sub> intermetallic compound p0290 A81-25496
- TANAKA, T.  
Heat generation for multipurpose utilization  
systems by heat of dilution converted from solar  
energy p0227 A81-25039
- TANG, H. H.  
The aerodynamics of heliostats for solar power  
plant applications p0253 A81-27310
- TANG, R.  
Utilization of staged combustion for controlling  
NO<sub>x</sub> emissions from a test facility simulating  
a coal-fired MHD power plant  
[AIAA PAPER 81-0101] p0328 A81-20603
- TANG, R. S.  
Ion implanted grating type Si solar cells -  
Junction depth dependence p0235 A81-27126
- TANGLER, J. L.  
Small wind systems technology assessment. State  
of the art and near term goals  
[BPP-3136/3533/80/18] p0358 H81-19600
- TANI, T.  
Heat generation for multipurpose utilization  
systems by heat of dilution converted from solar  
energy p0227 A81-25039
- TANNER, D.  
Evaluation and optimization of silicon sheet solar  
cells p0234 A81-27114

- TANNER, D. P.  
An all-plated, low cost contact system for silicon  
solar cells p0243 A81-27197
- TARNAN, P. B.  
Development status of the Steam-Iron Process for  
hydrogen production p0287 A81-25142
- TARPLEY, W. B., JR.  
Efficient ultrasonic grinding: A new technology  
for micron-sized coal  
[DOE/ER-10466/T1] p0315 H81-19317
- TARRICONE, L.  
Diffusion length measurements in CdS and CdSe  
Schottky barrier junctions p0209 A81-19698
- TATE, E.  
Pulsed self-excited MHD power generation at large  
energy densities p0327 A81-19814
- TATEBAYASHI, J.  
Fluidized bed combustion of coal p0299 A81-25130
- TAUHL, H.  
Prospects for developing an efficient  
photoemissive solar cell p0228 A81-25049
- TAWIL, J., J.  
Analysis of alternative strategies for energy  
conservation in new buildings  
[PNL-3309] p0199 H81-19353
- TAYLOR, R.  
Heat-flow measurements in the state of Arkansas  
[LA-8569-MS] p0324 H81-21573
- TAYLOR, R. W.  
Solar gasification of carbonaceous materials  
[UCRL-53063] p0272 H81-19605
- TAYLOR, W. D.  
A superconducting magnet for Stanford University  
p0334 A81-23441
- TAZAKI, Y.  
Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project p0298 A81-25113
- TEARE, J. D.  
Investigative data analysis technique for MHD  
generators  
[AIAA PAPER 81-0174] p0329 A81-20653
- TEKES, B.  
Wind energy utilization possibilities in Turkey  
p0338 A81-25075
- TEKUMALLA, V.  
Study of fuel cell on-site, integrated energy  
systems in residential/commercial applications  
[NASA-CR-165144] p0361 H81-21533
- TENBERG, K.  
Geothermal reservoir engineering computer code  
comparison and validation using the GEON2  
simulator program  
[DOE/SF-11450/1] p0314 H81-18478
- TENNERKONE, L.  
Chlorophyll sensitized solar photovoltaic cell  
with cuprous iodide electrode p0254 A81-28936
- TENNERGY, V. J.  
Economic application, design analysis, and  
material availability for ceramic heat exchangers  
[ORNL/TM-7580] p0196 H81-18528
- TEOPILLO, V. L.  
The fusion fission hybrid - Roles in the energy  
economy p0341 A81-25103
- TEPPER, H.  
The economics of advanced technologies for  
electricity generation from coal p0300 A81-25134
- TERASAWA, K. L.  
Regional price targets appropriate for advanced  
coal extraction  
[NASA-CR-163896] p0189 H81-16513
- TEPPER, C.  
Substrate related problems in RAD solar cells  
p0231 A81-27084
- THEILACKER, J. C.  
An algorithm for calculating monthly-average  
radiation on inclined surfaces p0253 A81-27555



**THEMELIS, M. P.**  
Performance and reliability of photovoltaic modules at various MIT LI test sites  
p0251 A81-27277

**THIEL, P. A.**  
11.5% solar conversion efficiency in the photocathodically protected p-InP/V/3+/-V/2+/-HCl/C semiconductor liquid junction cell  
Chemistry and preparation of III-V heterojunction solar cells  
p0230 A81-27014  
p0252 A81-27288

**THOMAS, R. E.**  
Solid source diffusion process for silicon solar cells  
High efficiency MIS/inversion layer silicon solar cells  
p0243 A81-27199  
p0252 A81-27290

**THOMAS, R. L.**  
Large wind-turbine projects in the United States wind energy program  
p0335 A81-23694

**THOMAS, T.**  
Current and future industrial energy service characterizations, volume 1 [SERI/TR-733-790-VOL-1]  
p0206 A81-21618

**THOMAS, R. J.**  
ETP magnet design alternatives for the national MHD program  
Impact of high-current operation on the cost of superconducting magnet systems for large-scale MHD applications  
p0334 A81-23443  
p0344 A81-26853

**THOMAS, J. M.**  
Highly efficient welding power supply [DOE/CS-40023/T2]  
Highly efficient welding power supply [DOE/CS-40023/T1]  
p0199 A81-19404  
p0202 A81-20441

**THOMPSON, A. R.**  
Effects of a satellite power system on ground-based radio and radar astronomy  
p0216 A81-22838

**THOMPSON, M. G.**  
Co-sputtered doped amorphous silicon as a photovoltaic material  
p0249 A81-27264

**THOMPSON, E. G.**  
Energy supply and demand properties from engineering process models [EPRI-EA-1568]  
p0191 A81-16603

**THORN, D. C.**  
A theoretical study of microwave beam absorption by a rectenna [NASA-CR-160921]  
p0369 A81-20328

**THORNTON, J. P.**  
Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results [SERI/TR-351-461-VOL-1]  
p0273 A81-19618

**THORNBESS, C. B.**  
Solar coal gasification: Plant design and economics [UCRL-84610]  
p0265 A81-18225

**THRESHER, E. M.**  
Overview of wind energy systems - Issues in development and application  
p0345 A81-27551

**TIEDJE, T.**  
Short circuit currents and collection efficiencies in a-SiHx solar cells  
p0246 A81-27235

**TIER, E. T.**  
Pigmented tin oxide solar cell  
p0235 A81-27124

**TILLMAN, D. A.**  
Energy from biological processes. Volume 3: Appendixes. Part A: Energy from wood [PB81-134777]  
p0323 A81-21234

**TIMBARI, R. J.**  
Ethanol from municipal cellulosic wastes  
p0299 A81-25124

**TIMMERHAUS, K. D.**  
Advances in cryogenic engineering. Volume 25 - Proceedings of the Cryogenic Engineering Conference, University of Wisconsin, Madison, Wis., August 21-24, 1979  
p0344 A81-26851

**TIMMONS, M.**  
Recent progress in the development of the cascade solar cell  
p0235 A81-27118

**TIMMONS, M. L.**  
Research on high efficiency cascade solar cells [SERI/PB-8136-1-T1]  
p0258 A81-16595

**TISHIN, A. P.**  
Thermodynamic and thermophysical properties of combustion products. Volume 10 - Fuels that are in current use, in the research stage, and considered a possibility. Part 2 - Multicomponent fuel compositions /Handbook/  
p0302 A81-26195

**TOBIN, R. G.**  
Development of glass encapsulation techniques for terrestrial photovoltaic arrays  
Integral glass covering of spacecraft solar cells by electrostatic bonding  
p0246 A81-27227  
p0250 A81-27269

**TOGIANI, H.**  
Low-cost, high-performance, point-focus concentrator array design  
p0242 A81-27189

**TOHITA, C. Y.**  
Ionospheric effects in active retrodirective array and mitigating system design  
p0366 A81-16549

**TONLINSON, L. O.**  
Economics of heavy fuels in gas turbines and combined cycles [ASME PAPER 81-GT-45]  
p0347 A81-29959

**TOMPKINS, A. M.**  
Marine Biomass Program [PB81-113185]  
p0307 A81-17297

**TORKELSON, L. E.**  
Pump heat loss test report [SAND-80-2526]  
p0273 A81-19614

**TORNA, A. E.**  
Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors [DOE/AL-04266/T1]  
p0268 A81-18537

**TORNIELLI, G. P.**  
Parabolic troughs concentrators photovoltaic module  
p0242 A81-27188

**TOTH, P.**  
The possibilities of improving the efficiency of gas turbines  
p0346 A81-28614

**TOTH, W. J.**  
Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain [PB81-123861]  
p0200 A81-19645

**TOTH, W. J.**  
Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy [PB81-119786]  
p0201 A81-19646

**TOYE, B. W.**  
Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 A81-25153

**TRACY, E.**  
Titanium dioxide antireflection coating for silicon solar cells by spray deposition  
p0209 A81-19766

**TRAN, D. Q.**  
Rapid-rate bituminous coal gasification [PB81-114290]  
p0306 A81-17293

**TRIMBLAY, P.**  
Development of an automatic heliostat cleaning system [SAND-79-8184]  
p0268 A81-18532

**TRIVICH, D.**  
Heterojunction solar cells on cuprous oxide  
Cuprous oxide MIS solar cells  
p0221 A81-24809  
p0237 A81-27139

**TRUBACHEV, A. M.**  
MK-generators using the transition of a semiconductor material into a conducting state  
p0331 A81-21064

- TRUKHOV, V. S.**  
Calculation of the internal heat exchange cycle of a Stirling engine  
p0343 A81-25625
- TRUNCCELLITO, M.**  
Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148]  
p0282 N81-21575
- TSANG, C. F.**  
Aquifer thermal energy storage: A survey [LBL-10441]  
p0378 N81-19606
- TSAROS, C. L.**  
The economics of hydrogen production  
p0285 A81-24013
- TSKANAKIA, V. K.**  
Low-temperature thermal emission rectifier with an oxidized titanium collector  
p0337 A81-24209
- TSUTSUI, M.**  
Metal chelate catalysts for fuel cells [PB81-132953]  
p0364 N81-21629
- TSUYA, W.**  
Ultra high speed growth of silicon ribbons for solar cells  
p0231 A81-27081
- TSYBENKO, A. S.**  
Investigation of dynamics of a waterwave power plant  
p0333 A81-22176
- TULLY, G. F.**  
Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence [SAND-80-7148]  
p0282 N81-21575
- TURCOTTE, R.**  
Low cost, sprayed CdTe solar cell research [SERI/PB-8104-3-12]  
p0279 N81-20585
- TURPLEY, R. M.**  
Minimizing end shadowing effects on parabolic concentrator arrays  
p0242 A81-27191
- PV-TAP - A program for performing electrical and thermal analyses on photovoltaic elements**  
p0250 A81-27275
- TURNBULL, D. M.**  
Synthetic gas production for methanol - Current and future trends  
p0295 A81-24016
- TURNBULL, P. G.**  
Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles [UCL-15259]  
p0376 N81-17963
- TURNER, G. W.**  
Efficient Si solar cells by laser photochemical doping  
p0229 A81-25873
- GaAs shallow-homojunction solar cells**  
p0247 A81-27243
- Efficient large-grained GaAs homojunction solar cells**  
p0251 A81-27285
- TURNER, L. M.**  
Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854
- Cryogenic aspects of the UTSI-CFPF superconducting dipole magnet for MHD research**  
p0345 A81-26855
- Safety analysis of the UTSI-CFPF superconducting magnet**  
p0345 A81-26856
- TURNER, R. D.**  
Diffuse sky measurements and determination of corrected shadow band multiplication factors [ASME PAPER 80-WA/SOL-26]  
p0213 A81-21150
- TURSUNBAEV, I. A.**  
Calculation of the internal heat exchange cycle of a Stirling engine  
p0343 A81-25625
- TEFVG, Y. C.**  
Indium phosphide films for photovoltaic devices  
p0240 A81-27173
- U**
- URHAYANAN, S. K.**  
Coal Hydrogasification process development. volume 1: Coal studies [FE-3125-24-VOL-1]  
p0312 N81-18238
- USTAMI, Y.**  
Progress in batteries and solar cells. Volume 3  
p0382 A81-25601
- ULLMAN, A. Z.**  
On the safety to solar electric power generation  
p0256 A81-29269
- ULRICH, W. C.**  
Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology [ORNL-5664]  
p0322 N81-21223
- UMABOV, G. IA.**  
Calculation of the internal heat exchange cycle of a Stirling engine  
p0343 A81-25625
- UNIKO, M.**  
Theoretical analysis of simplified four wavelength division solar cell system  
p0254 A81-28926
- UNGERNANN, C.**  
Aerodynamic characteristics of the TABP (Toroidal Accelerator Rotor Platform) wind energy conversion system [PB81-140675]  
p0364 N81-21632
- UNIONE, A.**  
Availability modeling methodology applied to solar power systems  
p0220 A81-24431
- UNISHKOV, V. A.**  
Concentration dependences of the parameters of high-voltage silicon photocells under high levels of illumination  
p0219 A81-23803
- UNKEL, W.**  
Approximate three-dimensional electric solution for a frame-type MHD generator  
p0327 A81-20022
- Investigative data analysis technique for MHD generators**  
[AIAA PAPER 81-0174]  
p0329 A81-20653
- UNO, F.**  
Evaluation and optimization of silicon sheet solar cells  
p0234 A81-27114
- UNO, F. M.**  
Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible  
p0234 A81-27116
- USHER, J.**  
HYPER: A Tokamak high temperature electrolysis system [BNL-28679]  
p0352 N81-16908
- V**
- VACHON, R. I.**  
Economic analysis and optimization of solar residential space heating [ASME PAPER 80-WA/SOL-11]  
p0212 A81-21137
- VAKHIN, S.**  
Hydrides of ternary TiFe<sub>x</sub>B<sub>1-x</sub>/B = Cr, Mn, Co, Ni/ intermetallics  
p0290 A81-26584
- VALENTINO, A. R.**  
Environmental assessment for the satellite power system concept development and evaluation program [AIAA PAPER 81-0244]  
p0185 A81-20695
- An assessment of the atmospheric effects of a Satellite Power System**  
p0187 A81-25053
- VAN DER BURGT, M. J.**  
Development of the Shell-Koppers coal gasification process  
p0303 A81-28995
- VAN HALEN, P.**  
MIS silicon grating solar cells on BSF substrates  
p0252 A81-27293
- VAN OVERSTADTEN, R.**  
Silicon solar cells with screen printed diffusion and metallization  
p0245 A81-27221
- MIS silicon grating solar cells on BSF substrates**  
p0252 A81-27293
- VAN WALSUM, E.**  
Korea tidal power and beyond  
p0340 A81-25084

- VANATTA, C. E.**  
US energy consumption and supply  
[UCID-18856] p0204 N81-21565
- VANDERVENDEER, J. P.**  
Drivers for light ion fusion  
[SAND-80-2432C] p0353 N81-17883
- VANDER ARHND, P. C.**  
Safety analysis of the UTSI-CFFF superconducting magnet  
p0345 A81-26856
- VANDERPLAS, H. A.**  
Further development of a novel solar cell concentrator photovoltaic converter system  
[SAND-80-7072] p0278 N81-20572
- VANDERWIEL, T.**  
An investigation of the Cu/x/S-CdS structure for photovoltaic conversion using an Al film vacuum deposited process  
p0241 A81-27178
- VANDERVENDEER, J. P.**  
Self-magnetically insulated ion diode  
p0344 A81-26552
- VANGSOOL, W.**  
Cost-energy dynamics: An engineering-economic basis for industrial energy conservation policies  
[ORAU/IEA-80-12(N)] p0193 N81-17583
- VANKA, S. P.**  
Three-dimensional analysis of MHD generators - Development of electrical solution  
[AIAA PAPER 81-0175] p0329 A81-20650
- VANKUIKEM, J. C.**  
Reliability, energy, and cost effects of wind integration with conventional electrical generating systems  
p0339 A81-25078
- VANSUCH, M. E.**  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[CONF-8010106-7] p0189 N81-16314  
Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data  
[CONF-8010106-3] p0305 N81-16315  
Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data  
[ORNL/TM-7525] p0316 N81-19332  
Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[ORNL/TM-7428] p0320 N81-20305
- VANWINKLE, W.**  
Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TM-6783] p0198 N81-18578
- VARDIS, K. S.**  
Domestic utilization of solar energy in the Michigan area  
p0226 A81-25034
- VARDI, I.**  
Design improvements in LiBr absorption chillers for solar applications  
p0253 A81-27558
- VASKO, A. T.**  
Electrochemical semiconductor solar energy converters  
p0215 A81-21674
- VAUGHN, J.**  
Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model  
p0232 A81-27099
- VENESIANI, P.**  
Remote sensing applied to the prospecting of geothermal anomaly in Caldas Novas County - State of Goias - Brazil  
p0295 A81-23630
- VENESIANI, S.**  
Optimized design of total energy systems: The RETE project  
[CISE-1606] p0196 N81-18512
- VENTURINI, M. G. E.**  
Solid-state power conversion - A Fourier analysis approach to generalized transformer synthesis  
p0347 A81-29243
- VERA, E. S.**  
Ultra high efficiency thin silicon p-n junction solar cells using reflecting surfaces  
p0235 A81-27125
- VERANDO, A. E.**  
Qualification testing of photovoltaic concentrator modules for system application experiments  
p0251 A81-27280
- VERDON, C. P.**  
Nonlinear evolution of ablation-driven Rayleigh-Taylor instability  
p0332 A81-21466
- VERYZNYVELT, S. A.**  
PBI treated polypropylene battery separator  
p0379 N81-21512
- VESILIND, P. A.**  
Design and management for resource recovery. Volume 2 - High technology A failure analysis  
p0300 A81-25225
- VETTER, A. A.**  
The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc  
[AIAA PAPER 81-0173] p0329 A81-20649
- VEZIROGLU, T. M.**  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 1 - Solar energy  
p0222 A81-24976  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 2 - Solar Energy 2  
p0381 A81-25004  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 3 - Solar energy 3  
p0381 A81-25040  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 4 - Indirect solar energy  
p0382 A81-25065  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 5 - Geothermal power/energy program  
p0187 A81-25088  
Alternative energy source II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 6 - Nuclear energy  
p0340 A81-25099  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 7 - Hydrocarbon conversion  
p0297 A81-25109  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 8 - Hydrogen energy  
p0287 A81-25137  
Thermoelectrochemical hydrogen production using sodium chloride  
p0288 A81-25145  
Alternative energy sources II; Proceedings of the Second Miami International Conference, Miami Beach, Fla., December 10-13, 1979. Volume 9 - Conservation, economics, and policy; Index  
p0187 A81-25161
- VIEHBOECK, P. P.**  
A new formal graphic language for the representation of complex energy distribution systems  
p0225 A81-25010  
Report on the measuring data evaluation of the first large-scale solar heated building in Austria  
p0226 A81-25032
- VIELSTICH, M.**  
Electrodes and diaphragms for fuel cells  
[BMFT-FB-T-79-140] p0359 N81-19639
- VILARDO, J. E.**  
Wind energy resource atlas. Volume 4: The Northeast region  
[FNL-3195-WEHA-4] p0321 N81-20592
- VINCENT, R. K.**  
Petroleum exploration with Landsat in Bay County, Michigan - An interim case study  
p0294 A81-23562

- VINOGRADOV, L. A.  
Solid-fuel combustion in fluidized beds  
p0303 A81-27539
- VIOLA, R. A.  
Coal-oil mixtures - Their technical and commercial status  
p0300 A81-25133
- VISSERS, D. B.  
Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications [ANL-80-49]  
p0375 A81-16591
- VITERNA, L. A.  
The NASA-LeRC wind turbine sound prediction code [NASA-TN-91737]  
p0362 A81-21537
- VITKOVITSKY, I. M.  
Pulsed high voltage and high current outputs from homopolar energy storage system [AD-A094910]  
p0377 A81-19575
- VOGT, R. V.  
Development of the Shell-Koppers coal gasification process  
p0303 A81-28995
- VOITSEKHOVSKII, B. V.  
Prospective energy sources and their comparison with current supplies  
p0185 A81-21063
- VON KLEINSCHMID, R. H.  
Methanol combustion in a 26-MW gas turbine [ASME PAPER 81-GT-64]  
p0348 A81-29974
- VON WALDKIRCH, T.  
Surface segregation effects in Mg<sub>2</sub>Cu, Mg<sub>2</sub>Ni and Mg-Mg<sub>2</sub>Ni hydrogen storage compounds  
p0290 A81-25498
- VONWACHENFELDT, T.  
Marine biomass: Algae as source of energy [NE/BIO-80/12]  
p0320 A81-20581
- VONZUELOW, H.  
High temperature water vapor electrolysis (HOT ELLY) [BNFT-FB-T-80-051]  
p0292 A81-21627
- VOSS, R.  
Progress in batteries and solar cells. Volume 3  
p0382 A81-25601
- VRABLE, D. L.  
Production of liquid fuels with a high-temperature gas-cooled reactor  
p0298 A81-25120
- VOUILLAUME, Y.  
Mapping of solar radiation for use in the Sudanese-Saharan region of Africa  
p0217 A81-23007
- W**
- WAGER, J. F.  
Degradation of ITO/p-Si solar cells  
p0248 A81-27257
- WAHL, G.  
Experimental study to define developments for terrestrial solar cell generators [BNFT-FB-T-79-143]  
p0279 A81-20600
- WAHLIG, H.  
Dynamic modeling and experimental simulation of active solar energy systems for the evaluation of control strategies [ASME PAPER 80-WA/SOL-14]  
p0213 A81-21139
- WATTSAN, D. A.  
Environmental consideration for TVA's ammonia from coal project [COBP-8004137-1]  
p0203 A81-21216
- WAKEFIELD, R. A.  
Study of fuel cell on-site, integrated energy systems in residential/commercial applications [NASA-CR-165144]  
p0361 A81-21533
- WALD, F. V.  
Progress in the growth of wide silicon ribbons by the EP6 technique at high speed using multiple growth stations  
p0230 A81-27078
- WALDON, C. A.  
Wind machine fatigue analysis and life prediction [RFP-3135/3533/80/19]  
p0357 A81-19495
- WALKER, D. R.  
STS-2 solar cell experiment after two years in orbit  
p0249 A81-27268
- Three year performance of the STS-2 solar cell experiment  
p0262 A81-17559
- WALKER, G. H.  
Simultaneous radiation damage and annealing of GaAs solar cells  
p0247 A81-27240
- High temperature properties of GaAs/GaAs heteroface solar cells  
p0247 A81-27242
- Study of process technology for GaAs/GaAs heteroface solar cells  
p0261 A81-17544
- WALKER, P. M.  
Surface-heating greenhouses with waste heated water [DOE/H5-10107/T1]  
p0200 A81-19620
- WALLACE, C.  
Decentralized energy studies: Compendium of international studies and research [SERI/RR-744-451]  
p0193 A81-17582
- WALSH, D.  
ZnSe solar spectrum converter for GaAs solar cells  
p0237 A81-27143
- WALTER, C. R.  
Inductive energy transfer in transportation [UCRL-85141]  
p0368 A81-18962
- WALTERS, C. T.  
Laser fusion systems for process heat  
p0341 A81-25106
- WALTON, J. J.  
Wind-power site-screening methodology [UCRL-52938]  
p0314 A81-18526
- WANG, C. D.  
The influence of grains and grain boundaries on the device characteristics of polycrystalline silicon solar cells  
p0233 A81-27101
- WANG, C.-K.  
Effect of zinc impurity on silicon solar-cell efficiency  
p0256 A81-29290
- WANG, E. Y.  
Cuprous oxide MIS solar cells  
p0237 A81-27139
- WANG, H. F.  
Nocturnal radiation from a solar collector [ASME PAPER 80-WA/SOL-35]  
p0214 A81-21155
- WANG, K. L.  
Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques  
p0252 A81-27287
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD  
p0261 A81-17543
- WANG, S. S.  
Hydrogen-methane separation processes and related phenomena [DOE/ETC-14386/106]  
p0321 A81-21153
- WANG, S.-T.  
Construction program for a large superconducting MHD magnet system at the Coal-Fired Flow Facility  
p0334 A81-23451
- Final design of a superconducting MHD magnet for the coal-fired flow facility at the University of Tennessee Space Institute  
p0345 A81-26854
- Cryogenic aspects of the UTISI-CFPF superconducting dipole magnet for MHD research  
p0345 A81-26855
- Safety analysis of the UTISI-CFPF superconducting magnet  
p0345 A81-26856
- WANG, W. L.  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239
- WARD, D. S.  
CSU Solar House 3 solar heating and cooling system performance [DOE/CS-30122/T1]  
p0272 A81-19587
- Handbook of experiences in the design and installation of solar heating and cooling systems [DOE/CS-32224/T1]  
p0282 A81-21566
- WARD, J. C.  
CSU Solar House 3 solar heating and cooling system performance [DOE/CS-30122/T1]  
p0272 A81-19587
- WARD, R. F.  
Alcohols as fuels - The global picture  
p0303 A81-27572

- WARHOLIC, G. B.  
A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program  
[PB81-111593] p0306 N81-17287  
A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 N81-17644
- WARREN, J. P.  
Gasoline from alcohols p0297 A81-24900
- WARREN, B. H., JR.  
Solar energy market penetration models - Science or number mysticism p0218 A81-23026
- WARREN, M. L.  
Dynamic modeling and experimental simulation of active solar energy systems for the evaluation of control strategies  
[ASME PAPER 80-WA/SOL-14] p0213 A81-21139
- WARSHAW, H.  
Status of commercial phosphoric acid fuel cell system development  
[AIAA PAPER 81-0396] p0330 A81-20805
- WASSELL, A. B.  
A UK view on future fuels  
[ASME PAPER 81-GT-87] p0304 A81-29994
- WASZCZAK, J. P.  
A superconducting magnet for Stanford University p0334 A81-23441
- WATABABE, H.  
Low cost production of terrestrial solar arrays utilizing EFG silicon ribbon crystals p0230 A81-27079
- WEAKLIEN, H. A.  
Amorphous thin films for solar-cell applications  
[SRI/PR-0-8254-F] p0283 N81-21591
- WEATHERBY, D. G.  
Proceedings: EPA/Industry Forum on Coal-Liquefaction  
[PB81-113052] p0195 N81-17645
- WEAVER, R. T.  
Comparison of solar cell performance to calculations using different energy band-gap narrowing models p0217 A81-22861
- WEAVER, R.  
Circuit design considerations for photovoltaic modules and systems p0238 A81-27153
- WEBER, H. R.  
PCM thermal energy storage in cylindrical containers of various configurations p0372 A81-24996
- WEBER, S. L.  
Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day  
[PNL-3695-APP-B] p0324 N81-21604
- WEDDIGEN, G.  
Development of sodium/sulfur batteries  
[BNFT-FB-T-79-60] p0376 N81-17607
- WEHR, A. G.  
Utilization of staged combustion for controlling NO<sub>x</sub>/emissions from a test facility simulating a coal-fired MHD power plant  
[AIAA PAPER 81-0101] p0328 A81-20603
- WEI DE, L.  
Solar energy research and applications in China p0219 A81-23703
- WEINBERG, I.  
Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells p0244 A81-27207
- WEINER, A. S.  
Grain boundary edge passivated solar cells on thin film GaAs p0251 A81-27284
- WEINSTEIN, R. A.  
Performance of active solar domestic hot water heating systems  
[SOLAR/0024-80/41] p0281 N81-21556
- WEIN, D. G.  
Solid state device technology for Solar Power Satellite p0368 N81-16567
- WEISS, A. B.  
Catalytic hydrogenation of Turkish lignites to oxygen free oil and gas p0298 A81-25114
- WEISS, C. S.  
The detection of trace element species in solvent refined coal p0308 N81-18117
- WEISS, R. S.  
Results of the 1980 NASA/JPL balloon flight solar cell calibration program  
[NASA-CR-164078] p0277 N81-20548
- WEISSBROD, B.  
Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 N81-19646
- WEISER, V.  
Recent progress in high-output-voltage silicon solar cells p0260 N81-17534
- WELLEN, S. W.  
Effects of pore diameter and catalyst loading in hydroliquefaction of coal with CoO/MoO<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> catalysts p0293 A81-22274
- WELLMAN, D. L.  
Cloud modification by man-made pollutants - Effects of a coal-fired power plant on cloud drop spectra p0188 A81-28478
- WELTER, C.  
Fluid bed hydrogenation of agglomerating bituminous coals p0298 A81-25115
- WEN, L.  
Thermal storage requirements for parabolic dish solar power plants  
[ASME PAPER 80-WA/SOL-21] p0213 A81-21145
- WENDELL, L. L.  
Meteorological aspects of wind energy - Assessing the resource and selecting the sites p0295 A81-23690
- WESLING, G. C.  
Storage requirement definition study  
[NASA-CR-163882] p0257 N81-16572
- WEST, J. A.  
Solar collector foundation designs  
[SAND-80-7070] p0279 N81-20582
- WEST, L. E.  
Improved liquid/solids handling module  
[DOE/ET-27193/T1] p0363 N81-21582
- WESTGORELAND, P. E.  
Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 N81-18232
- WETTERMARK, G.  
Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage  
[PB81-114324] p0376 N81-17618
- WHAN, R. B.  
Indirect conversion of coal to methanol and gasoline: Product price vs product slate  
[CONF-801142-3] p0311 N81-18228
- WHAN, R. B.  
Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664] p0322 N81-21223
- WHEELER, P. J.  
Preliminary skyshine calculations for the Poloidal Divertor Tokamak Experiment p0336 A81-23713
- WHIFFLE, D. E.  
Regional price targets appropriate for advanced coal extraction  
[NASA-CR-163896] p0189 N81-16513
- WHISNANT, R. A.  
Application analysis of photovoltaic systems for service/commercial/institutional and industrial sectors p0233 A81-27106
- WHITE, D. J.  
Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels  
[ASME PAPER 81-GT-109] p0348 A81-30014

- WHITE, M. R.**  
Environmental assessment for the Satellite Power System concept development and evaluation program: Nonmicrowave health and ecological effects  
[DOE/ER-0089] p0205 N81-21613
- WHITE, P. R.**  
Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site  
[LBL-11978] p0270 N81-18572
- WHITE, R.**  
Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 N81-21629
- WHITEHEAD, A. B.**  
Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project  
[NASA-CR-164134] p0281 N81-21546
- WHITEHEAD, C. Y.**  
Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana  
[SOLAR/1001-80/14] p0363 N81-21552
- WHITEHEAD, G. L.**  
Preliminary Faraday performance of a large MHD generator at high magnetic field  
[AIAA PAPER 81-0028] p0327 N81-20548
- WHITEHOUSE, D.**  
High efficiency ultrathin coplanar back contact cells  
p0232 N81-27092  
Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495
- WHITEHOUSE, G. D.**  
Performance of a solar heating system on the LSU Field House determined from test data  
p0226 N81-25033
- WHITEHOUSE, H. I.**  
Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California  
[EPRI-EM-1654] p0275 N81-19630
- WHITEHURST, D. D.**  
Coal liquefaction: The chemistry and technology of thermal processes  
p0304 N81-29692
- WHITENIGHT, D. L.**  
Environmental impact assessment guidelines for new source coal gasification facilities  
[PB81-114555] p0195 N81-17635
- WHITHORE, D. E.**  
Basic research on ceramic materials for energy storage and conversion systems  
[COO-2564-6] p0361 N81-21207
- WHITTLE, D. P.**  
Behaviour of high temperature alloys in aggressive environments: Proceedings of the Petten International Conference, Petten, Netherlands, October 15-18, 1979  
p0382 N81-26476
- WIESENER, E.**  
Tetrafulvalenes as catalysts for the reduction of oxygen in acid electrolytes  
p0342 N81-25325
- WIESMANN, H. J.**  
Plasma-assisted CVD of fluorinated, hydrogenated amorphous silicon  
[SEMI/TR-8041-2-T1] p0274 N81-19629
- WIJESUNDARA, M. E.**  
Optimum performance of thermal trap collectors  
p0220 N81-24432
- WILBY, J. P.**  
Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site  
[LBL-11978] p0270 N81-18572
- WILHELM, W. G.**  
Thin-film flat-plate solar collectors for low cost manufacture and installation  
[BNL-51124] p0269 N81-18545
- WILKES, C.**  
Residual fuel combustion in industrial gas turbines  
p0343 N81-26010
- WILLIAMS, D. E.**  
Progress in the development of the Marine Spey, SM1A  
[ASME PAPER 81-GT-186] p0349 N81-30080
- WILLIAMS, J. E. C.**  
A superconducting magnet for Stanford University  
p0334 N81-23441
- Superconducting MHD magnet engineering program  
p0344 N81-26852
- WILLIAMS, M. L.**  
Gas turbine materials evaluation program utilizing coal derived gaseous fuel  
[ASME PAPER 81-GT-65] p0348 N81-29975
- WILLIAMS, R.**  
Determination of amorphous silicon solar cell barrier properties by measurement of differential current-voltage characteristics  
p0249 N81-27266
- WILLIAMS, R. W.**  
Biologically-assisted hydrogen production - Attempts at optimizing the use of polymeric viologen mediators in a bioreactor based on the hydrogenase-catalyzed decomposition of dithionite  
p0289 N81-25153
- WILLIAMS, T. A.**  
Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PNL-3533-VOL-1] p0283 N81-21605
- WILLIAMSON, R. C.**  
Environmental consideration for TVA's ammonia from coal project  
[CONF-8004137-1] p0203 N81-21216
- WILLMOTT, A. J.**  
Thermal energy storage and regeneration  
p0371 N81-21391
- WILMSEN, C. W.**  
The effects of intragrain defects on the local photoresponse of polycrystalline silicon solar cells  
p0221 N81-24805
- Degradation of ITO/p-Si solar cells  
p0248 N81-27257
- WILSON, D. G.**  
Design analysis of high-efficiency low-stress ceramic gas turbines  
[ASME PAPER 81-GT-130] p0349 N81-30034
- WILSON, J. W.**  
Solar-pumped gas laser development  
[AIAA PAPER 81-0098] p0210 N81-20600  
Modeling of a solar-pumped iodine laser  
p0221 N81-24618
- Solar-pumped gas laser development  
[NASA-TN-81894] p0257 N81-16437
- WILSON, R. E.**  
Wind-turbine aerodynamics  
p0335 N81-23696
- WILSON, W. L.**  
Workshop on the microwave power transmission system for the solar power satellite - Review panel report  
p0365 N81-24832
- WILSON, W. R.**  
Thermal studies in a geothermal area. Report 1: Thermal studies at Roosevelt Hot Springs, Utah. Report 2: Heat flow above an arbitrarily dipping plane of heat sources. Report 3: A datum correction for heat flow measurements made on an arbitrary surface  
[DOE/ID-12079/19] p0314 N81-18479
- WINNER, L.**  
Report on the measuring data evaluation of the first large-scale solar heated building in Austria  
p0226 N81-25032
- WINDAVI, H.**  
The controlling influence of the Cu<sub>2</sub>S optical absorption coefficient on the short-circuit currents of Cu<sub>2</sub>S/CdS solar cells  
p0209 N81-20007
- Optical absorption coefficient changes in Cu<sub>2</sub>S as the cause of short circuit current changes in Cu<sub>2</sub>S/CdS solar cells  
p0241 N81-27183
- WINER, B. A.**  
An evaluation of superconducting magnetic energy storage  
p0371 N81-23439
- WINE, C. B.**  
Use of the ATOP system in the control of an off-peak storage device  
p0371 N81-20491
- FREHEAT - A passive solar system simulation program  
p0216 N81-22212

- WINSBERG, S.**  
Solar perspectives - Solar pond power, the  
Israel-California connection p0230 A81-26402
- WINTER, S.**  
Passive and hybrid solar manufactured housing and  
buildings [DOE/CS-30384/1] p0263 A81-17592
- WISE, J. F.**  
Solar power B and D for Air Force space requirements p0260 A81-17533
- WISER, W. H.**  
Mechanism of coal hydrogenation-liquefaction -  
Effect of temperature and coal particle size p0293 A81-22273  
Applied research and evaluation of process  
concepts for liquefaction and gasification of  
western coals [DOE/ET-10527/T1] p0319 A81-20292
- WITT, J. E.**  
Gasification combined cycle R&A assessment p0295 A81-24265
- WITTENBERG, L. J.**  
Construction and startup performance of the  
Miamisburg salt-gradient solar pond p0253 A81-27552
- WITTMER, V.**  
Efficiency and stability of experimental  
fluorescent planar concentrators /FPC/ p0242 A81-27190
- WOHLGEMUTH, J.**  
High efficiency ultrathin coplanar back contact  
cells p0232 A81-27092  
New developments in vertical junction silicon  
solar cells p0232 A81-27095  
Silicon solar cell optimization  
[AD-A092908] p0263 A81-17579  
Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 A81-18495
- WOHLGEMUTH, J. E.**  
Design and operation of the Solarex two-axis  
tracking linear concentrating collector system p0243 A81-27193
- WOLF, M.**  
Interactions of efficiency and material  
requirements for terrestrial silicon solar cells p0210 A81-20295  
Designing practical silicon solar cells  
approaching the 'limit conversion efficiency' p0239 A81-27159  
High efficiency silicon solar cells p0240 A81-27175  
Low cost processes for fabricating silicon solar  
cells p0245 A81-27218
- WOLFSON, R. L. T.**  
Experimental comparison of control strategies for  
solar energy systems incorporating dual storage  
tanks p0253 A81-27556
- WOOD, B. D.**  
Design and evaluation of a computer controlled  
solar collector simulator [ASME PAPER 80-WA/SOL-6] p0212 A81-21133
- WOOD, B. L.**  
Passive solar energy information user study  
[SERI/TR-751-746] p0273 A81-19607  
Photovoltaics information user study  
[SERI/TR-751-652] p0278 A81-20570  
Wind energy systems information user study  
[SERI/TR-751-749] p0363 A81-21578
- WOOD, L.**  
Design analysis of high-efficiency low-stress  
ceramic gas turbines [ASME PAPER 81-GT-130] p0349 A81-30034
- WOOD, R. E.**  
Mechanism of coal hydrogenation-liquefaction -  
Effect of temperature and coal particle size p0293 A81-22273
- WOOD, R. F.**  
Laser processing for high-efficiency silicon solar  
cells p0241 A81-27177  
Applications of laser annealing and laser-induced  
diffusion to photovoltaic conversion [CONF-801153-1] p0258 A81-16594
- WOODALL, D. E.**  
Synthetic fuel production in a particle-beam  
driven fusion reactor p0297 A81-25107
- WOODBIDGE, D. D.**  
Sources and potential uses of wave energy p0339 A81-25079
- WOODCOCK, G. E.**  
Solar power satellite microwave power transmission  
system description executive summary p0365 A81-16535  
SPS phase control studies p0366 A81-16547  
Rectenna system design p0257 A81-16559  
Modified reference SPS with solid state  
transmitting antenna p0367 A81-16564
- WOODFORD, P. G.**  
Development of sweet sorghum as an energy crop.  
Volume 3: Integration concepts [BAI-2054-VOL-3] p0316 A81-19334
- WOODHOUSE, G. D.**  
ITI GT601 - A new approach to vehicular gas  
turbine power unit design [ASME PAPER 81-GT-152] p0349 A81-30051
- WOODS, E. L.**  
A computer circuit analysis investigation into  
stray subplate capacitance effects during the  
discharge of an MHD magnet p0334 A81-23447
- WORNLEY, D. E.**  
Air/gas system dynamics of fossil fuel power  
plants. Volume 4: Experimental vibration and  
acoustic test data of a 500-MW unit  
[EPRI-CS-1444-VOL-4] p0351 A81-16602
- WOZNY, G.**  
Development of multistep processes for  
thermochemical hydrogen production using nuclear  
heat. A summary [BNFT-PB-T-79-121] p0291 A81-19339
- WRAY, W. O.**  
Study of the effectiveness of selective absorber  
coatings and phase change materials in passive  
solar space heating [LA-UR-80-2930] p0280 A81-20936
- WRIGHT, T. P.**  
Charge exchange and energy loss of carbon ions in  
air-plasma channels p0344 A81-26570
- WRIGLEY, C.**  
High efficiency ultrathin coplanar back contact  
cells p0232 A81-27092  
Development of a high efficiency thin silicon  
solar cell [NASA-CR-163931] p0259 A81-17522  
Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 A81-18495
- WRIGLEY, C. Y.**  
Design and operation of the Solarex two-axis  
tracking linear concentrating collector system p0243 A81-27193
- WRONSKI, C. E.**  
Short circuit currents and collection efficiencies  
in a-SiHx solar cells p0246 A81-27235
- WU, C. E.**  
Current transport mechanisms of  
metal-polycrystalline silicon Schottky barrier  
solar cells p0236 A81-27130
- WU, F. C. E.**  
Silicon solar cell design for medium concentration  
applications p0270 A81-18564
- WU, Y. C. L.**  
Experimental results of the UTSI coal-fired MHD  
generator and investigations of various power  
take-off schemes [AIAA PAPER 81-0030] p0328 A81-20550  
A comparison of experimental results from the UTSI  
coal-fired MHD generator to theoretical  
predictions [AIAA PAPER 81-0031] p0328 A81-20551

- MURSTER, G.  
Development of multistep processes for  
thermochemical hydrogen production using nuclear  
heat. A summary  
[BNFT-FB-T-79-121] p0291 A81-19339
- MYSTH, M. C.  
Thin polycrystalline Zn3P2 films for photovoltaic  
cells p0240 A81-27170
- MYWILL, J. C.  
Wood energy in West Virginia p0297 A81-25066

## X

- XERINOS, J.  
The aerodynamics of heliostats for solar power  
plant applications p0253 A81-27310

## Y

- YACOBUCCI, R. G.  
Low NO/x/ combustion systems for burning heavy  
residual fuels and high-fuel-bound nitrogen fuels  
[ASME PAPER 81-GT-109] p0348 A81-30014
- YAGGI, M. F.  
Hydrogen bonding in asphaltenes and coal liquids  
[DOE/PC-30252/T1] p0318 A81-20227
- YAMAGUCHI, R.  
Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project  
p0298 A81-25113
- YAMAZAWA, K. A.  
Effect of zinc impurity on silicon solar-cell  
efficiency p0256 A81-29290
- YANG, C. R.  
Variable speed constant frequency constant voltage  
alternator  
[DOE/ET-29246-T1] p0361 A81-21298
- YANG, R. S.  
Current transport mechanisms of  
metal-polycrystalline silicon Schottky barrier  
solar cells p0236 A81-27130
- YANG, H. T.  
Low bandgap /0.7 to 1.1 eV/ solar cells in the  
GaAlAsSb/GaSb system p0235 A81-27119
- Status of Rockwell-ERC high efficiency solar cell  
programs p0261 A81-17546
- YANG, H.-T.  
Stacked multiple-bandgap solar cells prepared by  
CVD techniques p0253 A81-27297
- YANG, J. J. J.  
Chemical vapor deposition of thin-film  
polycrystalline Si for low cost solar cells  
[SAB-3045-3] p0275 A81-19634
- YANG, R. T.  
Hydrogen-methane separation processes and related  
phenomena  
[DOE/NETC-14386/106] p0321 A81-21153
- YANO, K.  
Fluidized bed combustion of coal p0299 A81-25130
- YARHAN, T.  
Wind energy utilization possibilities in Turkey  
p0338 A81-25075
- YATES, C. C.  
Gas turbine materials evaluation program utilizing  
coal derived gaseous fuel  
[ASME PAPER 81-GT-65] p0348 A81-29975
- YAWS, C. L.  
Process feasibility study in support of silicon  
material task 1  
[NASA-CR-164009] p0271 A81-19570
- YE, D.-J.  
An analysis for aerodynamic performance of the  
vertical axis 'phi' type rotor wind turbine  
p0338 A81-25068
- YRAGER, R.  
Electrochemistry of oxygen p0343 A81-25609
- Major electrochemical developments related to the  
energy problem p0382 A81-25610

- YEDGER, R.  
Recent advances in the sciences of electrocatalysis  
[AD-A095095] p0356 A81-19257
- YEH, Y. C. M.  
Epitaxial and polycrystalline GaAs solar cells  
using OM-CVD techniques p0252 A81-27287
- High efficiency epitaxial GaAs/GaAs and GaAs/Ge  
solar cell technology using OM/CVD p0261 A81-17543
- YINGST, R. A.  
Design of a 100 kW photovoltaic flat panel system  
at a Washington, D.C. area waste treatment plant  
p0228 A81-25056
- YOO, H.  
Evaluation and optimization of silicon sheet solar  
cells p0234 A81-27114
- YORULMAZ, Y.  
Catalytic hydrogenation of Turkish lignites to  
oxygen free oil and gas p0298 A81-25114
- YOSHIDA, K.  
Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project  
p0298 A81-25113
- YOSHIMOTO, M.  
Status of the development of the general atomic  
thermochemical water-splitting cycle p0287 A81-25141
- YOSHIZAWA, S.  
Energy analysis of high temperature batteries  
p0374 A81-25614
- YOST, T. M.  
Everlasting sliding-disc valve METC SOA test valve  
No. B-3, state-of-the-art lockhopper valve  
testing and development project  
[DOE/METC-SP-80/17] p0323 A81-21361
- YOUNG, R.  
Investigation of mechanism of hydrogen transfer in  
coal hydrogenation  
[DOE/PC-30080/T2] p0305 A81-16318
- YOUNG, J. C.  
Air pollution control technology for municipal  
solid waste-to-energy conversion facilities:  
Capabilities and research needs  
[DOE/EV-0115] p0201 A81-19655
- YOUNG, M. I.  
Stability of large horizontal-axis axisymmetric  
wind turbines p0333 A81-22526
- Dynamic response of power generating wind turbines  
p0339 A81-25077
- YOUNG, R. T.  
Laser processing for high-efficiency silicon solar  
cells p0241 A81-27177
- Applications of laser annealing and laser-induced  
diffusion to photovoltaic conversion  
[CONF-801153-1] p0258 A81-16594
- YOUNG, S. K.  
Design of a 100 kW photovoltaic flat panel system  
at a Washington, D.C. area waste treatment plant  
p0228 A81-25056
- YOUNGBLOOD, R. L.  
Hydrocarbonization research: Completion report  
[ORNL/TM-6693] p0311 A81-18232
- YOUNGBLOOD, S. B.  
Solar production of industrial process hot water:  
Operation and evaluation of the Campbell Soup  
hot water solar facility  
[SAB-1218-4] p0274 A81-19626
- YOUNGER, P. R.  
Development of glass encapsulation techniques for  
terrestrial photovoltaic arrays p0246 A81-27227
- Integral glass covering of spacecraft solar cells  
by electrostatic bonding p0250 A81-27269
- YOUNGQUIST, G. R.  
Conversion of organic wastes to oil by reductive  
formylation p0302 A81-25563
- YOUNGQUIST, W.  
Pacific Northwest geothermal - Review and outlook  
p0188 A81-28549



## YUMIYAMA, M.

Low-Btu coal char gasification by a pressurized  
two-stage fluidized bed - Sunshine project  
p0298 A81-25113

## YUNG, C. S.

Analysis of a high-performance tubular solar  
collector  
p0223 A81-24987

## YURCHAK, S.

Gasoline from alcohols  
p0297 A81-24900

## Z

## ZAGHDOUDI, M.

An analytical model for solar cells  
p0221 A81-24806

## ZAININGER, H. W.

Wind power generation dynamic impacts on electric  
utility systems  
[EPRI-AP-1614]  
p0358 N81-19585

## ZAKKAY, V.

Bed expansion and attrition studies in a  
coal-fired fluidized bed  
p0299 A81-25128

## ZANI, P. E.

Cells and modules for linear P.V. concentrator  
systems with forced cooling  
p0242 A81-27186

## ZANIO, K.

Indium phosphide/cadmium sulfide thin-film solar  
cells  
[SERI/TR-8170-1-T2]  
p0268 N81-18533

## ZASTROW, A.

Efficiency and stability of experimental  
fluorescent planar concentrators /FPC/  
p0242 A81-27190

## ZAUDERER, B.

Pulsed self-excited MHD power generation at large  
energy densities  
p0327 A81-19814

## ZAVIALOVA, G. M.

Solar electric propulsion systems - A survey  
p0211 A81-20910

## ZENR, S. W.

Performance losses in high-efficiency monolithic  
multi-junction solar cells  
p0235 A81-27120

Effects of temperature variation in concentrator  
cell series resistance measurements  
p0237 A81-27138

Stacked multiple-bandgap solar cells prepared by  
CVD techniques  
p0253 A81-27297

Status of Rockwell-ERC high efficiency solar cell  
programs  
p0261 A81-17546

## ZELBY, L. W.

A perspective on OTEC plants  
p0340 A81-25085

## ZENNRICH, D. E.

Improved performance from thin film dielectric  
wraparound solar cells  
p0233 A81-27100

## ZGOLINSKI, A.

Passive and hybrid solar manufactured housing and  
buildings  
[DOE/CS-30384/1]  
p0263 N81-17592

## ZIEGLER, J.

Performance calculation of a vertical-axis wind  
power converter  
p0337 A81-24617

## ZIELINSKI, R. E.

Princeton I - In-situ coal conversion field test  
for bituminous coals  
p0298 A81-25111

## ZIELKE, C. W.

Zinc halide hydrocracking process for distillate  
fuels from coal. Volume 1: Summary and  
continuous bench studies  
[FE-1743-80-VOL-1]  
p0316 N81-19335

## ZIMMERMAN, A. T.

A preliminary investigation into the  
characteristics of a Hijke Tube pulsating  
combustor  
[AIAA PAPER 81-0411]  
p0293 A81-20815

## ZIMMERMAN, W. F.

Storage requirement definition study  
[NASA-CR-163882]  
p0257 N81-16572

## ZINGER, Z.

On the dynamic optimal coupling of a solar cell  
array to a load and storage batteries  
p0229 A81-26372

Dynamic matching of a solar-electrical  
/photovoltaic/ system - An estimation of the  
minimum requirements on the matching system  
p0229 A81-26373

Optimum operation of a combined system of a solar  
cell array and a dc motor  
p0229 A81-26374

## ZLATANOVIC, M.

Optical spectrum of a closed cycle MHD generator  
plasma  
p0333 A81-23063

## ZOOK, J. D.

Continuous coating of silicon-on-ceramic  
p0231 A81-27083

Silicon-on-ceramic process: Silicon sheet growth  
and device development for the large-area  
silicon sheet task of the low-cost solar array  
project  
[NASA-CR-164134]  
p0281 N81-21546

## ZUB, S. I.

Excitation of a superconducting strip resonator by  
a system of point Josephson contacts  
p0365 A81-21295

## ZULLER, L. G.

Energy from biological processes. Volume 3:  
Appendixes. Part A: Energy from wood  
[PB81-134777]  
p0323 N81-21234

## ZWICK, S. A.


Three-dimensional analysis of MHD generators -  
Development of electrical solution  
[AIAA PAPER 81-0175]  
p0329 A81-26650

# CORPORATE SOURCE INDEX

ENERGY/A Continuing Bibliography (Issue 30)

JULY 1981

## Typical Corporate Source Index Listing

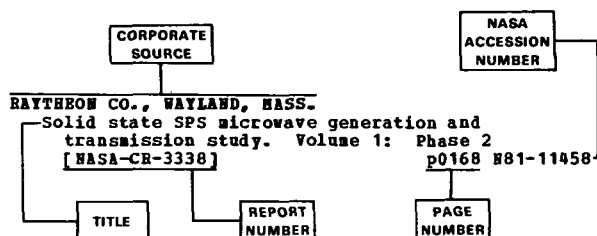

The title of the document is used to provide a brief description of the subject matter. The page number and NASA or AIAA accession number are included in each entry to assist the user in locating the abstract. If applicable, a report number is also included as an aid in identifying the document.

## A

- ACRES AMERICAN, INC., COLUMBIA, MD.**  
Adiabatic compressed air energy storage in hard rock  
[PNI-SA-9010] p0376 N81-17591
- ACRES SHAWINIGAN LTD., TORONTO (ONTARIO).**  
Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 1: Main report  
[NP-25187-VOL-1] p0203 N81-20563  
Study of the potential for cogeneration in Canada: Industrial steam turbines. Volume 2: Economic potential  
[NP-25187-VOL-2] p0360 N81-20564
- ACUREX CORP., MOUNTAIN VIEW, CALIF.**  
Survey of EPA facilities for solar thermal energy applications  
[NASA-CR-162469] p0265 N81-17617  
Advanced solar concentrator mass production, operation, and maintenance cost assessment  
[NASA-CR-164039] p0271 N81-19571  
Solar production of industrial process hot water: Operation and evaluation of the Campbell Soup hot water solar facility  
[SAM-1218-4] p0274 N81-19626
- ADVANCED MECHANICAL TECHNOLOGY, INC., NEWTON, MASS.**  
Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range, volume 1  
[DOE/ET-15207/T2-VOL-1] p0363 N81-21581
- AEG-TELEFUNKEN, HEDEL (WEST GERMANY).**  
A 10 kW small solar power station and operations optimization  
[BMFT-FB-T-79-139] p0275 N81-19638  
Experimental study to define developments for terrestrial solar cell generators  
[BMFT-FB-T-79-143] p0279 N81-20600
- AEROCHEM RESEARCH LABS., INC., PRINCETON, N. J.**  
Rate coefficients of combustion/fuel conversion reactions by high-temperature photochemistry  
[COO-4169-5] p0314 N81-18525
- AEROJET ENERGY CONSERVATION CO., SACRAMENTO, CALIF.**  
Improved liquid/solids handling module  
[DOE/ET-27193/T1] p0363 N81-21582
- AERONAUTICAL RESEARCH INST. OF SWEDEN, STOCKHOLM.**  
Study of Wind Energy Conversion Systems (WECS) in a farm area and WECS safety limit requirements. Minutes from expert meeting IBA, research and development WECS, annex one, subtask A1  
[PFA-TB-BU-2218] p0359 N81-19636

- The velocity induced by the wake of a wind turbine in a shear layer, including ground effect  
[PFA-133] p0359 N81-20037  
The velocity induced by the wake of a wind turbine in a shear layer, including ground effect  
[PB81-142184] p0364 N81-21635
- AERONAUTICAL RESEARCH LABS., MELBOURNE (AUSTRALIA).**  
Wind energy - how reliable  
[AD-A094988] p0317 N81-19563
- AEROSPACE CORP., GERMANTOWN, MD.**  
Military wastes-to-energy applications  
[AD-A093042] p0193 N81-17578
- AIR FORCE ACADEMY, COLO.**  
The USAF Academy flywheel-electric car  
[AD-A095130] p0378 N81-19969
- AIR FORCE ENGINEERING AND SERVICES CENTER, TYNDALL AFB, FLA.**  
The US Air Force Academy solar energy research project summary report  
[AD-A094802] p0199 N81-19576
- AIR FORCE INST. OF TECH., WRIGHT-PATTERSON AFB, OHIO.**  
Environmental influences in the simulation of a solar space heating system  
[AD-A092436] p0190 N81-16587  
Computer simulation of solar air heating systems using rock bed thermal storage units  
[AD-A094771] p0377 N81-19580  
Electric vehicle simulation for design optimization  
[AD-A094734] p0378 N81-19970
- AIR FORCE WRIGHT AERONAUTICAL LABS., WRIGHT-PATTERSON AFB, OHIO.**  
Solar power B and D for Air Force space requirements  
p0260 N81-17533  
The GaAs solar cell research and development programs of the Air Force  
p0260 N81-17542  
Results of the Air Force high efficiency cascaded multiple bandgap solar cell programs  
p0261 N81-17548
- AIR PRODUCTS AND CHEMICALS, INC., ALLENTOWN, PA.**  
Cryogenic methane separation/catalytic hydrogasification process analysis  
[DOE/ET-10325/T3] p0321 N81-21218
- AIRSEARCH MFG. CO., PHOENIX, ARIZ.**  
Regenerative Engine Analysis Program (REAP)  
[AD-A096113] p0361 N81-21080
- ALABAMA A & M UNIV., NORMAL.**  
Advanced solar thermal storage medium test data and analysis  
p0224 N81-24994
- ALABAMA UNIV., HUNTSVILLE.**  
Change-of-pace electric automobile user demonstration (COMCAR 2)  
[DOE/TIC-11373] p0379 N81-21359
- ALABAMA UNIV., UNIVERSITY.**  
High temperature thermal energy storage in aquifers with a solar power plant application  
p0377 N81-18486
- ALASKA STATE DIV. OF ENERGY AND POWER DEVELOPMENT, ANCHORAGE.**  
Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597  
Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 1: Beluga coal district analysis  
[DOE/EV-73002/1-VOL-1] p0205 N81-21595

- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 2: Hydroelectric development  
[DOE/EV-73002/1-VOL-2] p0205 N81-21596
- Alaska Regional Energy Resources Planning Project. Phase 2: Coal, hydroelectric and energy alternatives. Volume 3: Alaska's alternative energies and regional assessment inventory update  
[DOE/EV-73002/1-VOL-3] p0205 N81-21597
- AMERICAN HELIOTHERMAL CORP., DENVER, COLO.  
Evaluation of solar collectors for heat pump applications  
[DOE/CS-35351/T1] p0278 N81-20568
- AMERICAN PLANNING ASSOCIATION, CHICAGO, ILL.  
Residential solar design review: A manual on community architectural controls and solar energy use  
[PB81-128605] p0275 N81-19648
- AMERICAN SOCIETY OF MECHANICAL ENGINEERS, NEW YORK.  
The 1980 flywheel technology symposium  
[CONF-801022] p0378 N81-20561
- AMES LAB., IOWA.  
Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides  
[IS-4745] p0259 N81-16606
- Air pollution control technology for municipal solid waste-to-energy conversion facilities: Capabilities and research needs  
[DOE/EV-0115] p0201 N81-19655
- Photoelectrochemical solar cells based on d-band electrochemistry at transition metal diselenides  
[IS-4759] p0283 N81-21583
- APPLIED PHYSICS LAB., JOHNS HOPKINS UNIV., LAUREL, MD.  
Geothermal energy market study on the Atlantic Coastal Plain. Definition of markets for geothermal energy in the Northern Atlantic Coastal Plain  
[PB81-123861] p0200 N81-19645
- Geothermal energy market study on the Atlantic Coastal Plain. GRITS: A computer program for the economic evaluation of direct-use applications of geothermal energy  
[PB81-119786] p0201 N81-19646
- APPLIED SOLAR ENERGY CORP., CITY OF INDUSTRY, CALIF.  
A silicon sheet casting experiment  
p0231 N81-27082
- Evaluation and optimization of silicon sheet solar cells  
p0234 N81-27114
- An all-plated, low cost contact system for silicon solar cells  
p0243 N81-27197
- ARGONNE NATIONAL LAB., ILL.  
Sampling and instrumentation for fluidized-bed combustion  
[ANL/CBN/FE-80-2] p0305 N81-16317
- Lithium/iron sulfide batteries for electric-vehicle propulsion and other applications  
[ANL-80-49] p0375 N81-16591
- Technology assessments in transportation: Survey of recent literature  
[ANL/CHSV/TH-44] p0192 N81-16958
- Community energy auditing: Experience with the comprehensive community energy management program  
[ANL/CHSV/TH-43] p0193 N81-17588
- Some basic considerations and possible improvements on the solar pond  
[ANL-CT-80-23] p0268 N81-18540
- Classification and evaluation of electric motors and pumps  
[DOE/TIC-11339] p0199 N81-19463
- Employment impacts of selected solar and conventional energy systems: A framework for comparisons and preliminary findings  
[ANL/ERS-TH-116] p0383 N81-19611
- Local air quality constraints on energy growth, 1985-1990  
[ANL/ERS-TH-114] p0201 N81-19653
- Environmental data for sites in the National Solar Data Network  
[SOLAR/0010-80/12] p0276 N81-19665
- Two-dimensional MHD generator model  
[ANL/MHD-80-11] p0359 N81-19932
- Environmental assessment for the satellite power system concept development and evaluation program. Atmosphere effects  
[DOE/EE-0090] p0203 N81-20598
- Energy and materials flows in the production of olefins and their derivatives  
[ANL/CHSV-9] p0203 N81-21161
- Materials technology for coal-conversion processes  
[ANL-80-93] p0322 N81-21228
- STARFIRE: A commercial Tokamak fusion power plant study, volume 2  
[ANL/PPP-80-1-VOL-2] p0363 N81-21612
- State-of-the-art review of materials-related problems in flue gas desulfurization systems  
[ANL-80-59] p0384 N81-21645
- Monitoring temperatures in coal conversion and combustion processes via ultrasound  
[ANL-FR-49622-TH09] p0325 N81-21875
- ARIZONA STATE UNIV., TEMPE.  
Conversion of cellulosic wastes to liquid fuels  
[COO-2982-57] p0320 N81-20306
- ARIZONA UNIV., TUCSON.  
The retardation of crystallization of CVD amorphous silicon and the study of its structural and optical properties  
p0280 N81-20912
- ARMY MOBILITY EQUIPMENT RESEARCH AND DEVELOPMENT COMMAND, FORT BELVOIR, VA.  
Photovoltaic applications - Past and future  
p0246 N81-27231
- Verification test of jet industries Electra-Van 1000P  
[AD-A093738] p0376 N81-17961
- ASTRO RESEARCH CORP., CARPINTERIA, CALIF.  
Efficient structures for geosynchronous spacecraft solar arrays  
p0262 N81-17573
- ATOMIC ENERGY COMMISSION RESEARCH ESTABLISHMENT, RISO (DENMARK).  
Static deflection and eigenfrequency analysis of the Nibe wind turbine rotors. Theoretical background  
[RISOE-M-2199] p0357 N81-19497
- Analysis of data from the Gedser wind turbine: 1977 to 1979  
[RISOE-M-2242] p0359 N81-19637
- Investigations of structural dynamics on the Gedser WTG and on new Danish wind turbines  
[RISOE-M-2146] p0363 N81-21626
- AUTOMATED SCIENCES GROUP, INC., SILVER SPRING, MD.  
Support for the analytical tools for automotive fuel economy activities  
[PB81-109555] p0192 N81-17445
- AUTOMATION INDUSTRIES, INC., SILVER SPRING, MD.  
Environmental data for sites in the National Solar Data Network  
[SOLAR/0010-80/12] p0276 N81-19665
- October 1980 environmental data for sites in the National Solar Data Network  
[SOLAR/0010-80/10] p0279 N81-20588
- Solar energy system performance evaluation: Boulder Corporation, West Greenwood, Indiana  
[SOLAR/1001-80/14] p0363 N81-21552
- Hulco Construction, Prescott, Arizona: Solar energy system performance evaluation October 1979 - May 1980  
[SOLAR/1043-80/14] p0281 N81-21553
- Solar energy system performance evaluation: Kalwall Corporation, Manchester, New Hampshire  
[SOLAR/2015-80/14] p0281 N81-21554
- Troy-Miami Library, Troy, Ohio: Solar energy system performance evaluation  
[SOLAR/2029-80/14] p0281 N81-21555
- Performance of active solar domestic hot water heating systems  
[SOLAR/0024-80/41] p0281 N81-21556
- Solar energy system performance evaluation: Hei Wai Wong, Honolulu, Hawaii, November and December 1979 and April through August 1980  
[SOLAR/1014-80/14] p0281 N81-21557
- Environmental data for sites in the National Solar Data Network, January 1981  
[SOLAR/0010-81/01] p0284 N81-21710

**B**

**BABCOCK AND WILCOX CO., ALLIANCE, OHIO.**  
Study of seed-reprocessing systems for open-cycle coal-fired MHD power plants.  
[DOE/ET-15613/T1-APP] p0353 N81-17606

**BATTELLE COLUMBUS LABS., OHIO.**  
Development of sweet sorghum as an energy crop.  
Volume 3: Integration concepts  
[BHL-2054-VOL-3] p0316 N81-19334

Satellite Power Systems (SPS) space transportation cost analysis and evaluation  
[NASA-CR-164020] p0273 N81-19610

Analysis of field test data on residential heating and cooling  
[EPRI-EA-1649] p0204 N81-21561

**BATTELLE INST., FRANKFURT AM MAIN (WEST GERMANY).**  
Energy: Economic activity and energy demand; link to energy flow. Example: France  
[EUR-6773-EH] p0194 N81-17597

**BATTELLE MEMORIAL INST., GENEVA (SWITZERLAND).**  
Direct thermal water splitting by concentrated solar radiation for hydrogen production.  
Phase 0: Proof of concept experiment  
[NASA-CR-164137] p0291 N81-21210

**BATTELLE PACIFIC NORTHWEST LABS., RICHLAND, WASH.**  
Laboratory studies of hard rock for CAES  
[PNL-SA-8971] p0375 N81-16599

Compressed Air Energy Storage Technology Program overview  
[PNL-SA-8988] p0376 N81-16600

Seasonal Thermal Energy Storage Program  
[PNL-SA-9030] p0376 N81-17602

Barstow heliostat mirror glass characterization  
[PNL-3576] p0267 N81-18522

Assessment of solar options for large power applications  
[PNL-SA-8968] p0268 N81-18542

Analysis of alternative strategies for energy conservation in new buildings  
[PNL-3309] p0199 N81-19353

Methanol production with elemental phosphorus byproduct gas: Technical and economic feasibility  
[PNL-3694] p0322 N81-21224

Investigations on catalyzed steam gasification of biomass. Appendix B: Feasibility study of methanol production via catalytic gasification of 2000 tons of wood per day  
[PNL-3695-APP-B] p0324 N81-21604

Assessment of generic solar thermal systems for large power applications: Analysis of electric power generating costs for systems larger than 10 MWe, volume 1  
[PNL-3533-VOL-1] p0283 N81-21605

The economics of residential energy efficiency  
[PNL-SA-8696] p0206 N81-21624

Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic  
[DOE/ER-0096] p0207 N81-21642

**BDM CORP., HUNTSVILLE, ALA.**  
Coal gasification systems engineering and analysis. Volume 1: Executive summary  
[NASA-CR-161653] p0309 N81-18212

Coal gasification systems engineering and analysis, volume 2  
[NASA-CR-161654] p0309 N81-18213

Coal gasification systems engineering and analysis. Appendix A: Coal gasification catalog  
[NASA-CR-161655] p0309 N81-18214

Coal gasification systems engineering and analysis. Appendix B: Medium B+U gas design  
[NASA-CR-161656] p0309 N81-18215

Coal gasification systems engineering and analysis. Appendix C: Alternate product facility designs  
[NASA-CR-161657] p0309 N81-18216

Coal gasification systems engineering and analysis. Appendix D: Cost and economic studies  
[NASA-CR-161658] p0310 N81-18217

Coal gasification systems engineering and analysis. Appendix E: Cost estimation and economic evaluation methodology  
[NASA-CR-161659] p0310 N81-18218

Coal gasification systems engineering and analysis. Appendix F: Critical technology items/issues  
[NASA-CR-161660] p0310 N81-18219

Coal gasification systems engineering and analysis. Appendix G: Commercial design and technology evaluation  
[NASA-CR-161661] p0310 N81-18220

Coal gasification systems engineering and analysis. Appendix H: Work breakdown structure  
[NASA-CR-161662] p0310 N81-18221

**BECHTEL NATIONAL, INC., SAN FRANCISCO, CALIF.**  
Coal preparation using magnetic separation. Volume 5: Evaluation of magnetic coal desulfurization concepts  
[EPRI-CS-1517-VOL-5] p0319 N81-20302

**BIPHASE ENERGY SYSTEMS, INC., SANTA MONICA, CALIF.**  
Evaluation of a two-phase turbine for solar electric power generation  
[DOE/ET-20431/T1] p0263 N81-17587

**BOEING AEROSPACE CO., SEATTLE, WASH.**  
Solar power satellite microwave power transmission system description executive summary  
p0365 N81-16535

SPS large array simulation  
p0365 N81-16537

SPS phase control studies  
p0366 N81-16547

SPS fiber optic link assessment  
p0366 N81-16548

High efficiency SPS klystron design  
p0366 N81-16550

Reference System Description  
p0367 N81-16554

Rectenna system design  
p0257 N81-16559

Modified reference SPS with solid state transmitting antenna  
p0367 N81-16564

SPS solid state antenna power combiner  
p0367 N81-16565

**BOLT, BERANEK, AND NEWMAN, INC., CAMOGA PARK, CALIF.**  
Evaluation of the noise impact of satellite power system vehicles on the community and ecology at the launch site  
[LBL-11978] p0270 N81-18572

**BONN UNIV. (WEST GERMANY).**  
Electrodes and diaphragms for fuel cells  
[BHPT-PB-T-79-140] p0359 N81-19639

**BONNEVILLE POWER ADMINISTRATION, PORTLAND, OREG.**  
Wind energy integration study  
[DOE/BP-10552/17] p0205 N81-21593

**BROOKHAVEN NATIONAL LAB., UPTON, N. Y.**  
The value of forestation in absorbing carbon dioxide surrounding a coal fired power plant  
[BNL-51279] p0192 N81-16631

**HYFIRE: A Tokamak high temperature electrolysis system**  
[BNL-28679] p0352 N81-16908

Carbon monoxide: Resource of the future  
[BNL-28576] p0307 N81-17603

Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 N81-17615

Fuel-cells for electric utility and transportation applications  
[BNL-28696] p0354 N81-18518

Thin-film flat-plate solar collectors for low cost manufacture and installation  
[BNL-51124] p0269 N81-18545

Solar/performance goals for solar and ground-coupled heat pump systems  
[BNL-51259] p0273 N81-19609

Review of fusion synfuels  
[BNL-28627] p0291 N81-20300

Flash pyrolysis and hydropyrolysis of coal  
[BNL-28577] p0319 N81-20301

**BROWN, BOVERI UND CIE, A.G., HEIDELBERG (WEST GERMANY).**  
Development of sodium/sulfur batteries  
[BHPT-PB-T-79-60] p0376 N81-17607

**C**

**CALABRIA UNIV., COSENZA (ITALY).**  
Advanced solar collectors (concentrating troughs)  
p0267 N81-18505

- A natural convection solar house system  
p0267 N81-18506  
CALIFORNIA UNIV., BERKELEY. LAWRENCE BERKELEY LAB.  
Characterization of solid waste conversion and  
cogeneration systems  
[DOE/EV-0105] p0307 N81-17585  
Thin film electrochromic materials for energy  
efficient windows  
[LBL-10862] p0197 N81-18549  
Aquifer thermal energy storage: A survey  
[LBL-10441] p0378 N81-19606  
Transport of low energy positive and negative  
ion beam by permanent magnets  
[LBL-11636] p0359 N81-19888  
Updated plan for support of research related to  
geothermal reservoir engineering  
[LBL-10807] p0323 N81-21463  
Environmental assessment for the Satellite Power  
System concept development and evaluation  
program: Nonmicrowave health and ecological  
effects  
[DOE/ER-0089] p0205 N81-21613  
CALIFORNIA UNIV., LIVERMORE.  
Solar coal gasification: Plant design and  
economics  
[UCRL-84610] p0265 N81-18225  
CALIFORNIA UNIV., LIVERMORE. LAWRENCE LIVERMORE LAB.  
Ecology problems associated with geothermal  
development in California  
[UCRL-83941-BEV-1] p0192 N81-16635  
Energy/economic model analysis. Livermore  
energy policy model  
[PB81-114266] p0194 N81-17616  
Evaluation of a hybrid flywheel/battery  
propulsion system for electric vehicles  
[UCRL-15259] p0376 N81-17963  
Wind-power site-screening methodology  
[UCRL-52938] p0314 N81-18526  
Environment, health, socioeconomic and  
environmental control technology executive  
summary  
[DOE/TIC-11308] p0197 N81-18575  
Inductive energy transfer in transportation  
[UCRL-85141] p0368 N81-18962  
Characteristics of acidic electrolyte  
hydrogen-air fuel batteries (3)  
[UCRL-TRANS-11655] p0358 N81-19604  
Solar gasification of carbonaceous materials  
[UCRL-53063] p0272 N81-19605  
The 1980 flywheel technology symposium  
[CONF-801022] p0378 N81-20561  
World activity in solar ponds  
[UCID-18900] p0282 N81-21564  
US energy consumption and supply  
[UCID-18856] p0204 N81-21565  
Synopsis of R and D in geothermal-geochemical  
engineering at the Lawrence Livermore National  
Laboratory, 1976 - 1980  
[UCID-18863] p0324 N81-21615  
Environmental overview for the development of  
geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 N81-21639  
Management plan for fiscal year 1981:  
Environmental Control Technology Project  
geothermal development  
[UCID-18903] p0206 N81-21640  
CALIFORNIA UNIV., LOS ANGELES.  
Research in the geosciences related to resource  
assessment  
[DOE/IR-10119/T1] p0313 N81-18476  
Military wastes-to-energy applications  
p0314 N81-18483  
Effect of wall suction on laminar entrance flow  
with application to solar air heaters  
p0265 N81-18488  
Microenvironmental changes and plant responses  
due to shading and wind deflection by solar  
collectors: A simulation study  
[UCLA-12/1268] p0197 N81-18576  
Transparent glass honeycomb structures for  
energy loss control  
[UCLA-ENG-8039] p0274 N81-19622  
CALSPAN ADVANCED TECHNOLOGY CENTER, BUFFALO, N.Y.  
Aerosol formation from diesel exhaust and SO<sub>2</sub>, a  
chamber study  
[PB81-121147] p0201 N81-19674  
CASTLE TECHNOLOGY CORP., LEXINGTON, MASS.  
Survey of electrochemical production of  
inorganic compounds  
[ANL/OEPH-80-3] p0318 N81-20226  
CATALYTIC, INC., PHILADELPHIA, PA.  
Development of catalysts for coal conversion  
[PB81-111395] p0307 N81-17296  
CATALYTICA ASSOCIATES, INC., SANTA CLARA, CALIF.  
Distillate fuel-oil processing for phosphoric  
acid fuel cell power plants  
[DOE/ET-13323/2] p0358 N81-19583  
CENTRO INFORMAZIONI STUDI ESPERIMENTE, MILAN (ITALY).  
Optimized design of total energy systems: The  
RETE project  
[CISE-1606] p0196 N81-18512  
GaAs(GaAl) as solar cells to be used under  
concentrated solar light condition  
[EUR-6934-EN] p0274 N81-19625  
CHEVRON RESEARCH CO., RICHMOND, CALIF.  
Refining and upgrading of synfuels from coal and  
oil shales by advanced catalytic processes  
[FE-2315-55] p0311 N81-18231  
CHICAGO UNIV., ILL.  
Coal transformation chemistry  
[DOE/PC-30088/1] p0316 N81-19328  
CH2H/HILL, BOISE, IDAHO.  
Utilization of geothermal energy for methane  
production for J. A. Albertson Land and  
Cattle Company  
[DOE/ET-27230/T2] p0316 N81-19333  
CLEMSON UNIV., S.C.  
Investigation of reliability attributes and  
accelerated stress factors on terrestrial  
solar cells  
[NASA-CR-164012] p0271 N81-19568  
CLEVELAND STATE UNIV., OHIO.  
Theoretical results on the tandem junction solar  
cell based on its Ebers-Moll transistor model  
p0232 N81-27099  
COLORADO STATE UNIV., FORT COLLINS.  
CSU Solar House 3 solar heating and cooling  
system performance  
[DOE/CS-30122/T1] p0272 N81-19587  
Handbook of experiences in the design and  
installation of solar heating and cooling  
systems  
[DOE/CS-32224/T1] p0282 N81-21566  
COLORADO UNIV. AT BOULDER.  
Aerodynamic analysis of propeller-type windmills  
with helical trailing vortices  
p0355 N81-18565  
COMMERCE DEPT., WASHINGTON, D.C.  
Photovoltaics industry profile  
[DOE/EL-01830/T3] p0284 N81-21619  
COMMISSION OF THE EUROPEAN COMMUNITIES, BRUSSELS  
(BELGIUM).  
Energy: Solar energy programme of the  
Commission of the European Communities  
[EUR-6959-EN] p0263 N81-17593  
Europe in face of the future  
p0383 N81-18955  
COMMITTEE OF CONFERENCE (U. S. CONGRESS).  
Wind energy systems act of 1980  
[H-REPT-96-1217] p0190 N81-16525  
COMMITTEE ON ENERGY AND NATURAL RESOURCES (U.S.  
SENATE).  
October report on the current fuel situation  
from the Energy Information Administration  
[GPO-60-871] p0189 N81-16311  
Energy in transition, 1985-2010  
[GPO-63-171] p0190 N81-16585  
Effects of carbon dioxide buildup in the  
atmosphere  
[GPO-62-841] p0191 N81-16626  
COMMITTEE ON SCIENCE AND TECHNOLOGY (U. S. HOUSE).  
National Academy of Sciences report: Energy in  
transition, 1985-2010  
[GPO-61-647] p0189 N81-16524  
Foresight. Volume 2: Energy conservation in  
cities  
[GPO-47-454] p0190 N81-16527  
Fusion energy research, development, and  
demonstration act of 1980  
[H-REPT-96-1096] p0352 N81-16898  
Municipal solid waste to energy act of 1979  
[GPO-60-684] p0192 N81-16956  
COMMUNICATIONS SATELLITE CORP., CLARKSBURG, MD.  
Thin n-i-p silicon solar cell  
p0232 N81-27097

## CORPORATE SOURCE INDEX

## ENERGY RESEARCH CORP., DANBURY, CONN.

Silicon Research and Technology Workshop report  
p0260 N81-17541

COMPTROLLER GENERAL OF THE UNITED STATES,  
WASHINGTON, D.C.  
A framework for developing a national energy  
conservation program  
[EHD-79-76] p0190 N81-16531

How the petroleum refining industry approaches  
energy conservation. A case study  
[EHD-80-55] p0190 N81-16532

COMPUTER SCIENCES CORP., VIENNA, VA.  
Review of activities and plans for solar energy  
in Federal buildings  
[DOE/CR-10001/T2] p0200 N81-19590

COMPUTER SCIENCES CORP., WASHINGTON, D.C.  
Office of alcohol fuels program plan, FY 1981  
[DOE/AF-10001/T2] p0319 N81-20293

CONNECTICUT UNIV., STORRS.  
Thermal performance predictions of flat-plate  
solar collector air heaters  
p0270 N81-18566

CONOCO COAL DEVELOPMENT CO., LIBRARY, PA.  
Zinc halide hydrocracking process for distillate  
fuels from coal. Volume 1: Summary and  
continuous bench studies  
[FE-1743-80-VOL-1] p0316 N81-19335

COORDINATING RESEARCH COUNCIL, INC., ATLANTA, GA.  
Informational report: 1979 progress of the  
Chemical Characterization Panel of the  
composition of diesel exhaust project and  
results of particulate extraction round-robin  
[PB81-114670] p0195 N81-17636

CRYSTAL SYSTEMS, INC., SALEM, MASS.  
Low-cost conversion of polycrystalline silicon  
into sheet by HEM and FAST  
p0238 N81-27145

CYCLONATIC INDUSTRIES, INC., SAN DIEGO, CALIF.  
Highly efficient welding power supply  
[DOE/CS-40023/T2] p0199 N81-19404

Highly efficient welding power supply  
[DOE/CS-40023/T1] p0202 N81-20441

## D

DAVID SARNOFF RESEARCH CENTER, PRINCETON, N.J.  
SPS design with solid-state transmitter  
p0365 N81-24831

DAYTON UNIV., OHIO.  
Obtaining improved products from the organic  
fraction of municipal solid waste  
[PB81-110918] p0307 N81-17295

DECISION FOCUS, INC., PALO ALTO, CALIF.  
Energy/economic model analysis. Energy economic  
modeling system  
[PB81-114274] p0194 N81-17614

DELAWARE UNIV., NEWARK.  
Stability of large horizontal-axis axisymmetric  
wind turbines  
p0333 N81-22526

DELEGATIONEN FOER ENERGIFORSKNING, STOCKHOLM  
(SWEDEN).  
Production of a raw material for energy  
production in agriculture  
[DFE-31] p0324 N81-21550

DENVER UNIV., COLO.  
Municipal geothermal heat utilization plan for  
Glenwood Springs, Colorado  
[DOE/ID-12049-3] p0324 N81-21585

DEPARTMENT OF ENERGY, BARTLESVILLE, OKLA.  
Fleet trails using methanol/gasoline blends  
[CONF-801030-4] p0311 N81-18230

Comparisons of gasohol and gasoline in  
laboratory and field trials  
[CONF-801030-3] p0312 N81-18237

DEPARTMENT OF ENERGY, GRAND FORKS, N. DAK.  
Observations on test stockpiles of dried lignite  
and subbituminous coals  
[DOE/GPFC/RI-80/5] p0321 N81-21217

DEPARTMENT OF ENERGY, MORGANTOWN, W. VA.  
Everlasting sliding-disc valve METC SOA test  
valve No. B-3, state-of-the-art lockhopper  
valve testing and development project  
[DOE/METC-SR-80/17] p0323 N81-21361

DEPARTMENT OF ENERGY, OAKLAND, CALIF.  
Heavy oil reservoirs recoverable by thermal  
technology  
[DOE/ET-12380/1-VOL-3] p0317 N81-19540

DEPARTMENT OF ENERGY, OKLAHOMA CITY, OKLA.  
Heavy oil reservoirs recoverable by thermal  
technology  
[DOE/ET-12380/1-VOL-1] p0318 N81-19616

DEPARTMENT OF ENERGY, WASHINGTON, D. C.  
Introduction to meteorological measurements and  
data handling for solar energy applications  
[DOE/ER-0084] p0265 N81-17681

Generator gas operation of motor vehicles  
[DOE-TR-219] p0310 N81-18224

Internal combustion engines for alcohol motor  
fuels: A compilation of background technical  
information  
[DOE/AF-0001] p0313 N81-18398

Reducing US oil vulnerability: Energy policy  
for the 1980's  
[DOE/FE-0021] p0196 N81-18524

Automotive technology development program  
[DOE/CS-0069/1] p0356 N81-19464

Coal conversion 1979 technical report  
[DOE/FE-0010] p0319 N81-20297

The 1980 flywheel technology symposium  
[CONF-801022] p0378 N81-20561

Alternative fuels production program  
[DOE/EA-0058/2] p0321 N81-21220

Western Coal Survey: A survey of coal mining  
capacity in the west  
[DOE/EA-0045/1] p0323 N81-21464

Alternate sources of energy  
[CONF-8009109] p0384 N81-21580

Performance profiles of major energy producers  
[DOE/EIA-0206/78] p0324 N81-21610

Environmental development plan: Coal liquefaction  
[DOE/EDP-0044] p0206 N81-21641

DEUTSCHE FORSCHUNGS- UND VERSUCHSANSTALT FUER LUFT-  
UND RAUMFAHRT, STUTTGART (WEST GERMANY).  
Construction and properties of a quadrupole mass  
spectrometer device, developed for the  
investigation of a thermoionic  
barium-caesium-diode vapor atmosphere  
[DFVLR-FB-79-39] p0361 N81-21308

DORNIER-WERKE G.M.B.H., FRIEDRICHSHAFEN (WEST  
GERMANY).  
High temperature water vapor electrolysis (HOT  
ELLY)  
[BMFT-FB-T-80-051] p0292 N81-21627

DOW CORNING CORP., MIDLAND, MICH.  
Encapsulation of PV cells using silicone materials  
p0245 N81-27225

DUQUESNE LIGHT CO., PITTSBURGH, PA.  
Hydrogen bonding in asphaltene and coal liquids  
[DOE/PC-30252/T1] p0318 N81-20227

DYNECOLOGY, INC., HARRISON, N.Y.  
Energy from biomass: The simplex process for  
the gasification of coal and forest pulp  
[PB81-110512] p0305 N81-16324

## E

ECOLE POLYTECHNIQUE FEDERALE DE LAUSANNE  
(SWITZERLAND).  
Technical evaluation of gaseous suspensions of  
graphite for the absorption of concentrated  
solar radiation  
[EPPL-ITA-6] p0272 N81-19574

EDGERTON, GERMESHAUSEN AND GRIER, INC., IDAHO  
FALLS, IDAHO.  
Environmental and safety issues of the fusion  
fuel cycle  
[CONF-801011-66] p0353 N81-17911

EIC, INC., NEWTON, MASS.  
Low temperature alkali metal-sulfur batteries  
[COO-2520-7] p0379 N81-21586

ELECTROCHEM INDUSTRIES, INC., CLARENCE, N.Y.  
Performance and safety characteristics of Li/BCX  
and L/CSC systems  
p0379 N81-21495

ENERGY AND ENVIRONMENTAL ANALYSIS, INC., ARLINGTON,  
VA.  
Classification and evaluation of electric motors  
and pumps  
[DOE/TIC-11339] p0199 N81-19463

ENERGY AND MINERALS RESEARCH CO., EYTON, PA.  
Efficient ultrasonic grinding: A new technology  
for micron-sized coal  
[DOE/ER-10466/T1] p0315 N81-19317

ENERGY RESEARCH CORP., DANBURY, CONN.  
Improvement of phosphoric acid fuel cell stacks  
[AD-A092814] p0351 N81-16589

Technology development for phosphoric acid fuel cell powerplant, phase 2  
[NASA-CR-165317] p0362 N81-21536

Technology development for phosphoric acid fuel cell powerplant (phase 2)  
[NASA-CR-165316] p0362 N81-21547

**ENGINEERING SOCIETIES COMMISSION ON ENERGY, INC., WASHINGTON, D. C.**

Regional conversion to coal  
[FE-2468-63] p0314 N81-18517

**ENVIRONMENTAL PROTECTION AGENCY, ANN ARBOR, MICH.**

Comparison of gas phase hydrocarbon emissions from light-duty gasoline vehicles and light-duty vehicles equipped with diesel engines  
[PB81-122996] p0203 N81-20620

Emissions and fuel economy of a Comprex Pressure Wave Supercharged Diesel  
[PB81-133399] p0204 N81-21371

**ESCHER TECHNOLOGY ASSOCIATES, ST. JOHNS, MICH.**

Liquid-hydrogen automotive onboard storage and servicing system project  
[LA-UR-80-3491] p0291 N81-19971

**EXXON RESEARCH AND ENGINEERING CO., FLORENCE PARK, N.J.**

EDS coal liquefaction process development, phase 4-5  
[FE-2893-53] p0312 N81-18240

## F

**FAIRCHILD STRATOS CORP., MANHATTAN BEACH, CALIF.**

Dish Stirling solar receiver program  
[NASA-CR-163889] p0257 N81-16574

**FEDERAL LAB. CONSORTIUM, WASHINGTON, D. C.**

The Energy Link catalog. Volume 2: Energy resource catalog  
[PB81-140824] p0384 N81-21633

**FIRST MANUFACTURED HOMES, INC., LUBBOCK, TEX.**

Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30371/1] p0267 N81-18515

**FLORIDA UNIV., GAINESVILLE.**

Determination of lifetimes and recombination currents in p-n junction solar cells, diodes, and transistors  
p0209 A81-20011

Review of physics underlying recent improvements in silicon solar-cell performance  
p0241 A81-27176

Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 A81-27239

**FLUIDYNE ENGINEERING CORP., MINNEAPOLIS, MINN.**

MHD air heater development technology  
[DOE/ET-15602/T2] p0360 N81-20590

**FLUOR ENGINEERS AND CONSTRUCTORS, INC., IRVINE, CALIF.**

Economic comparison of molten carbonate fuel cells and gas turbines in coal gasification based power plants  
[EPRI-AP-1543] p0322 N81-21229

**FORD, BACON AND DAVIS, INC., NEW YORK.**

Energy emergency contingency plan  
[PB81-128704] p0203 N81-20604

**FORD AEROSPACE AND COMMUNICATIONS CORP., NEWPORT BEACH, CALIF.**

A dish-Stirling solar-thermal power system  
p0217 A81-22897

**FOSTER ASSOCIATES, INC., WASHINGTON, D.C.**

A statistical study of Coal Sulfur Variability and Related Factors. Documentation for the coal sulfur variability data base and analytical program  
[PB81-111593] p0306 N81-17287

A statistical study of coal sulfur variability and related factors  
[PB81-111585] p0195 N81-17644

**FOSTER-MILLER ASSOCIATES, INC., WALTHAM, MASS.**

Development of an automatic heliostat cleaning system  
[SAND-79-8184] p0268 N81-18532

Design and development of Stirling engines for stationary power generation applications in the 500 to 3000 horsepower range  
[DOE/ET-15208/1] p0355 N81-18562

**FRANKLIN RESEARCH CENTER, PHILADELPHIA, PA.**

Hot water from the Sun: A consumer guide to solar water heating  
[PB81-128597] p0275 N81-19647

**FRIENDS OF THE EARTH, SAN FRANCISCO, CALIF.**

Decentralized energy studies: Compendium of international studies and research  
[SERI/ER-744-451] p0193 N81-17582

## G

**GAMZE-KOROBKIN-CALOGHER, INC., WASHINGTON, D.C.**

Analysis of residential duct losses  
[PB80-228000] p0191 N81-16614

**GARRETT CORP., PHOENIX, ARIZ.**

Analytical design of an advanced radial turbine  
[NASA-CR-165170] p0361 N81-20958

**GENERAL ACCOUNTING OFFICE, WASHINGTON, D. C.**

A look at NASA's Aircraft Energy Efficiency program  
[PSAD-80-50] p0201 N81-20077

Liquefying coal for future energy needs  
[PB81-135956] p0322 N81-21232

Improved data and procedures needed for development and implementation of building energy performance standards  
[PB81-138422] p0206 N81-21630

**GENERAL ATOMIC CO., SAN DIEGO, CALIF.**

STARFIRE: A commercial Tokamak fusion power plant study, volume 2  
[AHL/FPP-80-1-VOL-2] p0363 N81-21612

**GENERAL ELECTRIC CO., CINCINNATI, OHIO.**

Storage requirement definition study  
[NASA-CR-163882] p0257 N81-16572

A conceptual design study of a high temperature solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523

**GENERAL ELECTRIC CO., EVENDALE, OHIO.**

Evaluation of advanced combustors for dry NO<sub>x</sub>/suppression with nitrogen bearing fuels in utility and industrial gas turbines  
[ASME PAPER 81-GT-125] p0349 A81-30029

**GENERAL ELECTRIC CO., PHILADELPHIA, PA.**

Marine Biomass Program  
[PB81-113185] p0307 N81-17297

Development of a combined photovoltaic/thermal linear receiver for a parabolic trough concentrator  
[SAND-80-7138] p0272 N81-19595

Photovoltaic concentrator array production process study. Volume 2: Study results  
[SAND-79-7055/2] p0282 N81-21574

Design of a side-by-side photovoltaic thermal system for a Northeast all-electric residence  
[SAND-80-7148] p0282 N81-21575

**GENERAL ELECTRIC CO., SANTA BARBARA, CALIF.**

Guidelines for conceptual design and evaluation of aquifer thermal energy storage  
[PRL-3581] p0380 N81-21587

**GENERAL ELECTRIC CO., SCHENECTADY, N. Y.**

Evaluation of advanced combustors for dry NO<sub>x</sub>/suppression with nitrogen bearing fuels in utility and industrial gas turbines  
[ASME PAPER 81-GT-125] p0349 A81-30029

Evaluation of a hybrid flywheel/battery propulsion system for electric vehicles  
[UCRL-15259] p0376 N81-17963

Development of high-temperature turbine subsystem technology to a technology readiness status, phase 2  
[FE-1806-96] p0360 N81-20440

**GENERAL ELECTRIC CO., ST. PETERSBURG, FLA.**

Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1  
[NASA-CR-164051] p0202 N81-20538

Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 2, appendix A: Selected DSG technologies and their general control requirements  
[NASA-CR-164052] p0202 N81-20539

Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix B: State of the art, trends, and potential growth of selected DSG technologies  
[NASA-CR-164054] p0202 N81-20540

- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 4, appendix C: Identification from utility visits of present and future approaches to integration of DSG into distribution networks  
[NASA-CR-164055] p0202 N81-20541
- Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 5, appendix D: Cost-benefit considerations for providing dispersed storage and generation for electric utilities  
[NASA-CR-164053] p0202 N81-20542
- GEOMET, INC., GAITHERSBURG, MD.  
Wind energy resource atlas. Volume 4: The Northeast region  
[FNL-3195-WBA-4] p0321 N81-20592
- GEORGIA INST. OF TECH., ATLANTA.  
Pyrolytic oils: Characterization and data development for continuous processing  
[PB81-110959] p0306 N81-17294
- GILBERT/COMMONWEALTH, READING, PA.  
Oxygen-enriched air production for MHD power plants  
[DOE/ET-11058/T4] p0364 N81-21920
- GILBERT ASSOCIATES, INC., READING, PA.  
Research and evaluation of biomass resources/conversion/utilization systems (market/experimental analysis for development of a data base for a fuels from biomass model. Volume 1: Biomass allocation model  
[DOE/ET-20611/14] p0315 N81-18553
- GOULD, INC., ROLLING MEADOWS, ILL.  
Development of zinc-bromine batteries for utility energy storage  
[DOE/ET-29345/21] p0379 N81-20591
- GRUNMAN ENERGY SYSTEMS, INC., BOHemia, N.Y.  
Development of an 8 kilowatt wind turbine generator for residential type applications. Phase 1: Design and analysis. Volume 2: Technical report  
[RFP-3007-VOL-2] p0357 N81-19581
- GULF RESEARCH AND DEVELOPMENT CO., PITTSBURGH, PA.  
Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T2] p0305 N81-16318
- Investigation of mechanism of hydrogen transfer in coal hydrogenation  
[DOE/PC-30080/T1] p0315 N81-19258
- Investigation of the liquefaction of partially dried and oxidized coals  
[EPRI-AP-1625] p0321 N81-21222
- H**
- HARBIDGE HOUSE, INC., WASHINGTON, D.C.  
Ground Water and Energy: Proceedings of the US Department of Energy's National Workshop  
[CONF-800137] p0199 N81-19584
- HARVARD UNIV., CAMBRIDGE, MASS.  
Boston solar retrofits: Studies of solar access and economics  
[DOE/CS-10047/T5] p0268 N81-18538
- Optimization of transparent electrode for solar cells  
[SERI/PR-9318-1-T1] p0274 N81-19621
- HAWAIIAN DREDGING AND CONSTRUCTION CO., HONOLULU.  
Engineering and economic studies for direct applications of geothermal energy in an industrial park in Pahoa, Hawaii  
[DOE/ET-27233/T2] p0314 N81-18513
- HIGGINS, AULD AND ASSOCIATES, ALBUQUERQUE, N. MEX.  
Solar collector foundation designs  
[SAND-80-7070] p0279 N81-20582
- HITMAN ASSOCIATES, INC., COLUMBIA, MD.  
Proceedings: EPA/Industry Forum on Coal-Liquefaction  
[PB81-113052] p0195 N81-17645
- HONEYWELL CORPORATE MATERIAL SCIENCES CENTER, BLOOMINGTON, MINN.  
Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project  
[NASA-CR-164134] p0281 N81-21546
- HONEYWELL CORPORATE TECHNOLOGY CENTER, BLOOMINGTON, MINN.  
Continuous coating of silicon-on-ceramic  
p0231 N81-27083
- HOUSTON CHEMICAL CO., CORPUS CHRISTI, TEX.  
Development and testing of heat transport fluids for use in active solar heating and cooling systems  
[NASA-TX-82395] p0368 N81-16584
- HOUSTON UNIV., TEX.  
Energy supply and demand properties from engineering process models  
[EPRI-BA-1568] p0191 N81-16603
- Oil ganglion dynamics in flow through porous media  
p0313 N81-18314
- HUGHES AIRCRAFT CO., EL SEGUNDO, CALIF.  
Summary results of the ATS-6 solar cell flight experiment  
p0244 N81-27209
- Concentrator designs for space photovoltaic arrays  
p0250 N81-27271
- Conceptual design study of concentrator enhanced solar arrays for space applications. Performance evaluation of 5 KW and 20 KW systems in Si and GaAs at 1 AU employing a flat plate trough concentrator  
[NASA-CR-164038] p0271 N81-19567
- HUGHES AIRCRAFT CO., LOS ANGELES, CALIF.  
High energy density batteries for satellite applications  
p0379 N81-21505
- HUGHES RESEARCH LABS., MALIBU, CALIF.  
Deep-level defects and recombination parameters in proton irradiated AlGaAs-GaAs solar cells  
p0247 N81-27239
- GaAs workshop report  
p0261 N81-17547
- Indium phosphide/cadmium sulfide thin-film solar cells  
[SERI/TR-8170-1-T2] p0268 N81-18533
- PBI treated polypropylene battery separator  
p0379 N81-21512
- I**
- ILLINOIS INST. OF TECH., CHICAGO.  
Solids circulation around a jet in a fluidized bed gasifier  
[DOE/ET-12229/T1] p0313 N81-18343
- ILLINOIS POWER CO., DECATUR.  
Surface-heating greenhouses with waste heated water  
[DOE/R5-10107/T1] p0200 N81-19620
- ILLINOIS UNIV., URBANA.  
Effect of zinc impurity on silicon solar-cell efficiency  
p0256 N81-29290
- Surface-heating greenhouses with waste heated water  
[DOE/R5-10107/T1] p0200 N81-19620
- INFORMATION SPECTRUM, INC., WARMINSTER, PA.  
Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 2: Abstract data base  
[AD-A094226] p0196 N81-18050
- Compilation of energy efficient concepts in advanced aircraft design and operations. Volume 1: Technical report  
[AD-A094225] p0196 N81-18051
- INSTITUT ROYAL METEOROLOGIQUE DE BELGIQUE, BRUSSELS.  
Meteorological data: Measurement techniques and solar components  
p0266 N81-18501
- INSTITUTE FOR TELECOMMUNICATION SCIENCES, BOULDER, COLO.  
Environmental assessment for the satellite power system concept development and evaluation program-electromagnetic  
[DOE/EE-0096] p0207 N81-21642
- INSTITUTE OF GAS TECHNOLOGY, CHICAGO, ILL.  
Study of the behavior of gas distribution equipments in hydrogen service, phase 2  
[CONF-801055-5] p0291 N81-16323
- Evaluation of coal conversion catalysts  
[PB81-111387] p0306 N81-17291
- Hydrogasification of oil shale  
[PB81-114092] p0306 N81-17292
- Rapid-rate bituminous coal gasification  
[PB81-114290] p0306 N81-17293
- Assessment of methane hydrates  
[PB81-113300] p0307 N81-17510



Fuel cell support studies: On-site molten carbonate systems  
[PB81-113672] p0353 N81-17619

High-temperature high-pressure particulate removal in coal gasification  
[PB81-113664] p0308 N81-17642

Electrochemical photovoltaic cells  
[SERI/PR-9175-1-T2] p0267 N81-18521

Preparation of a coal conversion systems technical data book  
[FE-2286-48] p0315 N81-19327

Analysis of geopressured aquifers  
[PB81-123416] p0317 N81-19553

Electrochemical photovoltaic cells  
[SERI/TR-8002-5-T1] p0272 N81-19582

**INSTITUTO GEOGRAFICO NACIONAL, MADRID (SPAIN).**  
Thermal mapping, geothermal source location, natural effluents and plant stress in the Mediterranean coast of Spain  
[E81-10119] p0323 N81-21423

**INTERNATIONAL INSTITUTE FOR APPLIED SYSTEMS ANALYSIS, LAIBENBURG (AUSTRIA).**  
Solar options in central Europe. A synthesis of solar technology assessment and contemporary criteria in 1978-1979  
[IIASA-ER-79-14] p0280 N81-21489

Effects of accounting rules on utility choices of energy technologies in the United States  
[IIASA-ER-80-27] p0204 N81-21490

**IOWA STATE UNIV. OF SCIENCE AND TECHNOLOGY, Ames.**  
Wind generator network methodology and analysis  
p0359 N81-20356

## J

**JET PROPULSION LAB., CALIFORNIA INST. OF TECH., PASADENA.**

Radiatively coupled thermionic and thermoelectric power system concept  
[AIAA PAPER 81-0217] p0329 A81-20683

High temperature solar thermal technology  
[ASME PAPER 80-WA/SOL-20] p0213 A81-21144

Thermal storage requirements for parabolic dish solar power plants  
[ASME PAPER 80-WA/SOL-21] p0213 A81-21145

Solar energy market penetration models - Science or number mysticism  
p0218 A81-23026

Analysis of a high-performance tubular solar collector  
p0223 A81-24987

The DOE photovoltaic program - An overview  
p0228 A81-25055

A silicon sheet casting experiment  
p0231 A81-27082

Behavior of interdigitated back-contact solar cells  
p0231 A81-27086

Evaluation and optimization of silicon sheet solar cells  
p0234 A81-27114

Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible  
p0234 A81-27116

Solar cells and modules from dendritic web silicon  
p0234 A81-27117

The spectral irradiance of some solar simulators and its effect on cell measurements  
p0238 A81-27147

Circuit design considerations for photovoltaic modules and systems  
p0238 A81-27153

An all-plated, low cost contact system for silicon solar cells  
p0243 A81-27197

Influence of processing on the electrical performance of proton irradiated silicon solar cells  
p0244 A81-27205

Cost effective, high throughput, junction formation techniques using spray-on dopants  
p0245 A81-27220

An improved lamination technique for solar arrays  
p0245 A81-27226

Flat-plate photovoltaic array design optimization  
p0248 A81-27247

Grain size dependence of silicon solar cell parameters  
p0249 A81-27261

Concentrator designs for space photovoltaic arrays  
p0250 A81-27271

Qualification test results for DOE solar photovoltaic flat panel procurement - PRDA 38  
p0251 A81-27278

Influence of module requirements on flat plate module design evolution  
p0251 A81-27279

Epitaxial and polycrystalline GaAs solar cells using OM-CVD techniques  
p0252 A81-27287

Radiatively coupled thermionic power system concept  
p0346 A81-28219

Effect of zinc impurity on silicon solar-cell efficiency  
p0256 A81-29290

Two-stage combustion for reducing pollutant emissions from gas turbine combustors  
[NASA-CR-163877] p0350 N81-16056

Regional price targets appropriate for advanced coal extraction  
[NASA-CR-163896] p0189 N81-16513

Rectenna array measurement results  
p0367 N81-16562

Storage requirement definition study  
[NASA-CR-163882] p0257 N81-16572

Advanced Cogeneration Technology Economic Optimization Study (ACTEQS)  
[NASA-CR-163887] p0306 N81-16573

Dish Stirling solar receiver program  
[NASA-CR-163889] p0257 N81-16574

Development of simplified process for environmentally resistant cells  
[NASA-CR-163884] p0257 N81-16575

Design, fabrication, test, qualification and price analysis for third generation design solar cell modules  
[NASA-CR-163917] p0257 N81-16576

Automated array assembly, phase 2  
[NASA-CR-163878] p0258 N81-16578

Photovoltaic module soiling studies, May 1978 - October 1980  
[DOE/JPL-1012-49] p0258 N81-16580

Criteria for evaluation of reflective surface for parabolic dish concentrators  
[NASA-CR-163898] p0258 N81-16581

Molten salt pyrolysis of latex  
[NASA-CASE-NPO-14315-1] p0306 N81-17261

Solar energy receiver for a Stirling engine  
[NASA-CASE-NPO-14619-1] p0259 N81-17518

Central station market development strategies for photovoltaics  
[NASA-CR-163947] p0193 N81-17520

Automated array assembly task development of low-cost polysilicon solar cells  
[NASA-CR-163939] p0259 N81-17521

Development of a high efficiency thin silicon solar cell  
[NASA-CR-163931] p0259 N81-17522

A conceptual design study of a high temperature solar thermal receiver (added tasks 6 and 7)  
[NASA-CR-163944] p0259 N81-17523

Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays  
[NASA-CR-163943] p0260 N81-17525

High efficiency epitaxial GaAs/GaAs and GaAs/Ge solar cell technology using OM/CVD  
p0261 N81-17543

Prospects for enhancing SEF array performance  
p0262 N81-17572

Blanket technology workshop report  
p0263 N81-17576

The environmental assessment of a contemporary coal mining system  
[NASA-CR-163974] p0197 N81-18571

Fuel cells feasibility  
p0356 N81-18998

Copper doped polycrystalline silicon solar cell  
[NASA-CASE-NPO-14670-1] p0270 N81-19558

Investigation of reliability attributes and accelerated stress factors on terrestrial solar cells  
[NASA-CR-164012] p0271 N81-19568

- Development of megasonic cleaning for silicon wafers  
[NASA-CR-164011] p0271 N81-19569  
Process feasibility study in support of silicon material task 1  
[NASA-CR-164009] p0271 N81-19570  
Array automated assembly task low cost silicon solar array project, phase 2  
[NASA-CR-164037] p0272 N81-19572  
Critical parameters for coarse coal underground slurry haulage systems  
[JPL-PUB-81-11] p0369 N81-20495  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG), volume 1  
[NASA-CR-164051] p0202 N81-20538  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 2, appendix A: Selected DSG technologies and their general control requirements  
[NASA-CR-164052] p0202 N81-20539  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 3, appendix B: State of the art, trends, and potential growth of selected DSG technologies  
[NASA-CR-164054] p0202 N81-20540  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 4, appendix C: Identification from utility visits of present and future approaches to integration of DSG into distribution networks  
[NASA-CR-164055] p0202 N81-20541  
Monitoring and control requirement definition study for Dispersed Storage and Generation (DSG). Volume 5, appendix D: Cost-benefit considerations for providing dispersed storage and generation for electric utilities  
[NASA-CR-164053] p0202 N81-20542  
LSA field test  
[NASA-CR-164083] p0276 N81-20544  
Proceedings of the 16th Project Integration Meeting  
[NASA-CR-164073] p0276 N81-20545  
The correction for spectral mismatch effects on the calibration of a solar cell when using a solar simulator  
[NASA-CR-164074] p0276 N81-20546  
Results of the 1980 NASA/JPL balloon flight solar cell calibration program  
[NASA-CR-164078] p0277 N81-20548  
Silicon solar cell process development, fabrication and analysis  
[NASA-CR-164164] p0281 N81-21541  
Silicon-on-ceramic process: Silicon sheet growth and device development for the large-area silicon sheet task of the low-cost solar array project  
[NASA-CR-164134] p0281 N81-21546  
JOINT RESEARCH CENTRE OF THE EUROPEAN COMMUNITIES, ISPRA (ITALY).  
Thermal processes in flat plate solar collectors  
Description and thermal performance of corrugated solar collectors  
Thermomechanical solar power/electricity generation. Technico-economic problems and perspectives of development and application  
JORGENSEN (DALE W.) ASSOCIATES, CAMBRIDGE, MASS.  
Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies  
[PB81-114258] p0194 N81-17613
- K**
- KATHOLIEKE UNIVERSITEIT TE LEUVEN (BELGIUM).  
Performance of air collector house heating systems with rock bed storage  
KATZEM (RAPHAEL) ASSOCIATES, CINCINNATI, OHIO.  
Farm and cooperative alcohol plant study: Technical and economic assessment as a commercial venture  
[PB81-112641] p0306 N81-17290
- KAYEX CORP., ROCHESTER, N. Y.  
Performance of silicon solar cells fabricated from multiple Czochralski ingots grown by using a single crucible  
KERNFORSCHUNGSANLAGE, JUELICH (WEST GERMANY).  
Test stations for flat plate collectors in Iran, Brazil and India  
[BNFT-PB-T-79-94] p0234 A81-27116  
KINETIC COATINGS, INC., BURLINGTON, MASS.  
Development of simplified process for environmentally resistant cells  
[NASA-CR-163884] p0257 N81-16575  
KMS FUSION, INC., ANN ARBOR, MICH.  
The chemically pumped iodine laser as a fusion driver  
[KNSF-U-944] p0350 N81-16456
- L**
- LA QUINTA MOTOR INNS, INC., SAN ANTONIO, TEX.  
Solar hot water system installed at Las Vegas, Nevada  
[NASA-CR-161642] p0281 N81-21535  
LABORATOIRES D'ELECTRONIQUE ET DE PHYSIQUE APPLIQUEE, LINHIL-BREHVAHES (FRANCE).  
Fabrication of amorphous silicon solar cells, using an industrial process  
[LEP-80.638-SMR-689-A] p0280 N81-20602  
LAMAR UNIV., BEAUMONT, TEX.  
Process feasibility study in support of silicon material task 1  
[NASA-CR-164009] p0271 N81-19570  
LAND (PETER), CHICAGO, ILL.  
Development of economic house type based upon passive solar energy utilization and energy conservation for high density urban planning  
[DOE/RS-10104/1] p0196 N81-18514  
LIBRARY OF CONGRESS, WASHINGTON, D. C.  
Foresight. Volume 2: Energy conservation in cities  
[GPO-47-454] p0190 N81-16527  
LINCOLN LAB., MASS. INST. OF TECH., LEXINGTON.  
Photovoltaic applications - Past and future  
Residential use of photovoltaics  
[DOE/ET-20279/109] p0264 N81-17604  
Construction of a photovoltaic power system at Natural Bridges National Monument  
[DOE/ET-20279/94] p0283 N81-21607  
Measuring dirt on photovoltaic modules, part 2  
[COO-4094-86-PT-2] p0284 N81-21609  
LINCON CORP., LOS ANGELES, CALIF.  
Coherent multiple tone technique for ground based SPS control  
LITTLE (ARTHUR D.), INC., CAMBRIDGE, MASS.  
Capital cost estimates of selected advanced thermal energy storage technologies  
[ANL/SPG-11] p0376 N81-17590  
Classification and evaluation of electric motors and pumps  
[DOE/TIC-11339] p0199 N81-19463  
LOCKHEED ENGINEERING AND MANAGEMENT SERVICES CO., INC., HOUSTON, TEX.  
Design and breadboard evaluation of the SPS reference phase control system concept  
LOCKHEED MISSILES AND SPACE CO., PALO ALTO, CALIF.  
Electrode materials for coal-fired MHD generators  
[EPRI-AP-1562] p0355 N81-18536  
LOGISTICS MANAGEMENT INST., WASHINGTON, D. C.  
The development of synthetic fuels: Department of Defense logistics implications  
[AD-A095713] p0319 N81-20290  
Defense Energy Information System (DEIS): DEIS-80 system design specification  
[AD-A096263] p0384 N81-21960  
LOS ALAMOS SCIENTIFIC LAB., N. MEX.  
A liquid-hydrogen-fueled buick  
[LA-8605-MS] p0291 N81-16483  
Constraints to bio-energy development  
[LA-UR-80-3387] p0191 N81-16604  
Energy, helium, and the future, 2  
[LA-UR-80-3342] p0191 N81-16605  
Possible application of electromagnetic guns to impact fusion  
[LA-UR-80-3137] p0353 N81-17910

Use of non-petroleum fuels to reduce military energy vulnerabilities: Self-sufficient bases and new weapon propulsion systems  
[LA-UR-80-3445] p0199 N81-19329

Some long-term energy options  
[LA-8628-MS] p0200 N81-19596

Basic research needed for the development of geothermal energy  
[LA-8562-MS] p0320 N81-20580

Solar coal gasification  
[DOE/TIC-11384] p0279 N81-20587

Inertial fusion program  
[LA-7755-PR] p0360 N81-20901

Study of the effectiveness of selective absorber coatings and phase change materials in passive solar space heating  
[LA-UR-80-2930] p0280 N81-20936

Water supply and demand in an energy supply model  
[DOE/EV-10180/2] p0204 N81-21560

Prospects of fuel cells with alkaline, solid-polymer, and superacid electrolytes as power sources for electric vehicles  
[LA-UR-81-293] p0363 N81-21572

Heat-flow measurements in the state of Arkansas  
[LA-8569-MS] p0324 N81-21573

Ceramic heat pipe development  
[DOE/TIC-11389] p0205 N81-21611

Micro-level land use impacts of bioconversion  
[LA-8599-T] p0325 N81-21616

Geothermal energy enhancement by thermal fracture  
[LA-8428] p0325 N81-21623

Max Planck Institute for Plasma Physics  
[LA-TR-80-25] p0364 N81-21919

LUND UNIV. (SWEDEN).  
Marine biomass: Algae as source of energy  
[NE/BIO-80/12] p0320 N81-20581

## M

MARTIN MARIETTA AEROSPACE, DENVER, COLO.  
Terrestrial photovoltaic system analysis  
[AD-A094827] p0272 N81-19578

The 10-kilowatt photovoltaic concentrator array fabrication  
[SAND-80-7062] p0279 N81-20599

MASSACHUSETTS INST. OF TECH., CAMBRIDGE.  
Solar power satellite system  
[NASA-CASE-BQM-10949-1] p0190 N81-16530

Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit  
[EPRI-CS-1444-VOL-4] p0351 N81-16602

MHD effects on viscous and thermal wakes and their influence on the performance of MHD generators  
[LOG-E281] p0352 N81-16899

Chalcogenide-glass solar cells  
[DOE/ET-23043/T1] p0284 N81-21608

MATHECH, INC., ARLINGTON, VA.  
Study of fuel cell on-site, integrated energy systems in residential/commercial applications  
[NASA-CR-165144] p0361 N81-21533

MATHECH, INC., PRINCETON, N. J.  
Advanced Cogeneration Technology Economic Optimization Study (ACTEOS)  
[NASA-CR-163887] p0306 N81-16573

MCDONNELL-DOUGLAS ASTRONAUTICS CO., HUNTINGTON BEACH, CALIF.  
Development of a prototype heat engine for energy conservation  
[DOE/OR-06028/T6] p0199 N81-19589

Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy  
[DOE/ET-20417/4] p0378 N81-19633

MCDONNELL-DOUGLAS ASTRONAUTICS CO., ST. LOUIS, MO.  
STARFIRE: A commercial Tokamak fusion power plant study, volume 2  
[ANL/PPF-80-1-VOL-2] p0363 N81-21612

MCELROY (RALPH) CO., AUSTIN, TEX.  
Max Planck Institute for Plasma Physics  
[LA-TR-80-25] p0364 N81-21919

MCHULLEN (JOHN J.) ASSOCIATES, INC., NEW YORK, N.Y.  
National petroleum reserve - Alaska: Marine transportation system analysis  
[PB81-105041] p0368 N81-17288

National petroleum reserve - Alaska: Marine transportation system analysis. Executive summary  
[PB81-105033] p0368 N81-17289

MECHANICAL TECHNOLOGY, INC., LATHAM, N. Y.  
Advanced propulsion system concept for hybrid vehicles  
[NASA-CR-159772] p0198 N81-18935

MERIDIAN CORP., FALLS CHURCH, VA.  
Central station market development strategies for photovoltaics  
[NASA-CR-163947] p0193 N81-17520

MICHIGAN STATE UNIV., EAST LANSING.  
The Indian Lands Study: An example of the application of geographic research to the analysis of complex energy and environmental policy issues  
p0189 N81-16510

Considerations in the design of solar engines  
p0276 N81-20536

MICHIGAN UNIV., ANN ARBOR.  
Light aircraft engines, the potential and problems for use of automotive fuels. Phase 1: Literature search  
[AD-A094154] p0308 N81-18057

Initiation of detonation in unconfined natural gas-air clouds  
[PB81-113292] p0308 N81-18149

The a priori decision in solar energy and conservation economics  
p0278 N81-20558

A life-cycle model for solar heating system design and economic evaluation Michigan Economic Model for Solar Heating (MESB)  
p0278 N81-20559

MICROWAVE ASSOCIATES, INC., BURLINGTON, MASS.  
High concentration silicon photovoltaic cell development  
[SAND-80-7068] p0279 N81-20595

MID-AMERICAN SOLAR ENERGY COMPLEX, MINNEAPOLIS, MINN.  
On-farm production of fuel-alcohol in Mid-America technical and economic potential  
[NASEC-TP-80-009] p0189 N81-16316

MIDWEST RESEARCH INST., GOLDEN, COLO.  
Incorporation of superlattice crystal layers in multijunction solar cells  
p0261 N81-17549

Decentralized energy studies: Compendium of international studies and research  
[SERI/RR-744-451] p0193 N81-17582

Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30384/1] p0263 N81-17592

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions  
[SERI/PR-8031-1-T2] p0264 N81-17595

Appropriate sizing of solar heating systems  
[SERI/TR-333-320] p0264 N81-17600

Combustion, pyrolysis, gasification, and liquefaction of biomass  
[SERI/TP-622-893] p0307 N81-17601

Omium-G parabolic dish optical efficiency: A comparison of two independent measurement techniques  
[SERI/TR-631-544] p0267 N81-18520

Solar central receiver systems comparative economics  
[SERI/SP-633-637] p0267 N81-18523

Electrochemical photovoltaic cells  
[SERI/TR-8002-5-T1] p0272 N81-19582

Passive solar energy information user study  
[SERI/TR-751-746] p0273 N81-19607

Comparative ranking of 0.1 to 10 MW sub e solar thermal electric power systems. Volume 1: Summary of results  
[SERI/TR-351-461-VOL-1] p0273 N81-19618

Mod 2 wind turbine development project  
[SERI/SP-732-728] p0358 N81-19619

Low cost sprayed CdTe solar cell research  
[DSR-4042-T34] p0275 N81-19631

Photovoltaics information user study  
[SERI/TR-751-652] p0278 N81-20570

Solar energy in Italy: A profile of renewable energy activity in its national context  
[SERI/SP-763-718] p0204 N81-21576

Interim performance criteria for photovoltaic energy systems  
[SERI/TR-742-654] p0282 N81-21577

Wind energy systems information user study  
[SERI/TR-751-749] p0363 N81-21578

Yearly average performance of the principal solar collector tapes  
[SERI/TR-631-716] p0282 N81-21579

# CORPORATE SOURCE INDEX

# NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.

Current and future industrial energy service characterizations, volume 1  
[SRI/TR-733-790-VOL-1] p0206 N81-21618

MISSISSIPPI STATE UNIV., MISSISSIPPI STATE.  
Development of a system for off-peak electrical energy use by air conditioners and heat pumps [TVA-EDT-122] p0377 N81-18509

MOBIL TYCO SOLAR ENERGY CORP., WALTHAM, MASS.  
Effect of short wavelength illumination on the characteristic bulk diffusion length in ribbon silicon solar cells p0216 A81-22198

Progress in the growth of wide silicon ribbons by the EFG technique at high speed using multiple growth stations p0230 A81-27078

MORGAN LTD., GAITHERSBURG, MD.  
Photovoltaic applications - Past and future p0246 A81-27231

MONOSOLAR, INC., SANTA MONICA, CALIF.  
Emerging materials for solar cell applications: Electrodeposited CdTe [SRI/PR-9152-1-T1] p0269 N81-18555

MOHS UNIV. (BELGIUM).  
General introduction to thermal conversion of solar energy p0266 N81-18500

Meteorological data: Treatment of radiation data, test reference year p0266 N81-18502

Latent and chemical storage p0277 N81-20550

Water systems modeling p0277 N81-20554

MOTOROLA, INC., PHOENIX, ARIZ.  
Flat plate vs. concentrator solar photovoltaic cells - A manufacturing cost analysis p0238 A81-27146

A reactive plasma process for forming metal grid patterns in solar cell antireflection coatings p0243 A81-27194

A base-metal conductor system for silicon solar cells p0243 A81-27196

Empirical study of the interaction of silicon substrate thickness, device design, and solar cell processing p0244 A81-27200

Near-term implementation of projection cost reductions for photovoltaic concentrator array [SAND-80-7073] p0274 N81-19628

MPD TECHNOLOGY CORP., WYCKOFF, N.J.  
The CMG nickel electrode p0379 N81-21509

MUELLER ASSOCIATES, INC., BALTIMORE, MD.  
Program plan for reliability and maintainability in active solar heating and cooling systems [DOE/CS-36010/01] p0264 N81-17596

Alternative fuels utilization and the automotive emission certification process [DOE/CS-56051/F1] p0316 N81-19336

## N

NATIONAL ACADEMY OF SCIENCES - NATIONAL RESEARCH COUNCIL, WASHINGTON, D. C.  
Energy choices in a democratic society [PB81-114852] p0197 N81-18563

Long-Range Environmental Outlook [PB81-114977] p0198 N81-18580

An evaluation of NASA's program for improving aircraft fuel efficiency [NASA-CR-164015] p0198 N81-19110

Environmental exposure and design criteria for offshore and gas structures [AD-A094651] p0201 N81-19652

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION, WASHINGTON, D. C.  
Solar power satellite system [NASA-CASR-EQB-10949-1] p0190 N81-16530

NASA's high efficiency and radiation damage solar cell program p0260 N81-17532

Large wind energy converter: Growian 3 MW [NASA-TM-75404] p0360 N81-20543

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.  
GODDARD SPACE FLIGHT CENTER, GREENBELT, MD.  
Summary results of the ATS-6 solar cell flight experiment p0244 A81-27209

Housing authority of Baltimore City-Public Housing Energy Workshop [NASA-TM-82050] p0190 N81-16569

Solar Maximum Mission (SMM) in-flight performance p0281 N81-21523

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.  
LYNDON B. JOHNSON SPACE CENTER, HOUSTON, TEX.  
Space construction technology needs [AIAA PAPER 81-0442] p0381 A81-22757

Solar Power Satellite Microwave Transmission and Reception [NASA-CP-2141] p0365 N81-16533

The development and utilization of solar photovoltaic cells: An assessment of the potential for a new energy technology [NASA-TM-58229] p0193 N81-17526

Solar power satellite system sizing tradeoffs [NASA-TP-1804] p0265 N81-18493

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.  
LANGLEY RESEARCH CENTER, HAMPTON, VA.  
Solar-pumped gas laser development [AIAA PAPER 81-0098] p0210 A81-20600

Utility of and technology for a space central power station [AIAA PAPER 81-0449] p0216 A81-22763

Modeling of a solar-pumped iodine laser p0221 A81-24618

Simultaneous radiation damage and annealing of GaAs solar cells p0247 A81-27240

High temperature properties of Gallias/GaAs heteroface solar cells p0247 A81-27242

Solar-pumped gas laser development [NASA-TM-81894] p0257 N81-16437

Study of process technology for Gallias/GaAs heteroface solar cells p0261 N81-17544

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.  
LEWIS RESEARCH CENTER, CLEVELAND, OHIO.  
Status of commercial phosphoric acid fuel cell system development [AIAA PAPER 81-0396] p0330 A81-20805

Stability of large horizontal-axis axisymmetric wind turbines p0333 A81-22526

Large wind-turbine projects in the United States wind energy program p0335 A81-23694

Theoretical results on the tandem junction solar cell based on its Ebers-Moll transistor model p0232 A81-27099

Space solar cells - High efficiency and radiation damage p0240 A81-27174

Radiation damage annealing mechanisms and possible low temperature annealing in silicon solar cells p0244 A81-27207

Photovoltaic applications - Past and future p0246 A81-27231

Analysis of GaAs and Si solar cell arrays for earth orbital and orbit transfer missions p0248 A81-27254

Ultra-lean combustion at high inlet temperatures [ASME PAPER 81-GT-44] p0347 A81-29958

Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels [ASME PAPER 81-GT-109] p0348 A81-30014

Evaluation of advanced combustors for dry NO<sub>x</sub>/ suppression with nitrogen bearing fuels in utility and industrial gas turbines [ASME PAPER 81-GT-125] p0349 A81-30029

Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels [ASME PAPER 81-GT-157] p0188 A81-30056

Analytical investigation of efficiency and performance limits in klystron amplifiers using multidimensional computer programs; multi-stage depressed collectors; and thermionic cathode life studies p0367 N81-16552

- Performance calculations for 1000 MWe MHD/steam power plants  
[NASA-TM-81667] p0351 N81-16570
- Off-design analysis of a gas turbine powerplant augmented by steam injection using various fuels  
[NASA-TM-81611] p0351 N81-16571
- Commercial (terrestrial) and modified solar array design studies for low cost, low power space applications  
[NASA-TM-81622] p0259 N81-17266
- Space Photovoltaic Research and Technology 1980. High Efficiency, Radiation Damage and Blanket Technology  
[NASA-CP-2169] p0260 N81-17531
- Recent progress in high-output-voltage silicon solar cells  
p0260 N81-17534
- Advanced continuously variable transmissions for electric and hybrid vehicles  
[NASA-TM-81718] p0368 N81-19459
- Improved thermionic energy converters  
[NASA-CASE-LRW-12443-1] p0357 N81-19561
- Thermionic Energy Conversion (TEC) topping thermoelectrics  
[NASA-TM-81677] p0359 N81-19920
- Analysis of costs of gallium arsenide and silicon solar arrays for space power applications  
[NASA-TP-1811] p0276 N81-20173
- The NASA-LeRC wind turbine sound prediction code  
[NASA-TM-81737] p0362 N81-21537
- NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.**  
**MARSHALL SPACE FLIGHT CENTER, HUNTSVILLE, ALA.**  
Microwave power transmission system workshop, session on solid state  
p0367 N81-16563
- Development and testing of heat transport fluids for use in active solar heating and cooling systems  
[NASA-TM-82395] p0368 N81-16584
- The Marshall Center: Its place in NASA  
[NASA-TM-82254] p0383 N81-17958
- Space platform reference mission studies overview  
p0383 N81-19174
- Research and Technology: Annual report  
[NASA-TM-82314] p0384 N81-21949
- NATIONAL AERONAUTICS AND SPACE ADMINISTRATION.**  
**PASADENA OFFICE, CALIF.**  
Molten salt pyrolysis of latex  
[NASA-CASE-NPO-14315-1] p0306 N81-17261
- Solar energy receiver for a Stirling engine  
[NASA-CASE-NPO-14619-1] p0259 N81-17518
- Copper doped polycrystalline silicon solar cell  
[NASA-CASE-NPO-14670-1] p0270 N81-19558
- NATIONAL ASSOCIATION OF HOME BUILDERS (NAHB) RESEARCH FOUNDATION, INC., ROCKVILLE, MD.**  
Appliance energy efficiency in new home construction  
[DOE/CS-23999/T1] p0200 N81-19608
- NATIONAL BUREAU OF STANDARDS, WASHINGTON, D.C.**  
The NBS Energy Model Assessment project: Summary and overview  
[PB81-105082] p0191 N81-16612
- Non-noble catalysts and catalyst supports for phosphoric acid fuel cells  
[NASA-CR-165221] p0354 N81-18497
- Life-cycle cost manual for the Federal Energy Management Program  
[PB81-136269] p0200 N81-19641
- A reference building approach to building energy performance standards for single-family residences  
[PB81-135642] p0201 N81-20318
- Dimensions/NBS. Volume 64, no. 8, October 1980  
[PB81-133654] p0384 N81-21007
- NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION, WASHINGTON, D. C.**  
Automotive fuel economy program  
[DOT-HS-805-279] p0195 N81-17959
- NATIONAL INST. OF BUILDING SCIENCES, WASHINGTON, D. C.**  
Residential energy efficiency standards study: Technical analysis  
[PB81-106981] p0191 N81-16611
- NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, BOULDER, COLO.**  
Scientific and Technical Publications of the Environmental Research Laboratories' fiscal year 1978  
[PB81-141301] p0384 N81-21975
- NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, WASHINGTON, D. C.**  
Report to the Congress on ocean pollution and offshore development  
[PB81-118333] p0195 N81-17630
- NATIONAL RESEARCH COUNCIL OF CANADA, OTTAWA (ONTARIO).**  
Solar Energy Program: Protective solar collector systems from corrosion  
[NR-25154] p0264 N81-17605
- NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VA.**  
Hydrocarbon fuel cells. Citations from the American Petroleum Institute data base  
[PB81-800021] p0352 N81-16615
- A directory of computer software applications: Energy  
[PB80-105497] p0383 N81-16773
- Energy policy and research planning. Citations from the NTIS data base  
[PB81-800112] p0195 N81-17620
- NATIONAL WATER WELL ASSOCIATION, NORTHINGTON, OHIO.**  
Ground-water heat pumps: An examination of hydrogeologic, environmental, legal, and economic factors affecting their use. Volume 1: Main text, appendices A, B, and C  
[DOE/CS-20060/5120-VOL-1] p0192 N81-17394
- NAVAL RESEARCH LAB., WASHINGTON, D. C.**  
Three year performance of the NTS-2 solar cell experiment  
p0262 N81-17559
- Pulsed high voltage and high current outputs from homopolar energy storage system  
[AD-A094910] p0377 N81-19575
- NAVAL SURFACE WEAPONS CENTER, WHITE OAK, MD.**  
Lightweight composite cadmium electrodes  
p0379 N81-21510
- NAVAL WEAPONS CENTER, CHINA LAKE, CALIF.**  
The Energy Link catalog. Volume 2: Energy resource catalog  
[PB81-140824] p0384 N81-21633
- NEUS, INC., SANTA MONICA, CALIF.**  
Biosources digest, a journal on biomass utilization, volume 2, number 3, July 1980  
[PB81-123952] p0317 N81-19340
- NEW MEXICO INST. OF MINING AND TECHNOLOGY, SOCORRO.**  
Microstructural and mechanical property evaluation of black chrome and zinc oxide coated solar collectors  
[DOE/AL-04266/T1] p0268 N81-18537
- NEW MEXICO STATE UNIV., LAS CRUCES.**  
Regional operations research program for commercialization of geothermal energy in the Rocky Mountain Basin and Range  
[DOE/ID-01756/T1] p0324 N81-21562
- Environmental overview for the development of geothermal resources in the state of New Mexico  
[UCRL-15317] p0206 N81-21639
- NEW MEXICO UNIV., ALBUQUERQUE.**  
Optimization of storage in passive solar heating systems  
[DOE/CS-35405/T1] p0278 N81-20574
- Variable speed constant frequency constant voltage alternator  
[DOE/ET-29246-T1] p0361 N81-21298
- Preparation of monthly maps of solar availability for New Mexico based on satellite photography  
[BND-78-2131] p0284 N81-21668
- NEW YORK UNIV., N. Y.**  
The Leboast Wind Turbine experimental program  
[PB81-141467] p0364 N81-21634
- NEW ZEALAND ENERGY RESEARCH AND DEVELOPMENT COMMITTEE, AUCKLAND.**  
Engineering study of pelleting waste paper for energy recovery  
[NZERDC-53] p0320 N81-20562
- NORTH CAROLINA STATE UNIV., RALEIGH.**  
Research on high efficiency cascade solar cells  
[SERI/PR-8136-1-T1] p0258 N81-16595
- NORTH CAROLINA UNIV., CHAPEL HILL.**  
Peat resources of North Carolina  
[DOE/ET-14693/T1] p0317 N81-19541

**NORTHWESTERN UNIV., EVANSTON, ILL.**

Basic research on ceramic materials for energy storage and conversion systems  
[COO-2564-6] p0361 N81-21207

**NOVAR ELECTRONICS CORP., BARBERTON, OHIO.**

An interferometer-based phase control system  
p0366 N81-16545

A sonic satellite power system microwave power transmission simulation  
p0366 N81-16546

A theoretical study of microwave beam absorption by a rectenna  
[NASA-CN-160921] p0369 N81-20328

A theoretical study of microwave beam absorption by a rectenna, introduction  
p0369 N81-20329

Tropospheric/ionospheric transmission tests  
p0369 N81-20335

**NUCLEAR UTILITY SERVICES, INC., ROCKVILLE, MD.**

Wind energy resource atlas. Volume 5: The East Central region  
[PNL-3195-VOL-5] p0325 N81-21712

**NUOVO PIGNONE S.p.A., FLORENCE (ITALY).**

Construction of a complete all season conditioning with solar energy of an office building of 260 m<sup>2</sup> and its operation  
[EUR-6702-BN] p0263 N81-17589

**O****OAK RIDGE ASSOCIATED UNIVERSITIES, TENN.**

Cost-energy dynamics: An engineering-economic basis for industrial energy conservation policies  
[ORAU/IRA-80-12(N)] p0193 N81-17583

**OAK RIDGE NATIONAL LAB., TENN.**

Photovoltaic applications - Past and future  
p0246 N81-27231

Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[CONF-8010106-7] p0189 N81-16314

Environmetrics of synfuels. II: A computer-based coding scheme for coal-conversion research data  
[CONF-8010106-3] p0305 N81-16315

Resource recovery from coal residues  
[CONF-801104-8] p0305 N81-16322

Applications of laser annealing and laser-induced diffusion to photovoltaic conversion  
[CONF-801153-1] p0258 N81-16594

Radioisotope powered light sources  
[CONF-801157-1] p0351 N81-16597

Life Sciences Synthetic Fuels program at Oak Ridge National Lab.  
[CONF-801039-3] p0192 N81-17285

Biological exposure sensors in coal conversion technologies  
[CONF-801143-1] p0192 N81-17410

End use energy consumption data base: Transportation sector  
[PB81-112203] p0194 N81-17610

Indirect conversion of coal to methanol and gasoline: Product price vs product slate  
[CONF-801142-3] p0311 N81-18228

Hydrocarbonization research: Completion report  
[ORNL/TN-6693] p0311 N81-18232

Fuel alcohol extraction technology commercialization conference  
[CONF-801212] p0311 N81-18233

Comments on long-term aspects of renewable versus nonrenewable resource substitution  
[CONF-801158-1] p0313 N81-18477

US Department of Energy thermal energy storage program  
[CONF-801154-1] p0196 N81-18510

Economic application, design analysis, and material availability for ceramic heat exchangers  
[ORNL/TN-7580] p0196 N81-18528

A comparison of environmental issues related to development of small hydropower resources at new versus existing sites  
[CONF-801210-13] p0197 N81-18577

Strategies for ecological effects assessment at DOE energy activity sites  
[ORNL/TN-6783] p0198 N81-18578

Environmetrics of synfuels. 2: A computer-based coding scheme for coal-conversion research data  
[ORNL/TN-7525] p0316 N81-19332

Fossil energy program  
[ORNL-5702] p0317 N81-19588

Design optimization of conventional heat pumps: Application to steady state heating efficiency  
[CONF-810101-5] p0200 N81-19599

Environmetrics of synfuels. 1: Processing the automated PDP-11 data components for the UMD gasifier facility  
[ORNL/TN-7428] p0320 N81-20305

Stress corrosion studies in solvent refined coal liquefaction pilot plants  
[ORNL/TN-7513] p0321 N81-21179

Liquefaction technology assessment. Phase 1: Indirect liquefaction of coal to methanol and gasoline using available technology  
[ORNL-5664] p0322 N81-21223

Future US energy supply: Constraints by nonfuel mineral resources  
[ORNL-5656] p0204 N81-21467

Fuel cycle analysis for fossil energy systems: Coal combustion  
[ORNL-5661] p0205 N81-21606

**QAO CORP., WASHINGTON, D.C.**

Fuels and chemicals made from solar energy: Options for the 1990's and beyond  
[DOE/CS-21051/01] p0263 N81-17586

**OFFICE NATIONAL D'ETUDES ET DE RECHERCHES**

AEROSPATIALES, PARIS (FRANCE).  
Closed-cycle helium gas turbine for solar tower power plant  
p0353 N81-18247

**OFFICE OF TECHNOLOGY ASSESSMENT, WASHINGTON, D. C.**

Energy from biological processes. Volume 2: Technical and environmental analyses  
[PB81-134769] p0323 N81-21233

Energy from biological processes. Volume 3: Appendixes. Part B: Agriculture, unconventional crops, and selected biomass wastes  
[PB81-134785] p0323 N81-21235

Energy from biological processes. Volume 3: Appendixes. Part C: Selected conversion technologies and end use  
[PB81-134793] p0323 N81-21236

**OHIO STATE UNIV., COLUMBUS.**

Preliminary design procedure for high power density MHD generators  
[AD-A096144] p0364 N81-21916

**OKLAHOMA STATE UNIV., STILLWATER.**

Development of an improved degree-day concept by analysis of historical weather data for predicting energy requirements of buildings  
p0198 N81-18620

**OLD DOMINION UNIV., NORFOLK, VA.**

Simultaneous radiation damage and annealing of GaAs solar cells  
p0247 N81-27240

High temperature properties of GaAlAs/GaAs heteroface solar cells  
p0247 N81-27242

**ONTARIO RESEARCH FOUNDATION, MISSISSAUGA.**

Solar Energy Program: Protective solar collector systems from corrosion  
[NP-25154] p0264 N81-17605

**OREGON INST. OF TECH., KLANATH FALLS.**

Ethanol: A brief economic evaluation  
[DOE/ET-27256/T7] p0316 N81-19331

Alaska: A guide to geothermal energy development  
[DOE/ET-28476/T12] p0318 N81-19597

Oregon: A guide to geothermal energy development  
[DOE/ET-28476/T11] p0318 N81-19598

**P****PACIFIC NORTHWEST LAB., RICHLAND, WASH.**

Adiabatic compressed air energy storage in hard rock  
[PNL-SA-9010] p0376 N81-17591

**PACIFIC SUN, INC., PALO ALTO, CALIF.**

Solar-heated hot water instrumentation project for EPRI headquarters complex, Palo Alto, California  
[EPRI-EH-1654] p0275 N81-19630

## R

**PARSONS (RALPH M.) CO., LOS ANGELES, CALIF.**  
 STARFIRE: A commercial Tokamak fusion power plant study, volume 2  
 [ANL/PPP-80-1-VOL-2] p0363 N81-21612

**PEDCO-ENVIRONMENTAL, INC., CINCINNATI, OHIO.**  
 Acid rain: The impact of local sources  
 [DOE/NETC-14787/103] p0197 N81-18573

**PENNSYLVANIA STATE UNIV., UNIVERSITY PARK.**  
 Classification of petroleum samples from gas chromatographic data by pattern recognition techniques and simulation of mass spectra by regression analysis of structural descriptors  
 p0318 N81-20202

**PENNSYLVANIA UNIV., PHILADELPHIA.**  
 Interactions of efficiency and material requirements for terrestrial silicon solar cells  
 p0210 A81-20295  
 Low cost processes for fabricating silicon solar cells  
 p0245 A81-27218

**PHOTONATE INTERNATIONAL, INC., TEMPE, ARIZ.**  
 Cost effective, high throughput, junction formation techniques using spray-on dopants  
 p0245 A81-27220  
 Automated array assembly task development of low-cost polysilicon solar cells  
 [NASA-CR-163939] p0259 N81-17521  
 Array automated assembly task low cost silicon solar array project, phase 2  
 [NASA-CR-164037] p0272 N81-19572

**PHYSICAL SCIENCES, INC., WOBURN, MASS.**  
 Task report no. 3. Systems analysis of organic Rankine bottoming cycles  
 [PSI-TR-245] p0354 N81-18529

**PLASMA PHYSICS CORP., LOCUST VALLEY, N. Y.**  
 Plasma-assisted CVD of fluorinated, hydrogenated amorphous silicon  
 [NASA-TR-8041-2-T1] p0274 N81-19629

**POLICY AND MANAGEMENT ASSOCIATES, INC., BOSTON, MASS.**  
 The effect of economic regulation on fuel use efficiency in private trucking-operations  
 [PB81-114753] p0198 N81-18931

**POLY SOLAR, INC., GARLAND, TEX.**  
 Thin film polycrystalline silicon solar cells  
 [SERI/PR-9192-1-T2] p0269 N81-18557

**PRATT AND WHITNEY AIRCRAFT GROUP, EAST HARTFORD, CONN.**  
 An assessment of the use of antimisting fuel in turbofan engines  
 [NASA-CR-165258] p0315 N81-19316

**PRC ENERGY ANALYSIS CO., LOS ANGELES, CALIF.**  
 Satellite Power System (SPS) public outreach experiment  
 [NASA-CR-164022] p0275 N81-19635  
 Satellite Power System (SPS) utility integration: Institutional, planning and operational issues  
 [EAC-R-4015] p0279 N81-20596  
 Satellite Power System (SPS) societal assessment  
 [NASA-CR-164153] p0205 N81-21590

**PRC ENERGY ANALYSIS CO., MCLEAN, VA.**  
 Biomass energy systems program summary. Information current as of September 30, 1979  
 [DOE/CS-21059/01] p0317 N81-19337

**PRINCETON UNIV., N. J.**  
 Alternative energy facility siting policies for urban coastal areas: Executive summary of findings and policy recommendations  
 [DOE/EV-01528/T1] p0204 N81-21559

**PUBLIC SERVICE CO. OF INDIANA, PLAINFIELD.**  
 Compressed air energy storage: Preliminary design and site development program in an aquifer. Task 1: Establish facility design criteria and utility benefits  
 [DOE/ET-29232/T2] p0377 N81-19586

**PURDUE UNIV., LAFAYETTE, IND.**  
 AGT-1500 combustor and fuel effects modeling  
 [AD-A092255] p0350 N81-16061  
 Computer modeling of high-efficiency solar cells  
 p0260 N81-17537  
 Flash photolysis studies of the semiconductor/electrolyte interface  
 p0265 N81-18114  
 Phase equilibrium in coal liquefaction processes  
 [EPRI-AP-1593] p0311 N81-18227  
 Mathematical programming applied to power systems expansion planning with pumped storage  
 p0377 N81-18485

**RADIATION MONITORING DEVICES, INC., WATERTOWN, MASS.**  
 Low cost sprayed CdTe solar cell research  
 [DSE-4042-T34] p0275 N81-19631  
 Low cost, sprayed CdTe solar cell research  
 [SERI/PR-8104-3-T2] p0279 N81-20585

**RAWN, INC., PALO ALTO, CALIF.**  
 Comparative analysis of coal use options for reducing the dependence of utilities on imported oil  
 [DOE/RA-12301-T1] p0322 N81-21230

**RAYTHEON CO., LEXINGTON, MASS.**  
 Initial NPTS study results: Design considerations and issues  
 p0365 N81-16536  
 The adapting of the crossed-field directional amplifier to the requirements of the SPS  
 p0367 N81-16553

**RAYTHEON CO., WALTHAM, MASS.**  
 The history of the development of the rectenna  
 p0257 N81-16558  
 Solid state sandwich concept: Designs, considerations and issues  
 p0368 N81-16568  
 Satellite Power System (SPS) magnetron tube assessment study  
 [NASA-CR-3383] p0368 N81-18490

**RCA CORP., PRINCETON, N. J.**  
 Solid state device technology for Solar Power Satellite  
 p0368 N81-16567  
 Development of megasonic cleaning for silicon wafers  
 [NASA-CR-164011] p0271 N81-19569

**RCA LABS., PRINCETON, N. J.**  
 Titanium dioxide antireflection coating for silicon solar cells by spray deposition  
 p0209 A81-19766  
 Epitaxial solar cells on metallurgical grade silicon substrates  
 p0231 A81-27085  
 Automated array assembly, phase 2  
 [NASA-CR-163878] p0258 N81-16578  
 RCA Satcom in-orbit experience  
 p0379 N81-21526  
 Amorphous thin films for solar-cell applications  
 [SERI/PR-0-8254-F] p0283 N81-21591

**RENSSELAIRE POLYTECHNIC INST., TROY, N. Y.**  
 Aerodynamic characteristics of the TARF (Toroidal Accelerator Rotor Platform) wind energy conversion system  
 [PB81-140675] p0364 N81-21632

**RESEARCH TRIANGLE INST., RESEARCH TRIANGLE PARK, N. C.**  
 Research on high efficiency cascade solar cells  
 [SERI/PR-8136-1-T1] p0258 N81-16595  
 AlGaAs-GaAs cascade solar cell  
 p0261 N81-17550  
 Fabrication of AlGaAs/GaAs cascade solar cell by LPE  
 p0262 N81-17551  
 Cascade Solar Cell Workshop report  
 p0262 N81-17553

**RESOURCE PLANNING ASSOCIATES, INC., WASHINGTON, D. C.**  
 Regional analysis of residential/commercial gas demand  
 [PB81-134496] p0206 N81-21631

**RICE UNIV., HOUSTON, TEX.**  
 Satellite Power System (SPS). Rectenna siting: Availability and distribution of nominally eligible sites  
 [DOE/ER-10041/T10] p0369 N81-19602  
 Social acceptability of Satellite Power Systems (SPS). The near term outlook  
 [DOE/ER-10072/1] p0200 N81-19603

**ROCKETDYNE, CANOGA PARK, CALIF.**  
 Thermal stability tests of heat transfer fluids for transfer and storage of thermal energy  
 [DOE/ET-20417/4] p0378 N81-19633

**ROCKWELL INTERNATIONAL CORP., ANAHEIM, CALIF.**  
 Chemical vapor deposition of thin-film polycrystalline Si for low cost solar cells  
 [SAS-3045-3] p0275 N81-19634

**ROCKWELL INTERNATIONAL CORP., CANOGA PARK, CALIF.**  
 Coal Hydrogasification process development. volume 1: Coal studies  
 [PR-3125-24-VOL-1] p0312 N81-18238

- Coal Hydrogasification process development.  
Volume 2: peat studies  
[FE-3125-24-VOL-2] p0312 H81-18239
- Molten salt coal gasification process  
development unit, phase 1. Volume 1: PDU  
operations  
[DOE/ET-10296/66-VOL-1] p0319 H81-20296
- Coal hydrogasification process development  
[DOE/ET-10328/27] p0319 H81-20304
- ROCKWELL INTERNATIONAL CORP., DOWNEY, CALIF.  
Satellite Power Study (SPS) concept definition  
study (Exhibit D). Volume 1: Executive summary  
[NASA-CR-3392] p0271 H81-19562
- Satellite Power Systems (SPS). LSSST systems and  
integration task for SPS flight test article  
[NASA-CR-3375] p0271 H81-19564
- Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 3: Transportation  
analysis  
[NASA-CR-3394] p0271 H81-19565
- Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 6, part 1: Cost  
and Programmatic  
[NASA-CR-3397] p0276 H81-20537
- Satellite Power System (SPS) concept definition  
study (Exhibit D). Volume 2:  
Systems/subsystems analyses  
[NASA-CR-3393] p0280 H81-21491
- Satellite Power Systems (SPS) concept definition  
study (Exhibit D). Volume 4, Part 2: Cost  
and programmatic appendix  
[NASA-CR-3398] p0280 H81-21492
- ROCKWELL INTERNATIONAL CORP., GOLDEN, COLO.  
Wind machine fatigue analysis and life prediction  
[RFP-3135/3533/80/19] p0357 H81-19495
- Small wind systems technology assessment. State  
of the art and near term goals  
[RFP-3136/3533/80/18] p0358 H81-19600
- Dunlite model 81/002550 wind turbine generator  
[RFP-3149/3533/80/17] p0358 H81-19601
- ROCKWELL INTERNATIONAL CORP., PITTSBURGH, PA.  
Ionospheric effects in active retrodirective  
array and mitigating system design  
p0366 H81-16549
- Solid state systems concepts  
p0367 H81-16566
- ROCKWELL INTERNATIONAL CORP., SEAL BEACH, CALIF.  
Summary of LSSST systems analysis and integration  
task for SPS flight test articles  
p0270 H81-19177
- ROCKWELL INTERNATIONAL CORP., THOUSAND OAKS, CALIF.  
Status of Rockwell-ERC high efficiency solar  
cell programs  
p0261 H81-17546
- Studies of the mechanism of coal hydrogenation  
by electron spin resonance  
[DOE/PC-30072/T2] p0313 H81-18241
- ROCKWELL INTERNATIONAL SCIENCE CENTER, THOUSAND  
OAKS, CALIF.  
Gallium arsenide photovoltaic dense array for  
concentrator applications  
[SAND-78-7056] p0267 H81-18530
- ROSENBLATT (M.) AND SON, INC., NEW YORK.  
Preliminary designs for modular OTEC platforms'  
station-keeping subsystems, volume 3  
[DOE/NOAA/OTEC-30-VOL-3] p0363 H81-21592
- ROSS (BERND) ASSOCIATES, SAN DIEGO, CALIF.  
Screenable silver and base metal solar cell  
contacts  
p0243 A81-27195
- ROYAL INST. OF TECH., STOCKHOLM (SWEDEN).  
Gasification and desulfurization of coal by  
injection into molten metals  
[STU-78-4560] p0310 H81-18223
- S
- SAN DIEGO TECHNOLOGY ACTION CENTER, CALIF.  
The Energy Link catalog. Volume 2: Energy  
resource catalog  
[PB81-140824] p0384 H81-21633
- SANDIA LABS., ALBUQUERQUE, N. MEX.  
Photovoltaic applications - Past and future  
p0246 A81-27231
- Design, fabrication, and performance of a 20  
percent efficient silicon solar cell  
[SAND-80-2225] p0258 H81-16592
- Performance of a solar-heated assembly building  
at Sandia National Laboratories  
[SAND-80-0599] p0258 H81-16593
- Photovoltaic advanced systems test facility:  
Description and operations plan  
[SAND-80-1612] p0259 H81-16607
- Comparative analysis of combined flat-plate PV/T  
collectors with separate PV/T collectors  
[SAND-80-1494] p0259 H81-16608
- Computer modeling of high-efficiency solar cells  
p0260 H81-17537
- Drivers for light ion fusion  
[SAND-80-2432C] p0353 H81-17883
- Proceedings of the Vertical Axis Wind Turbine  
(VAWT) Design Technology Seminar for Industry  
[SAND-80-0984] p0355 H81-18550
- Midtemperature Solar Systems Test Facility  
Program for predicting thermal performance of  
line-focusing, concentrating solar collectors  
[SAND-80-1964] p0269 H81-18551
- Strategic petroleum reserve data acquisition  
system  
[SAND-80-2143] p0317 H81-19539
- Development of sheet molding compound solar  
collectors with molded-in silvered glass  
reflective surfaces  
[SAND-80-0702] p0273 H81-19613
- Pump heat loss test report  
[SAND-80-2526] p0273 H81-19614
- Kilauea Iki lava lake experiment plans  
[SAND-80-1653] p0318 H81-19699
- Comparative assessment of five potential sites  
for hydrothermal-magma systems: Summary  
[DOE/TIC-11303] p0320 H81-20525
- Handbook for calculating solar-influenced  
building heat losses  
[SAND-79-2173] p0279 H81-20583
- Catalytic effects in coal gasification  
[SAND-80-2151] p0322 H81-21231
- Strategic Petroleum Reserve (SPR) geological  
summary. Weeks Island Salt Dome  
[SAND-80-1323] p0324 H81-21468
- Midtemperature solar systems test facility  
predictions for thermal performance of the  
Acurex solar collector with PEK 244 reflector  
surface  
[SAND-80-1964/3] p0282 H81-21568
- Photovoltaic concentrator technology development  
project  
[SAND-80-2373] p0282 H81-21571
- An acoustic measurement of boiling instabilities  
in a solar receiver  
[SAND-80-2409] p0284 H81-21621
- Survey of US industrial process heat usage  
distributions  
[SAND-80-8234] p0206 H81-21622
- SANDIA LABS., LIVERMORE, CALIF.  
Fatigue-creep lifetime analysis of four advanced  
central receiver concepts  
[SAND-80-8047] p0273 H81-19612
- Cost-performance comparison of water-steam  
receivers for solar central electric power  
plants  
[SAND-80-8245] p0273 H81-19615
- Methodology for estimating future market values  
of solar thermal technologies  
[SAND-80-8248] p0284 H81-21617
- SARGENT AND LUNDY, ENGINEERS, CHICAGO, ILL.  
Compressed air energy storage: Preliminary  
design and site development program in an  
aquifer, task 2. Volume 2: Characterize and  
explore potential sites and prepare research  
and development plan  
[DOE/ET-29232/T1-VOL-2] p0377 H81-18531
- SCIENCE APPLICATIONS, INC., MCLEAN, VA.  
Heavy oil reservoirs recoverable by thermal  
technology  
[DOE/ET-12380/1-VOL-3] p0317 H81-19540
- Heavy oil reservoirs recoverable by thermal  
technology  
[DOE/ET-12380/1-VOL-1] p0318 H81-19616
- Heavy oil reservoirs recoverable by thermal  
technology  
[DOE/ET-12380/1-VOL-2] p0318 H81-19617
- SENSOR TECHNOLOGY, INC., CHATSWORTH, CALIF.  
Array automated assembly task low cost silicon  
solar array project, phase 2  
[NASA-CR-164037] p0272 H81-19572



## SHEFFIELD UNIV. (ENGLAND).

An optimal control approach to energy minimization in electric vehicles  
[REPT-109] p0201 N81-19972

## SILTEC CORP., MENLO PARK, CALIF.

Low cost monocrystalline silicon sheet fabrication for solar cells by advanced ingot technology  
p0234 A81-27113

## SIRRIE (J. E.) CO., ALLIANCE, OHIO.

Study of seed-reprocessing systems for open-cycle coal-fired MHD power plants.  
[DOE/ET-15613/T1-APP] p0353 N81-17606

## SOCIETE NATIONALE INDUSTRIELLE AEROSPATIALE, LES MUREAUX (FRANCE).

Example of a favorable policy for space technology transfer to other fields  
p0198 N81-18951

## SOLAR POWER CORP., WOBURN, MASS.

Design, fabrication, test, qualification and price analysis for third generation design solar cell modules  
[NASA-CR-163917] p0257 N81-16576

## SOLAR TURBINES INTERNATIONAL, SAN DIEGO, CALIF.

Low NO<sub>x</sub>/ combustion systems for burning heavy residual fuels and high-fuel-bound nitrogen fuels  
[ASME PAPER 81-GT-109] p0348 A81-30014

## SOLAREX CORP., ROCKVILLE, MD.

High efficiency ultrathin coplanar back contact cells  
p0232 A81-27092

Nickel contacts for low cost solar cells  
p0245 A81-27223

Development of a high efficiency thin silicon solar cell  
[NASA-CR-163931] p0259 N81-17522

Silicon solar cell optimization  
[AD-A092908] p0263 N81-17579

Coplanar back contacts for thin silicon solar cells  
[NASA-CR-165272] p0266 N81-18495

## SOUTHERN CALIFORNIA GAS CO., LOS ANGELES.

Project SAGE: Solar assisted gas energy  
[DOE/TIC-11105] p0274 N81-19624

## SOUTHERN RESEARCH INST., BIRMINGHAM, ALA.

A manual for the use of electrostatic precipitators to collect fly ash particles  
[PB81-112757] p0308 N81-17640

## SOUTHWEST RESEARCH INST., SAN ANTONIO, TEX.

Hybrid fuels for highway transportation  
[DOE/CS-54240/T1] p0313 N81-18242

Lubricants for combating effects of high-sulfur fuel  
[AD-A094900] p0315 N81-19312

## SPECTROLAB, INC., SYLMAR, CALIF.

High efficiency wraparound contact solar cells  
/HEWACS/  
p0232 A81-27094

An improved lamination technique for solar arrays  
p0245 A81-27226

The HEWAC pilot line experience  
p0262 N81-17574

Silicon solar cell process development, fabrication and analysis  
[NASA-CR-164164] p0281 N81-21541

The 10 kilowatt photovoltaic concentrator system as installed at Sandia Laboratories, 1979  
[SAND-80-7063] p0283 N81-21601

## SPIRE CORP., BEDFORD, MASS.

Silicon solar cells with high open-circuit voltage  
p0232 A81-27089

Low-cost ion implantation and annealing technology for solar cells  
p0244 A81-27201

Development of glass encapsulation techniques for terrestrial photovoltaic arrays  
p0246 A81-27227

## SRI INTERNATIONAL CORP., MENLO PARK, CALIF.

Line-Focus Solar Central Power System, phase 1.  
Volume 1: Executive summary  
[DOE/ET-20550/2-VOL-1] p0283 N81-21598

Line-Focus Solar Central Power System, phase 1.  
Volume 2: Text  
[DOE/ET-20550/2-VOL-2] p0283 N81-21599

Line-Focus Solar Central Power System, phase 1.  
Volume 3: Appendices  
[DOE/ET-20550/2-VOL-3] p0283 N81-21600

## STANFORD LINEAR ACCELERATOR CENTER, CALIF.

Ultra headless hydro power  
[SLAC-PUB-2613] p0352 N81-16609

## STANFORD UNIV., CALIF.

Photoelectronic properties of zinc phosphide crystals, films and heterojunctions  
[SERI/FR-8031-1-T2] p0264 N81-17595

Optical diagnostic measurements of coal slag parameters in combustion MHD systems  
p0353 N81-18153

Geothermal reservoir engineering computer code comparison and validation using the GEONZ simulator program  
[DOE/SP-11450/1] p0314 N81-18478

Silicon solar cell design for medium concentration applications  
p0270 N81-18564

Fluctuations in combustion-driven MHD generators  
p0356 N81-18877

Solar space and water heating system at Stanford University, Central Food Services Building  
[DOE/CS-31522/T1] p0283 N81-21603

## STATE UNIV. OF NEW YORK, BUFFALO.

Fabrication and testing of MIS solar cells on a-Si:F:H  
[SERI/TR-8041-9-T1] p0269 N81-18552

Hydrogen-methane separation processes and related phenomena  
[DOE/METC-14386/106] p0321 N81-21153

Catalytic combustion of synthetic fuels  
[DOE/PC-30220/T1] p0321 N81-21154

## STATE UNIV. OF NEW YORK, STONY BROOK.

Response of the global climate to changes in atmospheric chemical composition due to fossil fuel burning  
[ASME PAPER 80-WA/HT-3] p0185 A81-21101

## STD RESEARCH CORP., ARCADIA, CALIF.

The STD/MHD codes - Comparison of analyses with experiments at AEDC/HPDE, Reynolds Metal Co., and Hercules, Inc.  
[AIAA PAPER 81-0173] p0329 A81-20649

On the magnetoacoustic instability  
[AIAA PAPER 81-0248] p0330 A81-20698

## STEVENS INST. OF TECH., HOBOKEN, N. J.

Kinetics of donor-solvent liquefaction of coal in nonisothermal experiments  
p0309 N81-18211

## STONEHART ASSOCIATES, INC., MADISON, CONN.

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165179] p0352 N81-17527

Preparation and evaluation of advanced electrocatalysts for phosphoric acid fuel cells  
[NASA-CR-165245] p0354 N81-18496

## STRASBOURG UNIV. (FRANCE).

General reflections on the theme of innovations  
p0383 N81-18940

## STYRELSEN FOR TEKNIKSK UTVECKLING, STOCKHOLM (SWEDEN).

Energy production from waste heat by means of elastomers or memory metals  
[STU-79-6394] p0362 N81-21551

## SWEDISH COUNCIL FOR BUILDING RESEARCH, STOCKHOLM.

Thermochemical energy storage: Proceedings from the International Seminar on Thermochemical Energy Storage  
[PB81-114324] p0376 N81-17618

A solar heating plant in Studsvik: Design and first year operational performance  
[PB81-114480] p0275 N81-19640

Continuous heat source model for ground heat storage  
[PB81-122889] p0378 N81-19643

Swedish energy storage projects 1979: Research-development-full-scale experiments supported by governmental organizations  
[PB81-122947] p0378 N81-19644

Flat plate thermal solar collectors: A physical background  
[PB81-135741] p0280 N81-20605

## SYNERGISTIC PRODUCTS, INC., IRVINE, CALIF.

Current and future industrial energy service characterizations, volume 1  
[SERI/TR-733-790-VOL-1] p0206 N81-21618

## SYSTEMS SCIENCE AND SOFTWARE, LA JOLLA, CALIF.

Computer modeling of coal gasification reactors, year 4  
[FE-1770-66] p0312 N81-18235

## T

**TECHNICAL PLANNING, INC., BELTSVILLE, MD.**  
Coordination and management tasks for the IEA solar heating and cooling program and CCMS solar energy pilot study  
[DOE/CS-30108/T3] p0278 N81-20567

**TECHNICAL RESEARCH CENTRE OF FINLAND, ESPOO.**  
Applied research activities for 1979  
p0384 N81-20004

**TECHNISCHE HOCHSCHULE, AACHEN (WEST GERMANY).**  
Development of multistep processes for thermochemical hydrogen production using nuclear heat. A summary  
[BNFT-FB-T-79-121] p0291 N81-19339

**TECHNISCHE PHYSISCHE DIENST TWO-TE, DELFT (NETHERLANDS).**  
The benefits of advanced heat storage systems  
p0277 N81-20551  
A method to tune the various components of a solar heating system  
p0277 N81-20552

**TECHNISCHE UNIV., BERLIN (WEST GERMANY).**  
Analysis of the utilization of lunar resources for space power systems. Part 1: System definition and model structure  
[ILB-HITT-73/1980-PT-1] p0284 N81-21628

**TENNESSEE UNIV., TULLAHOMA.**  
Investigation of swirling flow mixing for application in an MHD pulverized coal combustor using isothermal modeling  
[DOE/ET-10815/39] p0356 N81-19266

**TENNESSEE VALLEY AUTHORITY, MUSCLE SHOALS, ALA.**  
Environmental consideration for TVA's ammonia from coal project  
[CONF-8004137-1] p0203 N81-21216

**TETRA TECH, INC., LAFAYETTE, CALIF.**  
Methodology to evaluate the potential for ground water contamination from geothermal fluid releases  
[PB81-111114] p0195 N81-17641

**TEXAS A&M UNIV., COLLEGE STATION.**  
Heat transport in groundwater systems. Volume 2: Laboratory model  
[PB81-104135] p0375 N81-16523  
Technical and economic feasibility of a Thermal Gradient Utilization Cycle (TGUC) power plant  
[DOE/CS-56604/T1] p0355 N81-18546  
Photochemical solar energy conversion in surfactant vehicles  
[DOE/ER-10601/1] p0269 N81-18560  
Metal chelate catalysts for fuel cells  
[PB81-132953] p0364 N81-21629

**TEXAS UNIV., AUSTIN.**  
Environmental analysis of geopressured-geothermal prospect areas, DeWitt and Colorado counties, Texas  
[DOE/ET-27127/1] p0207 N81-21646

**TEXTRON, INC., BUFFALO, N. Y.**  
Coal gasifier wall protection system  
[PB81-141921] p0323 N81-21237

**TOLEDO METROPOLITAN AREA COUNCIL OF GOVERNMENTS, OHIO.**  
Groundwater as an alternative energy source for space heating and cooling, geothermal heat extraction  
[DOE/TIC-11357] p0320 N81-20571

**TRI-STATE REGIONAL PLANNING COMMISSION, NEW YORK.**  
Energy emergency contingency plan  
[PB81-128704] p0203 N81-20604

**TRW DEFENSE AND SPACE SYSTEMS GROUP, REDONDO BEACH, CALIF.**  
Design requirements for high-efficiency high concentration ratio space solar cells  
p0263 N81-17575

**TRW, INC., MCLEAN, VA.**  
Energy/economic model analysis. Volume 1: Gas technology assessments using three energy supply/demand and integrating models  
[PB81-114225] p0194 N81-17611  
Energy/economic model analysis. Volume 2: Evaluation of energy supply/demand integrating models  
[PB81-114233] p0194 N81-17612  
Energy/economic model analysis. Macroeconomic impacts of research and development in gas supply and end use technologies  
[PB81-114258] p0194 N81-17613

Energy/economic model analysis. Energy economic modeling system  
[PB81-114274] p0194 N81-17614  
Energy/economic model analysis. Time-stepped energy system optimization model  
[PB81-114241] p0194 N81-17615  
Energy/economic model analysis. Livermore energy policy model  
[PB81-114266] p0194 N81-17616  
Energy balances in the production and end-use of alcohols derived from biomass  
[PB81-125585] p0317 N81-19342

**TRW SYSTEMS GROUP, MCLEAN, VA.**  
Energy balances in the production and end-use of methanol derived from coal  
[DOE/FE-70151/T4] p0312 N81-18234

## U

**UNIBILT INDUSTRIES, VANDALIA, OHIO.**  
Passive and hybrid solar manufactured housing and buildings  
[DOE/CS-30384/1] p0263 N81-17592

**UNITED STATES STEEL CORP., MONROEVILLE, PA.**  
Use of coal injection and oxygen in a blast furnace to produce fuel gas  
[IDO-10089] p0312 N81-18236

**UNITED STIRLING A.B. MALMO (SWEDEN).**  
Design study of a kinematic Stirling engine for dispersed solar electric power systems  
[NASA-CR-159588] p0265 N81-18492

**UNITED TECHNOLOGIES CORP., SOUTH WINDSOR, CONN.**  
Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels  
[ASME PAP81-GT-157] p0188 N81-30056  
Improved PCG-1 cell technology  
[EPRI-EM-1566] p0351 N81-16598  
High-reliability gas turbine combined-cycle development program, phase 1  
[EPRI-AP-1599-VOL-1] p0357 N81-19466  
Optimization of carbon-supported platinum catalysts for fuel cell electrodes  
[AD-A094714] p0357 N81-19579  
High-reliability gas turbine combined-cycle development program, phase 1. Volume 2: Appendixes  
[EPRI-AP-1599-VOL-2] p0360 N81-20434  
Evaluation of battery converters based on 4.8-MW fuel cell demonstrator inverter  
[DOE/EA-26961/01] p0378 N81-20575

**UNITED TECHNOLOGIES CORP., WEST PALM BEACH, FLA.**  
Evaluation of concepts for controlling exhaust emissions from minimally processed petroleum and synthetic fuels  
[ASME PAP81-GT-157] p0188 N81-30056

**UNITED TECHNOLOGIES RESEARCH CENTER, EAST HARTFORD, CONN.**  
Applications study of advanced power generation systems utilizing coal-derived fuels. Volume 1: Executive summary  
[NASA-CR-161691] p0362 N81-21538  
Applications study of advanced power generation systems utilizing coal-derived fuels, volume 2  
[NASA-CR-161692] p0362 N81-21539

**UOP, INC., DES PLAINES, ILL.**  
Upgrading of coal liquids: Upgrading distillates from coal liquefaction  
[FE-2566-42] p0310 N81-18226

**UTAH STATE UNIV., LOGAN.**  
An evaluation of polycyclic aromatic hydrocarbons from processed oil shales  
p0308 N81-18104

**UTAH UNIV., SALT LAKE CITY.**  
Catalytic cracking of hydrotreated coal liquids and related polycyclic naphthenes and naphthoenaromatics  
p0308 N81-18118  
Thermal studies in a geothermal area. Report 1: Thermal studies at Roosevelt Hot Springs, Utah. Report 2: Heat flow above an arbitrarily dipping plane of heat sources. Report 3: A datum correction for heat flow measurements made on an arbitrary surface  
[DOE/ID-12079/19] p0314 N81-18479  
Management assistance for the development of hydrothermal energy in the Rocky Mountain/basin and range region  
[DOE/ET-28392/T2] p0315 N81-18547

Applied research and evaluation of process concepts for liquefaction and gasification of western coals  
[DOE/ET-10527/T1] p0319 N81-20292

## V

## VANDERBILT UNIV., NASHVILLE, TENN.

Modeling of a solar-pumped iodine laser p0221 A81-24618

## VARIAN ASSOCIATES, PALO ALTO, CALIF.

High efficiency klystron for the SPS application p0366 N81-16551

High efficiency compound semiconductor concentrator photovoltaics p0261 N81-17545

OM-VPE grown materials for high efficiency solar cells p0262 N81-17552

Further development of a novel solar cell concentrator photovoltaic converter system [SAND-80-7072] p0278 N81-20572

## VIK A.B., VÄRMLINGBY (SWEDEN).

Energy out of groundwater [NE/HRTV-80/9] p0320 N81-20565

## VIRGINIA POLYTECHNIC INST. AND STATE UNIV., BLACKSBURG.

Evaluation and targeting of geothermal energy resources in the southeastern United States [DOE/ET-27001/8] p0314 N81-18480

The aerodynamic analysis of a 10 kW horizontal-axis windmill p0354 N81-18484

The CdS<sub>1</sub>As<sub>2</sub> thin films for solar cell applications [DOE/ET-23007/4] p0270 N81-18561

## VIRGINIA UNIV., CHARLOTTESVILLE.

Improvements in the electrolytic generation of hydrogen p0291 N81-20287

## VOLVO FLYGHTOR A.B., TROLLHÄTTAN (SWEDEN).

Development of method and equipment for energy recovery from the exhaust gases of the oil-fueled smelting and holding furnaces [STU-78-6895] p0203 N81-20573

## VON KARMAN INST. FOR FLUID DYNAMICS,

## RHODE-SAINT-GENESE (BELGIUM).

Heat exchange and solar energy, volume 1 [VKI-LS-1980-2-VOL-1] p0266 N81-18499

Heat exchange and solar energy, volume 2 [VKI-LS-1980-2-VOL-2] p0277 N81-20549

System modeling using TRNSYS computer simulation p0277 N81-20555

## W

## WAPORA, INC., WASHINGTON, D. C.

Environmental impact assessment guidelines for new source coal gasification facilities [PB81-114555] p0195 N81-17635

## WASHINGTON STATE UNIV., PULLMAN.

The detection of trace element species in solvent refined coal p0308 N81-18117

## WASHINGTON UNIV., SEATTLE.

Energy from biological processes. Volume 3: Appendixes. Part 1: Energy from wood [PB81-134777] p0323 N81-21234

## WATER AND POWER RESOURCES SERVICE, DENVER, COLO.

Wind resource of the area surrounding Medicine Bow, Wyoming [PB81-109621] p0308 N81-17684

Solar/hydro integration study [DOE/SF-10505/4] p0355 N81-18558

## WESTERN RESERVE UNIV., CLEVELAND, OHIO.

Recent advances in the sciences of electrocatalysis [AD-A095095] p0356 N81-19257

## WESTINGHOUSE ELECTRIC CORP., ATHENS, GA.

Optimization of distribution transformer efficiency characteristics [DOE/ET-29298/T1] p0356 N81-19402

## WESTINGHOUSE ELECTRIC CORP., CONCORDVILLE, PA.

Gas turbine combustor performance on synthetic fuels, volume 1 [EPRI-AP-1623-VOL-1] p0356 N81-19259

High-reliability gas turbine combined-cycle development program, phase 1 [EPRI-AP-1598] p0358 N81-19632

## WESTINGHOUSE ELECTRIC CORP., LESTER, PA.

Ocean Thermal Energy Conversion Power System Development: PSD-I, phase 2 [DOE/ET-21039/1] p0353 N81-17594

## WESTINGHOUSE ELECTRIC CORP., PHILADELPHIA, PA.

Steam turbines for large power outputs p0360 N81-20427

## WESTINGHOUSE ELECTRIC CORP., PITTSBURGH, PA.

Solar cells and modules from dendritic web silicon p0234 A81-27117

Air/gas system dynamics of fossil fuel power plants. Volume 4: Experimental vibration and acoustic test data of a 500-MW unit [EPRI-CS-1444-VOL-4] p0351 N81-16602

Operational analysis of open-cycle MHD [EPRI-AP-1463] p0352 N81-16909

Disk MHD generator study [NASA-CR-159872] p0354 N81-18491

## WESTINGHOUSE ELECTRIC CORP., TRAFFORD, PA.

Low cost solar array project silicon materials task. Development of a process for high capacity arc heater production of silicon for solar arrays [NASA-CR-163943] p0260 N81-17525

## WESTINGHOUSE RESEARCH AND DEVELOPMENT CENTER, PITTSBURGH, PA.

The properties of polycrystalline silicon solar cells with controlled titanium additions p0209 A81-20010

Development of processes for the production of low cost silicon dendritic web for solar cells p0231 A81-27080

Solar cells and modules from dendritic web silicon p0234 A81-27117

Cell module and fuel conditioner [NASA-CR-165189] p0354 N81-18494

Development of copper sulfide/cadmium sulfide thin film solar cells [SERI/PR-8143-1-T2] p0269 N81-18559

Cell module and fuel conditioner development [NASA-CR-165190] p0357 N81-19573

## WINTER (STEVEN) ASSOCIATES, INC., NEW YORK, N.Y.

Passive and hybrid solar manufactured housing and buildings [DOE/CS-30384/1] p0263 N81-17592

## Y

## YALE UNIV., NEW HAVEN, CONN.

US solar energy policy for less developed countries [DOE/CS-10048/T1] p0194 N81-17598

## Z

## ZIMMER ENGINEERING CO., SAN JOSE, CALIF.


Wind power generation dynamic impacts on electric utility systems [EPRI-AP-1614] p0358 N81-19585

# CONTRACT NUMBER INDEX

ENERGY/A Continuing Bibliography (Issue 30)

JULY 1981

## Typical Contract Number Index Listing



Listings in this index are arranged alphanumerically by contract number. Under each contract number, the accession numbers denoting documents that have been produced as a result of research done under that contract are arranged in ascending order with the AIAA accession numbers appearing first. The accession number denotes the number by which the citation is identified in either the AIAA or STAR section.

AF PROJ. 2054  
p0199 N81-19576  
AF PROJ. 2303  
p0378 N81-19969  
AF PROJ. 3145  
p0272 N81-19578  
AF-49 (638)-1160  
p0330 N81-20698  
AGA PROJ. 1U-4-7  
p0306 N81-17292  
AT (29-1)-789  
p0331 N81-21138  
p0296 N81-24303  
BMFT-ET-4155-A  
p0374 N81-25613  
BMFT-ET-4190-A  
p0242 N81-27190  
CEC-244-77-RED  
p0374 N81-25613  
CNR-78-02438.07  
p0267 N81-18506  
CRC PROJ. CAPI-1-64  
p0195 N81-17636  
DA PROJ. 1L1-62209-AH-76  
p0361 N81-21080  
DA PROJ. 1L1-62733-AH-20  
p0357 N81-19579  
DA PROJ. 1L2-63702-DE-10  
p0351 N81-16589  
DA PROJ. 1L7-62733-AH-20  
p0315 N81-19312  
DAA629-78-G-0092  
p0350 N81-16061  
DAA629-79-C-0169  
p0350 N81-16061  
DAAK51-79-C-0057  
p0361 N81-21080  
DAAK70-77-C-0174  
p0351 N81-16589  
DAAK70-78-C-0001  
p0315 N81-19312  
DAAK70-79-C-0151  
p0357 N81-19579  
DAAK70-80-C-0001  
p0315 N81-19312  
DE-AB01-77ET-10069  
p0312 N81-18240  
DE-AB03-77CS-31522  
p0283 N81-21603  
DE-AC01-76CS-32224  
p0282 N81-21566  
DE-AC01-76ET-1034  
p0360 N81-20440  
DE-AC01-76ET-10489  
p0316 N81-19335  
DE-AC01-76ET-10527  
p0319 N81-20292  
DE-AC01-76ET-10532  
p0311 N81-18231  
DE-AC01-76ET-26961  
p0378 N81-20575  
DE-AC01-77ET-10131  
p0310 N81-18226  
DE-AC01-77ET-11058  
p0364 N81-21920  
DE-AC01-77ET-21059  
p0317 N81-19337  
DE-AC01-78CS-20060  
p0192 N81-17394  
DE-AC01-78ET-10325  
p0321 N81-21218  
DE-AC01-78ET-10328  
p0312 N81-18238  
p0312 N81-18239  
p0319 N81-20304  
DE-AC01-78ET-29298  
p0356 N81-19402  
DE-AC01-78EA-12301  
p0322 N81-21230  
DE-AC01-79ER-10001  
p0200 N81-19590  
p0319 N81-20293  
DE-AC01-79CS-30027  
p0276 N81-19665  
p0279 N81-20588  
p0363 N81-21552  
p0281 N81-21553  
p0281 N81-21554  
p0281 N81-21555  
p0281 N81-21556  
p0281 N81-21557  
p0284 N81-21710  
DE-AC01-79ER-10041  
p0369 N81-19602  
p0279 N81-20596  
p0205 N81-21590  
DE-AC01-79ET-14940  
p0294 N81-23495  
DE-AC01-79ET-21051  
p0263 N81-17586  
DE-AC01-79ET-23108  
p0221 N81-24804  
DE-AC01-79ET-29246  
p0361 N81-21298  
DE-AC01-79ET-146933  
p0317 N81-19541  
DE-AC01-79PE-70151  
p0312 N81-18234  
DE-AC01-80CS-23999  
p0200 N81-19608

DE-AC01-80CS-36010  
p0264 N81-17596  
DE-AC01-80ET-15602  
p0360 N81-20590  
DE-AC01-80ET-15611  
p0346 N81-28217  
DE-AC01-80ET-15614  
p0328 N81-20601  
p0329 N81-20652  
p0330 N81-20696  
p0330 N81-20699  
DE-AC02-76CH-00016  
p0192 N81-16631  
p0307 N81-17603  
p0354 N81-18518  
p0273 N81-19609  
p0291 N81-20300  
p0319 N81-20301  
DE-AC02-76CH-03073  
p0332 N81-21640  
DE-AC02-76ET  
p0332 N81-21480  
DE-AC02-76ET-20279  
p0264 N81-17604  
p0283 N81-21607  
p0284 N81-21609  
DE-AC02-76ET-25003  
p0379 N81-21586  
DE-AC02-76ET-26602  
p0371 N81-23440  
DE-AC02-77CG-00178  
p0358 N81-19619  
DE-AC02-77CH-00178  
p0264 N81-17600  
p0307 N81-17601  
p0267 N81-18520  
p0267 N81-18521  
p0267 N81-18523  
p0268 N81-18533  
p0269 N81-18552  
p0269 N81-18555  
p0269 N81-18557  
p0269 N81-18559  
p0273 N81-19607  
p0273 N81-19618  
p0274 N81-19621  
p0274 N81-19629  
p0278 N81-20570  
p0279 N81-20585  
p0204 N81-21576  
p0282 N81-21577  
p0363 N81-21578  
p0282 N81-21579  
p0283 N81-21591  
p0206 N81-21618  
DE-AC02-77ER-04169  
p0314 N81-18525  
DE-AC02-78ET-20611  
p0315 N81-18553  
DE-AC02-78ET-29232  
p0377 N81-18531  
p0377 N81-19586  
DE-AC02-78ET-29345  
p0379 N81-20591  
DE-AC02-79CS-10048  
p0194 N81-17598  
DE-AC02-79CS-30108  
p0278 N81-20567  
DE-AC02-79CS-30122  
p0272 N81-19587  
DE-AC02-79CS-30150  
p0189 N81-16316  
DE-AC02-79ER-10450  
p0285 N81-21955  
DE-AC02-79ER-10466  
p0315 N81-19317  
DE-AC02-79ET-10815  
p0328 N81-20550  
p0331 N81-21105  
p0356 N81-19266  
DE-AC02-79ET-15207  
p0363 N81-21581  
DE-AC02-79ET-15208  
p0355 N81-18562  
DE-AC02-79ET-15613  
p0353 N81-17606  
DE-AC02-79ET-21062  
p0303 N81-28690  
DE-AC02-79ET-21067  
p0256 N81-29268  
DE-AC02-79ET-10815  
p0328 N81-20551  
DE-AC02-80ET-15601  
p0328 N81-20602  
p0328 N81-20603  
DE-AC03-76CS-31218  
p0274 N81-19626  
DE-AC03-76ET-11301  
p0351 N81-16598  
DE-AC03-76ET-20417  
p0378 N81-19633  
DE-AC03-76ET-20431  
p0263 N81-17587  
DE-AC03-76SF-00012  
p0197 N81-18576  
DE-AC03-76SF-00515  
p0352 N81-16609  
DE-AC03-77ET-10296  
p0319 N81-20296  
DE-AC03-77ET-13323  
p0358 N81-19583  
DE-AC03-78CS-40023  
p0199 N81-19404  
p0202 N81-20441  
DE-AC03-78ET-12380  
p0317 N81-19540  
p0318 N81-19616  
p0318 N81-19617  
DE-AC03-78ET-15365  
p0342 N81-25602  
DE-AC03-79CS-30203  
p0212 N81-21133  
DE-AC03-79ET-21039  
p0353 N81-17594  
DE-AC03-79ET-23043  
p0284 N81-21608  
DE-AC03-79ET-23044  
p0221 N81-24803  
p0236 N81-27127  
DE-AC03-79ET-23045  
p0275 N81-19634  
DE-AC03-79ET-23047  
p0248 N81-27255  
DE-AC03-79ET-23049  
p0236 N81-27130  
DE-AC03-79ET-27193  
p0363 N81-21582  
DE-AC03-79ET-27233  
p0314 N81-18513  
DE-AC03-80SF-11450  
p0314 N81-18478  
DE-AC04-76DP-00053  
p0298 N81-25111  
p0253 N81-27552  
DE-AC04-76DP-00789  
p0331 N81-21142  
p0332 N81-21143  
p0288 N81-25148  
p0289 N81-25159  
p0289 N81-25160  
p0344 N81-26552  
p0344 N81-26571  
p0242 N81-27187  
p0258 N81-16593  
p0353 N81-17883  
p0267 N81-18530  
p0355 N81-18550  
p0269 N81-18551  
p0317 N81-19539  
p0272 N81-19595  
p0273 N81-19612  
p0273 N81-19613  
p0273 N81-19614  
p0273 N81-19615

# CONTRACT NUMBER INDEX

p0274 881-19628  
p0320 881-20525  
p0278 881-20572  
p0279 881-20582  
p0279 881-20583  
p0279 881-20595  
p0279 881-20599  
p0322 881-21231  
p0324 881-21468  
p0282 881-21568  
p0282 881-21571  
p0282 881-21574  
p0282 881-21575  
p0283 881-21601  
DE-AC04-76DP-03533  
p0357 881-19495  
p0357 881-19581  
p0358 881-19600  
p0358 881-19601  
DE-AC04-76DP-000789  
p0258 881-16592  
DE-AC04-78CS-35351  
p0278 881-20568  
DE-AC04-78CS-54240  
p0313 881-18242  
DE-AC04-78ET-20539  
p0232 881-27091  
DE-AC04-78ET-23063  
p0232 881-27090  
DE-AC04-79DP-00789  
p0268 881-18532  
DE-AC04-79ET-23007  
p0270 881-18561  
DE-AC04-79ET-23008  
p0237 881-27142  
DE-AC04-79ET-23010  
p0221 881-24809  
DE-AC04-808V-10180  
p0204 881-21560  
DE-AC05-760R-00033  
p0193 881-17583  
DE-AC05-78ET-27001  
p0314 881-18480  
DE-AC05-780R-06028  
p0199 881-19589  
DE-AC05-79CS-56051  
p0316 881-19336  
DE-AC06-76RL-01630  
p0375 881-16599  
p0376 881-16600  
p0376 881-17591  
p0376 881-17602  
p0267 881-18522  
p0268 881-18542  
p0199 881-19353  
p0321 881-20592  
p0322 881-21224  
p0380 881-21587  
p0324 881-21604  
p0283 881-21605  
p0284 881-21619  
p0206 881-21624  
p0207 881-21642  
p0325 881-21712  
DE-AC07-76ID-01570  
p0353 881-17911  
p0312 881-18236  
DE-AC07-78ET-28392  
p0315 881-18547  
DE-AC07-80ID-12079  
p0314 881-18479  
DE-AC08-78DP-40030  
p0345 881-26857  
p0350 881-16456  
DE-AC08-80DP-40124  
p0332 881-21466  
DE-AC21-76ET-10242  
p0312 881-18235  
DE-AC21-80MC-14361  
p0354 881-18529  
DE-AC21-80MC-14386  
p0321 881-21153  
DE-AC21-80MC-14787  
p0197 881-18573  
DE-AC22-80PC-30072  
p0313 881-18241  
DE-AC22-80PC-30080  
p0305 881-16318  
p0315 881-19258  
DE-AC22-80PC-30088  
p0316 881-19328

DE-AC22-80PC-30252  
p0318 881-20227  
DE-AC51-79ET-27230  
p0316 881-19333  
DE-AC79-79BP-10552  
p0205 881-21593  
DE-AC81-79ER-10041  
p0275 881-19635  
DE-AI01-76ET-12548  
p0189 881-16513  
p0197 881-18571  
p0369 881-20495  
DE-AI01-76ET-20356  
p0276 881-20544  
p0276 881-20545  
p0276 881-20546  
DE-AI01-76ET-20366  
p0362 881-21537  
DE-AI01-77CS-51040  
p0361 881-20958  
DE-AI01-77CS-51044  
p0368 881-19459  
DE-AI01-77ET-20396  
p0363 881-21592  
DE-AI01-80ET-17088  
p0357 881-19573  
DE-AI03-79ET-11272  
p0354 881-18494  
p0361 881-21533  
p0362 881-21547  
DE-AI03-79SP-10505  
p0355 881-18558  
DE-AL01-80ET-17088  
p0354 881-18496  
p0354 881-18497  
DE-AL03-79ET-11272  
p0362 881-21536  
DE-AM21-80MC-15422  
p0323 881-21361  
DE-AS02-76CS-40202  
p0320 881-20306  
DE-AS02-76ER-02564  
p0361 881-21207  
DE-AS02-77ET-10487  
p0316 881-19328  
DE-AS03-77EV-01528  
p0204 881-21559  
DE-AS04-78AL-04266  
p0268 881-18537  
DE-AS04-78CS-35405  
p0278 881-20574  
DE-AS05-79ER-10068  
p0293 881-20815  
DE-AS05-79ER-10072  
p0200 881-19603  
DE-AS05-79ET-27127  
p0207 881-21646  
DE-AS05-80ER-10601  
p0269 881-18560  
DE-AS06-77ET-28476  
p0318 881-19597  
p0318 881-19598  
DE-AS07-78ID-01756  
p0324 881-21562  
DE-AS07-79ID-12049  
p0324 881-21585  
DE-AT01-79CS-10047  
p0268 881-18538  
DE-AT03-76ET-20550  
p0283 881-21598  
p0283 881-21599  
p0283 881-21600  
DE-AT03-76SF-70046  
p0331 881-21096  
p0332 881-21162  
DE-AT03-76SF-71061  
p0298 881-25120  
DE-AT03-76SF-90351  
p0287 881-25141  
DE-AT03-79ER-10119  
p0313 881-18476  
DE-AT06-77EV-73002  
p0205 881-21595  
p0205 881-21597  
DE-AT21-80MC-14689  
p0323 881-21361  
DE-AI01-77ET-10769  
p0351 881-16570  
p0354 881-18491  
DE-EC02-80CS-30371  
p0267 881-18515

DE-FC02-80CS-30384  
p0263 881-17592  
DE-FG01-78CS-56604  
p0355 881-18546  
DE-FG02-79ER-10538  
p0216 881-22349  
DE-FG02-79R5-10104  
p0196 881-18514  
DE-FG02-79R5-10107  
p0200 881-19620  
DE-FG03-76CS-31084  
p0274 881-19622  
DE-FG06-79ET-27256  
p0316 881-19331  
DE-FG21-78ET-12229  
p0313 881-18343  
DE-FG22-80PC-30220  
p0321 881-21154  
DEN3-56  
p0265 881-18492  
DEN3-67  
p0362 881-21536  
p0362 881-21547  
DEN3-89  
p0361 881-21533  
DEN3-92  
p0198 881-18935  
DEN3-106  
p0361 881-20958  
DEN3-139  
p0354 881-18491  
DEN3-161  
p0354 881-18494  
p0357 881-19573  
DEN3-176  
p0352 881-17527  
p0354 881-18496  
DEN3-179  
p0329 881-20649  
p0330 881-20698  
DEN3-202  
p0329 881-20649  
p0330 881-20698  
DGRST-78-7-0050  
p0280 881-20602  
DI-14-34-0001-7091  
p0375 881-16523  
DI-14-34-0001-7092  
p0375 881-16523  
DI-14-34-0001-8046  
p0375 881-16523  
DO-A01-78-00-3082  
p0368 881-17288  
p0368 881-17289  
DOE ORDER 4-X-6722H-1  
p0371 881-23450  
DOE-31-109-38-4914  
p0371 881-23439  
DOT-FA79NA-6083  
p0308 881-18057  
DOT-HS-7-01708  
p0192 881-17445  
DOT-OS-90023  
p0198 881-18931  
E(04-3)-1203  
p0215 881-22155  
E(40-1)-5246  
p0289 881-25155  
p0290 881-25497  
E(49-18)-2006  
p0319 881-20292  
E(49-18)-2215  
p0327 881-20022  
E(49-18)-2414  
p0293 881-22278  
E-8-77-5-02-4512  
p0211 881-21029  
EA-77-A-01-6010  
p0201 881-20318  
EC-77-A-31-1042  
p0376 881-17961  
EC-77-A-31-1044  
p0198 881-18935  
EC-77-A-31-1062  
p0359 881-19920  
EC-77-C-01-4042  
p0272 881-19582  
EC-77-X-01-3559  
p0379 881-21359  
ED-78-C-08-1598  
p0345 881-26857

EEC-166-76-1-EGI  
p0296 881-24304  
EEC-439-78-1-ESB  
p0252 881-27293  
EEC-456-78-1  
p0215 881-21954  
EF-76-C-01-2256  
p0299 881-25128  
EF-76-C-01-2315  
p0311 881-18231  
EF-77-A-01-2893  
p0312 881-18240  
EF-77-C-01-2468  
p0314 881-18517  
EF-77-C-01-2566  
p0310 881-18226  
EG-77-A-29-1078  
p0363 881-21592  
EG-77-C-01-0442  
p0278 881-20570  
EG-77-C-01-4042  
p0209 881-20007  
p0241 881-27183  
p0251 881-27281  
p0258 881-16595  
p0259 881-16606  
p0193 881-17582  
p0264 881-17600  
p0307 881-17601  
p0273 881-19618  
p0275 881-19631  
p0204 881-21576  
p0282 881-21577  
p0363 881-21578  
p0282 881-21579  
p0206 881-21618  
EG-77-C-04-3974  
p0255 881-29252  
EG-77-C-91-4042  
p0283 881-21583  
EG-77-G-01-1654  
p0281 881-21535  
EG-77-S-02-4519  
p0371 881-20491  
EG-77-S-05-5440  
p0347 881-29199  
EG-77-S-06-1043  
p0295 881-23693  
EG-77-05-5565  
p0213 881-21150  
EG-78-C-07-1701  
p0315 881-18547  
EM-78-C-03-1725  
p0253 881-27557  
EM-78-C-03-1837  
p0202 881-20441  
EM-78-C-04-5351  
p0278 881-20568  
EM-78-C-04-5366  
p0214 881-21158  
EM-78-S-04-5405  
p0278 881-20574  
EM-78-S-4719  
p0255 881-27556  
EPA-R-804416  
p0306 881-17294  
EPA-R-804421  
p0307 881-17295  
EPA-R-806403  
p0306 881-17294  
EPA-68-02-2114  
p0308 881-17640  
EPA-68-02-2592  
p0306 881-17287  
p0195 881-17644  
EPA-68-02-2987  
p0201 881-19674  
EPA-68-02-3147  
p0195 881-17645  
EPA-68-03-2567  
p0265 881-17617  
EPA-68-03-2671  
p0195 881-17641  
p0195 881-17635  
EPRI PROJ. RP-635-2  
p0379 881-20591  
EPRI PROJ. 239-2  
p0322 881-21229  
EPRI PROJ. 367-2  
p0311 881-18227

# CONTRACT NUMBER INDEX

EPRI PROJ. 468-2	EY-76-G-03-1084	JPL-955055	p0271 N81-19568
p0355 N81-18536	p0274 N81-19622	p0281 N81-21541	p0271 N81-19569
EPRI PROJ. 639-1	EY-76-S-02-2588-A003	JPL-955079	p0271 N81-19570
p0352 N81-16909	p0253 A81-27555	p0257 N81-16575	p0271 N81-19571
EPRI PROJ. 779-25	EY-76-S-02-2982	JPL-955089	p0369 N81-20495
p0321 N81-21222	p0302 A81-25564	p0234 A81-27114	p0276 N81-20544
EPRI PROJ. 842-5	p0320 N81-20306	JPL-955115	p0276 N81-20545
p0351 N81-16598	EY-76-S-02-4070	p0217 A81-22897	p0276 N81-20546
EPRI PROJ. 980-5	p0296 A81-24427	JPL-955194	p0277 N81-20548
p0319 N81-20302	EY-76-S-06-2438	p0271 N81-19567	p0291 N81-21210
EPRI PROJ. 989-1	p0295 A81-23693	JPL-955244	NAS8-32255
p0356 N81-19259	EY-76-S-02-4051-A001	p0243 A81-27197	p0368 N81-16584
EPRI PROJ. 1055-1	p0296 A81-24302	JPL-955265	NAS8-32475
p0191 N81-16603	E4-76-C-03-1108	p0259 N81-17521	p0271 N81-19562
EPRI PROJ. 1187-1	p0378 N81-19633	JPL-955277	p0271 N81-19564
p0357 N81-19466	F33615-77-C-3108	p0291 N81-21210	p0271 N81-19565
p0360 N81-20434	p0250 A81-27270	JPL-955328	p0276 N81-20537
EPRI PROJ. 1187-2	F33615-77-C-3120	p0244 A81-27200	p0280 N81-21491
p0358 N81-19632	p0250 A81-27269	JPL-955342	p0280 N81-21492
EPRI PROJ. 1191-1	F33615-78-C-2036	p0271 N81-19569	NAS8-32986
p0275 N81-19630	p0217 A81-22874	JPL-955388	p0263 N81-17575
EPRI PROJ. 1364-1	p0235 A81-27119	p0257 N81-16572	NAS8-33157
p0204 N81-21561	p0253 A81-27297	JPL-955400	p0368 N81-18490
EPRI PROJ. 1651	F33615-78-C-2039	p0257 N81-16574	NAS8-33824
p0351 N81-16602	p0232 A81-27095	JPL-955403	p0309 N81-18212
ER-78-S-02-4995	p0263 N81-17579	p0257 N81-16576	p0309 N81-18213
p0221 A81-24809	F33615-78-C-2077	JPL-955455	p0309 N81-18214
p0237 A81-27139	p0235 A81-27118	p0259 N81-17523	p0309 N81-18215
ER-78-02-4737	p0261 N81-17550	JPL-955456	p0309 N81-18216
p0285 A81-21955	F33615-79-C-2001	p0202 N81-20538	p0310 N81-18217
ES-77-C-02-4149	p0272 N81-19578	p0202 N81-20539	p0310 N81-18218
p0345 A81-26857	F33615-79-C-2038	p0202 N81-20540	p0310 N81-18219
ET-76-C-01-2159	p0334 A81-23436	p0202 N81-20541	p0310 N81-18220
p0377 N81-19586	GRI-5010-323-0014	p0202 N81-20542	p0310 N81-18221
ET-78-A-03-2208	p0307 N81-17297	JPL-955477	NAS8-33996
p0236 A81-27128	GRI-5011-310-0097	p0271 N81-19571	p0362 N81-21538
ET-78-C-01-2159	p0307 N81-17510	JPL-955559	p0362 N81-21539
p0377 N81-18531	GRI-5011-322-0082	p0306 N81-16573	NAS9-15755
ET-78-C-01-2683	p0306 N81-17293	JPL-955820	p0365 A81-24831
p0364 N81-21920	GRI-5014-310-0238	p0193 N81-17520	NAS9-15782
ET-78-C-01-3125	p0206 N81-21631	MA PROJ. 2791-4072	p0366 N81-16544
p0312 N81-18238	GRI-5014-322-0139	p0368 N81-17288	NAS9-15800
p0319 N81-20304	p0306 N81-17291	p0368 N81-17289	p0366 N81-16543
ET-78-C-02-5022	GRI-5014-322-0145	NDA903-77-C-0370	NAS9-16055
p0315 N81-18553	p0307 N81-17296	p0319 N81-20290	p0369 N81-20328
ET-78-C-05-6028	GRI-5014-363-0174	p0384 N81-21960	NCC5-7 p0185 A81-21101
p0199 N81-19589	p0364 N81-21629	NAPC-T-16076549	NR PROJ. 359-451
ET-78-G-01-3381	GSRI PROJ. 5014-363-0132	p0306 N81-17290	p0356 N81-19257
p0313 N81-18343	p0308 N81-18149	NASA ORDER C-46229-D	NR PROJECT 062-228
ET-78-S-02-5085	HUD-H-2573	p0354 N81-18497	p0303 A81-28690
p0185 A81-19848	p0275 N81-19648	NASW-2342	NRC OSX-78-00062
p0346 A81-29031	HUD-HC-5040	p0198 N81-19110	p0243 A81-27199
EW-78-C-02-4984	p0191 N81-16611	NASW-3199	NRC 05X-78-00091
p0379 N81-20591	IGT PROJ. 30520	p0360 N81-20543	p0241 A81-27178
EX-76-A-29-1012	p0306 N81-17292	NAS3-20065	NRC 115Q31025-7-1509-5
p0258 N81-16580	ISPR-145-75-PIPGI	p0232 A81-27094	p0286 A81-24557
EX-76-A-29-1060	p0266 N81-18504	NAS3-20823	NSC-68E-0404-03(05)-1979
p0265 N81-18492	JPL-954343	p0232 A81-27089	p0235 A81-27126
EX-76-A-36-1008	p0271 N81-19570	NAS3-21250	NSERC-7879-G0089
p0200 N81-19645	JPL-954355	p0232 A81-27092	p0246 A81-27228
p0201 N81-19646	p0216 A81-22198	p0266 N81-18495	NSF AER-75-11171
EX-76-C-01-1743	p0230 A81-27078	NAS3-21270	p0288 A81-25152
p0316 N81-19335	JPL-954356	p0232 A81-27094	NSF AER-76-17159
EX-76-C-01-1806	p0281 N81-21546	p0262 N81-17574	p0288 A81-25152
p0360 N81-20440	JPL-954363	NAS3-21280	HSP AER-77-11545
EX-76-C-01-2013	p0238 A81-27146	p0232 A81-27097	p0288 A81-25152
p0293 A81-22274	JPL-954589	NAS3-22045	NSF C-727
EX-76-C-01-2490	p0260 N81-17525	p0315 N81-19316	p0329 A81-20649
p0297 A81-24900	JPL-954796	NAS3-22217	p0330 A81-20698
EX-77-A-01-2295	p0245 A81-27218	p0260 N81-17534	NSF CHE-79-09065
p0344 A81-26853	JPL-954817	NAS5-24458	p0185 A81-21101
EY-76-C-02-2520	p0231 A81-27085	p0244 A81-27209	NSF ENG-76-84533
p0379 N81-21586	JPL-954847	NAS7-100	p0344 A81-26018
EY-76-C-02-2709	p0238 A81-27146	p0329 A81-20683	NSF ENG-77-23932
p0345 A81-26857	p0243 A81-27194	p0216 A81-22198	p0346 A81-28217
EY-76-C-02-3073	p0243 A81-27196	p0234 A81-27116	NSF ENG-79-10896
p0337 A81-23848	JPL-954854	p0244 A81-27205	p0249 A81-27264
EX-76-C-03-0115	p0245 A81-27223	p0250 A81-27271	NSF ISP-78-22221
p0283 N81-21598	JPL-954865	p0346 A81-28219	p0384 N81-21633
p0283 N81-21599	p0272 N81-19572	p0350 N81-16056	NSF PFR-77-12500
p0283 N81-21600	JPL-954868	p0189 N81-16513	p0317 N81-19340
EY-76-C-03-0167-PA-63	p0209 A81-19766	p0257 N81-16574	NSF PTF-75-03457
p0286 A81-24022	p0258 N81-16578	p0258 N81-16578	p0274 N81-19624
EY-76-C-03-1255	JPL-954869	p0258 N81-16580	HSG-1425
p0263 N81-17587	p0243 A81-27196	p0258 N81-16581	p0247 A81-27239
EY-76-C-03-1285	JPL-954873	p0259 N81-17522	HSG-3018
p0233 A81-27105	p0234 A81-27117	p0261 N81-17543	p0209 A81-20011
EY-76-C-06-1830	JPL-954883	p0262 N81-17572	HSG-8041
p0295 A81-23690	p0259 N81-17522	p0262 N81-17573	p0224 A81-24994
p0340 A81-25092	JPL-954888	p0197 N81-18571	NZERDC-3096
	p0234 A81-27116	p0271 N81-19567	p0295 A81-23692

# CONTRACT NUMBER INDEX

N00014-75-C-0953  
     p0356 H81-19257  
 N00014-76-C-0001  
     p0256 A81-29261  
 N00014-76-C-0309  
     p0201 H81-19652  
 N00017-72-C-4401  
     p0337 A81-24433  
 N62269-80-C-0200  
     p0196 H81-18050  
     p0196 H81-18051  
 PHS-RR-00292  
     p0318 H81-20227  
 RR-98036  
     p0288 A81-25152  
 RR0110941  
     p0377 H81-19575  
 SWEDBESD-5060-601  
     p0359 H81-19636  
 UN-ROK/72/027  
     p0340 A81-25084  
 W-31-109-ENG-38  
     p0328 A81-20552  
     p0328 A81-20604  
     p0329 A81-20650  
     p0330 A81-20747  
     p0305 H81-16317  
     p0192 H81-16958  
     p0193 H81-17588  
     p0376 H81-17590  
     p0268 H81-18540  
     p0355 H81-18562  
     p0199 H81-19463  
     p0273 H81-19610  
     p0383 H81-19611  
     p0201 H81-19653  
     p0359 H81-19932  
     p0318 H81-20226  
     p0320 H81-20571  
     p0203 H81-20598  
     p0203 H81-21161  
     p0322 H81-21228  
     p0363 H81-21612  
     p0384 H81-21645  
     p0325 H81-21875  
 W-7405-ENG-26  
     p0185 A81-21022  
     p0332 A81-21480  
     p0333 A81-22659  
     p0287 A81-25143  
     p0342 A81-25492  
     p0241 A81-27177  
     p0189 H81-16314  
     p0305 H81-16315  
     p0305 H81-16322  
     p0258 H81-16594  
     p0351 H81-16597  
     p0192 H81-17285  
     p0192 H81-17410  
     p0194 H81-17610  
     p0311 H81-18228  
     p0311 H81-18232  
     p0311 H81-18233  
     p0313 H81-18477  
     p0196 H81-18510  
     p0196 H81-18528  
     p0197 H81-18577  
     p0198 H81-18578  
     p0316 H81-19332  
     p0317 H81-19588  
     p0200 H81-19599  
     p0320 H81-20305  
     p0321 H81-21179  
     p0322 H81-21223  
     p0204 H81-21467  
     p0205 H81-21606  
 W-7405-ENG-36  
     p0191 H81-16604  
     p0191 H81-16605  
     p0353 H81-17910  
     p0199 H81-19329  
     p0199 H81-19584  
     p0200 H81-19596  
     p0291 H81-19971  
     p0320 H81-20580  
     p0279 H81-20587  
     p0360 H81-20901  
     p0280 H81-20936  
     p0363 H81-21572  
     p0324 H81-21573  
     p0205 H81-21611


    p0325 H81-21616  
     p0364 H81-21919  
 W-7405-ENG-48  
     p0213 A81-21139  
     p0294 A81-22511  
     p0335 A81-23452  
     p0226 A81-25029  
     p0374 A81-25837  
     p0307 H81-17585  
     p0376 H81-17963  
     p0265 H81-18225  
     p0314 H81-18526  
     p0197 H81-18549  
     p0270 H81-18572  
     p0197 H81-18575  
     p0368 H81-18962  
     p0358 H81-19604  
     p0272 H81-19605  
     p0378 H81-19606  
     p0359 H81-19888  
     p0378 H81-20561  
     p0323 H81-21463  
     p0282 H81-21564  
     p0204 H81-21565  
     p0205 H81-21613  
     p0324 H81-21615  
     p0206 H81-21639  
     p0206 H81-21640  
 W-7405-ENG-82  
     p0201 H81-19655  
     p0283 H81-21583  
 W-7405-ENG-92  
     p0316 H81-19334  
 XI-9-8000-1  
     p0251 A81-27284  
 XJ-9-8254  
     p0234 A81-27111  
     p0240 A81-27167  
     p0249 A81-27262  
 XM-9-81361  
     p0235 A81-27118  
 XP-9-8002-9  
     p0215 A81-22148  
 XR-9-8063-1  
     p0241 A81-27179  
     p0241 A81-27180  
     p0241 A81-27183  
     p0242 A81-27185  
 XS-9-8032-1  
     p0235 A81-27119  
 XS-9-8232-1  
     p0221 A81-24805  
 XS-9-8233-1  
     p0235 A81-27125  
     p0252 A81-27295  
 XS-9-8274  
     p0231 A81-27085  
 073-36-00-00-72  
     p0193 H81-17526  
 505-44-22  
     p0315 H81-19316  
 506-55-13-07  
     p0257 H81-16437  
 506-55-42  
     p0260 H81-17531  
 506-55-72  
     p0276 H81-20173  
 778-11-05  
     p0351 H81-16570  
 778-46-12  
     p0351 H81-16571  
 927-76-31  
     p0362 H81-21537  
 953-36-00-00-72  
     p0365 H81-16533  
 986-15-89-00-72  
     p0265 H81-18493

# REPORT/ACCESSION INDEX

ENERGY/A Continuing Bibliography (Issue 30)

JULY 1981

## Typical Report/Accession Number Index Listing

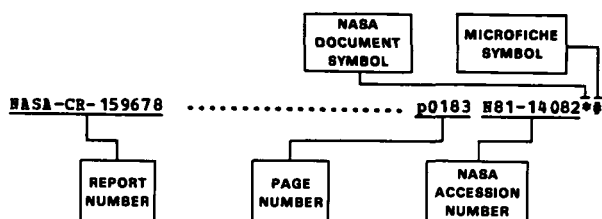

Listings in this index are arranged alphabetically by report number. The page number indicates the actual page where the citation may be located. The accession number denotes the number by which the citation is identified. An asterisk (\*) indicates that the item is a NASA report. A pound sign (#) indicates that the item is available on microfiche.

ACUREX-FR-80-14/AE ..... p0271 N81-19571\*#

ACUREX-80-40/EE ..... p0265 N81-17617\*#

AD-A092255 ..... p0350 N81-16061 #

AD-A092436 ..... p0190 N81-16587 #

AD-A092814 ..... p0351 N81-16589 #

AD-A092908 ..... p0263 N81-17579 #

AD-A093042 ..... p0193 N81-17578 #

AD-A093738 ..... p0376 N81-17961 #

AD-A094158 ..... p0308 N81-18057 #

AD-A094225 ..... p0196 N81-18051 #

AD-A094226 ..... p0196 N81-18050 #

AD-A094651 ..... p0201 N81-19652 #

AD-A094714 ..... p0357 N81-19579 #

AD-A094734 ..... p0378 N81-19970 #

AD-A094771 ..... p0377 N81-19580 #

AD-A094802 ..... p0199 N81-19576 #

AD-A094827 ..... p0272 N81-19578 #

AD-A094900 ..... p0315 N81-19312 #

AD-A094910 ..... p0377 N81-19575 #

AD-A094988 ..... p0317 N81-19563 #

AD-A095095 ..... p0356 N81-19257 #

AD-A095130 ..... p0378 N81-19969 #

AD-A095713 ..... p0319 N81-20290 #

AD-A096113 ..... p0361 N81-21080 #

AD-A096144 ..... p0364 N81-21916 #

AD-A096263 ..... p0384 N81-21960 #

ARD-80-48 ..... p0259 N81-17523\*#

ARD-80-57 ..... p0257 N81-16572\*#

AREOCHEM-TH-214 ..... p0314 N81-18525 #

ARESD-TH-3064 ..... p0354 N81-18491\*#

APESC/ESI-TR-80-35 ..... p0199 N81-19576 #

APIT-CI-80-20T ..... p0190 N81-16587 #

APIT/GAE/AA/80D-4 ..... p0377 N81-19580 #

APIT/GAE/AA/80D-19 ..... p0378 N81-19970 #

APLRL-127 ..... p0315 N81-19312 #

APWAL-TR-80-2059 ..... p0263 N81-17579 #

APWAL-TR-80-2074 ..... p0272 N81-19578 #

APWAL-TR-80-2077 ..... p0364 N81-21916 #

AIAA PAPER 81-0028 ..... p0327 A81-20548 #

AIAA PAPER 81-0029 ..... p0327 A81-20549 #

AIAA PAPER 81-0030 ..... p0328 A81-20550 #

AIAA PAPER 81-0031 ..... p0328 A81-20551 #

AIAA PAPER 81-0032 ..... p0328 A81-20552 #

AIAA PAPER 81-0098 ..... p0210 A81-20600\*#

AIAA PAPER 81-0099 ..... p0328 A81-20601 #

AIAA PAPER 81-0101 ..... p0328 A81-20603 #

AIAA PAPER 81-0102 ..... p0328 A81-20604 #

AIAA PAPER 81-0110 ..... p0328 A81-20602 #

AIAA PAPER 81-0173 ..... p0329 A81-20649\*#

AIAA PAPER 81-0174 ..... p0329 A81-20653 #

AIAA PAPER 81-0175 ..... p0329 A81-20650 #

AIAA PAPER 81-0176 ..... p0329 A81-20651 #

AIAA PAPER 81-0177 ..... p0329 A81-20652 #

AIAA PAPER 81-0217 ..... p0329 A81-20683\*#

AIAA PAPER 81-0244 ..... p0185 A81-20695 #

AIAA PAPER 81-0246 ..... p0330 A81-20696 #

AIAA PAPER 81-0248 ..... p0330 A81-20698\*#

AIAA PAPER 81-0249 ..... p0330 A81-20699 #

AIAA PAPER 81-0250 ..... p0330 A81-20700 #

AIAA PAPER 81-0316 ..... p0330 A81-20747 #

AIAA PAPER 81-0319 ..... p0330 A81-20748 #

AIAA PAPER 81-0368 ..... p0210 A81-20787 #

AIAA PAPER 81-0392 ..... p0330 A81-20802 #

AIAA PAPER 81-0395 ..... p0293 A81-20804 #

AIAA PAPER 81-0396 ..... p0330 A81-20805\*#

AIAA PAPER 81-0411 ..... p0293 A81-20815 #

AIAA PAPER 81-0442 ..... p0381 A81-22757\*#

AIAA PAPER 81-0449 ..... p0216 A81-22763\*#

ANL-CT-80-23 ..... p0268 N81-18540 #

ANL-FE-49622-TH09 ..... p0325 N81-21875 #

ANL-80-49 ..... p0375 N81-16591 #

ANL-80-59 ..... p0384 N81-21645 #

ANL-80-93 ..... p0322 N81-21228 #

ANL/CEN/FE-80-2 ..... p0305 N81-16317 #

ANL/CHSV-9 ..... p0203 N81-21161 #

ANL/CHSV/TH-43 ..... p0193 N81-17588 #

ANL/CHSV/TA-44 ..... p0192 N81-16958 #

ANL/RES-TH-114 ..... p0201 N81-19653 #

ANL/RES-TH-116 ..... p0383 N81-19611 #

ANL/FPF-80-1-VOL-2 ..... p0363 N81-21612 #

ANL/HHD-80-11 ..... p0359 N81-19932 #

ANL/OEPH-80-3 ..... p0318 N81-20226 #

ANL/SPG-11 ..... p0376 N81-17590 #

AR-1 ..... p0279 N81-20585 #

AR-1 ..... p0379 N81-20591\*#

AR-2 ..... p0268 N81-18537 #

AR-2 ..... p0356 N81-19464 #

AR-3 ..... p0271 N81-19568\*#

AR-5 ..... p0281 N81-21546\*#

AR-6 ..... p0195 N81-17630 #

ARL/STRUC-380 ..... p0317 N81-19563 #

ARO-15642.5-E ..... p0350 N81-16061 #

ARTTC-4 ..... p0195 N81-17959 #

ASG-TR-80-31 ..... p0192 N81-17445 #

ASHE PAPER 80-GT-82 ..... p0332 A81-21162 #

ASHE PAPER 80-GT-99 ..... p0332 A81-21163 #

ASHE PAPER 80-WA/GT-1 ..... p0331 A81-21096 #

ASHE PAPER 80-WA/HT-3 ..... p0185 A81-21101\*#

ASHE PAPER 80-WA/HT-9 ..... p0331 A81-21103 #

ASHE PAPER 80-WA/HT-10 ..... p0331 A81-21104 #

ASHE PAPER 80-WA/HT-11 ..... p0331 A81-21105 #

ASHE PAPER 80-WA/HT-44 ..... p0211 A81-21113 #

ASHE PAPER 80-WA/HT-45 ..... p0371 A81-21114 #

ASHE PAPER 80-WA/SOL-1 ..... p0211 A81-21129 #

ASHE PAPER 80-WA/SOL-2 ..... p0211 A81-21130 #

ASHE PAPER 80-WA/SOL-3 ..... p0212 A81-21131 #



# REPORT/ACCESSION NUMBER INDEX

ASME PAPER 80-WA/SOL-4	p0212	A81-21132	#	BNL-28696	p0354	N81-18518	#
ASME PAPER 80-WA/SOL-6	p0212	A81-21133	#	BNL-51124	p0269	N81-18545	#
ASME PAPER 80-WA/SOL-7	p0212	A81-21134	#	BNL-51259	p0273	N81-19609	#
ASME PAPER 80-WA/SOL-9	p0212	A81-21135	#	BNL-51279	p0192	N81-16631	#
ASME PAPER 80-WA/SOL-10	p0212	A81-21136	#				
ASME PAPER 80-WA/SOL-11	p0212	A81-21137	#	CISE-1606	p0196	N81-18512	#
ASME PAPER 80-WA/SOL-13	p0331	A81-21138	#				
ASME PAPER 80-WA/SOL-14	p0213	A81-21139	#	CONF-800137	p0199	N81-19584	#
ASME PAPER 80-WA/SOL-15	p0213	A81-21140	#	CONF-800208-19	p0350	N81-16456	#
ASME PAPER 80-WA/SOL-18	p0331	A81-21142	#	CONF-800828-3	p0206	N81-21624	#
ASME PAPER 80-WA/SOL-19	p0332	A81-21143	#	CONF-800867-1-REV-1	p0192	N81-16635	#
ASME PAPER 80-WA/SOL-20	p0213	A81-21144	#	CONF-800883-1	p0354	N81-18518	#
ASME PAPER 80-WA/SOL-21	p0213	A81-21145	#	CONF-800972-6	p0280	N81-20936	#
ASME PAPER 80-WA/SOL-24	p0213	A81-21148	#	CONF-801011-20	p0353	N81-17883	#
ASME PAPER 80-WA/SOL-26	p0213	A81-21150	#	CONF-801011-66	p0353	N81-17911	#
ASME PAPER 80-WA/SOL-28	p0213	A81-21152	#	CONF-801011-74	p0291	N81-20300	#
ASME PAPER 80-WA/SOL-32	p0214	A81-21153	#	CONF-801022	p0378	N81-20561	#
ASME PAPER 80-WA/SOL-35	p0214	A81-21155	#	CONF-801030-3	p0312	N81-18237	#
ASME PAPER 80-WA/SOL-36	p0214	A81-21156	#	CONF-801030-4	p0311	N81-18230	#
ASME PAPER 80-WA/SOL-37	p0214	A81-21157	#	CONF-801039-3	p0192	N81-17285	#
ASME PAPER 80-WA/SOL-38	p0214	A81-21158	#	CONF-801055-5	p0291	N81-16323	#
ASME PAPER 80-WA/SOL-39	p0214	A81-21159	#	CONF-801097-2	p0264	N81-17604	#
ASME PAPER 80-WA/SOL-40	p0214	A81-21160	#	CONF-801104-6	p0265	N81-18225	#
ASME PAPER 80-WA/SOL-41	p0215	A81-21161	#	CONF-801104-8	p0305	N81-16322	#
ASME PAPER 81-DGP-1	p0189	A81-30118	#	CONF-801130	p0307	N81-17601	#
ASME PAPER 81-DGP-4	p0305	A81-30116	#	CONF-801138-4	p0353	N81-17910	#
ASME PAPER 81-GT-44	p0347	A81-29958	#	CONF-801142-1	p0307	N81-17603	#
ASME PAPER 81-GT-45	p0347	A81-29959	#	CONF-801142-3	p0311	N81-18228	#
ASME PAPER 81-GT-50	p0348	A81-29963	#	CONF-801143-1	p0192	N81-17410	#
ASME PAPER 81-GT-51	p0348	A81-29964	#	CONF-801151	p0282	N81-21571	#
ASME PAPER 81-GT-64	p0348	A81-29974	#	CONF-801153-1	p0258	N81-16594	#
ASME PAPER 81-GT-65	p0348	A81-29975	#	CONF-801154-1	p0196	N81-18510	#
ASME PAPER 81-GT-69	p0348	A81-29978	#	CONF-801157-1	p0351	N81-16597	#
ASME PAPER 81-GT-87	p0304	A81-29994	#	CONF-801158-1	p0313	N81-18477	#
ASME PAPER 81-GT-102	p0348	A81-30008	#	CONF-801162-1	p0368	N81-18962	#
ASME PAPER 81-GT-103	p0348	A81-30009	#	CONF-801210-3	p0352	N81-16609	#
ASME PAPER 81-GT-109	p0348	A81-30014	#	CONF-801210-6	p0191	N81-16605	#
ASME PAPER 81-GT-125	p0349	A81-30029	#	CONF-801210-7	p0191	N81-16604	#
ASME PAPER 81-GT-127	p0349	A81-30031	#	CONF-801210-9	p0352	N81-16908	#
ASME PAPER 81-GT-130	p0349	A81-30034	#	CONF-801210-13	p0197	N81-18577	#
ASME PAPER 81-GT-152	p0349	A81-30051	#	CONF-801212	p0311	N81-18233	#
ASME PAPER 81-GT-157	p0188	A81-30056	#	CONF-801239-1	p0199	N81-19329	#
ASME PAPER 81-GT-186	p0349	A81-30080	#	CONF-801242-1	p0363	N81-21572	#
ASME PAPER 81-GT-190	p0349	A81-30083	#	CONF-810101-5	p0200	N81-19599	#
ASME PAPER 81-GT-191	p0349	A81-30084	#	CONF-810206-4	p0291	N81-19971	#
ASME PAPER 81-GT-201	p0349	A81-30091	#	CONF-7909189-1	p0267	N81-18523	#
ASME PAPER 81-GT-212	p0350	A81-30101	#	CONF-8004124-1	p0189	N81-16316	#
ASME PAPER 81-GT-213	p0350	A81-30102	#	CONF-8004128	p0355	N81-18550	#
ASME PAPER 81-GT-218	p0350	A81-30106	#	CONF-8004137-1	p0203	N81-21216	#
ASME PAPER 81-PET-5	p0350	A81-30114	#	CONF-8005120-1	p0196	N81-18512	#
ASME PAPER 81-PET-11	p0189	A81-30113	#	CONF-8009109	p0384	N81-21580	#
ASME PAPER 81-PET-18	p0350	A81-30112	#	CONF-8010106-3	p0305	N81-16315	#
ASME PAPER 81-PID-1	p0305	A81-30110	#	CONF-8010106-7	p0189	N81-16314	#
ASME PAPER 81-PID-2	p0188	A81-30111	#	CONF-8010126-1	p0319	N81-20301	#
ASME PAPER 81-SOL-1	p0365	A81-30109	#	CONF-8010129-1	p0268	N81-18542	#
ATPR-2	p0313	N81-18242	#	COO-2520-7	p0379	N81-21586	#
ATPR-2-GFY-80-VOL-1	p0312	N81-18238	#	COO-2564-6	p0361	N81-21207	#
ATPR-2-GFY-80-VOL-2	p0312	N81-18239	#	COO-2982-57	p0320	N81-20306	#
ATR-80(8374)-1	p0193	N81-17578	#	COO-4094-86-PT-2	p0284	N81-21609	#
				COO-4169-5	p0314	N81-18525	#
BBN-4210	p0270	N81-18572	#				
BDM/H-80-800-TR-APP-A	p0309	N81-18214	#	CRC-APRAC-CARI-1-64-516	p0195	N81-17636	#
BDM/H-80-800-TR-APP-B	p0309	N81-18215	#				
BDM/H-80-800-TR-APP-C	p0309	N81-18216	#	CRC-516	p0195	N81-17636	#
BDM/H-80-800-TR-APP-D	p0310	N81-18217	#	DEPD-81-001-1-VOL-1	p0205	N81-21595	#
BDM/H-80-800-TR-APP-E	p0310	N81-18218	#	DEPD-81-001-2-VOL-2	p0205	N81-21596	#
BDM/H-80-800-TR-APP-F	p0310	N81-18219	#	DEPD-81-001-3-VOL-3	p0205	N81-21597	#
BDM/H-80-800-TR-APP-G	p0310	N81-18220	#				
BDM/H-80-800-TR-APP-H	p0310	N81-18221	#	DPE-31	p0324	N81-21550	#
BDM/H-80-800-TR-VOL-1	p0309	N81-18212	#				
BDM/H-80-800-TR-VOL-2	p0309	N81-18213	#	DFVLR-FB-79-39	p0361	N81-21308	#
BHFT-FB-T-79-60	p0376	N81-17607	#				
BHFT-FB-T-79-94	p0264	N81-17609	#	DOE-TR-219	p0310	N81-18224	#
BHFT-FB-T-79-121	p0291	N81-19339	#				
BHFT-FB-T-79-139	p0275	N81-19638	#	DOE/AP-0001	p0313	N81-18398	#
BHFT-FB-T-79-140	p0359	N81-19639	#	DOE/AP-10001/T2	p0319	N81-20293	#
BHFT-FB-T-79-143	p0279	N81-20600	#	DOE/AL-04266/T1	p0268	N81-18537	#
BHFT-FB-T-80-051	p0292	N81-21627	#	DOE/BP-10552/17	p0205	N81-21593	#
				DOE/CR-10001/T2	p0200	N81-19590	#
BNI-2054-VOL-3	p0316	N81-19334	#	DOE/CS-0069/1	p0356	N81-19464	#
				DOE/CS-10047/T5	p0268	N81-18538	#
BNL-28576	p0307	N81-17603	#	DOE/CS-10048/T1	p0194	N81-17598	#
BNL-28577	p0319	N81-20301	#	DOE/CS-20060/5120-VOL-1	p0192	N81-17394	#
BNL-28627	p0291	N81-20300	#	DOE/CS-21051/01	p0263	N81-17586	#
BNL-28679	p0352	N81-16908	#	DOE/CS-21059/01	p0317	N81-19337	#
				DOE/CS-23999/T1	p0200	N81-19608	#
				DOE/CS-30108/T3	p0278	N81-20567	#

# REPORT/ACCESSION NUMBER INDEX

DOE/CS-30122/T1	p0272	N81-19587	DOE/JPL-954865-80/9	p0272	N81-19572**
DOE/CS-30371/1	p0267	N81-18515	DOE/JPL-954868-80/9	p0258	N81-16578**
DOE/CS-30384/1	p0263	N81-17592	DOE/JPL-954929-81/8	p0271	N81-19568**
DOE/CS-31522/T1	p0283	N81-21603	DOE/JPL-955055-81/6	p0281	N81-21541**
DOE/CS-32224/T1	p0282	N81-21566	DOE/JPL-955079-80/1	p0257	N81-16575**
DOE/CS-35351/T1	p0278	N81-20568	DOE/JPL-955265-80/3	p0259	N81-17521**
DOE/CS-35405/T1	p0278	N81-20574	DOE/JPL-955342-79/2	p0271	N81-19569**
DOE/CS-36010/U1	p0264	N81-17596	DOE/JPL-955403-80/1	p0257	N81-16576**
DOE/CS-40023/T1	p0202	N81-20441	DOE/JPL-955456-1	p0202	N81-20538**
DOE/CS-40023/T2	p0199	N81-19404	DOE/JPL-955456-1	p0202	N81-20539**
DOE/CS-54240/T1	p0313	N81-18242	DOE/JPL-955456-1	p0202	N81-20540**
DOE/CS-56051/T1	p0316	N81-19336	DOE/JPL-955456-1	p0202	N81-20541**
DOE/CS-56604/T1	p0355	N81-18546	DOE/JPL-955456-1	p0202	N81-20542**
DOE/DF-81/002A	p0194	N81-17610	DOE/JPL-955820-80	p0193	N81-17520**
DOE/EDP-0044	p0206	N81-21641	DOE/NETC-SP-80/17	p0323	N81-21361
DOE/EA-0206/78	p0324	N81-21610	DOE/NETC-14386/106	p0321	N81-21153
DOE/EA-0084	p0265	N81-17681	DOE/NETC-14787/103	p0197	N81-18573
DOE/EA-0086	p0273	N81-19610**	DOE/NASA-0089-80/1	p0361	N81-21533**
DOE/EA-0089	p0205	N81-21613	DOE/NASA/0056-79/2	p0265	N81-18492**
DOE/EA-0090	p0203	N81-20598	DOE/NASA/0067-79-3	p0362	N81-21536**
DOE/EA-0096	p0207	N81-21642	DOE/NASA/0067-79/2	p0362	N81-21547**
DOE/EA-10041/T10	p0369	N81-19602	DOE/NASA/0092-80/1	p0198	N81-18935**
DOE/EA-10041/T11	p0275	N81-19635**	DOE/NASA/0106-1	p0361	N81-20958**
DOE/EA-10041/T12	p0205	N81-21590**	DOE/NASA/0139-1	p0354	N81-18491**
DOE/EA-10072/1	p0200	N81-19603	DOE/NASA/0161-5	p0354	N81-18494**
DOE/EA-10466/T1	p0315	N81-19317	DOE/NASA/0161-6	p0357	N81-19573**
DOE/EA-10601/1	p0269	N81-18560	DOE/NASA/0176-80/3	p0352	N81-17527**
DOE/ET-10296/66-VOL-1	p0319	N81-20296	DOE/NASA/0176-80/4	p0354	N81-18496**
DOE/ET-10325/T3	p0321	N81-21218	DOE/NASA/1062-8	p0359	N81-19920**
DOE/ET-10328/27	p0319	N81-20304	DOE/NASA/6229-1	p0354	N81-18497**
DOE/ET-10527/T1	p0319	N81-20292	DOE/NASA/10769-13	p0351	N81-16570**
DOE/ET-10815/39	p0356	N81-19266	DOE/NASA/20366-1	p0362	N81-21537**
DOE/ET-11058/T4	p0364	N81-21920	DOE/NASA/51044-17	p0368	N81-19459**
DOE/ET-12229/T1	p0313	N81-18343	DOE/NOAA/OTEC-30-VOL-3	p0363	N81-21592
DOE/ET-12380/1-VOL-1	p0318	N81-19616	DOE/OB-06028/T6	p0199	N81-19589
DOE/ET-12380/1-VOL-2	p0318	N81-19617	DOE/PC-30072/T2	p0313	N81-18241
DOE/ET-12380/1-VOL-3	p0317	N81-19540	DOE/PC-30080/T1	p0315	N81-19258
DOE/ET-12548/4	p0369	N81-20495**	DOE/PC-30080/T2	p0305	N81-16318
DOE/ET-13323/2	p0358	N81-19583	DOE/PC-30088/1	p0316	N81-19328
DOE/ET-14693/T1	p0317	N81-19541	DOE/PC-30220/T1	p0321	N81-21154
DOE/ET-15207/T2-VOL-1	p0363	N81-21581	DOE/PC-30252/T1	p0318	N81-20227
DOE/ET-15208/1	p0355	N81-18562	DOE/PE-0021	p0196	N81-18524
DOE/ET-15602/T2	p0360	N81-20590	DOE/PE-70151/T4	p0312	N81-18234
DOE/ET-15613/T1-APP	p0353	N81-17606	DOE/RA-0045/1	p0323	N81-21464
DOE/ET-20279/94	p0283	N81-21607	DOE/RA-0058/2	p0321	N81-21220
DOE/ET-20279/109	p0264	N81-17604	DOE/RA-12301-T1	p0322	N81-21230
DOE/ET-20417/4	p0378	N81-19633	DOE/RA-26961/01	p0378	N81-20575
DOE/ET-20431/T1	p0263	N81-17587	DOE/RL-01830/T3	p0284	N81-21619
DOE/ET-20550/2-VOL-1	p0283	N81-21598	DOE/R5-10104/1	p0196	N81-18514
DOE/ET-20550/2-VOL-2	p0283	N81-21599	DOE/R5-10107/T1	p0200	N81-19620
DOE/ET-20550/2-VOL-3	p0283	N81-21600	DOE/SF-10505/4	p0355	N81-18558
DOE/ET-20611/14	p0315	N81-18553	DOE/SF-11450/1	p0314	N81-18478
DOE/ET-21039/1	p0353	N81-17594	DOE/TIC-11105	p0274	N81-19624
DOE/ET-23007/4	p0270	N81-18561	DOE/TIC-11303	p0320	N81-20525
DOE/ET-23043/T1	p0284	N81-21608	DOE/TIC-11308	p0197	N81-18575
DOE/ET-27001/8	p0314	N81-18480	DOE/TIC-11339	p0199	N81-19463
DOE/ET-27127/1	p0207	N81-21646	DOE/TIC-11357	p0320	N81-20571
DOE/ET-27193/T1	p0363	N81-21582	DOE/TIC-11373	p0379	N81-21359
DOE/ET-27230/T2	p0316	N81-19333	DOE/TIC-11384	p0279	N81-20587
DOE/ET-27233/T2	p0314	N81-18513	DOE/TIC-11389	p0205	N81-21611
DOE/ET-27256/T7	p0316	N81-19331			
DOE/ET-28392/T2	p0315	N81-18547	DOT-HS-805-279	p0195	N81-17959
DOE/ET-28476/T11	p0318	N81-19598	DOT-HS-805-518	p0192	N81-17445
DOE/ET-28476/T12	p0318	N81-19597			
DOE/ET-29232/T1-VOL-2	p0377	N81-18531	DOT-P-50-37	p0198	N81-18931
DOE/ET-29232/T2	p0377	N81-19586			
DOE/ET-29246-T1	p0361	N81-21298	DBL-015	p0271	N81-19571**
DOE/ET-29298/T1	p0356	N81-19402			
DOE/ET-29345/21	p0379	N81-20591	DRO-SE003	p0271	N81-19571**
DOE/EV-0105	p0307	N81-17585			
DOE/EV-0115	p0201	N81-19655	DSE-4042-T34	p0275	N81-19631
DOE/EV-01528/T1	p0204	N81-21559			
DOE/EV-10180/2	p0204	N81-21560	D19-1980	p0378	N81-19644
DOE/EV-73002/1-VOL-1	p0205	N81-21595	D34-1980	p0378	N81-19643
DOE/EV-73002/1-VOL-2	p0205	N81-21596	D35-1980	p0280	N81-20605
DOE/EV-73002/1-VOL-3	p0205	N81-21597			
DOE/FE-0010	p0319	N81-20297	E-FC-002	p0361	N81-21533**
DOE/GFETC/RI-80/5	p0321	N81-21217			
DOE/ID-01756/T1	p0324	N81-21562	E-469	p0260	N81-17531**
DOE/ID-12049-3	p0324	N81-21585	E-536	p0276	N81-20173**
DOE/ID-12079/19	p0314	N81-18479	E-609	p0351	N81-16571**
DOE/IR-10119/T1	p0313	N81-18476	E-632	p0259	N81-17266**
DOE/JPL-1012-49	p0258	N81-16580**	E-688	p0351	N81-16570**
DOE/JPL-1012-50	p0276	N81-20546**	E-702	p0359	N81-19920**
DOE/JPL-1012-51	p0276	N81-20545**	E-752	p0368	N81-19459**
DOE/JPL-1012-52	p0276	N81-20544**	E-808	p0362	N81-21537**
DOE/JPL-1060-39	p0258	N81-16581**			
DOE/JPL-954356-80/14	p0281	N81-21546**	EAC-E-4015	p0279	N81-20596
DOE/JPL-954589-80/9	p0260	N81-17525**			

# REPORT/ACCESSION NUMBER INDEX

EE-266(80)DOE-808-1	p0361	N81-21298	#
EEB-W-80-10	p0197	N81-18549	#
EED-78-2131	p0284	N81-21668	#
EED-78-2236	p0324	N81-21562	#
EED-79-76	p0190	N81-16531	#
EED-80-55	p0190	N81-16532	#
EED-80-84	p0322	N81-21232	#
EED-81-2	p0206	N81-21630	#
EPA-AA-CTAB/PA-80-5	p0203	N81-20620	#
EPA-AA-TBB-81-1	p0204	N81-21371	#
EPA-130/6-80-001	p0195	N81-17635	#
EPA-450/5-80-008A	p0195	N81-17644	#
EPA-450/5-80-008B	p0306	N81-17287	#
EPA-600/2-80-121	p0307	N81-17295	#
EPA-600/2-80-122	p0306	N81-17294	#
EPA-600/3-80-095	p0201	N81-19674	#
EPA-600/7-80-117	p0195	N81-17641	#
EPA-600/7-80-176	p0265	N81-17617*	#
EPA-600/8-80-025	p0308	N81-17640	#
EPA-600/9-80-054	p0195	N81-17645	#
EPFL-ITA-6	p0272	N81-19574	
EPRI-AP-1463	p0352	N81-16909	#
EPRI-AP-1543	p0322	N81-21229	#
EPRI-AP-1562	p0355	N81-18536	#
EPRI-AP-1593	p0311	N81-18227	#
EPRI-AP-1598	p0358	N81-19632	#
EPRI-AP-1599-VOL-1	p0357	N81-19466	#
EPRI-AP-1599-VOL-2	p0360	N81-20434	#
EPRI-AP-1614	p0358	N81-19585	#
EPRI-AP-1623-VOL-1	p0356	N81-19259	#
EPRI-AP-1625	p0321	N81-21222	#
EPRI-CS-1444-VOL-4	p0351	N81-16602	#
EPRI-CS-1517-VOL-5	p0319	N81-20302	#
EPRI-EA-1568	p0191	N81-16603	#
EPRI-EA-1649	p0204	N81-21561	#
EPRI-EH-1566	p0351	N81-16598	#
EPRI-EH-1654	p0275	N81-19630	#
ER-79917-3	p0257	N81-16574*	#
ERC-18	p0362	N81-21536*	#
EUR-6702-EH	p0263	N81-17589	#
EUR-6773-EH	p0194	N81-17597	#
EUR-6934-EH	p0274	N81-19625	#
EUR-6959-EH	p0263	N81-17593	#
R81-10119	p0323	N81-21423*	#
FAA-CT-81-150	p0308	N81-18057	#
FE-1743-80-VOL-1	p0316	N81-19335	#
FE-1770-66	p0312	N81-18235	#
FE-1806-96	p0360	N81-20440	#
FE-2286-48	p0315	N81-19327	#
FE-2315-55	p0311	N81-18231	#
FE-2468-63	p0314	N81-18517	#
FE-2566-42	p0310	N81-18226	#
FE-2893-53	p0312	N81-18240	#
FE-3125-24-VOL-1	p0312	N81-18238	#
FE-3125-24-VOL-2	p0312	N81-18239	#
FFA-TB-HU-2218	p0359	N81-19636	#
FFA-133	p0359	N81-20037	#
FFA-133	p0364	N81-21635	#
FJSRL-TR-80-0025	p0378	N81-19969	#
FR-2321:01	p0363	N81-21582	#
FTR-2	p0378	N81-19969	#
GPO-47-454	p0190	N81-16527	#
GPO-60-684	p0192	N81-16956	#
GPO-60-871	p0189	N81-16311	#
GPO-61-647	p0189	N81-16524	#
GPO-62-841	p0191	N81-16626	#
GPO-63-171	p0190	N81-16585	#
GR-4	p0354	N81-18496*	#
GRI-78/0046	p0308	N81-17642	#
GRI-79/0037	p0191	N81-16614	#
GRI-79/0040	p0317	N81-19553	#
GRI-79/0052.1	p0194	N81-17611	#
GRI-79/0052.2	p0194	N81-17612	#
GRI-79/0052.3	p0194	N81-17615	#
GRI-79/0052.4	p0194	N81-17613	#
GRI-79/0052.5	p0194	N81-17616	#
GRI-79/0052.6	p0194	N81-17614	#
GRI-79/0059	p0364	N81-21629	#
GRI-79/0064	p0306	N81-17292	#
GRI-79/0067	p0353	N81-17619	#
GRI-79/0068	p0308	N81-18149	#
GRI-79/0070	p0307	N81-17510	#
GRI-79/0074	p0306	N81-17293	#
GRI-79/0077	p0306	N81-17291	#
GRI-79/0079	p0307	N81-17297	#
GRI-79/0115	p0307	N81-17296	#
GRI-80/0011	p0206	N81-21631	#
R-REPT-96-1096	p0352	N81-16898	#
R-REPT-96-1217	p0190	N81-16525	#
RIT-C1005/402-80-938	p0195	N81-17645	#
HUD-0001671	p0191	N81-16611	#
HUD-0001752	p0275	N81-19647	#
HUD-0001753	p0275	N81-19648	#
HUD/PDR-548	p0275	N81-19647	#
HUD/PDR-579	p0275	N81-19648	#
HUGHES-BRF-B3256	p0271	N81-19567*	#
IDO-10089	p0312	N81-18236	#
IBRL-RTP-1112	p0195	N81-17645	#
IIASA-RR-79-14	p0280	N81-21489	#
IIASA-RR-80-27	p0204	N81-21490	#
ILR-HITT-73/1980-PT-1	p0284	N81-21628	#
INFORMATION-5	p0320	N81-20571	#
IS-4745	p0259	N81-16606	#
IS-4759	p0283	N81-21583	#
ISBN-0-309-03038-2	p0198	N81-18580	#
ISBN-0-309-03045-5	p0197	N81-18563	#
ISBN-3-2600-4592-9	p0272	N81-19574	#
ISBN-87-550-0627-2	p0357	N81-19497	#
ISBN-87-550-0693-0	p0359	N81-19637	#
ISBN-87-550-0695-7	p0363	N81-21626	#
ISBN-91-540-3257-1	p0378	N81-19644	#
ISBN-91-540-3265-2	p0275	N81-19640	#
ISBN-91-540-3301-2	p0376	N81-17618	#
ISBN-91-540-3323-3	p0378	N81-19643	#
ISBN-91-540-3329-2	p0280	N81-20605	#
ISSN-SW-0081-5640	p0359	N81-20037	#
ISSN-0110-1692	p0320	N81-20562	#
ISSN-0340-7608	p0376	N81-17607	#
ISSN-0340-7608	p0264	N81-17609	#
ISSN-0340-7608	p0291	N81-19339	#
ISSN-0340-7608	p0275	N81-19638	#
ISSN-0340-7608	p0359	N81-19639	#
ISSN-0340-7608	p0279	N81-20600	#
ISSN-0340-7608	p0292	N81-21627	#
ISSN-0418-6435	p0357	N81-19497	#
ISSN-0418-6435	p0359	N81-19637	#
ISSN-0418-6435	p0363	N81-21626	#
IYA-BEDDELANDER-229	p0376	N81-17618	#
JBU/APL/GEMS-002	p0200	N81-19645	#
JBU/APL/GEMS-008	p0201	N81-19646	#
JBU/APL/QA-80-075	p0200	N81-19645	#
JBU/APL/QA-80-077	p0201	N81-19646	#
JPL-PUB-80-63	p0350	N81-16056*	#
JPL-PUB-80-81	p0258	N81-16581*	#
JPL-PUB-80-87	p0258	N81-16580*	#
JPL-PUB-80-91	p0189	N81-16513*	#

# REPORT/ACCESSION NUMBER INDEX

JPL-PUB-80-99	p0197	N81-18571*	NADC-79239-60-VOL-1	p0196	N81-18051 #
JPL-PUB-80-100	p0276	N81-20545*	NADC-79239-60-VOL-2	p0196	N81-18050 #
JPL-PUB-81-1	p0276	N81-20546*			
JPL-PUB-81-11	p0369	N81-20495*			
JPL-PUB-81-11	p0369	N81-20495*	NAPC-80-08	p0306	N81-17290 #
JPL-PUB-81-12	p0276	N81-20544*	NAPC-80-10	p0317	N81-19342 #
JPL-PUB-81-18	p0277	N81-20548*			
			NASA-CASE-HQN-10949-1	p0190	N81-16530*
JPL-9950-419	p0202	N81-20538*			
JPL-9950-419	p0202	N81-20539*	NASA-CASE-LEW-12443-1	p0357	N81-19561*
JPL-9950-419	p0202	N81-20540*			
JPL-9950-419	p0202	N81-20541*	NASA-CASE-NPO-14315-1	p0306	N81-17261*
JPL-9950-419	p0202	N81-20542*	NASA-CASE-NPO-14619-1	p0259	N81-17518*
JPL-9950-453	p0258	N81-16578*	NASA-CASE-NPO-14670-1	p0270	N81-19558*
JPL-9950-463	p0271	N81-19567*			
JPL-9950-464	p0257	N81-16576*	NASA-CP-2141	p0365	N81-16533*
JPL-9950-468	p0257	N81-16575*	NASA-CP-2169	p0260	N81-17531*
JPL-9950-471	p0306	N81-16573*			
JPL-9950-472	p0257	N81-16572*	NASA-CR-3375	p0271	N81-19564*
JPL-9950-473	p0257	N81-16574*	NASA-CR-3383	p0368	N81-18490*
JPL-9950-481	p0271	N81-19568*	NASA-CR-3392	p0271	N81-19562*
JPL-9950-495	p0281	N81-21546*	NASA-CR-3393	p0280	N81-21491*
JPL-9950-498	p0271	N81-19569*	NASA-CR-3394	p0271	N81-19565*
JPL-9950-509	p0272	N81-19572*	NASA-CR-3397	p0276	N81-20537*
JPL-9950-512	p0291	N81-21210*	NASA-CR-3398	p0280	N81-21492*
JPL-9950-523	p0281	N81-21541*	NASA-CR-159588	p0265	N81-18492*
JPL-9950483	p0259	N81-17523*	NASA-CR-159772	p0198	N81-18935*
JPL-9950491	p0260	N81-17525*	NASA-CR-159872	p0354	N81-18491*
			NASA-CR-160921	p0369	N81-20328*
KNSP-D-944	p0350	N81-16456 #	NASA-CR-161642	p0281	N81-21535*
			NASA-CR-161653	p0309	N81-18212*
LA-TR-80-25	p0364	N81-21919 #	NASA-CR-161654	p0309	N81-18213*
			NASA-CR-161655	p0309	N81-18214*
LA-UR-80-2930	p0280	N81-20936 #	NASA-CR-161656	p0309	N81-18215*
LA-UR-80-3137	p0353	N81-17910 #	NASA-CR-161657	p0309	N81-18216*
LA-UR-80-3342	p0191	N81-16605 #	NASA-CR-161658	p0310	N81-18217*
LA-UR-80-3387	p0191	N81-16604 #	NASA-CR-161659	p0310	N81-18218*
LA-UR-80-3445	p0199	N81-19329 #	NASA-CR-161660	p0310	N81-18219*
LA-UR-80-3491	p0291	N81-19971 #	NASA-CR-161661	p0310	N81-18220*
LA-UR-81-293	p0363	N81-21572 #	NASA-CR-161662	p0310	N81-18221*
			NASA-CR-161691	p0362	N81-21538*
LA-7755-PR	p0360	N81-20901 #	NASA-CR-161692	p0362	N81-21539*
LA-8428	p0325	N81-21623 #	NASA-CR-162469	p0265	N81-17617*
LA-8562-MS	p0320	N81-20580 #	NASA-CR-163877	p0350	N81-16056*
LA-8569-MS	p0324	N81-21573 #	NASA-CR-163878	p0258	N81-16578*
LA-8599-T	p0325	N81-21616 #	NASA-CR-163882	p0257	N81-16572*
LA-8605-MS	p0291	N81-16483 #	NASA-CR-163884	p0257	N81-16575*
LA-8628-MS	p0200	N81-19596 #	NASA-CR-163887	p0306	N81-16573*
			NASA-CR-163889	p0257	N81-16574*
LBL-10441	p0378	N81-19606 #	NASA-CR-163896	p0189	N81-16513*
LBL-10807	p0323	N81-21463 #	NASA-CR-163898	p0258	N81-16581*
LBL-10862	p0197	N81-18549 #	NASA-CR-163917	p0257	N81-16576*
LBL-11636	p0359	N81-19888 #	NASA-CR-163931	p0259	N81-17522*
LBL-11978	p0270	N81-18572 #	NASA-CR-163939	p0259	N81-17521*
			NASA-CR-163943	p0260	N81-17525*
LC-80-16190	p0198	N81-18580 #	NASA-CR-163944	p0259	N81-17523*
LC-80-81335	p0197	N81-18563 #	NASA-CR-163947	p0193	N81-17520*
LC-80-600118	p0323	N81-21233 #	NASA-CR-163974	p0197	N81-18571*
			NASA-CR-164009	p0271	N81-19570*
LEP-80.638.SRR-689-A	p0280	N81-20602 #	NASA-CR-164011	p0271	N81-19569*
			NASA-CR-164012	p0271	N81-19568*
LLL-MISC-138-2	p0384	N81-21633 #	NASA-CR-164015	p0198	N81-19110*
			NASA-CR-164020	p0273	N81-19610*
LNI-M1010	p0319	N81-20290 #	NASA-CR-164022	p0275	N81-19635*
LNI-M1917	p0384	N81-21960 #	NASA-CR-164037	p0272	N81-19572*
			NASA-CR-164038	p0271	N81-19567*
LOG-R281	p0352	N81-16899 #	NASA-CR-164039	p0271	N81-19571*
			NASA-CR-164051	p0202	N81-20538*
M-331	p0368	N81-18490*	NASA-CR-164052	p0202	N81-20539*
			NASA-CR-164053	p0202	N81-20542*
MA-RD-940-81012	p0368	N81-17289 #	NASA-CR-164054	p0202	N81-20540*
MA-RD-940-81013	p0368	N81-17288 #	NASA-CR-164055	p0202	N81-20541*
			NASA-CR-164073	p0276	N81-20545*
MASEC-TP-80-009	p0189	N81-16316 #	NASA-CR-164074	p0276	N81-20546*
			NASA-CR-164075	p0369	N81-20495*
MCGER-80-002	p0201	N81-19646 #	NASA-CR-164076	p0369	N81-20495*
			NASA-CR-164078	p0277	N81-20548*
MCR-80-683	p0272	N81-19578 #	NASA-CR-164083	p0276	N81-20544*
			NASA-CR-164113	p0323	N81-21423*
MDC-G9331	p0378	N81-19633 #	NASA-CR-164134	p0281	N81-21546*
			NASA-CR-164137	p0291	N81-21210*
MERADCON-2311	p0376	N81-17961 #	NASA-CR-164153	p0205	N81-21590*
			NASA-CR-164164	p0281	N81-21541*
MRS-REPT-604206	p0363	N81-21592 #	NASA-CR-165144	p0361	N81-21533*
			NASA-CR-165170	p0361	N81-20958*
MSU-XIRS-MS-80-1	p0377	N81-18509 #	NASA-CR-165179	p0352	N81-17527*
			NASA-CR-165189	p0354	N81-18494*
MPI-80TR25	p0198	N81-18935*	NASA-CR-165190	p0357	N81-19573*
			NASA-CR-165221	p0354	N81-18497*

# REPORT/ACCESSION NUMBER INDEX

NASA-CR-165245	.....	p0354	N81-18496*	PB81-110512	.....	p0305	N81-16324 *
NASA-CR-165258	.....	p0315	N81-19316*	PB81-110918	.....	p0307	N81-17295 *
NASA-CR-165272	.....	p0266	N81-18495*	FB81-110959	.....	p0306	N81-17294 *
NASA-CR-165316	.....	p0362	N81-21547*	PB81-111114	.....	p0195	N81-17641 *
NASA-CR-165317	.....	p0362	N81-21536*	PB81-111387	.....	p0306	N81-17291 *
NASA-TM-58229	.....	p0193	N81-17526*	PB81-111395	.....	p0307	N81-17296 *
NASA-TM-75404	.....	p0360	N81-20543*	PB81-111585	.....	p0195	N81-17644 *
NASA-TM-81611	.....	p0351	N81-16571*	PB81-111593	.....	p0306	N81-17287 *
NASA-TM-81622	.....	p0259	N81-17266*	PB81-112203	.....	p0194	N81-17610 *
NASA-TM-81667	.....	p0351	N81-16570*	PB81-112641	.....	p0306	N81-17290 *
NASA-TM-81677	.....	p0359	N81-19920*	PB81-112757	.....	p0308	N81-17640 *
NASA-TM-81718	.....	p0368	N81-19459*	PB81-113052	.....	p0195	N81-17645 *
NASA-TM-81737	.....	p0362	N81-21537*	PB81-113185	.....	p0307	N81-17297 *
NASA-TM-81894	.....	p0257	N81-16437*	PB81-113292	.....	p0308	N81-18149 *
NASA-TM-82050	.....	p0190	N81-16569*	PB81-113300	.....	p0307	N81-17510 *
NASA-TM-82254	.....	p0383	N81-17958*	PB81-113664	.....	p0308	N81-17642 *
NASA-TM-82314	.....	p0384	N81-21949*	PB81-113672	.....	p0353	N81-17619 *
NASA-TM-82395	.....	p0368	N81-16584*	PB81-114092	.....	p0306	N81-17292 *
NASA-TF-1804	.....	p0265	N81-18493*	PB81-114225	.....	p0194	N81-17611 *
NASA-TF-1811	.....	p0276	N81-20173*	PB81-114233	.....	p0194	N81-17612 *
NBS-DIM-64-8	.....	p0384	N81-21007 *	PB81-114241	.....	p0194	N81-17615 *
NBS-HB-135	.....	p0200	N81-19641 *	PB81-114258	.....	p0194	N81-17613 *
NBSIR-80-2128	.....	p0191	N81-16612 *	PB81-114266	.....	p0194	N81-17616 *
NBSIR-80-2161	.....	p0201	N81-20318 *	PB81-114274	.....	p0194	N81-17614 *
NR/BIO-80/12	.....	p0320	N81-20581 *	PB81-114290	.....	p0306	N81-17293 *
NR/HETV-80/9	.....	p0320	N81-20565 *	PB81-114324	.....	p0376	N81-17618 *
NOAA-80093001	.....	p0195	N81-17630 *	PB81-114480	.....	p0275	N81-19640 *
NOAA-80110406	.....	p0384	N81-21975 *	PB81-114555	.....	p0195	N81-17635 *
NP-25154	.....	p0264	N81-17605 *	PB81-114670	.....	p0195	N81-17636 *
NP-25187-VOL-1	.....	p0203	N81-20563 *	PB81-114753	.....	p0198	N81-18931 *
NP-25187-VOL-2	.....	p0360	N81-20564 *	PB81-114852	.....	p0197	N81-18563 *
NRL-NR-4433	.....	p0377	N81-19575 *	PB81-114977	.....	p0198	N81-18580 *
NSF/RA-790330/31	.....	p0274	N81-19624 *	PB81-116790	.....	p0198	N81-19110*
NSF/RA-800222-VOL-2	.....	p0317	N81-19340 *	PB81-118333	.....	p0195	N81-17630 *
NSF/RA-800264	.....	p0384	N81-21633 *	PB81-119786	.....	p0201	N81-19646 *
NTIS/PS-78/0651	.....	p0352	N81-16615 *	PB81-121147	.....	p0201	N81-19674 *
NTIS/PS-78/0962	.....	p0195	N81-17620 *	PB81-122889	.....	p0378	N81-19643 *
NTIS/PS-79/0718	.....	p0352	N81-16615 *	PB81-122947	.....	p0378	N81-19644 *
NTIS/PS-79/1069	.....	p0195	N81-17620 *	PB81-122996	.....	p0203	N81-20620 *
NTIS/SA-80/01	.....	p0383	N81-16773 *	PB81-123416	.....	p0317	N81-19553 *
NYSERDA-80-2	.....	p0305	N81-16324 *	PB81-123861	.....	p0200	N81-19645 *
NYSERDA-80-5	.....	p0323	N81-21237 *	PB81-123952	.....	p0317	N81-19340 *
NYSERDA-80-7	.....	p0364	N81-21632 *	PB81-125585	.....	p0317	N81-19342 *
NYSERDA-80-16	.....	p0364	N81-21634 *	PB81-128597	.....	p0275	N81-19647 *
NZERDC-53	.....	p0320	N81-20562 *	PB81-128605	.....	p0275	N81-19648 *
ORAU/IEA-80-12(M)	.....	p0193	N81-17583 *	PB81-128704	.....	p0203	N81-20604 *
ORNL-5656	.....	p0204	N81-21467 *	PB81-132953	.....	p0364	N81-21629 *
ORNL-5661	.....	p0205	N81-21606 *	PB81-133359	.....	p0204	N81-21371 *
ORNL-5664	.....	p0322	N81-21223 *	PB81-133654	.....	p0384	N81-21007 *
ORNL-5702	.....	p0317	N81-19588 *	PB81-134496	.....	p0206	N81-21631 *
ORNL/TM-6693	.....	p0311	N81-18232 *	PB81-134769	.....	p0323	N81-21233 *
ORNL/TM-6783	.....	p0198	N81-18578 *	PB81-134777	.....	p0323	N81-21234 *
ORNL/TM-7428	.....	p0320	N81-20305 *	PB81-134785	.....	p0323	N81-21235 *
ORNL/TM-7513	.....	p0321	N81-21179 *	PB81-134793	.....	p0323	N81-21236 *
ORNL/TM-7525	.....	p0316	N81-19332 *	PB81-135642	.....	p0201	N81-20318 *
ORNL/TM-7580	.....	p0196	N81-18528 *	PB81-135741	.....	p0280	N81-20605 *
OTA-C-78-339	.....	p0323	N81-21234 *	PB81-135956	.....	p0322	N81-21232 *
OTA-E-128	.....	p0323	N81-21233 *	PB81-136269	.....	p0200	N81-19641 *
OWRT-A-039-TEX(2)-VOL-2	.....	p0375	N81-16523 *	PB81-138422	.....	p0206	N81-21630 *
PB80-105497	.....	p0383	N81-16773 *	PB81-140675	.....	p0364	N81-21632 *
PB80-228000	.....	p0191	N81-16614 *	PB81-140824	.....	p0384	N81-21633 *
PB81-104135	.....	p0375	N81-16523 *	FB81-141301	.....	p0384	N81-21975 *
PB81-105033	.....	p0368	N81-17289 *	PB81-141467	.....	p0364	N81-21634 *
PB81-105041	.....	p0368	N81-17288 *	PB81-141921	.....	p0323	N81-21237 *
PB81-105082	.....	p0191	N81-16612 *	PB81-142184	.....	p0364	N81-21635 *
PB81-106981	.....	p0191	N81-16611 *	PB81-800021	.....	p0352	N81-16615 *
PB81-109316	.....	p0265	N81-17617*	PB81-800112	.....	p0195	N81-17620 *
PB81-109555	.....	p0192	N81-17445 *	PNL-SA-8696	.....	p0206	N81-21624 *
PB81-109621	.....	p0308	N81-17684 *	PNL-SA-8968	.....	p0268	N81-18542 *
				PNL-SA-8971	.....	p0375	N81-16599 *
				PNL-SA-8988	.....	p0376	N81-16600 *
				PNL-SA-9010	.....	p0376	N81-17591 *
				PNL-SA-9030	.....	p0376	N81-17602 *
				PNL-3195-VOL-5	.....	p0325	N81-21712 *
				PNL-3195-WERA-4	.....	p0321	N81-20592 *
				PNL-3309	.....	p0199	N81-19353 *
				PNL-3533-VOL-1	.....	p0283	N81-21605 *
				PNL-3576	.....	p0267	N81-18522 *
				PNL-3581	.....	p0380	N81-21587 *
				PNL-3694	.....	p0322	N81-21224 *
				PNL-3695-APP-B	.....	p0324	N81-21604 *
				PR-3	.....	p0323	N81-21423*
				PR-16	.....	p0276	N81-20545*
				PSAD-80-50	.....	p0201	N81-20077

# REPORT/ACCESSION NUMBER INDEX

PSD/UTC-PCR-2834	p0357	N81-19579	#
PSI-PR-245	p0354	N81-18529	#
PUB-1602	p0316	N81-19332	#
PUBL-96-99	p0192	N81-16956	#
PUBL-96-101	p0189	N81-16311	#
PUBL-96-107	p0191	N81-16626	#
PUBL-96-110	p0190	N81-16585	#
PUBL-1564	p0189	N81-16314	#
PUBL-1602	p0305	N81-16315	#
PURDU-CL-80-03	p0350	N81-16061	#
PWA-5697-29	p0315	N81-19316	#
QPR-1	p0316	N81-19328	#
QPR-6	p0264	N81-17595	#
QR-1	p0354	N81-18497	#
QR-1	p0355	N81-18562	#
QR-2	p0269	N81-18555	#
QR-3	p0352	N81-17527	#
QR-4	p0354	N81-18494	#
QR-5	p0357	N81-19573	#
QR-5	p0362	N81-21547	#
QR-6	p0362	N81-21536	#
QPR-3	p0275	N81-19634	#
QPR-4	p0314	N81-18513	#
QPR-4	p0315	N81-19317	#
REPT-21-3668	p0361	N81-21080	#
REPT-31-1653	p0361	N81-20958	#
REPT-80-986-NARED-R4	p0354	N81-18494	#
REPT-80-986-NARED-R5	p0357	N81-19573	#
REPT-109	p0201	N81-19972	#
REPT-2150	p0306	N81-16573	#
REPT-2791/4072-F	p0368	N81-17288	#
REPT-3540-7	p0308	N81-17640	#
REPT-9240-2	p0191	N81-16614	#
RFP-3007-VOL-2	p0357	N81-19581	#
RFP-3135/3533/80/19	p0357	N81-19495	#
RFP-3136/3533/80/18	p0358	N81-19600	#
RFP-3149/3533/80/17	p0358	N81-19601	#
RISOB-M-2146	p0363	N81-21626	#
RISOB-M-2199	p0357	N81-19497	#
RISOB-M-2242	p0359	N81-19637	#
RPA-RA-80-0429(2)	p0206	N81-21631	#
R81-9955343-9-VOL-1	p0362	N81-21538	#
R81-9955343-9-VOL-2	p0362	N81-21539	#
S-503	p0365	N81-16533	#
S-505	p0265	N81-18493	#
SAN-1218-4	p0274	N81-19626	#
SAN-3045-3	p0275	N81-19634	#
SAN-7908	p0268	N81-18532	#
SAND-78-7056	p0267	N81-18530	#
SAND-79-2173	p0279	N81-20583	#
SAND-79-7055/2	p0282	N81-21574	#
SAND-79-8184	p0268	N81-18532	#
SAND-80-0599	p0258	N81-16593	#
SAND-80-0702	p0273	N81-19613	#
SAND-80-0984	p0355	N81-18550	#
SAND-80-1323	p0324	N81-21468	#
SAND-80-1494	p0259	N81-16608	#
SAND-80-1612	p0259	N81-16607	#
SAND-80-1653	p0318	N81-19699	#
SAND-80-1964	p0269	N81-18551	#
SAND-80-1964/3	p0282	N81-21568	#
SAND-80-2143	p0317	N81-19539	#
SAND-80-2151	p0322	N81-21231	#
SAND-80-2225	p0258	N81-16592	#
SAND-80-2373	p0282	N81-21571	#
SAND-80-2409	p0284	N81-21621	#
SAND-80-2432C	p0353	N81-17883	#
SAND-80-2526	p0273	N81-19614	#
SAND-80-7062	p0279	N81-20599	#
SAND-80-7063	p0283	N81-21601	#
SAND-80-7068	p0279	N81-20595	#
SAND-80-7070	p0279	N81-20582	#
SAND-80-7072	p0278	N81-20572	#
SAND-80-7073	p0274	N81-19628	#
SAND-80-7138	p0272	N81-19595	#
SAND-80-7148	p0282	N81-21575	#
SAND-80-8047	p0273	N81-19612	#
SAND-80-8234	p0206	N81-21622	#
SAND-80-8245	p0273	N81-19615	#
SAND-80-8248	p0284	N81-21617	#
SERI/PR-0-8254-F	p0283	N81-21591	#
SERI/PR-8031-1-T2	p0264	N81-17595	#
SERI/PR-8104-3-T2	p0279	N81-20585	#
SERI/PR-8136-1-T1	p0258	N81-16595	#
SERI/PR-8143-1-T2	p0269	N81-18559	#
SERI/PR-9152-1-T1	p0269	N81-18555	#
SERI/PR-9175-1-T2	p0267	N81-18521	#
SERI/PR-9192-1-T2	p0269	N81-18557	#
SERI/PR-9318-1-T1	p0274	N81-19621	#
SERI/PR-744-451	p0193	N81-17582	#
SERI/SP-633-637	p0267	N81-18523	#
SERI/SP-732-728	p0358	N81-19619	#
SERI/SP-763-718	p0204	N81-21576	#
SERI/TP-622-893	p0307	N81-17601	#
SERI/TP-333-320	p0264	N81-17600	#
SERI/TR-351-461-VOL-1	p0273	N81-19618	#
SERI/TR-631-544	p0267	N81-18520	#
SERI/TR-631-716	p0282	N81-21579	#
SERI/TR-733-790-VOL-1	p0206	N81-21618	#
SERI/TR-742-654	p0282	N81-21577	#
SERI/TR-751-652	p0278	N81-20570	#
SERI/TR-751-746	p0273	N81-19607	#
SERI/TR-751-749	p0363	N81-21578	#
SERI/TR-8002-5-T1	p0272	N81-19582	#
SERI/TR-8041-2-T1	p0274	N81-19629	#
SERI/TR-8041-9-T1	p0269	N81-18552	#
SERI/TR-8170-1-T2	p0268	N81-18533	#
SLAC-PUB-2613	p0352	N81-16609	#
SOLAR/0010-80/10	p0279	N81-20588	#
SOLAR/0010-80/12	p0276	N81-19665	#
SOLAR/0010-81/01	p0284	N81-21710	#
SOLAR/0024-80/41	p0281	N81-21556	#
SOLAR/1001-80/14	p0363	N81-21552	#
SOLAR/1014-80/14	p0281	N81-21557	#
SOLAR/1043-80/14	p0281	N81-21553	#
SOLAR/2015-80/14	p0281	N81-21554	#
SOLAR/2029-80/14	p0281	N81-21555	#
SORI-EAS-80-066	p0308	N81-17640	#
SRD-80-042-I-VOL-1	p0202	N81-20538	#
SRD-80-042-II-VOL-2	p0202	N81-20539	#
SRD-80-042-III-VOL-3	p0202	N81-20540	#
SRD-80-042-IV-VOL-4	p0202	N81-20541	#
SRD-80-042-V-VOL-5	p0202	N81-20542	#
SSD-80-0102	p0271	N81-19564	#
SSD-80-0108-1	p0271	N81-19562	#
SSD-80-0108-2	p0280	N81-21491	#
SSD-80-0108-3	p0271	N81-19565	#
SSD-80-0108-6-1	p0276	N81-20537	#
SSD-80-0108-6-2	p0280	N81-21492	#
SSS-R-80-4416	p0312	N81-18235	#
STU-78-4560	p0310	N81-18223	#
STU-78-6895	p0203	N81-20573	#
STU-79-6394	p0362	N81-21551	#
SI/115/F	p0259	N81-17522	#
TR-9	p0325	N81-21875	#
TPI/IEA/F-7	p0278	N81-20567	#
TR-2	p0269	N81-18557	#
TR-3	p0269	N81-18559	#
TR-BER-4 (80) DOE-720-1	p0278	N81-20574	#
TR-52	p0356	N81-19257	#
TR-104-VOL-2	p0375	N81-16523	#
TVA-EDT-122	p0377	N81-18509	#
UCID-18856	p0204	N81-21565	#
UCID-18863	p0324	N81-21615	#
UCID-18900	p0282	N81-21564	#

# REPORT/ACCESSION NUMBER INDEX

UCID-18903 .....	p0206	N81-21640 #
UCLA-ENG-8039 .....	p0274	N81-19622 #
UCLA-12/1268 .....	p0197	N81-18576 #
UCRL-TRANS-11655 .....	p0358	N81-19604 #
UCRL-15259 .....	p0376	N81-17963 #
UCRL-15317 .....	p0206	N81-21639 #
UCRL-52938 .....	p0314	N81-18526 #
UCRL-53063 .....	p0272	N81-19605 #
UCRL-83941-REV-1 .....	p0192	N81-16635 #
UCRL-84610 .....	p0265	N81-18225 #
UCRL-85141 .....	p0368	N81-18962 #
UNICB-320639-P .....	p0308	N81-18149 #
UNTA-NY-09-0054-80-1 .....	p0203	N81-20604 #
US-PATENT-APPL-SN-027559 .....	p0259	N81-17518*
US-PATENT-APPL-SN-043941 .....	p0270	N81-19558*
US-PATENT-APPL-SN-191747 .....	p0190	N81-16530**
US-PATENT-APPL-SN-235797 .....	p0357	N81-19561**
US-PATENT-APPL-SN-900659 .....	p0306	N81-17261*
US-PATENT-CLASS-44-50 .....	p0306	N81-17261*
US-PATENT-CLASS-44-62 .....	p0306	N81-17261*
US-PATENT-CLASS-60-524 .....	p0259	N81-17518*
US-PATENT-CLASS-60-641 .....	p0259	N81-17518*
US-PATENT-CLASS-126-419 .....	p0259	N81-17518*
US-PATENT-CLASS-136-258 .....	p0270	N81-19558*
US-PATENT-CLASS-201-8 .....	p0306	N81-17261*
US-PATENT-CLASS-201-10 .....	p0306	N81-17261*
US-PATENT-CLASS-201-25 .....	p0306	N81-17261*
US-PATENT-CLASS-252-62.3E .....	p0270	N81-19558*
US-PATENT-CLASS-357-30 .....	p0270	N81-19558*
US-PATENT-CLASS-357-59 .....	p0270	N81-19558*
US-PATENT-CLASS-357-63 .....	p0270	N81-19558*
US-PATENT-4,236,383 .....	p0259	N81-17518*
US-PATENT-4,246,001 .....	p0306	N81-17261*
US-PATENT-4,249,957 .....	p0270	N81-19558*
USAAVRADCOM-TR-81-D-2 .....	p0361	N81-21080 #
VKI-LS-1980-2-VOL-1 .....	p0266	N81-18499 #
VKI-LS-1980-2-VOL-2 .....	p0277	N81-20549 #
W80-06700-VOL-2 .....	p0375	N81-16523 #





# **PUBLIC COLLECTIONS OF NASA DOCUMENTS**

## **DOMESTIC**

NASA distributes its technical documents and bibliographic tools to eleven special libraries located in the organizations listed below. Each library is prepared to furnish the public such services as reference assistance, interlibrary loans, photocopy service, and assistance in obtaining copies of NASA documents for retention.

### **CALIFORNIA**

University of California, Berkeley

### **COLORADO**

University of Colorado, Boulder

### **DISTRICT OF COLUMBIA**

Library of Congress

### **GEORGIA**

Georgia Institute of Technology, Atlanta

### **ILLINOIS**

The John Crerar Library, Chicago

### **MASSACHUSETTS**

Massachusetts Institute of Technology, Cambridge

### **MISSOURI**

Linda Hall Library, Kansas City

### **NEW YORK**

Columbia University, New York

### **OKLAHOMA**

University of Oklahoma, Bizzell Library

### **PENNSYLVANIA**

Carnegie Library of Pittsburgh

### **WASHINGTON**

University of Washington, Seattle

NASA publications (those indicated by an "\*" following the accession number) are also received by the following public and free libraries:

### **CALIFORNIA**

Los Angeles Public Library

San Diego Public Library

### **COLORADO**

Denver Public Library

### **CONNECTICUT**

Hartford Public Library

### **MARYLAND**

Enoch Pratt Free Library, Baltimore

### **MASSACHUSETTS**

Boston Public Library

### **MICHIGAN**

Detroit Public Library

### **MINNESOTA**

Minneapolis Public Library and Information Center

### **NEW JERSEY**

Trenton Public Library

### **NEW YORK**

Brooklyn Public Library

Buffalo and Erie County Public Library

Rochester Public Library

New York Public Library

### **OHIO**

Akron Public Library

Cincinnati and Hamilton County Public Library

Cleveland Public Library

Dayton Public Library

Toledo and Lucas County Public Library

### **TEXAS**

Dallas Public Library

Fort Worth Public Library

### **WASHINGTON**

Seattle Public Library

### **WISCONSIN**

Milwaukee Public Library

An extensive collection of NASA and NASA-sponsored documents and aerospace publications available to the public for reference purposes is maintained by the American Institute of Aeronautics and Astronautics, Technical Information Service, 555 West 57th Street, 12th Floor, New York, New York 10019.

## **EUROPEAN**

An extensive collection of NASA and NASA-sponsored publications is maintained by the British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. By virtue of arrangements other than with NASA, the British Library Lending Division also has available many of the non-NASA publications cited in STAR. European requesters may purchase facsimile copy of microfiche of NASA and NASA-sponsored documents, those identified by both the symbols "\*" and "#", from ESA - Information Retrieval Service, European Space Agency, 8-10 rue Mario-Nikis, 75738 Paris CEDEX 15, France.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
WASHINGTON D C 20546

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

SPECIAL FOURTH CLASS MAIL  
Book

POSTAGE AND FEES PAID  
NATIONAL AERONAUTICS AND  
SPACE ADMINISTRATION  
NASA-451



POSTMASTER

If Undeliverable (Section 158  
Postal Manual) Do Not Return

## NASA CONTINUING BIBLIOGRAPHY SERIES

NUMBER	TITLE	FREQUENCY
NASA SP-7011	AEROSPACE MEDICINE AND BIOLOGY Aviation medicine, space medicine, and space biology	Monthly
NASA SP-7037	AERONAUTICAL ENGINEERING Engineering, design, and operation of aircraft and aircraft components	Monthly
NASA SP-7039	NASA PATENT ABSTRACTS BIBLIOGRAPHY NASA patents and applications for patent	Semiannually
NASA SP-7041	EARTH RESOURCES Remote sensing of earth resources by aircraft and spacecraft	Quarterly
NASA SP-7043	ENERGY Energy sources, solar energy, energy conversion, transport, and storage	Quarterly
NASA SP-7500	MANAGEMENT Program, contract, and personnel management, and management techniques	Annually

*Details on the availability of these publications may be obtained from:*

SCIENTIFIC AND TECHNICAL INFORMATION BRANCH  
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
Washington, D.C. 20546